



SANYO Semiconductors

## DATA SHEET

An ON Semiconductor Company

# LB1940T LB1940U

Monolithic Digital IC  
2-ch H-Bridge Constant Current Driver

## Overview

The LB1940T and LB1940U are 2-phase exciter type bipolar stepper motor driver ICs that feature low-voltage, (supporting 3V battery) and low current operation with low saturation voltage. These ICs enable constant-current control of actuators, and are optimal for driving the actuators of PC peripherals such as USB compatible scanners, FDDs, and printers, as well as for controlling the shutter, iris, and AF of a digital still camera.

## Features

- Low-voltage driving  
2-power source type:  $V_S = 1.6$  to  $7.5V$ ,  $V_{DD} = 1.9$  to  $6.5V$   
Single power source type:  $V_S = V_{DD} = 1.9$  to  $7.5V$
- Low saturation output:  $V_{O(sat)} = 0.3V$  at  $I_O$  of 200mA
- Constant-current control
- Built-in reference voltage ( $V_{ref} = 0.9V$ )
- Small-sized, low-profile package (LB1940T: TSSOP20; 225mil; thickness (t) = 1.2mm max.)  
(LB1940U: MSOP20; thickness (t) = 0.85mm max.)

## Specifications

**Absolute Maximum Ratings** at  $T_a = 25^\circ C$

| Parameter                   | Symbol        | Conditions                     | Ratings       | Unit       |
|-----------------------------|---------------|--------------------------------|---------------|------------|
| Maximum supply voltage      | $V_B$ max     | $V_{S1}$ , $V_{S2}$ , $V_{DD}$ | -0.3 to +10.5 | V          |
| Output applied voltage      | $V_{OUT}$ max | OUT1, OUT2, OUT3, OUT4         | -0.3 to +10.5 | V          |
| Output Current              | $I_O$ max     |                                | 400           | mA         |
| Input applied voltage       | $V_{IN}$ max  | ENA1, ENA2, IN1, IN2, VC       | -0.3 to +10.5 | V          |
| Allowable power dissipation | $P_d$ max     | Mounted on a specified board * | 800           | mW         |
| Operating temperature       | $T_{opr}$     |                                | -20 to +85    | $^\circ C$ |
| Storage temperature         | $T_{stg}$     |                                | -55 to +150   | $^\circ C$ |

\* Mounted on a Specified board: 114.3mm×76.1mm×1.6mm, glass epoxy

- Any and all SANYO Semiconductor Co.,Ltd. products described or contained herein are, with regard to "standard application", intended for the use as general electronics equipment. The products mentioned herein shall not be intended for use for any "special application" (medical equipment whose purpose is to sustain life, aerospace instrument, nuclear control device, burning appliances, transportation machine, traffic signal system, safety equipment etc.) that shall require extremely high level of reliability and can directly threaten human lives in case of failure or malfunction of the product or may cause harm to human bodies, nor shall they grant any guarantee thereof. If you should intend to use our products for new introduction or other application different from current conditions on the usage of automotive device, communication device, office equipment, industrial equipment etc., please consult with us about usage condition (temperature, operation time etc.) prior to the intended use. If there is no consultation or inquiry before the intended use, our customer shall be solely responsible for the use.
- Specifications of any and all SANYO Semiconductor Co.,Ltd. products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.

**SANYO Semiconductor Co., Ltd.**

<http://www.sanyosemi.com/en/network/>

# LB1940T, LB1940U

## Allowable Operating Range at Ta = 25°C

| Parameter                          | Symbol          | Conditions                        | Ratings |     |     | unit |
|------------------------------------|-----------------|-----------------------------------|---------|-----|-----|------|
|                                    |                 |                                   | min     | typ | max |      |
| Function-guaranteed voltage range  | VOPR1           | V <sub>DD</sub> system, VS = 2.0V | 1.9     |     | 6.5 | V    |
|                                    | VOPR2           | VS system, V <sub>DD</sub> = 5.0V | 1.6     |     | 7.5 |      |
| Low level input threshold voltage  | V <sub>IL</sub> | ENA1, ENA2, IN1, IN2              | -0.3    |     | 1.0 | V    |
| High level input threshold voltage | V <sub>IH</sub> | ENA1, ENA2, IN1, IN2              | 2.0     |     | 6.0 | V    |
| VC input voltage                   | VC              |                                   | 0.19    |     | 1.0 | V    |

## Electrical Characteristics at Ta = 25°C, VS = 3V, V<sub>DD</sub> = 5V

| Parameter                                                | Symbol               | Conditions                                                                                                                                                                       | Ratings |      |      | unit |
|----------------------------------------------------------|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|------|------|------|
|                                                          |                      |                                                                                                                                                                                  | min     | typ  | max  |      |
| Standby current dissipation                              | ISTB                 | VS = V <sub>DD</sub> = 6.5V                                                                                                                                                      |         | 0.1  | 1.0  | μA   |
| <b>Regulator output circuit</b>                          |                      |                                                                                                                                                                                  |         |      |      |      |
| VREF output voltage                                      | VREF                 | I <sub>OL</sub> = 0 to 1mA                                                                                                                                                       | 0.85    | 0.9  | 0.95 | V    |
| SVDD output voltage                                      | VSVD                 | I <sub>OL</sub> = 10mA                                                                                                                                                           | 4.70    | 4.85 |      | V    |
| <b>H bridge output circuit</b>                           |                      |                                                                                                                                                                                  |         |      |      |      |
| OUT output saturation voltage<br>(at saturation control) | V <sub>O(sat)1</sub> | V <sub>DD</sub> = 5.0V, VS = 2.0V<br>I <sub>O</sub> = 200mA (PNP side)                                                                                                           |         | 0.20 | 0.30 | V    |
|                                                          | V <sub>O(sat)2</sub> | V <sub>DD</sub> = 5.0V, VS = 2.0V<br>I <sub>O</sub> = 200mA (NPN side)                                                                                                           |         | 0.10 | 0.15 | V    |
| OUT output current<br>(at constant current control)      | I <sub>OUT1</sub>    | V <sub>DD</sub> = 6.0V, VC = 0.2V, VS = 3.5V<br>R <sub>L</sub> = 5Ω (between OUT-OUT), RFB = 2Ω                                                                                  | 94      | 100  | 106  | mA   |
|                                                          | I <sub>OUT2</sub>    | $VC = \frac{R_b}{R_a + R_b} VREF \text{ (} R_a = 70k\Omega, R_b = 20k\Omega \text{) } *$<br>V <sub>DD</sub> = 6.0V, VS = 2.0V<br>R <sub>L</sub> = 5Ω (between OUT-OUT), RFB = 1Ω | 180     | 200  | 220  | mA   |
| VS system operating current<br>consumption               | IS1                  | $VC = \frac{R_b}{R_a + R_b} VREF \text{ (} R_a = 70k\Omega, R_b = 20k\Omega \text{) } *$                                                                                         |         | 1.5  | 3    | mA   |
| V <sub>DD</sub> system operating current<br>dissipation  | I <sub>DD1</sub>     | $VC = \frac{R_b}{R_a + R_b} VREF \text{ (} R_a = 70k\Omega, R_b = 20k\Omega \text{) } *$<br>ENA1 = 2V                                                                            |         | 4    | 7    | mA   |
| VC input current                                         | IVC                  | V <sub>DD</sub> = 6.0V, VS = 2.0V, VC = 1.9V                                                                                                                                     | 0       |      | -1   | μA   |
| <b>Control input circuit</b>                             |                      |                                                                                                                                                                                  |         |      |      |      |
| Control pin maximum input current                        | I <sub>IH</sub>      | V <sub>IH</sub> = 5.5V                                                                                                                                                           |         | 80   | 100  | μA   |
|                                                          | I <sub>IL</sub>      | V <sub>IL</sub> = GND                                                                                                                                                            | -1      |      | 0    |      |

\* For Ra and Rb, refer to Application Circuit Diagram.


# LB1940T, LB1940U

## Package Dimensions

unit : mm (typ)

3246

[LB1940T]


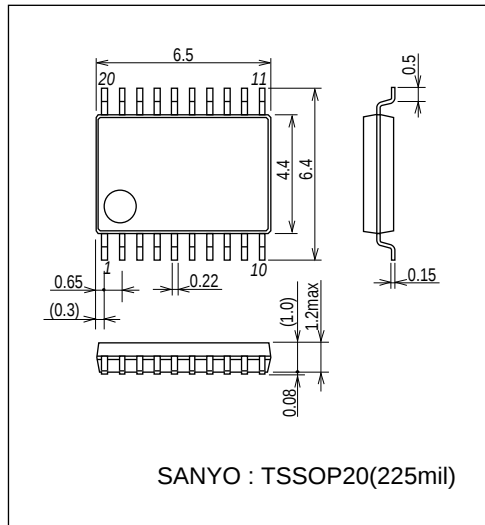


## Package Dimensions

unit : mm (typ)

3262

[LB1940U]

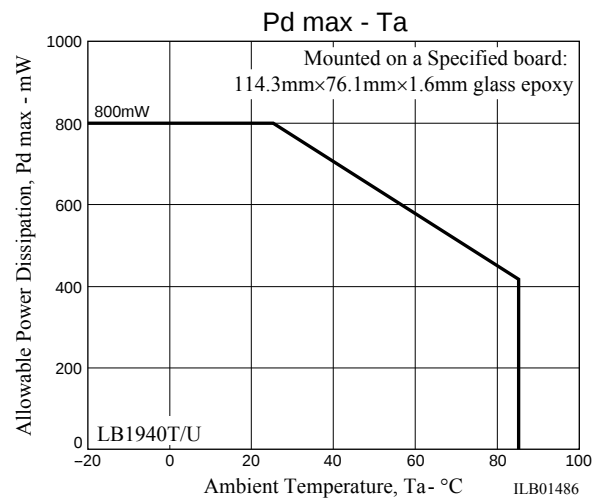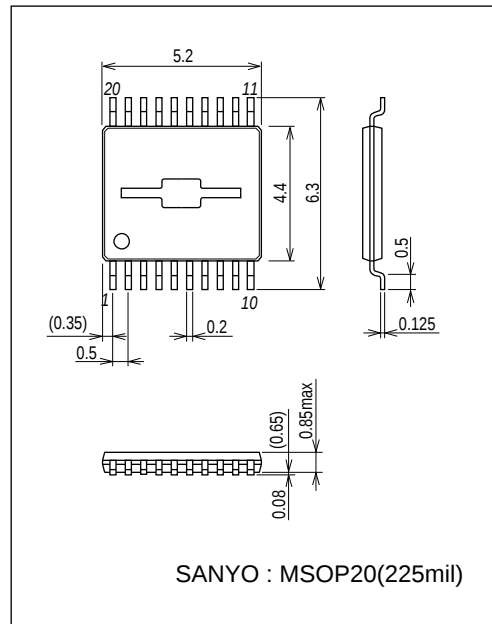


## True Table

| Input                       |   |    |   | Output               |   |   |   |      | Mode                               |
|-----------------------------|---|----|---|----------------------|---|---|---|------|------------------------------------|
| ENA                         |   | IN |   | OUT                  |   |   |   | SVDD |                                    |
| 1                           | 2 | 1  | 2 | 1                    | 2 | 3 | 4 |      |                                    |
| L                           | L |    |   |                      |   |   |   |      | Standby (current dissipation zero) |
| H                           |   | H  |   | L                    | H |   |   | on   | Reverse rotation                   |
|                             |   | L  |   | H                    | L |   |   | on   | Forward rotation                   |
|                             | H |    | H |                      |   | L | H | on   | Reverse rotation                   |
|                             |   |    | L |                      |   | H | L | on   | Forward rotation                   |
| A blank means "don't care". |   |    |   | A blank means "off". |   |   |   |      |                                    |

# LB1940T, LB1940U


## Pin Assignment

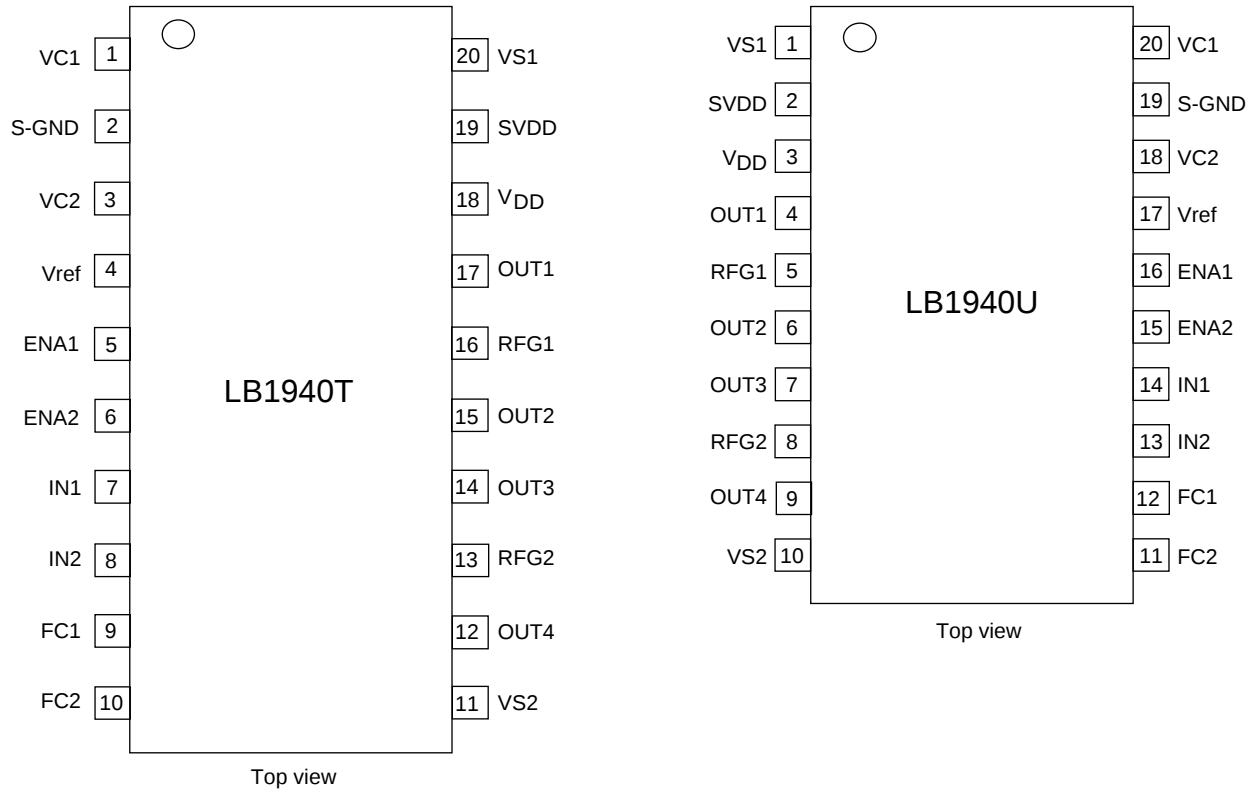


## Pin Description

| Pin No. |         | Pin Name | Description                                 | Pin No. |         | Pin Name        | Description                      |
|---------|---------|----------|---------------------------------------------|---------|---------|-----------------|----------------------------------|
| LB1940T | LB1940U |          |                                             | LB1940T | LB1940U |                 |                                  |
| 1       | 20      | VC1      | Reference voltage input for 1ch control     | 11      | 10      | VS2             | Motor power supply (+)           |
| 2       | 19      | S-GND    | GND for control system                      | 12      | 9       | OUT4            | Motor drive output 4             |
| 3       | 18      | VC2      | Reference voltage input for 2ch control     | 13      | 8       | RFG2            | Constant-current detection pin   |
| 4       | 17      | Vref     | Reference voltage output                    | 14      | 7       | OUT3            | Motor drive output 3             |
| 5       | 16      | ENA1     | Signal input for 1ch control                | 15      | 6       | OUT2            | Motor drive output 2             |
| 6       | 15      | ENA2     | Signal input for 2ch control                | 16      | 5       | RFG1            | Constant-current detection pin 1 |
| 7       | 14      | IN1      | Signal input for 1ch control                | 17      | 4       | OUT1            | Motor drive output 1             |
| 8       | 13      | IN2      | Signal input for 2ch control                | 18      | 3       | V <sub>DD</sub> | Control system power supply (+)  |
| 9       | 12      | FC1      | C connection pin for 1ch phase compensation | 19      | 2       | SVDD            | Control system power output      |
| 10      | 11      | FC2      | C connection pin for 2ch phase compensation | 20      | 1       | VS1             | Motor power supply (+)           |

# Block Diagram

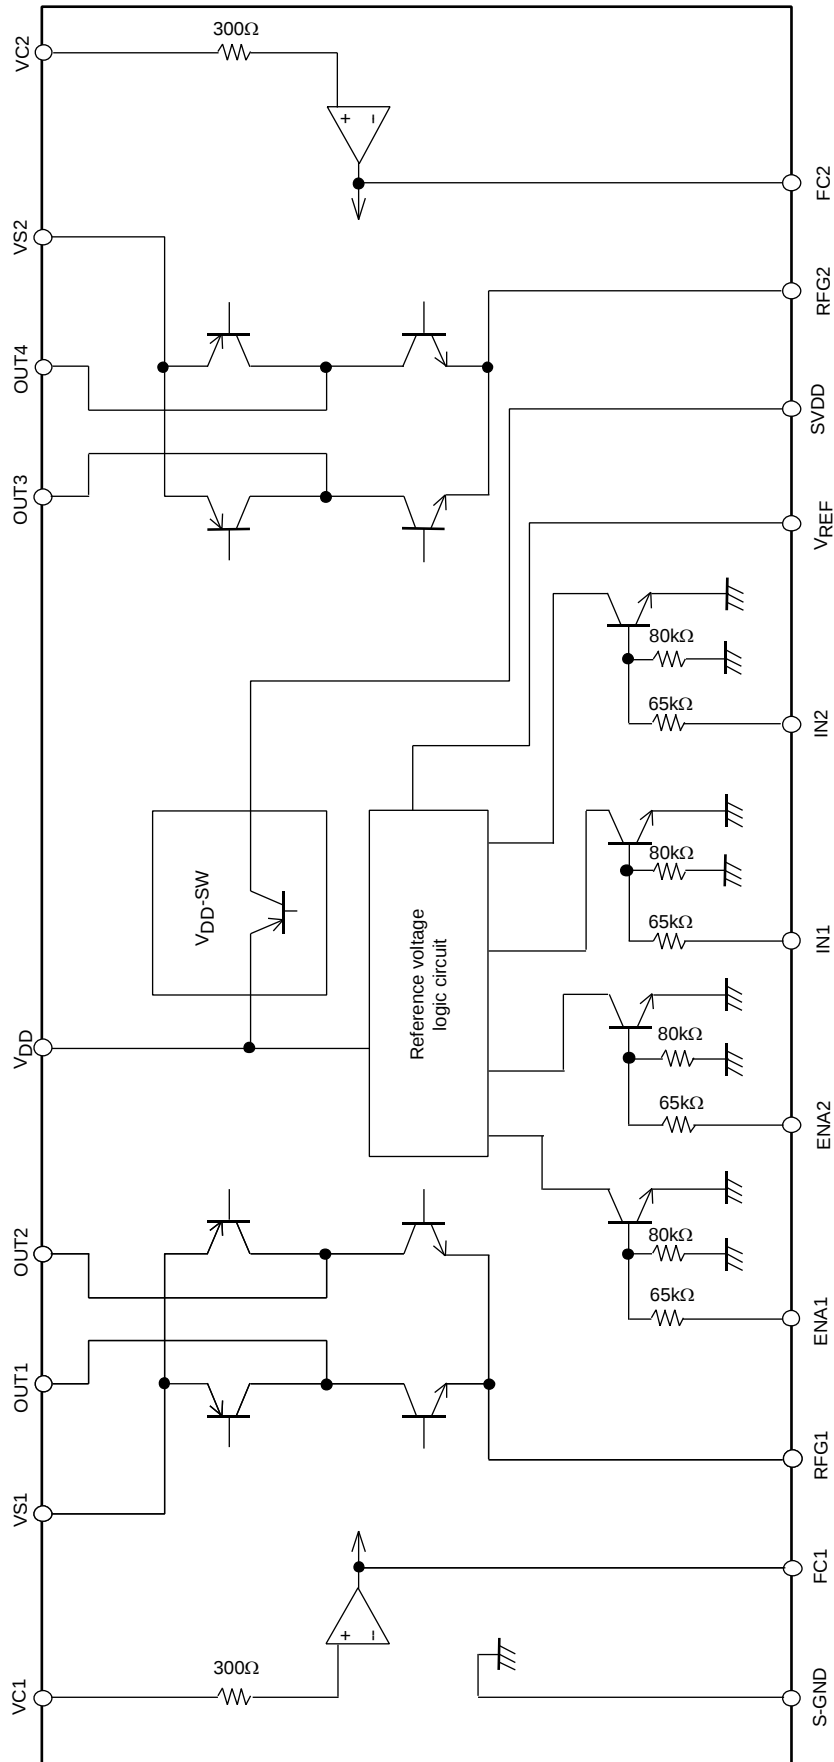

## Application Circuit Diagram

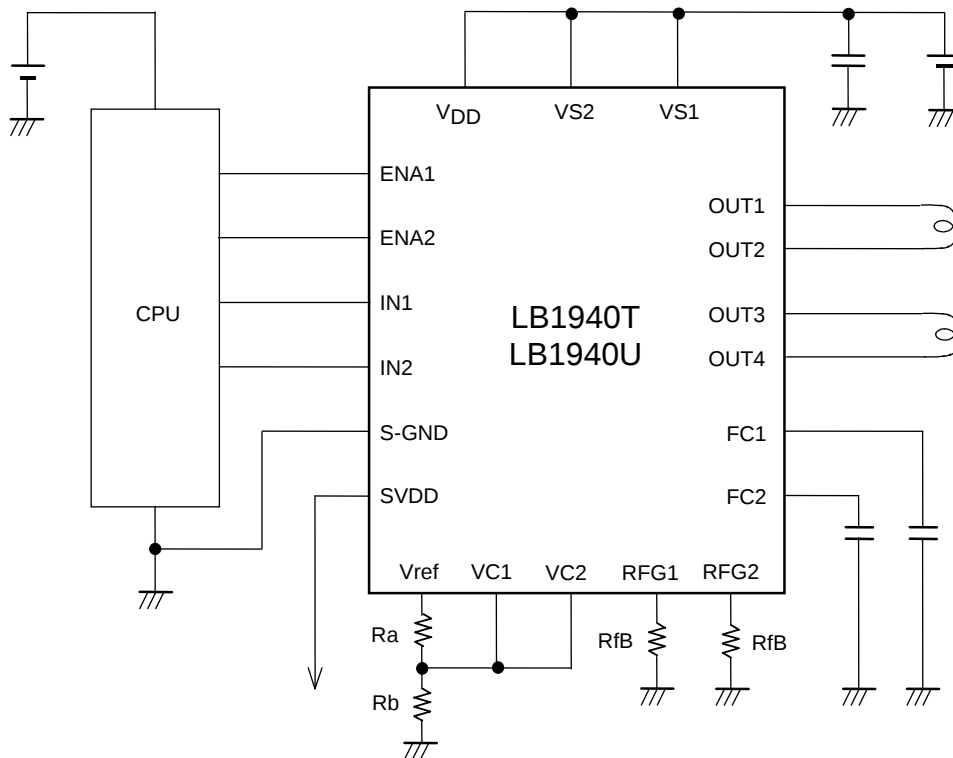

At constant-current control: The OUT current is controlled so that the RFG pin voltage is equal to the VC input pin voltage.

For example,  $I_{OUT} = 200\text{mA}$  ( $= 0.2\text{V}/1\Omega$ ) when  $VC = 0.2\text{V}$  and  $R_{FB} = 1\Omega$ .

\*: There is no priority relationship between respective input voltages (ENA, IN) and respective supply voltages ( $V_{DD}$ , VS). For example, operation with  $V_{IN} = 5\text{V}$ ,  $V_{DD} = 3\text{V}$ ,  $VS = 2\text{V}$  is possible.

Note: The input voltage range to the reference voltage input pin VC for constant-current setting is from 0.19V to 1.0V.

## Constant current setting

The composition of the constant-control circuit of this IC is as shown in the figure below.

The voltage entered in the VC pin is entered as a reference to the “+” side input of the constant-current control amplifier.

The “-” side of this constant-current control amplifier is connected to the RFG pin via the wire bonded resistor  $R_b (= 0.1\Omega)$ .


The constant-current control circuit consists of comparison of the voltage generated at the external current detection resistor with the above reference voltage.









In addition, since the bias current  $I_b (= 1.5\mu\text{A})$  flows out of the positive (+) input of the constant current control amplifier during the constant current control, if the voltage is input to the VC pin by dividing the VREF voltage by 4.5 according to the dividing resistance ( $70\text{k}\Omega$  and  $20\text{k}\Omega$ ) as shown in the figure, the formula for calculating the VC voltage is as follows :



$$VC = V_{REF}/4.5 + I_b \times 20\text{k}\Omega = V_{REF}/4.5 + 0.03$$

Therefore, the theoretical equation to set the constant current  $I_{OUT}$  is as follows:

$$I_{OUT} = VC/(R_{FB} + R_b) = (V_{REF}/4.5 + 0.03)/(R_{FB} + R_b)$$

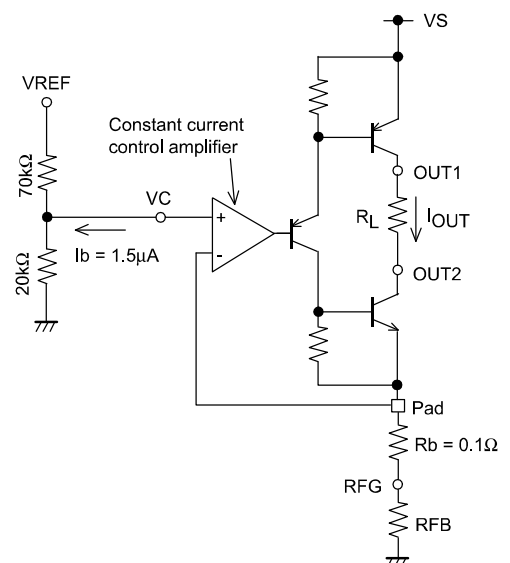

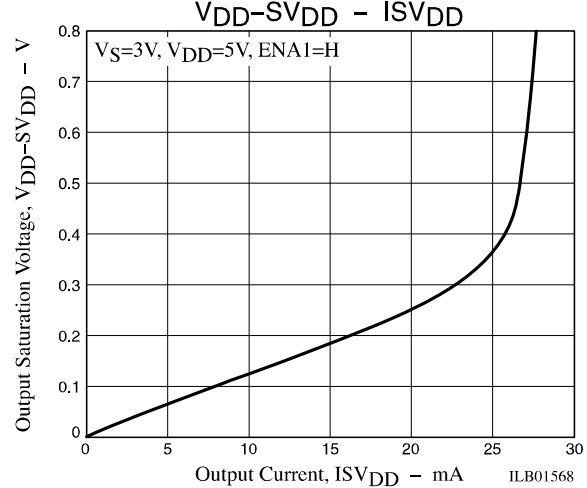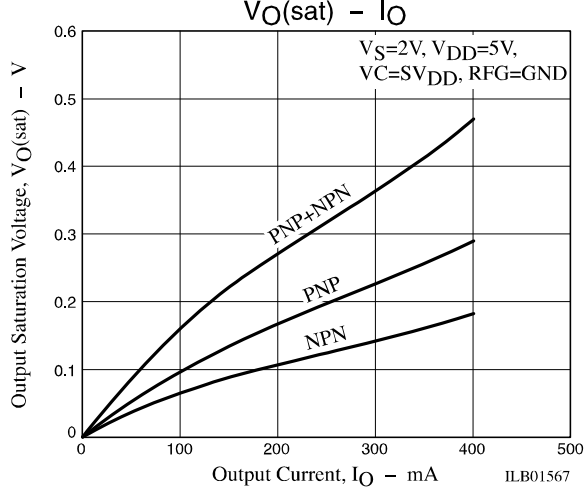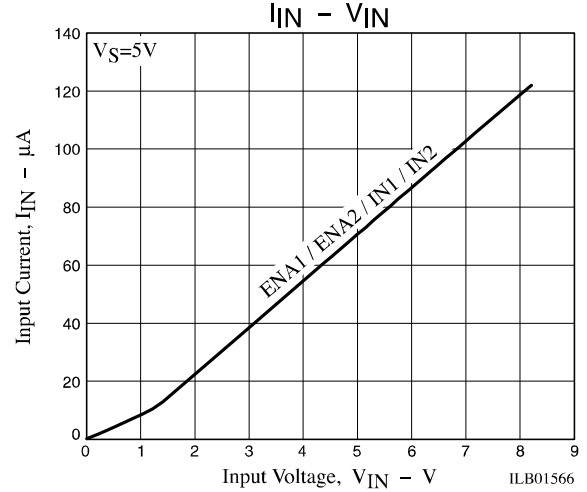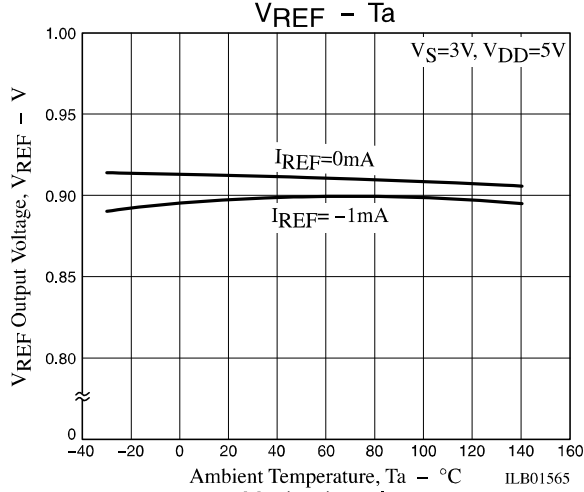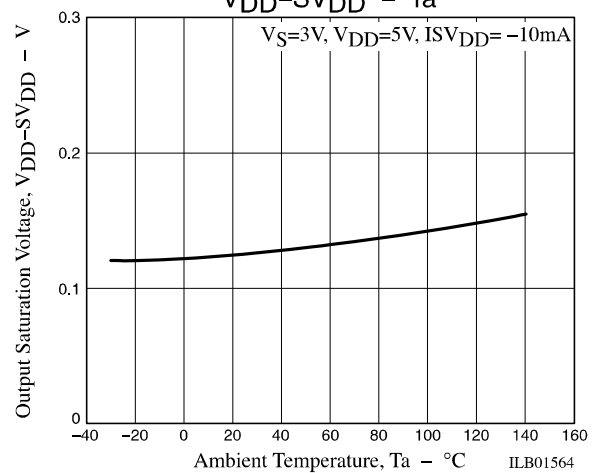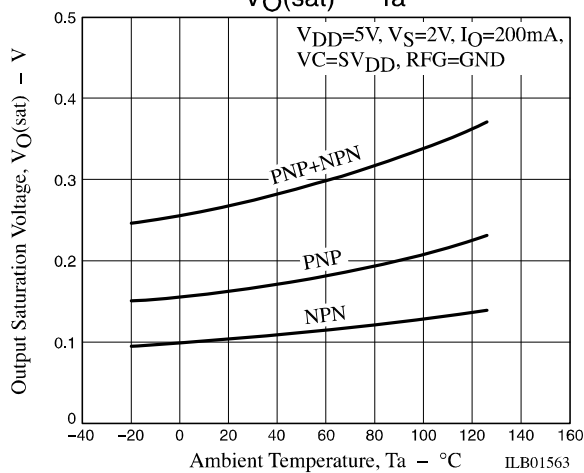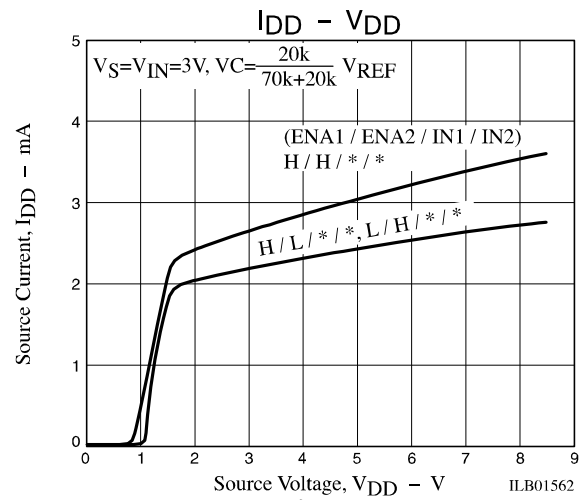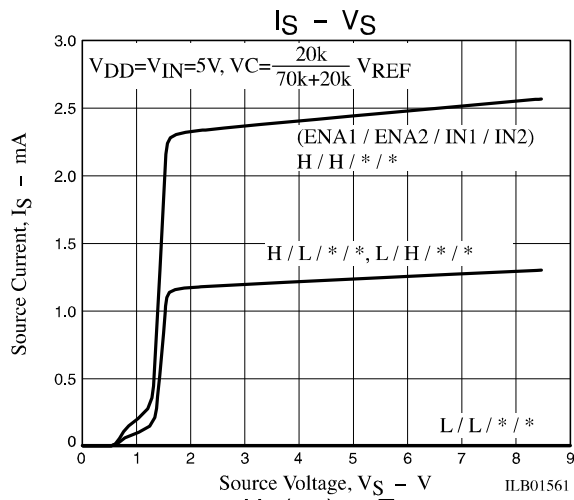

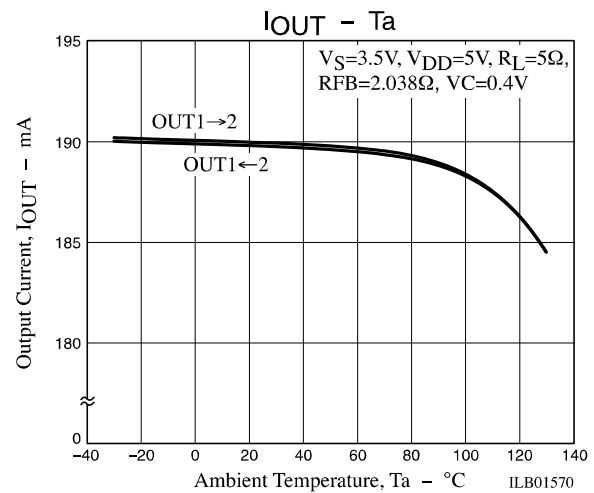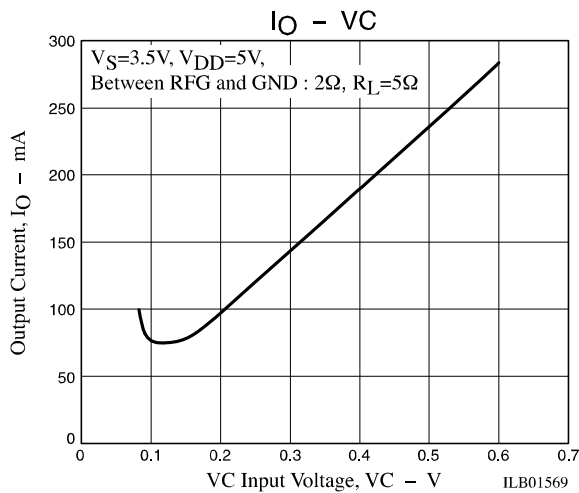

- SANYO Semiconductor Co.,Ltd. assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO Semiconductor Co.,Ltd. products described or contained herein.
- Regarding monolithic semiconductors, if you should intend to use this IC continuously under high temperature, high current, high voltage, or drastic temperature change, even if it is used within the range of absolute maximum ratings or operating conditions, there is a possibility of decrease reliability. Please contact us for a confirmation.
- SANYO Semiconductor Co.,Ltd. strives to supply high-quality high-reliability products, however, any and all semiconductor products fail or malfunction with some probability. It is possible that these probabilistic failures or malfunction could give rise to accidents or events that could endanger human lives, trouble that could give rise to smoke or fire, or accidents that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO Semiconductor Co.,Ltd. products described or contained herein are controlled under any of applicable local export control laws and regulations, such products may require the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written consent of SANYO Semiconductor Co.,Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO Semiconductor Co.,Ltd. product that you intend to use.
- Upon using the technical information or products described herein, neither warranty nor license shall be granted with regard to intellectual property rights or any other rights of SANYO Semiconductor Co.,Ltd. or any third party. SANYO Semiconductor Co.,Ltd. shall not be liable for any claim or suits with regard to a third party's intellectual property rights which has resulted from the use of the technical information and products mentioned above.

This catalog provides information as of December, 2012. Specifications and information herein are subject to change without notice.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А