

## General Description

The MAX44211 evaluation kit (EV kit) provides a proven design to evaluate the MAX44211 high-current differential line driver for powerline communications (PLC). The line driver is an efficient low-distortion power amplifier that provides high current to the low-impedance loads.

The MAX44211 EV kit printed circuit board (PCB) comes with a MAX44211ETP+ in a 20-pin TQFN package.

Refer to the ZENOPCEVK1# for a complete microcontroller and line driver evaluation platform.

## Benefits and Features

- On-Board Single to Differential Amplifier (MAX9626) for Single-Ended Signal Sources to Match with MAX44211 Differential Inputs
- Connector with Accessible Signals and Supplies for Host Processor
- Proven PCB Layout
- Fully Assembled and Tested

[Ordering Information](#) appears at end of data sheet.

## Quick Start

### Required Equipment

Before beginning, the following equipment is needed:

- MAX44211 EV kit
- +8V to +20V, 3A DC power supply
- +2.7V to +5.5V, 100mA DC power supply
- +3.3V, 100mA DC power supply
- Function generator (Agilent 33220A)
- Artificial mains network (line impedance stabilization network) or a 50 $\Omega$  load across OUT- and OUT-

### Procedure

The MAX44211 EV kit is fully assembled and tested. Follow the steps below to verify the board operation.

**Caution: Do not turn on power supply until all connections are made.**

- 1) Connect the positive terminal of the +8V to +20V supply to the AVDD test point and the negative terminal of the supply to the nearest AGND test point.
- 2) Connect the positive terminal of the +2.7V to +5.5V supply to the DVDD test point and the negative terminal of the supply to the nearest DGND test point.
- 3) Connect the positive terminal of the +3.3V supply to the VCC\_U2 test point and the negative terminal of the supply to the VEE\_U2 test point.
- 4) Connect the artificial mains network to the OUT connector.
- 5) Connect the signal from the function generator to the SD\_IN BNC.
- 6) Set the signal generator for 100mV<sub>P-P</sub>, 0V offset, and 100kHz sine wave.
- 7) Enable all supplies.
- 8) Enable function generator.
- 9) Observe the output signal from the artificial mains network.

**Table 1. Jumper Description**

JUMPER	SHUNT POSITION	DESCRIPTION
JU1	Installed*	Connects the G1 pin of the MAX44211 to DVDD for appropriate gain selection. See Table 2.
	Not installed	Disconnects the G1 pin of the MAX44211 from DVDD for appropriate gain selection. See Table 2.
JU2	Installed*	Connects the G0 pin of the MAX44211 to DVDD for appropriate gain selection. See Table 2.
	Not installed	Disconnects the G1 pin of the MAX44211 from DVDD for appropriate gain selection. See Table 2.
JU3	Installed*	Enables TXEN.
	Not installed	Disables TXEN.
JU4	Installed	ARIB mode.
	Not installed*	Standard mode.
JU5	1-2*	Sets the output current limit to 2A.
	2-3	Do not connect.
	Not installed	Sets the output current limit as defined by a user-supplied resistor connected between the ILSET pin and GND.
JU6	Installed*	Connects the OUT- output of the MAX9626 to the input of the MAX44211.
	Not installed	Disconnects the OUT- output of the MAX9626 to the input of the MAX44211.
JU7	Installed*	Connects the OUT+ output of the MAX9626 to the input of the MAX44211.
	Not installed	Disconnects the OUT+ output of the MAX9626 to the input of the MAX44211.

\*Default configuration

## Detailed Description of Hardware

The MAX44211 EV kit provides a proven design to evaluate the MAX44211 high-current line driver for power-line communications. The EV kit includes a MAX9626 amplifier used to generate the differential signal required by the MAX44211 from a single-ended input. The jumpers are used for gain and current limit settings, transmit enabling (TXEN), setting modes (MODE), and removing the single to differential input feature. A 12-pin connector is available to connect to a host processor. Also included are LEDs to indicate the status of the MAX44211.

### Analog Inputs

Differential analog inputs can be applied to the IN+ and IN- BNC on the MAX44211 EV kit.

### Optional On-Board Single to Differential Amplifier

When a differential input source is not available, the user can use the on-board single-ended to differential amplifier (MAX9626). This option requires that a separate supply

**Table 2. Gain Settings (Jumpers JU1 and JU2)**

Gain (V/V)	G1 (JU1)	G0 (JU0)
6	Not installed	Not installed
12	Not installed	Installed
15	Installed	Not installed
18	Installed*	Installed*

\*Default configuration

of +3.3V be applied between the VCC\_U2 and VEE\_U2 test points. The single-ended signal can be applied at the SD\_IN BNC. Shunts must be installed at jumpers JU6 and JU7 to drive the MAX44211 analog inputs.

### Gain Settings

The gain settings of the MAX44211 are summarized in [Table 2](#).

**Current Settings**

Jumper JU5 controls the output current limit of the MAX44211. When the shunt is in the 1-2 position of jumper JU5, the current limit is set to 2A. Users can set their own current limit by removing the shunt on jumper JU5 and connecting their own resistor between the ILSET test point and GND. Use the equation below to set the desired current limit. ILIM is amps and RSET is in kΩ.

$$I_{LIM} = \frac{60}{R_{SET} + 1}$$

**Status**

The MAX44211 have two diagnostic status outputs: STATUS0 AND STATUS1. These are open-drain outputs that indicate the status of the device as shown in [Table 3](#).

**Connector**

The connector (J1) is used to connect to a host processor. Signal and supply connections are listed in [Table 4](#).

**Component List**

See the following links for component information:

- [MAX44211 EV BOM](#)

**Table 3. Status**

STATUS1	STATUS0	DEVICE STATUS
0	0	<i>Overtemperature shut-down active</i>
0	1	<i>High temperature warning active</i>
1	0	Overcurrent active
1	1	Normal operation

**Table 4. Connector Pin Assignment**

J1	SIGNAL
1	G0
2	G1
3	STATUS0
4	STATUS1
5	DGND
6	DVDD
7	MODE
8	TXEN
9	INP
10	INN
11	AGND
12	AVDD



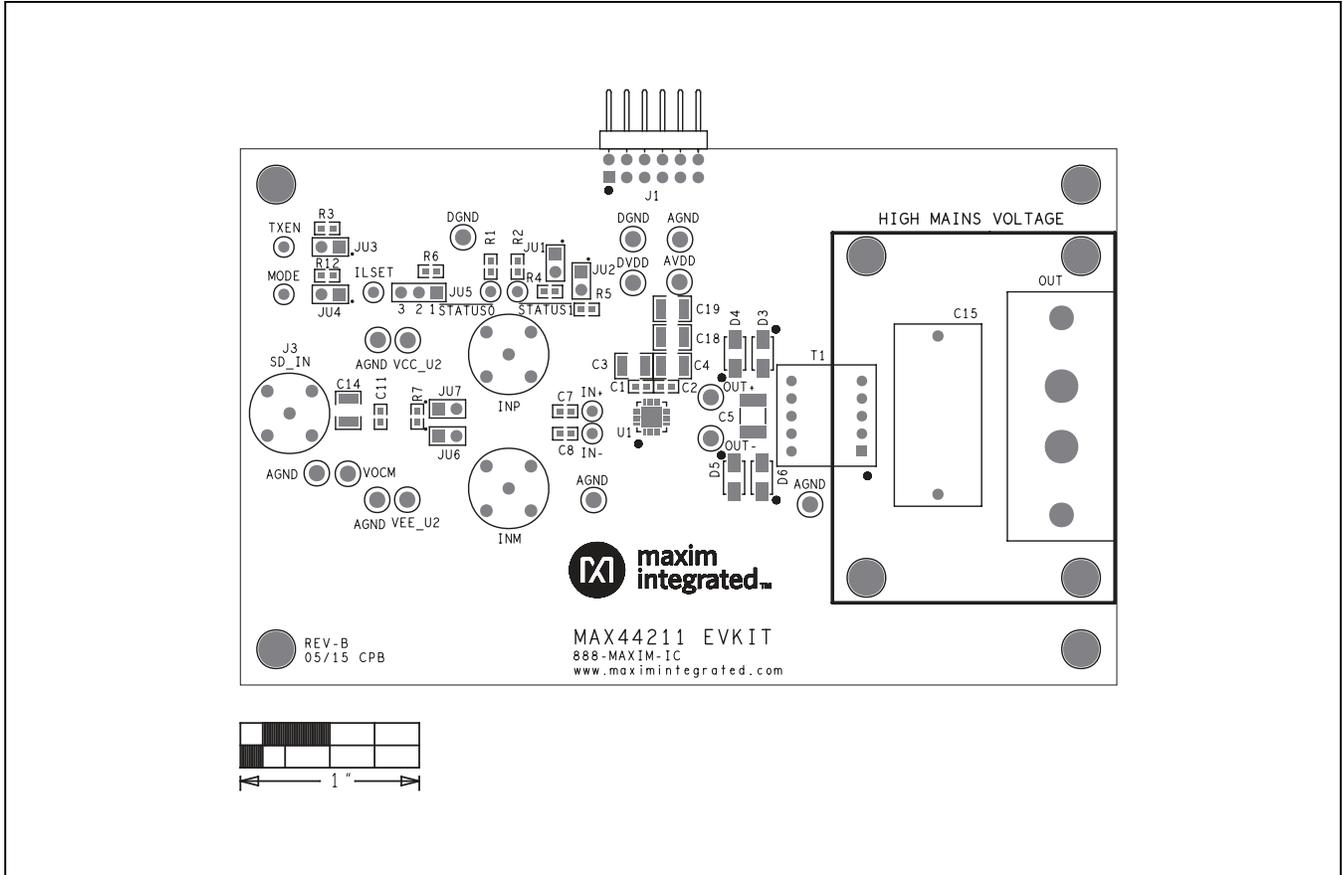


Figure 2. MAX44211 EV Kit Component Placement Guide—Component Side

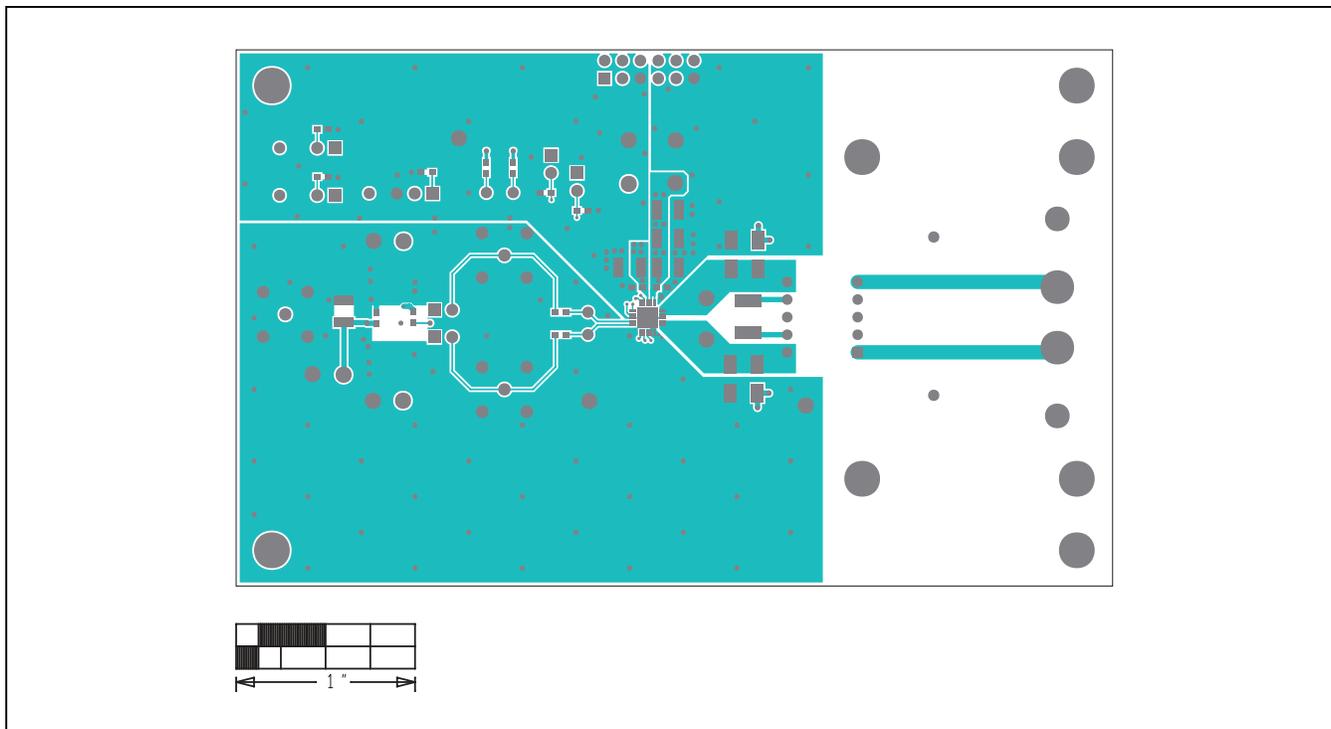


Figure 3. MAX44211 EV Kit PCB Layout—Component Side

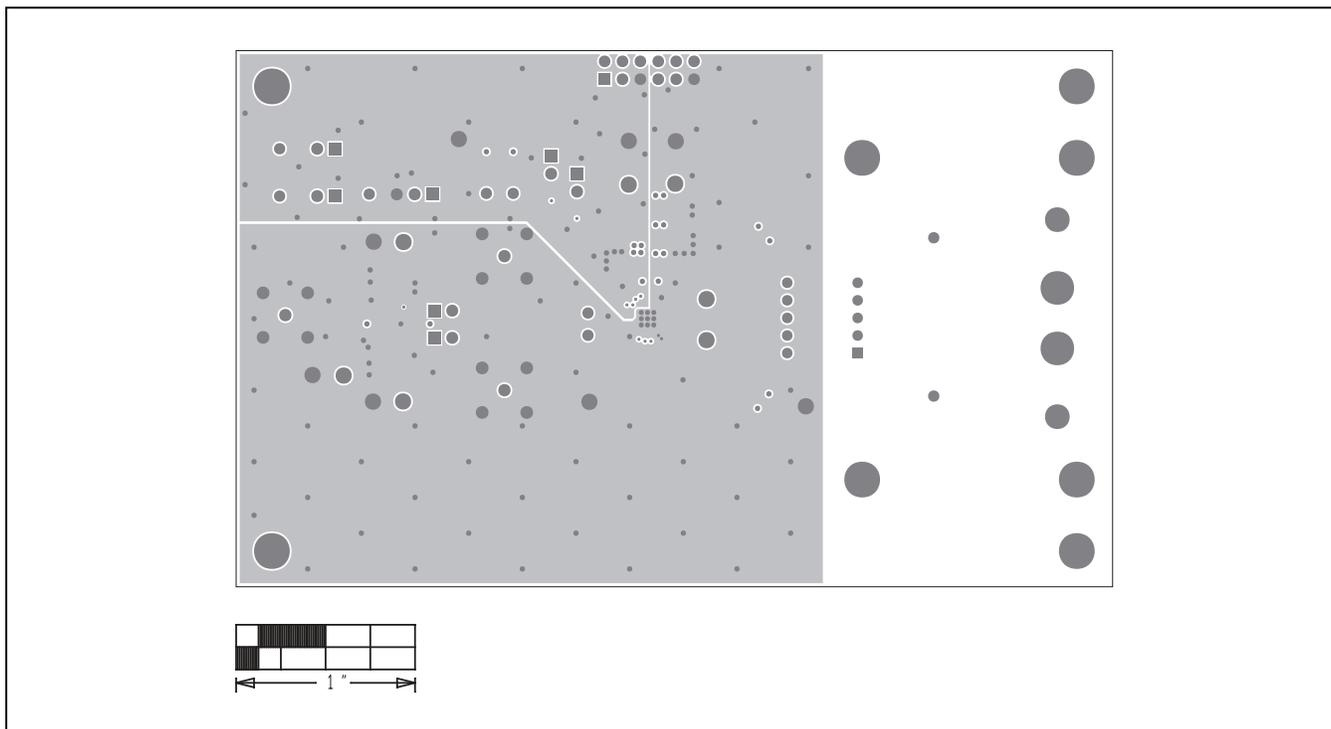


Figure 4. MAX44211 EV Kit PCB Layout—Inner Layer 2

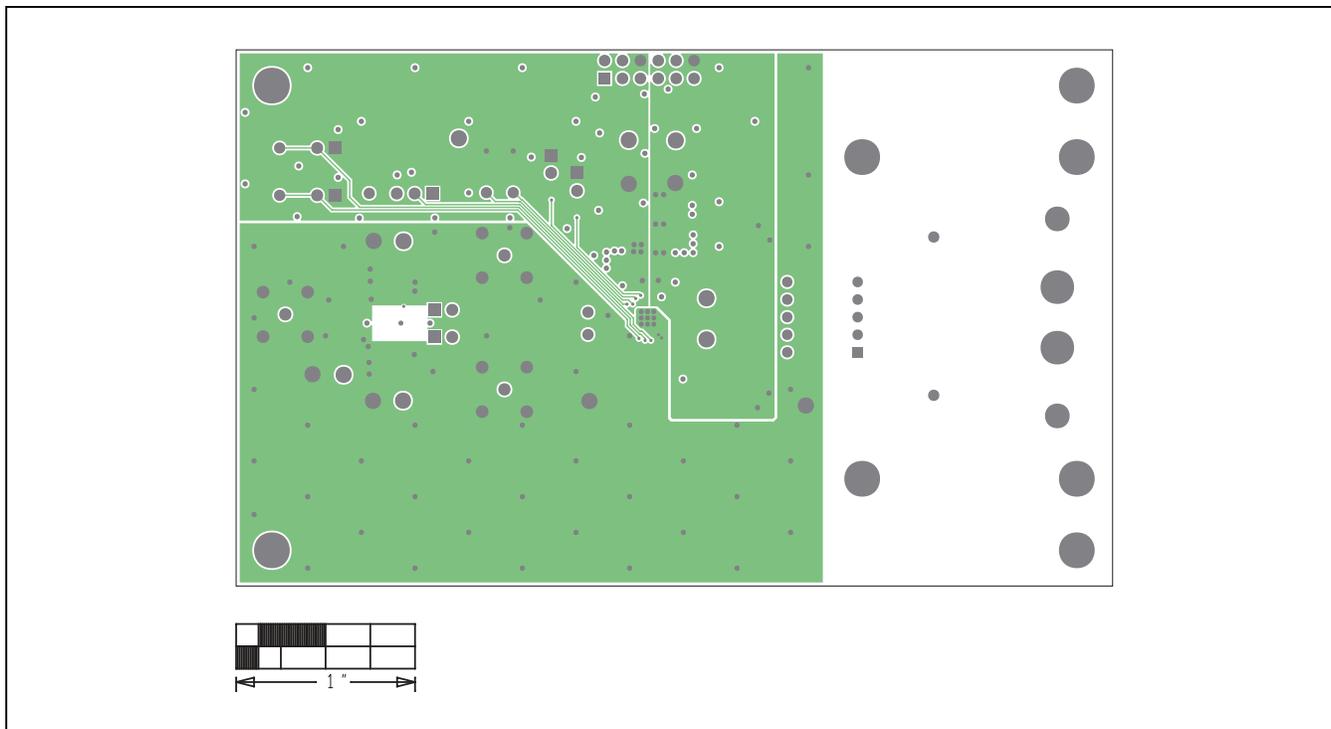


Figure 5. MAX44211 EV Kit PCB Layout—Inner Layer 3

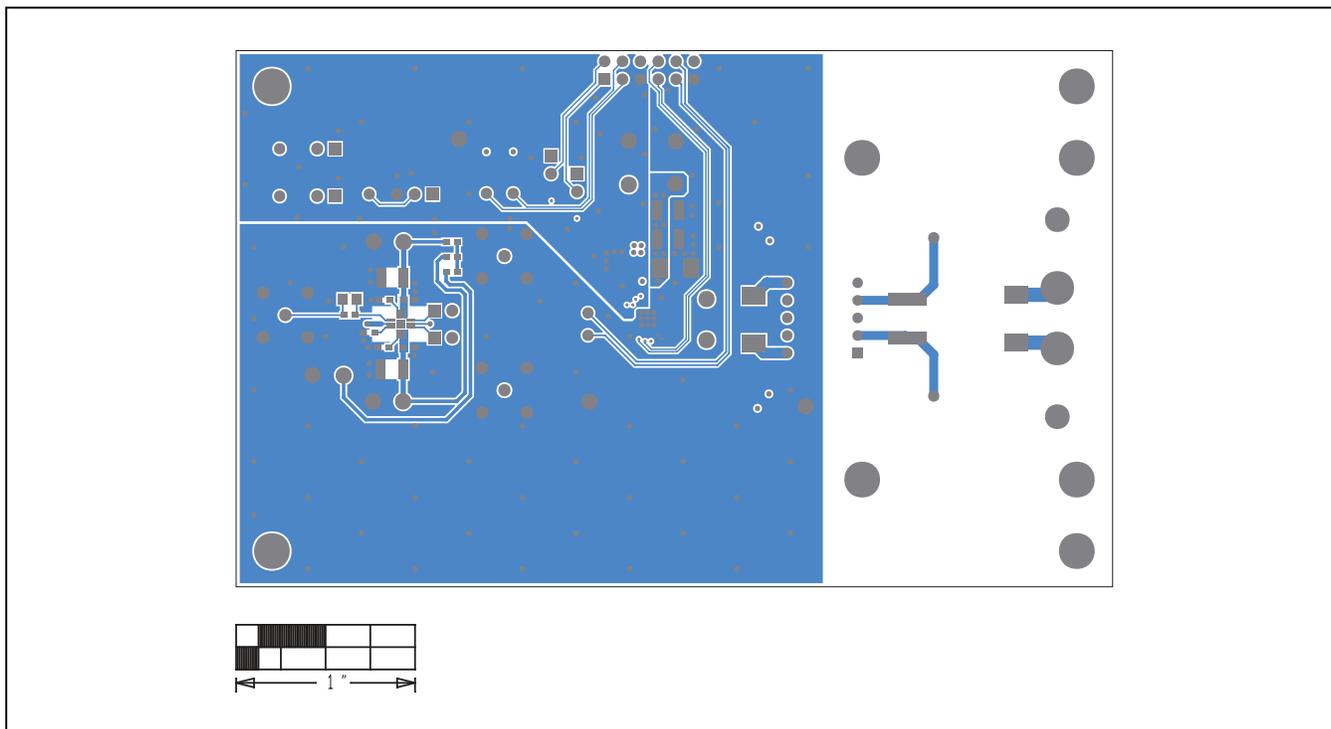


Figure 6. MAX44211 EV Kit PCB Layout—Solder Side

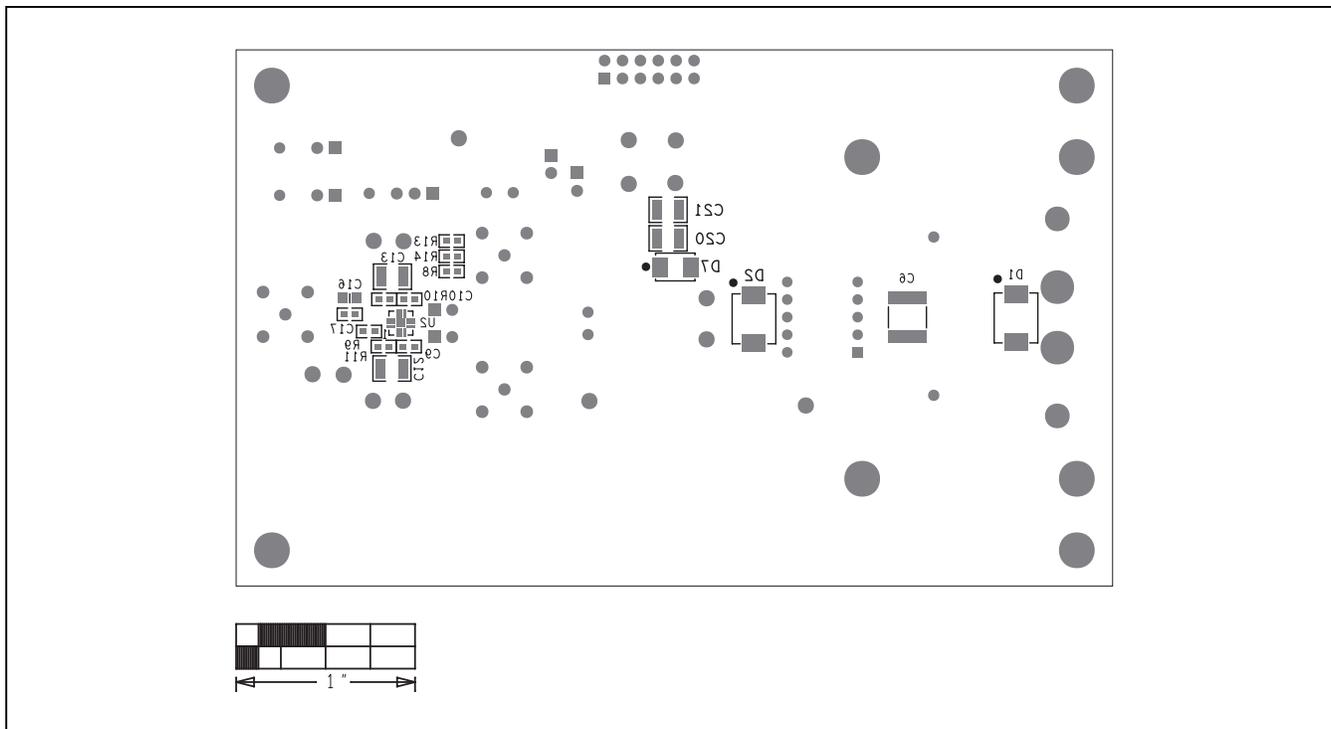


Figure 7. MAX44211 EV Kit Component Placement Guide—Solder Side

### Ordering Information

PART	TYPE
MAX44211EVKIT#	EV Kit

#RoHS-compliant

### Revision History

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
0	6/15	Initial release	—

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim Integrated's website at [www.maximintegrated.com](http://www.maximintegrated.com).

*Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time.*

ITEM	REF_DES	DNI	QTY	MFG PART #	MANUFACTURER	VALUE	DESCRIPTION	COMMENTS
1	X1, X2, X5, X21- X23, AGND, DGND	-	8		5011 ?		TEST POINT; PIN DIA=0.125IN; TOTAL LENGTH=0.445IN; BOARD HOLE=0.063IN; BLACK; PHOSPHOR BRONZE WIRE SILVER PLATE FINISH;	
2	AVDD, DVDD, VOCM, VCC_U2, VEE_U2	-	5		5010 ?		TESTPOINT WITH 1.80MM HOLE DIA, RED, MULTIPURPOSE	
3	C1, C2, C7-C11, C17	-	8	C0603C104K5RAC; C1608X7R1H104K	KEMET; TDK	0.1UF	CAPACITOR; SMT (0603); CERAMIC CHIP; 0.1UF; 50V; TOL=10%; TG=-55 DEGC TO +125 DEGC; TC=X7R;NOTE: CAPACITOR; SMT (1210); CERAMIC CHIP; 10UF; 50V; TOL=10%; TG=-55 DEGC TO +125 DEGC; TC=X7R	
4	C3, C4, C12-C14	-	5	GRM32ER71H106KA12L; CL32B106KB1NNN	MURATA; SAMSUNG ELECTRONICS	10UF	CAPACITOR; SMT (1812); CERAMIC CHIP; 1.5UF; 100V; TOL=10%; MODEL=C SERIES; TG=-55 DEGC TO +125 DEGC; TC=X7R	
5	C5	-	1	C4532X7R2A155K230KA	TDK	1.5UF	CAPACITOR; SMT (2220); CERAMIC CHIP; 1UF; 450V; TOL=10%; MODEL=C SERIES; TG=-55 DEGC TO +125 DEGC; TC=X7T	
6	C6	-	1	C5750X7T2W105K250KE	TDK	1UF	CAPACITOR; SMT (0805); CERAMIC CHIP; 10UF; 16V; TOL=10%; TG=-55 DEGC TO +125 DEGC; TC=X7R	
7	C16	-	1	CL21B106KQNNN	SAMSUNG ELECTRONICS	10UF	DIODE; TVS; SMC; PIV=440V; IF=2.1A; -65 DEGC TO +150 DEGC	
8	D1	-	1	SMCJ440CA	LITTLE FUSE	440V	DIODE; SCH; SMA (DO- 214AC); PIV=50V; IF=3A	
9	D3-D6	-	4	B350A	DIODES INCORPORATED	B350A	DIODE; ZNR; SMB (DO- 214AA); VZ=24V; IZ=0.0156A	
10	D7	-	1	15MB59348T3G	ON SEMICONDUCTOR	24V	TEST POINT; PIN DIA=0.1IN; TOTAL LENGTH=0.3IN; BOARD HOLE=0.04IN; RED; PHOSPHOR BRONZE WIRE SILVER PLATE FINISH;	
11	MODE, TXEN, ILSET	-	3		5000 KEYSTONE	N/A	TEST POINT; PIN DIA=0.1IN; TOTAL LENGTH=0.3IN; BOARD HOLE=0.04IN; WHITE; PHOSPHOR BRONZE WIRE SILVER;	
12	IN+, IN-, STATUS0, STATUS1	-	4		5002 KEYSTONE	N/A	CONNECTOR; FEMALE; THROUGH HOLE; BNC JACK; STRAIGHT; 5PINS	
13	J3, INM, INP	-	3	CN-BNC-011PG	FIRST TECH ELECTRONICS, CO.	CN-BNC-011PG	CONNECTOR; THROUGH HOLE; DOUBLE ROW; RIGHT ANGLE; 12PINS	
14	J1	-	1	TSW-106-08-S-D-RA	SAMTEC	TSW-106-08-S-D-RA	CONNECTOR; MALE; THROUGH HOLE; BREAKAWAY; STRAIGHT;	
15	JU1-JU4, JU6, JU7	-	6	PEC02SAAN	SULLINS	PEC02SAAN	2PINS	
16	JU5	-	1	PEC03SAAN	SULLINS	PEC03SAAN	CONNECTOR; MALE; THROUGH HOLE; BREAKAWAY; STRAIGHT;	
17	OUT	-	1	770WX203	QUALTEK ELECTRONICS CORP.	770WX203	3PINS CONNECTOR; MALE; THROUGH HOLE; AC RECEPTACLE; STRAIGHT;	
18	OUT+, OUT-	-	2		5012 ?		TEST POINT; PIN DIA=0.125IN; TOTAL LENGTH=0.445IN; BOARD HOLE=0.063IN; WHITE; PHOSPHOR BRONZE WIRE SILVER PLATE FINISH;	
19	R1-R5, R7, R12	-	7	CRCW06031003FK; ERJ- 3EKF1003	VISHAY DALE/PANASONIC	100K	RESISTOR; 0603; 100K; 1%; 100PPM; 0.10W; THICK FILM	
20	R6	-	1	RC0603FR-0729K4L	YAGEO PHYCOMP	29.4K	RESISTOR; 0603; 29.4K OHM; 1%; 100PPM; 0.10W; THICK FILM	
21	R8-R11	-	4	CR0603-16W-000T; CR0603- 16W-000RJT	VENKEL LTD.		RESISTOR; 0603; 0 OHM; 5%; 0 JUMPER; 0.063W; THICK FILM	
22	R13, R14	-	2	CRCW06031001FK; ERJ- 2 3EKF1001V	VISHAY DALE; PANASONIC	1K	RESISTOR; 0603; 1K; 1%; 100PPM; 0.10W; THICK FILM TRANSFORMER; TH; 10; 1.333 : 1; VITEC	
23	T1	-	1	60PR970	VITEC	60PR970	IC; DRV; HIGH-CURRENT DIFFERENTIAL LINE DRIVER FOR POWERLINE	
24	U1	-	1	MAX44211ETP+	MAXIM	MAX44211ETP+	COMMUNICATION; TQFN20- EP 4X4	
25	U2	-	1	MAX9626ATC+	MAXIM	MAX9626ATC+	IC; AMP; LOW-NOISE, LOW- DISTORTION, 1.35GHZ FULLY DIFFERENTIAL AMPLIFIER; TQFN12-EP 3X3	
26	C15	DNP	1	ECQ-U2A105ML	PANASONIC	1UF	CAPACITOR; THROUGH HOLE- RADIAL LEAD; POLYESTER; 1UF; 275V; TOL=20%; MODEL=ECQ-UL SERIES; TG=- 40 DEGC TO 100 DEGC	
27	C18-C21	DNP	4	N/A	N/A	?	CAPACITOR; 1210 PACKAGE; GENERIC	OPEN
28	D2	DNP	1	SMCJ440CA	LITTLE FUSE	440V	DIODE; TVS; SMC; PIV=440V; IF=2.1A; -65 DEGC TO +150 DEGC	
TOTAL			79					

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А