

# Dual/Quad Rail-to-Rail Output, Picoamp Input Precision Op Amps

## FEATURES

- **Offset Voltage:** 50 $\mu$ V Max (LT1884A)
- **Input Bias Current:** 400pA Max (LT1884A)
- **Offset Voltage Drift:** 0.8 $\mu$ V/ $^{\circ}$ C Max
- **Rail-to-Rail Output Swing**
- Operates with Single or Split Supplies
- Open-Loop Voltage Gain: 1 Million Min
- 1mA Maximum Supply Current Per Amplifier
- Slew Rate: 1V/ $\mu$ s
- Standard Pinouts

## APPLICATIONS

- Thermocouple Amplifiers
- Bridge Transducer Conditioners
- Instrumentation Amplifiers
- Battery-Powered Systems
- Photo Current Amplifiers
- Precision Integrators
- Precision Current Sources

## DESCRIPTION

The LT<sup>®</sup>1884/LT1885 op amps bring high accuracy input performance to amplifiers with rail-to-rail output swing while providing faster response than other precision amplifiers. Input offset voltage is trimmed to less than 50 $\mu$ V and the low drift maintains this accuracy over the operating temperature range. Input bias currents are an ultralow 400pA maximum.

The amplifiers work on any total power supply voltage between 2.7V and 36V (fully specified from 5V to  $\pm$ 15V). Output voltage swings to within 40mV of the negative supply and 220mV of the positive supply make these amplifiers good choices for low voltage single supply operation.


Slew rates of 1V/ $\mu$ s with a supply current of less than 1mA per amplifier give superior response and settling time performance in a low power precision amplifier.

The dual LT1884 is available with standard pinouts in 8-pin SO and PDIP packages. The quad LT1885 is also in the standard pinout 14-pin SO package.

LT, LTC and LT are registered trademarks of Linear Technology Corporation.

## TYPICAL APPLICATION

**Input Fault Protected Instrumentation Amplifier**

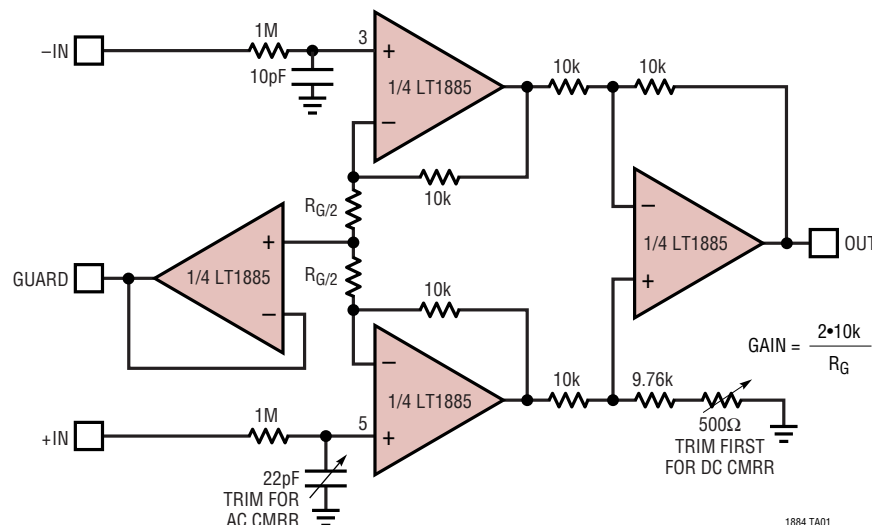

1884 TA01



# LT1884/LT1885

## ABSOLUTE MAXIMUM RATINGS (Note 1)

Supply Voltage ( $V^+$  to  $V^-$ ) ..... 40V  
Differential Input Voltage (Note 2) .....  $\pm 10V$   
Input Voltage .....  $V^+$  to  $V^-$   
Input Current (Note 2) .....  $\pm 10mA$   
Output Short-Circuit Duration (Note 3) ..... Indefinite

Operating Temperature Range (Note 4) ..  $-40^{\circ}C$  to  $85^{\circ}C$   
Specified Temperature Range (Note 5) ...  $-40^{\circ}C$  to  $85^{\circ}C$   
Maximum Junction Temperature .....  $150^{\circ}C$   
Storage Temperature Range .....  $-65^{\circ}C$  to  $150^{\circ}C$   
Lead Temperature (Soldering, 10 sec) .....  $300^{\circ}C$

## PACKAGE/ORDER INFORMATION

|  <p>TOP VIEW</p> <p>N8 PACKAGE<br/>8-LEAD PDIP</p> <p>S8 PACKAGE<br/>8-LEAD PLASTIC SO</p> <p><math>T_{JMAX} = 150^{\circ}C</math>, <math>\theta_{JA} = 130^{\circ}C/W</math> (N8)<br/> <math>T_{JMAX} = 150^{\circ}C</math>, <math>\theta_{JA} = 190^{\circ}C/W</math> (S8)</p> | ORDER<br>PART NUMBER                                                                                     |  <p>TOP VIEW</p> <p>S PACKAGE<br/>14-LEAD PLASTIC SO</p> <p><math>T_{JMAX} = 150^{\circ}C</math>, <math>\theta_{JA} = 110^{\circ}C/W</math></p> | ORDER<br>PART NUMBER |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
|                                                                                                                                                                                                                                                                                                                                                                   | LT1884CN8<br>LT1884CS8<br>LT1884ACN8<br>LT1884ACS8<br>LT1884IN8<br>LT1884IS8<br>LT1884AIN8<br>LT1884AIS8 |                                                                                                                                                                                                                                    | LT1885CS<br>LT1885IS |
|                                                                                                                                                                                                                                                                                                                                                                   | S8 PART MARKING                                                                                          |                                                                                                                                                                                                                                    |                      |
|                                                                                                                                                                                                                                                                                                                                                                   | 1884    1884I<br>1884A   1884AI                                                                          |                                                                                                                                                                                                                                    |                      |

Consult factory for Military grade parts.

## ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^{\circ}C$ .  
Single supply operation  $V_{EE} = 0$ ,  $V_{CC} = 5V$ ;  $V_{CM} = V_{CC}/2$  unless otherwise noted. (Note 5)

| SYMBOL   | PARAMETER                            | CONDITIONS                         | MIN | TYP | MAX  | UNITS   |
|----------|--------------------------------------|------------------------------------|-----|-----|------|---------|
| $V_{OS}$ | Input Offset Voltage (LT1884A)       | $0^{\circ}C < T_A < 70^{\circ}C$   |     | 25  | 50   | $\mu V$ |
|          |                                      | $-40^{\circ}C < T_A < 85^{\circ}C$ |     |     | 85   | $\mu V$ |
|          | Input Offset Voltage (LT1884/LT1885) | $0^{\circ}C < T_A < 70^{\circ}C$   |     | 30  | 80   | $\mu V$ |
|          |                                      | $-40^{\circ}C < T_A < 85^{\circ}C$ |     |     | 125  | $\mu V$ |
| $I_{OS}$ | Input Offset Current (LT1884A)       | $0^{\circ}C < T_A < 70^{\circ}C$   |     | 100 | 300  | pA      |
|          |                                      | $-40^{\circ}C < T_A < 85^{\circ}C$ |     |     | 400  | pA      |
|          | Input Offset Current (LT1884/LT1885) | $0^{\circ}C < T_A < 70^{\circ}C$   |     | 150 | 900  | pA      |
|          |                                      | $-40^{\circ}C < T_A < 85^{\circ}C$ |     |     | 1200 | pA      |

# ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ .  
Single supply operation  $V_{EE} = 0$ ,  $V_{CC} = 5\text{V}$ ;  $V_{CM} = V_{CC}/2$  unless otherwise noted. (Note 5)

| SYMBOL    | PARAMETER                                            | CONDITIONS                                                                          | MIN | TYP            | MAX            | UNITS                        |
|-----------|------------------------------------------------------|-------------------------------------------------------------------------------------|-----|----------------|----------------|------------------------------|
| $I_B$     | Input Bias Current (LT1884A)                         | $0^\circ\text{C} < T_A < 70^\circ\text{C}$                                          | ●   | 100            | 400            | pA                           |
|           |                                                      | $-40^\circ\text{C} < T_A < 85^\circ\text{C}$                                        | ●   |                | 500            | pA                           |
|           |                                                      |                                                                                     |     |                | 600            | pA                           |
|           | Input Bias Current (LT1884/LT1885)                   | $0^\circ\text{C} < T_A < 70^\circ\text{C}$                                          | ●   | 150            | 900            | pA                           |
|           |                                                      | $-40^\circ\text{C} < T_A < 85^\circ\text{C}$                                        | ●   |                | 1200           | pA                           |
|           |                                                      |                                                                                     |     |                | 1400           | pA                           |
|           | Input Noise Voltage                                  | 0.1Hz to 10Hz                                                                       |     | 0.4            |                | $\mu\text{V}_{P-P}$          |
| $e_n$     | Input Noise Voltage Density                          | $f = 1\text{kHz}$                                                                   |     | 9.5            |                | $\text{nV}/\sqrt{\text{Hz}}$ |
| $i_n$     | Input Noise Current Density                          | $f = 1\text{kHz}$                                                                   |     | 0.05           |                | $\text{pA}/\sqrt{\text{Hz}}$ |
| $V_{CM}$  | Input Voltage Range                                  |                                                                                     | ●   | $V_{EE} + 1.0$ | $V_{CC} - 1.0$ | V                            |
|           |                                                      |                                                                                     |     | $V_{EE} + 1.2$ | $V_{CC} - 1.2$ | V                            |
| CMRR      | Common Mode Rejection Ratio                          | $1\text{V} < V_{CM} < 4\text{V}$                                                    | ●   | 108            | 128            | dB                           |
|           |                                                      | $1.2\text{V} < V_{CM} < 3.8\text{V}$                                                |     | 106            |                | dB                           |
| PSRR      | Power Supply Rejection Ratio                         | $V_{EE} = 0$ , $V_{CM} = 1.5\text{V}$                                               | ●   | 108            | 132            | dB                           |
|           |                                                      | $0^\circ\text{C} < T_A < 85^\circ\text{C}$ , $2.7\text{V} < V_{CC} < 32\text{V}$    |     | 108            | 132            | dB                           |
|           |                                                      | $T_A = -40^\circ\text{C}$ , $3\text{V} < V_{CC} < 32\text{V}$                       |     |                |                | dB                           |
|           | Minimum Operating Supply Voltage                     |                                                                                     | ●   | 2.4            | 2.7            | V                            |
| $A_{VOL}$ | Large-Signal Voltage Gain                            | $R_L = 10\text{k}$ ; $1\text{V} < V_{OUT} < 4\text{V}$                              | ●   | 500            | 1600           | V/mV                         |
|           |                                                      |                                                                                     |     | 350            |                | V/mV                         |
|           |                                                      | $R_L = 2\text{k}$ ; $1\text{V} < V_{OUT} < 4\text{V}$                               | ●   | 400            | 800            | V/mV                         |
|           |                                                      |                                                                                     |     | 300            |                | V/mV                         |
|           |                                                      | $R_L = 1\text{k}$ ; $1\text{V} < V_{OUT} < 4\text{V}$                               | ●   | 300            | 400            | V/mV                         |
|           |                                                      |                                                                                     |     | 200            |                | V/mV                         |
| $V_{OL}$  | Output Voltage Swing Low                             | No Load                                                                             | ●   | 20             | 40             | mV                           |
|           |                                                      | $I_{SINK} = 100\mu\text{A}$                                                         | ●   | 25             | 50             | mV                           |
|           |                                                      | $I_{SINK} = 1\text{mA}$                                                             | ●   | 70             | 150            | mV                           |
|           |                                                      | $I_{SINK} = 5\text{mA}$                                                             | ●   | 270            | 600            | mV                           |
| $V_{OH}$  | Output Voltage Swing High<br>(Referred to $V_{CC}$ ) | No Load                                                                             | ●   | 120            | 220            | mV                           |
|           |                                                      | $I_{SOURCE} = 100\mu\text{A}$                                                       | ●   | 130            | 230            | mV                           |
|           |                                                      | $I_{SOURCE} = 1\text{mA}$                                                           | ●   | 180            | 300            | mV                           |
|           |                                                      | $I_{SOURCE} = 5\text{mA}$                                                           | ●   | 360            | 600            | mV                           |
| $I_S$     | Supply Current per Amplifier                         | $V_{CC} = 3\text{V}$                                                                | ●   | 0.45           | 0.65           | 0.85                         |
|           |                                                      |                                                                                     |     |                |                | 1.30                         |
|           |                                                      | $V_{CC} = 5\text{V}$                                                                | ●   | 0.50           | 0.65           | 0.9                          |
|           |                                                      |                                                                                     |     |                |                | 1.4                          |
|           |                                                      | $V_{CC} = 12\text{V}$                                                               | ●   | 0.50           | 0.70           | 1.0                          |
|           |                                                      |                                                                                     |     |                |                | 1.5                          |
| $I_{SC}$  | Short-Circuit Current                                | $V_{OUT}$ Short to GND                                                              | ●   | 15             | 30             | mA                           |
|           |                                                      | $V_{OUT}$ Short to $V_{CC}$                                                         | ●   | 15             | 30             | mA                           |
| GBW       | Gain-Bandwidth Product                               | $f = 20\text{kHz}$                                                                  |     | 1.2            | 2              | MHz                          |
| $t_S$     | Settling Time                                        | 0.01%, $V_{OUT} = 1.5\text{V}$ to $3.5\text{V}$ ,<br>$A_V = -1$ , $R_L = 2\text{k}$ |     | 10             |                | $\mu\text{s}$                |
| $SR^+$    | Positive Slew Rate                                   | $A_V = -1$                                                                          | ●   | 0.45           | 0.9            | V/ $\mu\text{s}$             |
|           |                                                      |                                                                                     |     | 0.36           |                | V/ $\mu\text{s}$             |
| $SR^-$    | Negative Slew Rate                                   | $A_V = -1$                                                                          | ●   | 0.35           | 0.7            | V/ $\mu\text{s}$             |
|           |                                                      |                                                                                     |     | 0.25           |                | V/ $\mu\text{s}$             |

## ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ .  
Single supply operation  $V_{EE} = 0$ ,  $V_{CC} = 5\text{V}$ ;  $V_{CM} = V_{CC}/2$  unless otherwise noted. (Note 5)

| SYMBOL              | PARAMETER                                          | CONDITIONS                                                                       | MIN | TYP | MAX  | UNITS                        |
|---------------------|----------------------------------------------------|----------------------------------------------------------------------------------|-----|-----|------|------------------------------|
| $\Delta V_{OS}$     | Offset Voltage Match (LT1884A)                     | $0^\circ\text{C} < T_A < 70^\circ\text{C}$                                       |     | 30  | 70   | $\mu\text{V}$                |
|                     |                                                    | $-40^\circ\text{C} < T_A < 85^\circ\text{C}$                                     |     |     | 125  | $\mu\text{V}$                |
|                     |                                                    |                                                                                  |     |     | 160  | $\mu\text{V}$                |
|                     | Offset Voltage Match (LT1884/LT1885)               | (Note 7)                                                                         |     | 35  | 125  | $\mu\text{V}$                |
|                     |                                                    | $0^\circ\text{C} < T_A < 70^\circ\text{C}$                                       |     |     | 195  | $\mu\text{V}$                |
|                     |                                                    | $-40^\circ\text{C} < T_A < 85^\circ\text{C}$                                     |     |     | 235  | $\mu\text{V}$                |
|                     | Offset Voltage Match Drift                         | (Notes 6, 7)                                                                     |     | 0.4 | 1.2  | $\mu\text{V}/^\circ\text{C}$ |
| $\Delta I_{B+}$     | Noninverting Bias Current Match (LT1884A)          | $0^\circ\text{C} < T_A < 70^\circ\text{C}$                                       |     | 200 | 600  | pA                           |
|                     |                                                    | $-40^\circ\text{C} < T_A < 85^\circ\text{C}$                                     |     |     | 700  | pA                           |
|                     |                                                    |                                                                                  |     |     | 850  | pA                           |
|                     | Noninverting Bias Current Match (LT1884/LT1885)    | (Notes 7, 9)                                                                     |     | 250 | 1200 | pA                           |
|                     |                                                    | $0^\circ\text{C} < T_A < 70^\circ\text{C}$                                       |     |     | 1600 | pA                           |
|                     |                                                    | $-40^\circ\text{C} < T_A < 85^\circ\text{C}$                                     |     |     | 1900 | pA                           |
| $\Delta\text{CMRR}$ | Common Mode Rejection Match                        | (Notes 7, 9)                                                                     | 104 | 125 |      | dB                           |
| $\Delta\text{PSRR}$ | Positive Power Supply Rejection Match (Notes 7, 9) | $V_{EE} = 0$ , $V_{CM} = 1.5\text{V}$                                            |     |     |      |                              |
|                     |                                                    | $0^\circ\text{C} < T_A < 85^\circ\text{C}$ , $2.7\text{V} < V_{CC} < 32\text{V}$ | 104 | 126 |      | dB                           |
|                     |                                                    | $T_A = -40^\circ\text{C}$ , $3\text{V} < V_{CC} < 32\text{V}$                    | 104 | 126 |      | dB                           |

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ .  
Split supply operation  $V_S = \pm 15\text{V}$ ;  $V_{CM} = 0\text{V}$  unless otherwise noted. (Note 5)

| SYMBOL   | PARAMETER                            | CONDITIONS                                   | MIN            | TYP  | MAX            | UNITS                        |
|----------|--------------------------------------|----------------------------------------------|----------------|------|----------------|------------------------------|
| $V_{OS}$ | Input Offset Voltage (LT1884A)       | $0^\circ\text{C} < T_A < 70^\circ\text{C}$   |                | 25   | 50             | $\mu\text{V}$                |
|          |                                      | $-40^\circ\text{C} < T_A < 85^\circ\text{C}$ |                |      | 85             | $\mu\text{V}$                |
|          |                                      |                                              |                |      | 110            | $\mu\text{V}$                |
|          | Input Offset Voltage (LT1884/LT1885) | $0^\circ\text{C} < T_A < 70^\circ\text{C}$   |                | 30   | 80             | $\mu\text{V}$                |
|          |                                      | $-40^\circ\text{C} < T_A < 85^\circ\text{C}$ |                |      | 125            | $\mu\text{V}$                |
|          |                                      |                                              |                |      | 150            | $\mu\text{V}$                |
|          | Input Offset Voltage Drift (Note 6)  | $0^\circ\text{C} < T_A < 70^\circ\text{C}$   |                | 0.3  | 0.8            | $\mu\text{V}/^\circ\text{C}$ |
|          |                                      | $-40^\circ\text{C} < T_A < 85^\circ\text{C}$ |                | 0.3  | 0.8            | $\mu\text{V}/^\circ\text{C}$ |
| $I_{OS}$ | Input Offset Current (LT1884A)       | $0^\circ\text{C} < T_A < 70^\circ\text{C}$   |                | 150  | 300            | pA                           |
|          |                                      | $-40^\circ\text{C} < T_A < 85^\circ\text{C}$ |                |      | 400            | pA                           |
|          |                                      |                                              |                |      | 500            | pA                           |
|          | Input Offset Current (LT1884/LT1885) | $0^\circ\text{C} < T_A < 70^\circ\text{C}$   |                | 150  | 900            | pA                           |
|          |                                      | $-40^\circ\text{C} < T_A < 85^\circ\text{C}$ |                |      | 1200           | pA                           |
|          |                                      |                                              |                |      | 1400           | pA                           |
| $I_B$    | Input Bias Current (LT1884A)         | $0^\circ\text{C} < T_A < 70^\circ\text{C}$   |                | 150  | 400            | pA                           |
|          |                                      | $-40^\circ\text{C} < T_A < 85^\circ\text{C}$ |                |      | 500            | pA                           |
|          |                                      |                                              |                |      | 600            | pA                           |
|          | Input Bias Current (LT1884/LT1885)   | $0^\circ\text{C} < T_A < 70^\circ\text{C}$   |                | 150  | 900            | pA                           |
|          |                                      | $-40^\circ\text{C} < T_A < 85^\circ\text{C}$ |                |      | 1200           | pA                           |
|          |                                      |                                              |                |      | 1400           | pA                           |
|          | Input Noise Voltage                  | 0.1Hz to 10Hz                                |                | 0.4  |                | $\mu\text{V}_{P-P}$          |
| $e_n$    | Input Noise Voltage Density          | $f = 1\text{kHz}$                            |                | 9.5  |                | $\text{nV}/\sqrt{\text{Hz}}$ |
| $i_n$    | Input Noise Current Density          | $f = 1\text{kHz}$                            |                | 0.05 |                | $\text{pA}/\sqrt{\text{Hz}}$ |
| $V_{CM}$ | Input Voltage Range                  |                                              | $V_{EE} + 1.0$ |      | $V_{CC} - 1.0$ | V                            |
|          |                                      |                                              | $V_{EE} + 1.2$ |      | $V_{CC} - 1.2$ | V                            |
| CMRR     | Common Mode Rejection Ratio          | $-13.5\text{V} < V_{CM} < 13.5\text{V}$      | 114            | 130  |                | dB                           |

# ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ . Split supply operation  $V_S = \pm 15\text{V}$ ;  $V_{CM} = 0\text{V}$  unless otherwise noted. (Note 5)

| SYMBOL                | PARAMETER                                            | CONDITIONS                                                                                             |   | MIN  | TYP       | MAX        | UNITS                        |
|-----------------------|------------------------------------------------------|--------------------------------------------------------------------------------------------------------|---|------|-----------|------------|------------------------------|
| +PSRR                 | Positive Power Supply Rejection Ratio                | $V_{EE} = -15\text{V}$ , $V_{CM} = 0\text{V}$ ; $1.5\text{V} < V_{CC} < 18\text{V}$                    | ● | 114  | 132       |            | dB                           |
| –PSRR                 | Negative Power Supply Rejection Ratio                | $V_{CC} = 15\text{V}$ , $V_{CM} = 0\text{V}$ ; $-1.5\text{V} < V_{EE} < -18\text{V}$                   | ● | 106  | 132       |            | dB                           |
|                       | Minimum Operating Supply Voltage                     |                                                                                                        | ● |      | $\pm 1.2$ | $\pm 1.35$ | V                            |
| $A_{VOL}$             | Large-Signal Voltage Gain                            | $R_L = 10\text{k}\Omega$ ; $-13.5\text{V} < V_{OUT} < 13.5\text{V}$                                    | ● | 1000 | 1600      |            | V/mV                         |
|                       |                                                      |                                                                                                        | ● | 700  |           |            | V/mV                         |
|                       |                                                      | $R_L = 2\text{k}\Omega$ ; $-13.5\text{V} < V_{OUT} < 13.5\text{V}$                                     | ● | 250  | 420       |            | V/mV                         |
|                       |                                                      |                                                                                                        | ● | 175  |           |            | V/mV                         |
|                       |                                                      | $R_L = 1\text{k}\Omega$ ; $-12\text{V} < V_{OUT} < 12\text{V}$                                         | ● | 100  | 230       |            | V/mV                         |
|                       |                                                      |                                                                                                        | ● | 75   |           |            | V/mV                         |
| $V_{OL}$              | Output Voltage Swing Low<br>(Referred to $V_{EE}$ )  | No Load                                                                                                | ● |      | 20        | 40         | mV                           |
|                       |                                                      | $I_{SINK} = 100\mu\text{A}$                                                                            | ● |      | 25        | 50         | mV                           |
|                       |                                                      | $I_{SINK} = 1\text{mA}$                                                                                | ● |      | 70        | 150        | mV                           |
|                       |                                                      | $I_{SINK} = 5\text{mA}$                                                                                | ● |      | 270       | 600        | mV                           |
| $V_{OH}$              | Output Voltage Swing High<br>(Referred to $V_{CC}$ ) | No Load                                                                                                | ● |      | 160       | 220        | mV                           |
|                       |                                                      | $I_{SOURCE} = 100\mu\text{A}$                                                                          | ● |      | 160       | 230        | mV                           |
|                       |                                                      | $I_{SOURCE} = 1\text{mA}$                                                                              | ● |      | 180       | 300        | mV                           |
|                       |                                                      | $I_{SOURCE} = 5\text{mA}$                                                                              | ● |      | 360       | 600        | mV                           |
| $I_S$                 | Supply Current Per Amplifier                         | $V_S = \pm 15\text{V}$                                                                                 | ● |      | 0.85      | 1.1        | mA                           |
|                       |                                                      |                                                                                                        | ● |      |           | 1.6        | mA                           |
| $I_{SC}$              | Short-Circuit Current                                | $V_{OUT}$ Short to $V_{EE}$                                                                            | ● | 15   | 50        |            | mA                           |
|                       |                                                      | $V_{OUT}$ Short to $V_{CC}$                                                                            | ● | 15   | 30        |            | mA                           |
| GBW                   | Gain-Bandwidth Product                               | $f = 20\text{kHz}$                                                                                     |   | 1.5  | 2.2       |            | MHz                          |
| $t_S$                 | Settling Time                                        | 0.01%, $V_{OUT} = -5\text{V}$ to $5\text{V}$ ,<br>$A_V = -1$ , $R_L = 2\text{k}\Omega$                 |   |      | 17        |            | $\mu\text{s}$                |
| $SR^+$                | Positive Slew Rate                                   | $A_V = -1$                                                                                             | ● | 0.5  | 1.0       |            | V/ $\mu\text{s}$             |
|                       |                                                      |                                                                                                        | ● | 0.4  |           |            | V/ $\mu\text{s}$             |
| $SR^-$                | Negative Slew Rate                                   | $A_V = -1$                                                                                             | ● | 0.40 | 0.7       |            | V/ $\mu\text{s}$             |
|                       |                                                      |                                                                                                        | ● | 0.26 |           |            | V/ $\mu\text{s}$             |
| $\Delta V_{OS}$       | Offset Voltage Match (LT1884A)                       | (Note 7)                                                                                               |   |      | 35        | 70         | $\mu\text{V}$                |
|                       |                                                      | $0^\circ\text{C} < T_A < 70^\circ\text{C}$                                                             | ● |      |           | 125        | $\mu\text{V}$                |
|                       |                                                      | $-40^\circ\text{C} < T_A < 85^\circ\text{C}$                                                           | ● |      |           | 160        | $\mu\text{V}$                |
|                       | Offset Voltage Match (LT1884/LT1885)                 | (Note 7)                                                                                               |   |      | 35        | 125        | $\mu\text{V}$                |
|                       |                                                      | $0^\circ\text{C} < T_A < 70^\circ\text{C}$                                                             | ● |      |           | 175        | $\mu\text{V}$                |
|                       |                                                      | $-40^\circ\text{C} < T_A < 85^\circ\text{C}$                                                           | ● |      |           | 235        | $\mu\text{V}$                |
|                       | Offset Voltage Match Drift                           | (Note 6, 7)                                                                                            | ● |      | 0.4       | 1.1        | $\mu\text{V}/^\circ\text{C}$ |
| $\Delta I_B^+$        | Noninverting Bias Current Match<br>(LT1884A)         | (Notes 7, 8)                                                                                           |   |      | 200       | 600        | pA                           |
|                       |                                                      | $0^\circ\text{C} < T_A < 70^\circ\text{C}$                                                             | ● |      |           | 700        | pA                           |
|                       |                                                      | $-40^\circ\text{C} < T_A < 85^\circ\text{C}$                                                           | ● |      |           | 850        | pA                           |
|                       | Noninverting Bias Current Match<br>(LT1884/LT1885)   | (Notes 7, 8)                                                                                           |   |      | 240       | 1200       | pA                           |
|                       |                                                      | $0^\circ\text{C} < T_A < 70^\circ\text{C}$                                                             | ● |      |           | 1600       | pA                           |
|                       |                                                      | $-40^\circ\text{C} < T_A < 85^\circ\text{C}$                                                           | ● |      |           | 1900       | pA                           |
| $\Delta\text{CMRR}$   | Common Mode Rejection Match                          | (Notes 7, 9)                                                                                           | ● | 106  | 125       |            | dB                           |
| $\Delta +\text{PSRR}$ | Positive Power Supply Rejection Match                | $V_{EE} = -15\text{V}$ , $V_{CM} = 0\text{V}$ , $1.5\text{V} < V_{CC} < 18\text{V}$ ,<br>(Notes 7, 9)  | ● | 108  | 124       |            | dB                           |
| $\Delta -\text{PSRR}$ | Negative Power Supply Rejection Match                | $V_{CC} = 15\text{V}$ , $V_{CM} = 0\text{V}$ , $-1.5\text{V} < V_{EE} < -18\text{V}$ ,<br>(Notes 7, 9) | ● | 102  | 132       |            | dB                           |

## ELECTRICAL CHARACTERISTICS

**Note 1:** Absolute Maximum Ratings are those values beyond which the life of the device may be impaired.

**Note 2:** The inputs are protected by back-to-back diodes. If the differential input voltage exceeds 0.7V, the input current should be limited to less than 10mA.

**Note 3:** A heat sink may be required to keep the junction temperature below absolute maximum.

**Note 4:** The LT1884C/LT1885C and LT1884I/LT1885I are guaranteed functional over the operating temperature range of  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$ .

**Note 5:** The LT1884C/LT1885C are designed, characterized and expected to meet specified performance from  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$  but are not tested or QA sampled at these temperatures. LT1884I is guaranteed to meet specified performance from  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$ .

**Note 6:** This parameter is not 100% tested.


**Note 7:** Matching parameters are the difference between amplifiers A and B in the LT1884 and between amplifiers A and D and B and C in the LT1885.

**Note 8:** This parameter is the difference between the two noninverting input bias currents.


**Note 9:**  $\Delta\text{CMRR}$  and  $\Delta\text{PSRR}$  are defined as follows: CMRR and PSRR are measured in  $\mu\text{V/V}$  on each amplifier. The difference is calculated in  $\mu\text{V/V}$  and then converted to dB.

## TYPICAL PERFORMANCE CHARACTERISTICS


Distribution of Offset Voltage Drift

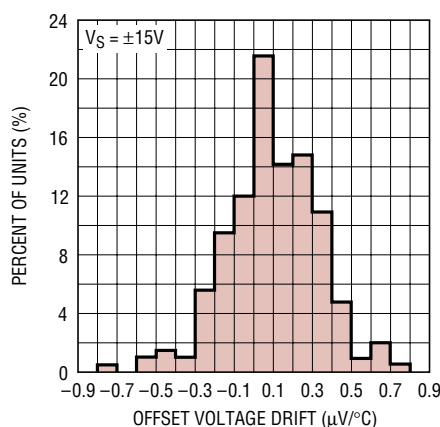


Input Offset Voltage vs Temperature

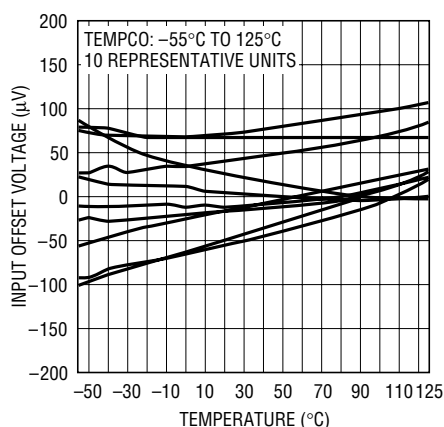


$V_{\text{OUT}}$  vs  $I_{\text{SINK}}$

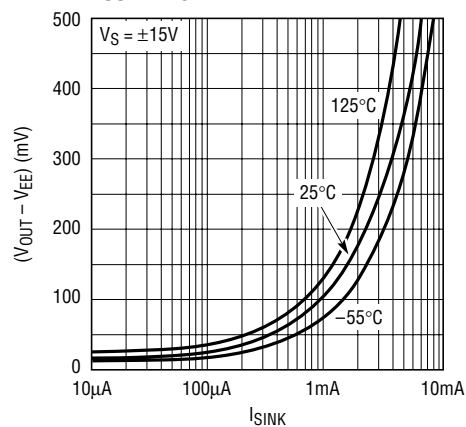


$V_{\text{OUT}}$  vs  $I_{\text{SOURCE}}$

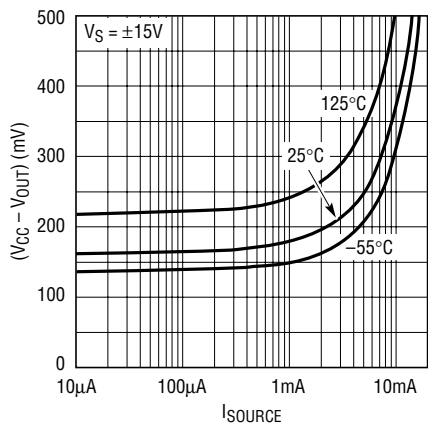

Gain vs Frequency

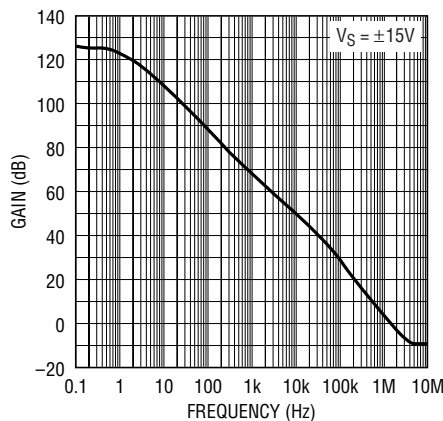


Gain, Phase Shift vs Frequency

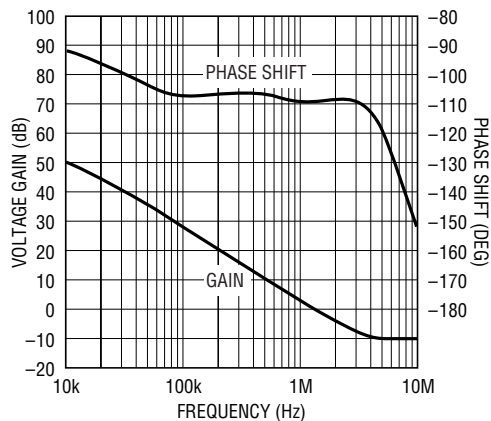


# TYPICAL PERFORMANCE CHARACTERISTICS


CMRR vs Frequency

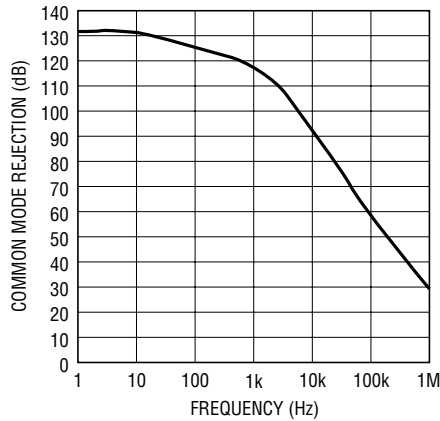


PSRR vs Frequency

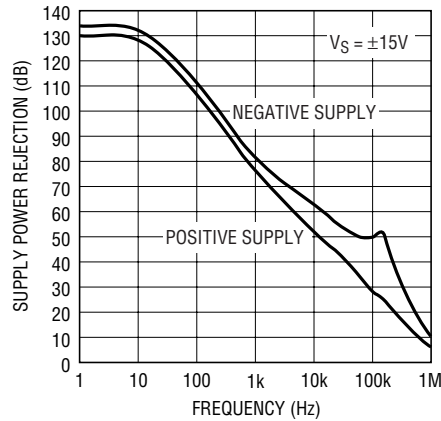


$V_n, I_n$  vs Frequency

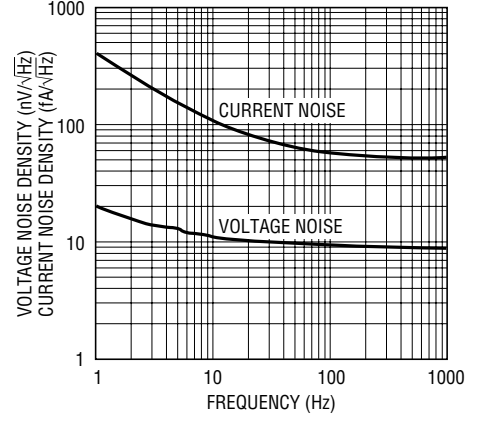


0.1Hz to 10Hz Noise

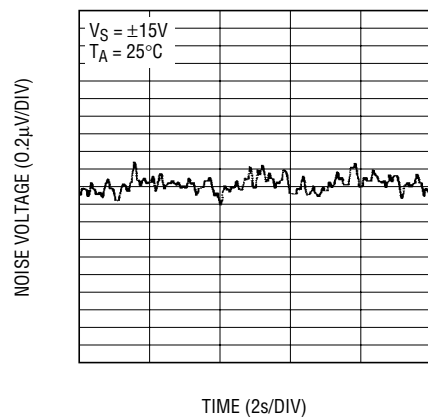


0.01Hz to 1Hz Noise

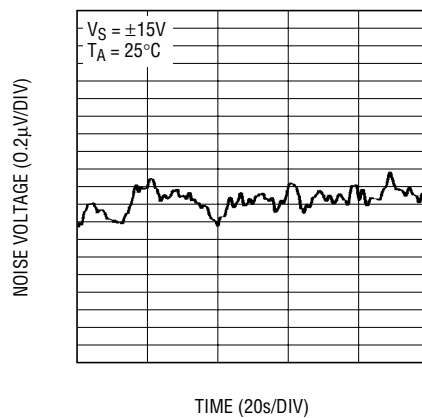


Slew Rate vs Temperature

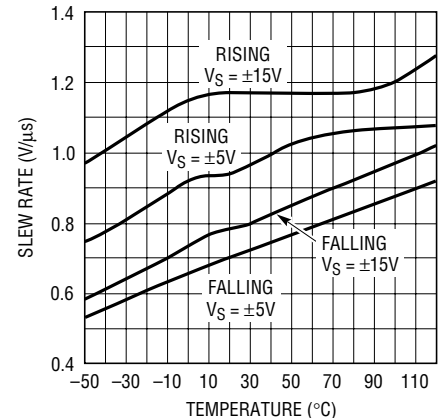


Settling Time to 0.01% vs Output Step

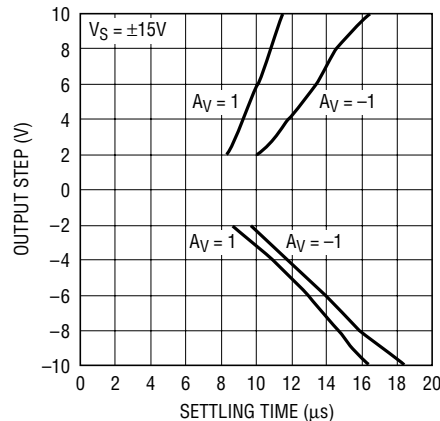





Supply Current per Amplifier vs Supply Voltage

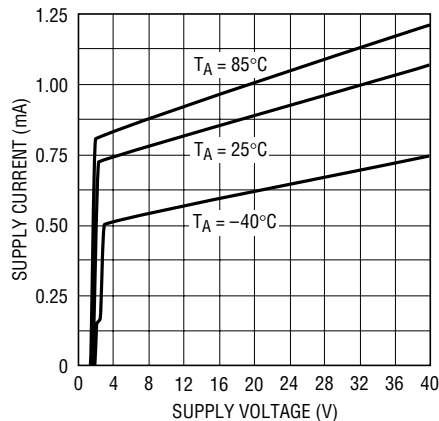


Input Bias Current vs Common Mode Voltage

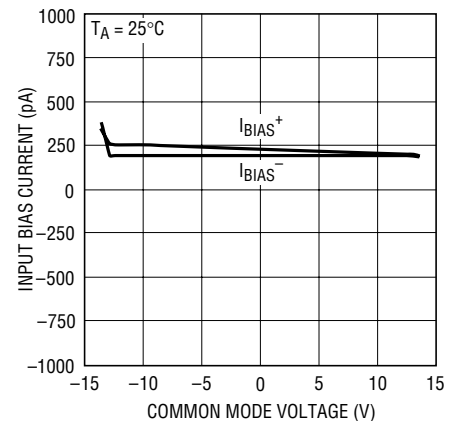


## TYPICAL PERFORMANCE CHARACTERISTICS

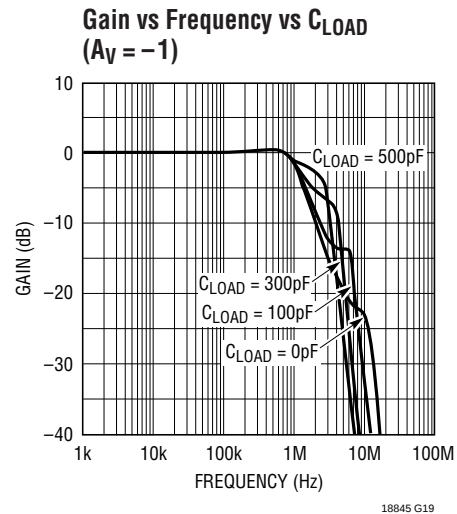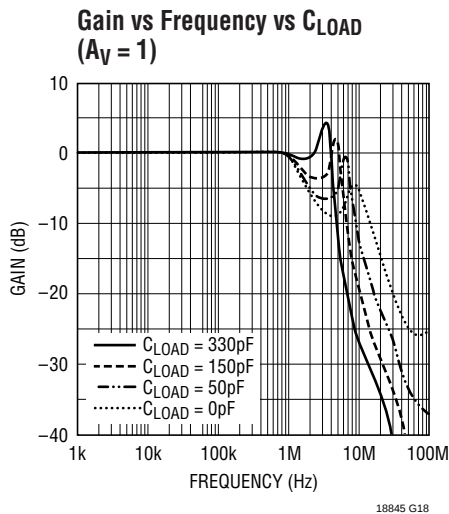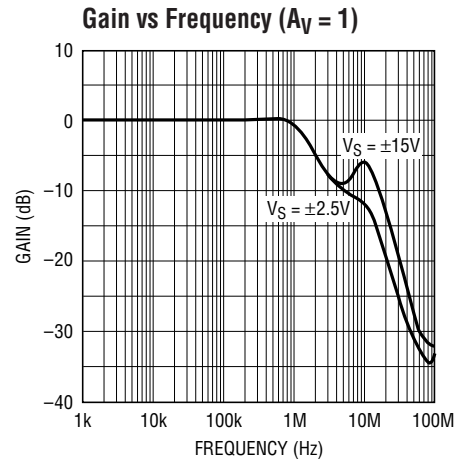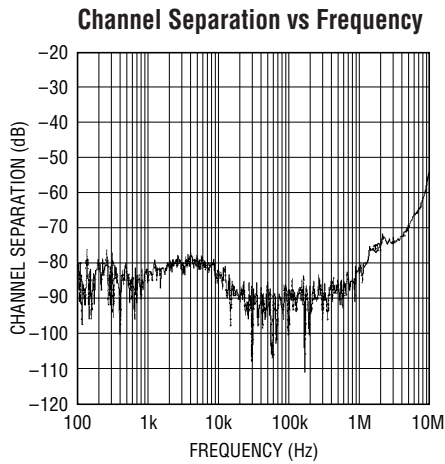

### Large-Signal Response

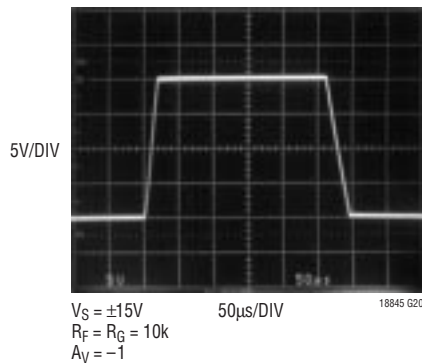

### Small-Signal Response

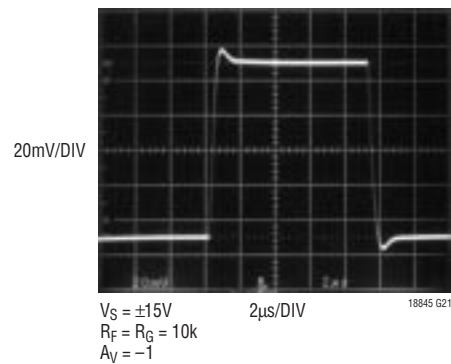

## APPLICATIONS INFORMATION

The LT1884/LT1885 dual op amp features exceptional input precision with rail-to-rail output swing. Slew rate and small-signal bandwidth are superior to other amplifiers with comparable input precision. These characteristics make the LT1884/LT1885 a convenient choice for precision low voltage systems and for improved AC performance in higher voltage precision systems. Maintaining the advantage of the precision inherent in the amplifier depends upon proper applications circuit design and board layout.

### Preserving Input Precision

Preserving the input voltage accuracy of the LT1884/LT1885 requires that the applications circuit and PC board layout do not introduce errors comparable to or greater than the 30 $\mu$ V offset. Temperature differentials across the input connections can generate thermocouple voltages of 10s of microvolts. PC board layouts should keep connections to the amplifier's input pins close together and away from heat dissipating components. Air currents across the board can also generate temperature differentials.

The extremely low input bias currents, 100pA, allow high accuracy to be maintained with high impedance sources and feedback networks. The LT1884/LT1885's low input bias currents are obtained by using a cancellation circuit on-chip. This causes the resulting  $I_{BIAS}^+$  and  $I_{BIAS}^-$  to be uncorrelated, as implied by the  $I_{OS}$  specification being comparable to the  $I_{BIAS}$ . The user should not try to balance the input resistances in each input lead, as is commonly recommended with most amplifiers. The impedance at either input should be kept as small as possible to minimize total circuit error.

PC board layout is important to ensure that leakage currents do not corrupt the low  $I_{BIAS}$  of the amplifier. In high precision, high impedance circuits, the input pins should be surrounded by a guard ring of PC board

interconnect, with the guard driven to the same common mode voltage as the amplifier inputs.

### Input Common Mode Range

The LT1884/LT1885 output is able to swing close to each power supply rail, but the input stage is limited to operating between  $V_{EE} + 0.8V$  and  $V_{CC} - 0.9V$ . Exceeding this common mode range will cause the gain to drop to zero; however, no gain reversal will occur.

### Input Protection

The inverting and noninverting input pins of the LT1884/LT1885 have limited on-chip protection. ESD protection is provided to prevent damage during handling. The input transistors have voltage clamping and limiting resistors to protect against input differentials up to 10V. Short transients above this level will also be tolerated. If the input pins may be subject to a sustained differential voltage above 10V, external limiting resistors should be used to prevent damage to the amplifier. A 1k resistor in each input lead will provide protection against a 30V differential voltage.

### Capacitive Loads

The LT1884/LT1885 can drive capacitive loads up to 300pF when configured for unity gain. The capacitive load driving capability increases as the amplifier is used in higher gain configurations. Capacitive load driving may also be increased by decoupling the capacitance from the output with a small resistance.


### Input Bias Currents

While it may be tempting to seek out a JFET amplifier for low input bias current, remember that bipolar devices improve with temperature while JFETs degrade.

# PACKAGE DESCRIPTION


Dimensions in inches (millimeters) unless otherwise noted.

## N8 Package 8-Lead PDIP (Narrow 0.300) (LTC DWG # 05-08-1510)

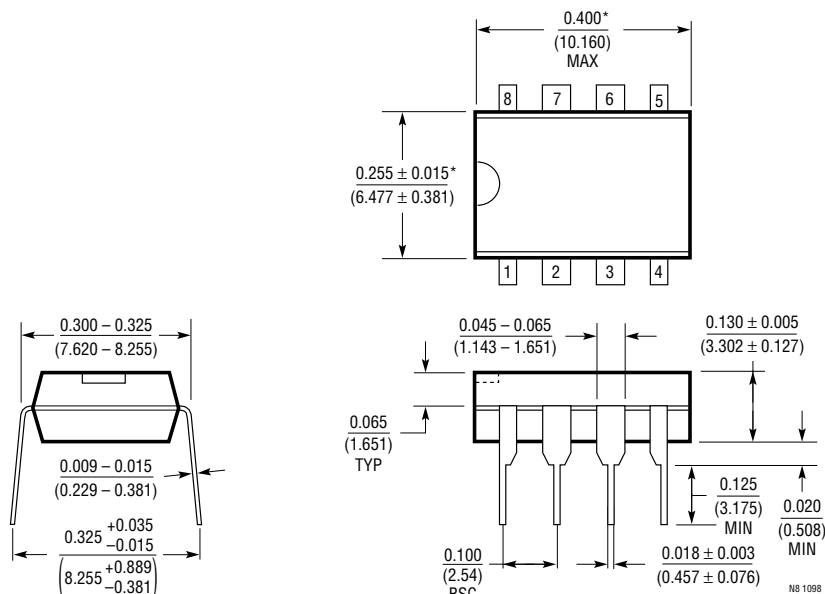

\*THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.  
MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.010 INCH (0.254mm)

## S8 Package 8-Lead Plastic Small Outline (Narrow 0.150) (LTC DWG # 05-08-1610)

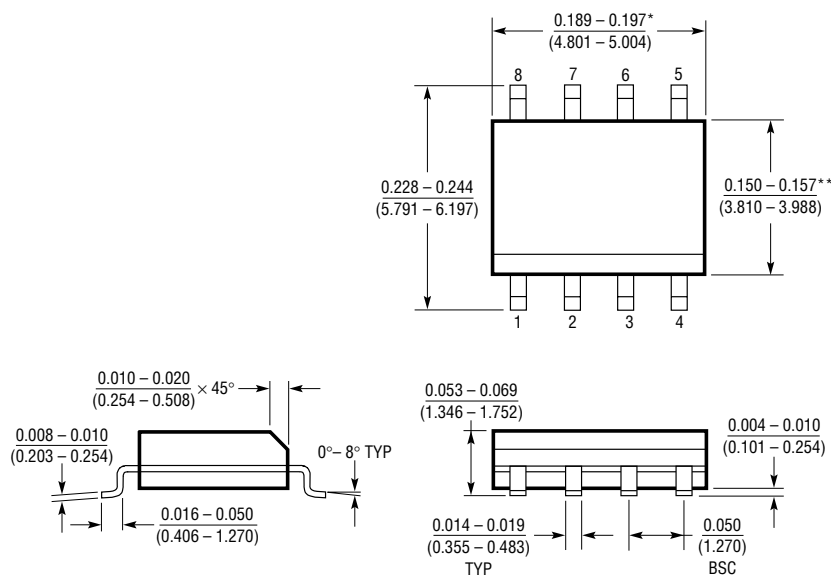

\* DIMENSION DOES NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED 0.006" (0.152mm) PER SIDE


\*\* DIMENSION DOES NOT INCLUDE INTERLEAD FLASH. INTERLEAD FLASH SHALL NOT EXCEED 0.010" (0.254mm) PER SIDE

S08 1298

# PACKAGE DESCRIPTION

Dimensions in inches (millimeters) unless otherwise noted.


## S Package 14-Lead Plastic Small Outline (Narrow 0.150) (LTC DWG # 05-08-1610)

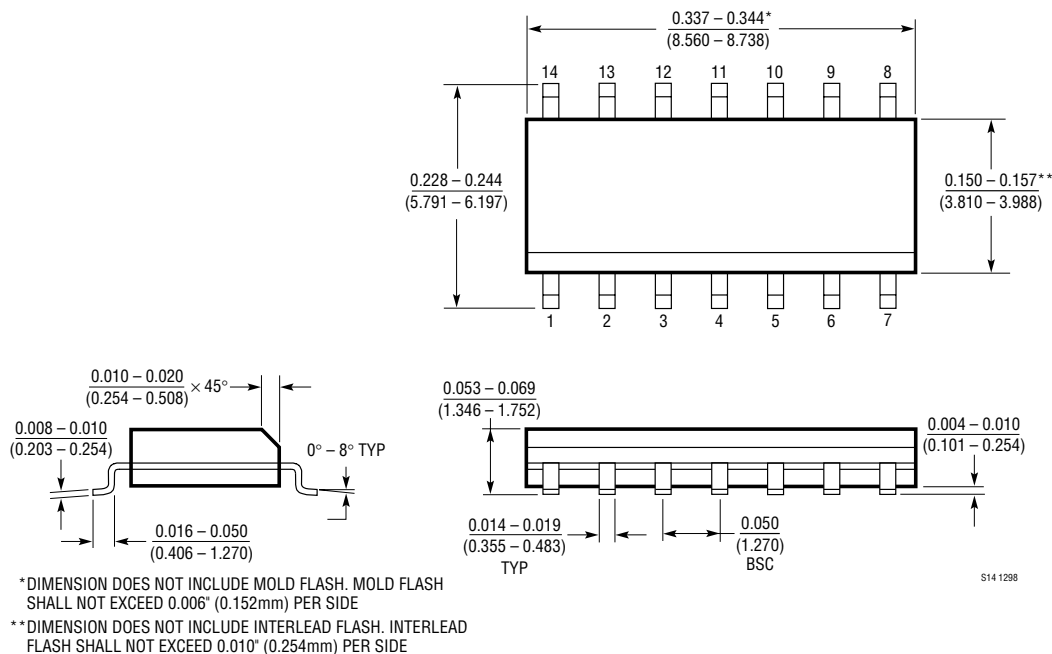

S14 1298

TYPICAL APPLICATION

16-Bit Voltage Output DAC on  $\pm 5V$  Supply

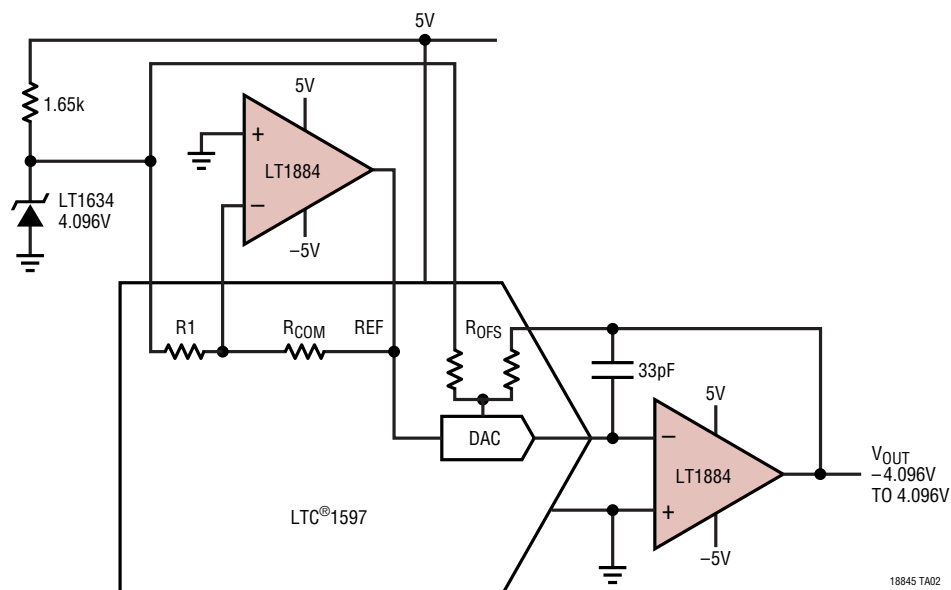

RELATED PARTS

| PART NUMBER   | DESCRIPTION                                     | COMMENTS                                     |
|---------------|-------------------------------------------------|----------------------------------------------|
| LT1112        | Dual Picoamp Input Op Amp                       | $V_{OS} = 60\mu V$ Max                       |
| LT1114        | Quad Picoamp Input Op Amp                       | $V_{OS} = 60\mu V$ Max                       |
| LT1167        | Gain Programmable Instrumentation Amp           | Gain Error = 0.08% Max                       |
| LT1490        | Micropower Rail-to-Rail Input and Output Op Amp | Over-The-Top™ Common Mode Range              |
| LT1793        | Low Noise JFET Op Amp                           | $I_B = 10pA$ Max                             |
| LT1881/LT1882 | Picoamp Input Rail-to-Rail Output Op Amp        | Lower Input Bias Currents Than LT1884/LT1885 |
| LTC2050       | Zero Drift Op Amp in SOT-23                     | $V_{OS} = 3\mu V$ Max, Rail-to-Rail Output   |

Over-The-Top is a trademark of Linear Technology Corporation.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А