
Sup/IRBuck™

USER GUIDE FOR IR3895 EVALUATION BOARD

1.2Vout

DESCRIPTION

The IR3895 is a synchronous buck converter, providing a compact, high performance and flexible solution in a small 5mm X 6 mm Power QFN package.

Key features offered by the IR3895 include internal Digital Soft Start/Soft Stop, precision 0.5V reference voltage, Power Good, thermal protection, programmable switching frequency, Enable input, input under-voltage lockout for proper start-up, enhanced line/load regulation with feed forward, external frequency synchronization with smooth clocking, smart internal LDO and pre-bias start-up.

Output over-current protection function is implemented by sensing the voltage developed across the on-resistance of the synchronous rectifier MOSFET for optimum cost and performance and the current limit is thermally compensated.

This user guide contains the schematic and bill of materials for the IR3895 evaluation board. The guide describes operation and use of the evaluation board itself. Detailed application information for IR3895 is available in the IR3895 data sheet.

BOARD FEATURES

- $V_{in} = +12V (+ 13.2V \text{ Max})$
- $V_{out} = +1.2V @ 0- 16A$
- $F_s = 600kHz$
- $L = 0.4\mu H$
- $C_{in} = 5 \times 10\mu F$ (ceramic 1206) + $1 \times 330\mu F$ (electrolytic)
- $C_{out} = 6 \times 47\mu F$ (ceramic 0805)

CONNECTIONS AND OPERATING INSTRUCTIONS

A well regulated +12V input supply should be connected to VIN+ and VIN-. A maximum of 16A load should be connected to VOUT+ and VOUT-. The input and output connections of the board are listed in Table I.

IR3895 has only one input supply and internal LDO generates Vcc from Vin. If operation with external Vcc is required, then R15 can be removed and external Vcc can be applied between Vcc+ and Vcc- pins. Vin pin and Vcc/LDOout pins should be shorted together for external Vcc operation (use zero ohm resistor for R29).

The output can track voltage at the Vp pin. For this purpose, Vref pin is to be connected to ground (use zero ohm resistor for R21). The value of R14 and R28 can be selected to provide the desired tracking ratio between output voltage and the tracking input.


Table I. Connections

| Connection | Signal Name |
|------------|----------------------|
| VIN+ | Vin (+12V) |
| VIN- | Ground of Vin |
| Vout+ | Vout(+1.2V) |
| Vout- | Ground for Vout |
| Vcc+ | Vcc/ LDO_out Pin |
| Vcc- | Ground for Vcc input |
| Enable | Enable |
| PGood | Power Good Signal |
| Gnd | Analog ground |


LAYOUT

The PCB is a 4-layer board (2.23"x2") using FR4 material. All layers use 2 Oz. copper. The PCB thickness is 0.062". The IR3895 and other major power components are mounted on the top side of the board.

Power supply decoupling capacitors, the bootstrap capacitor and feedback components are located close to IR3895. The feedback resistors are connected to the output at the point of regulation and are located close to the SupIRBuck IC. To improve efficiency, the circuit board is designed to minimize the length of the on-board power ground current path.

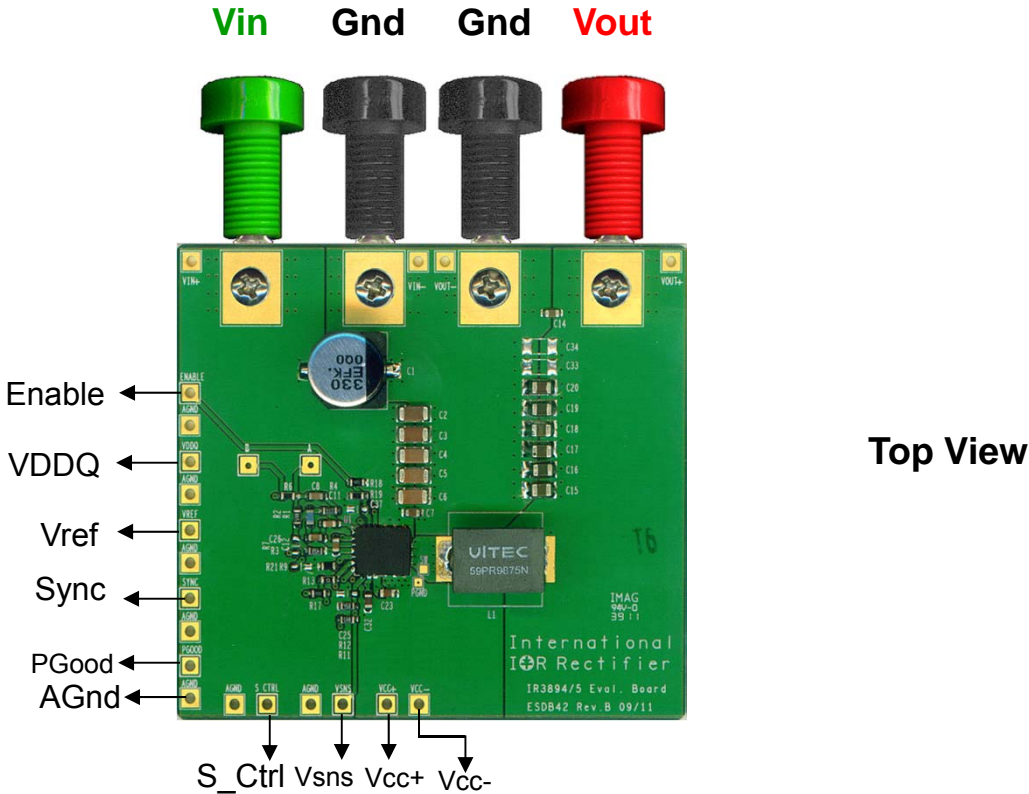

Top View

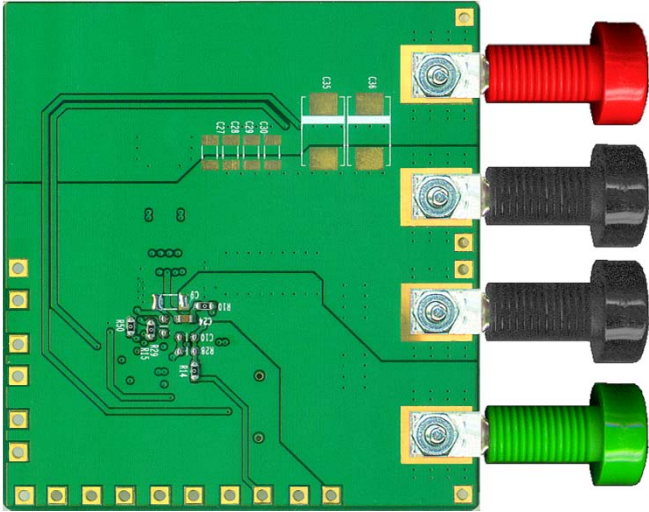

Bottom View

Fig. 1: Connection Diagram of IR3895/94 Evaluation Boards

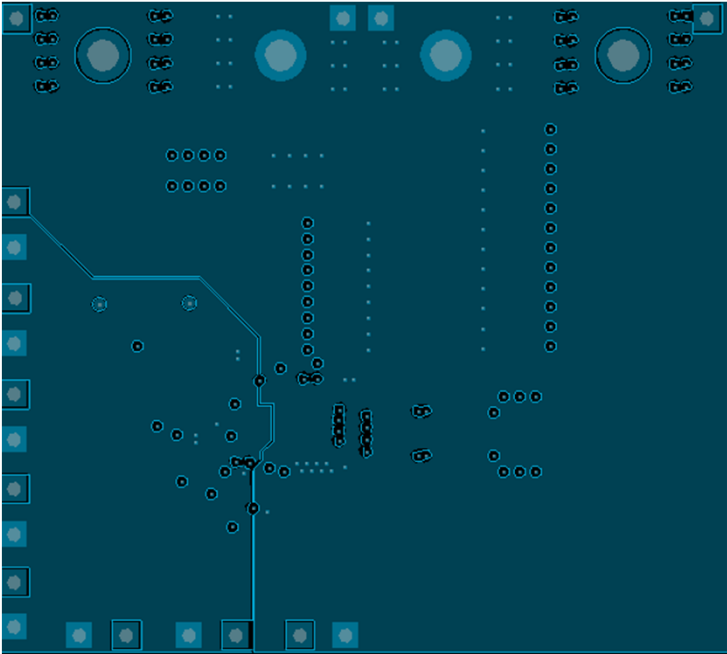


Fig. 4: Board Layout-Mid Layer 1

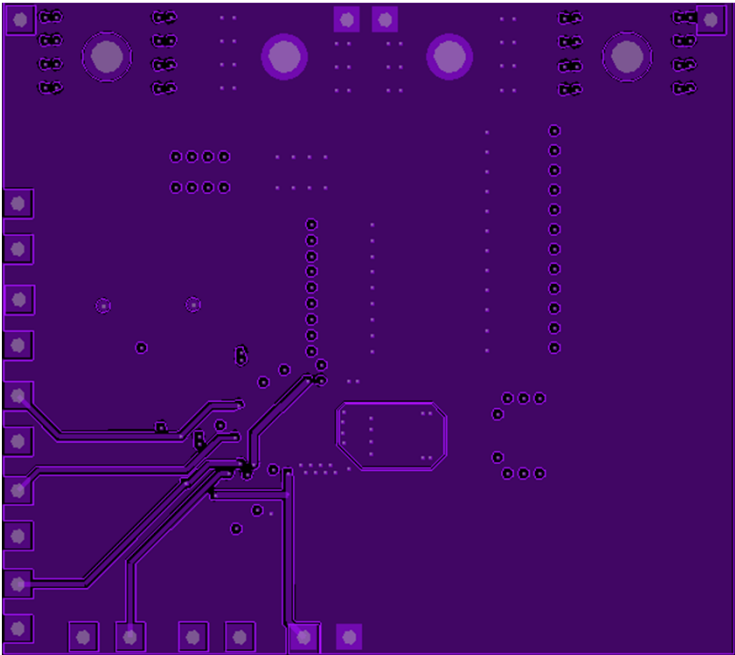


Fig. 5: Board Layout-Mid Layer 2

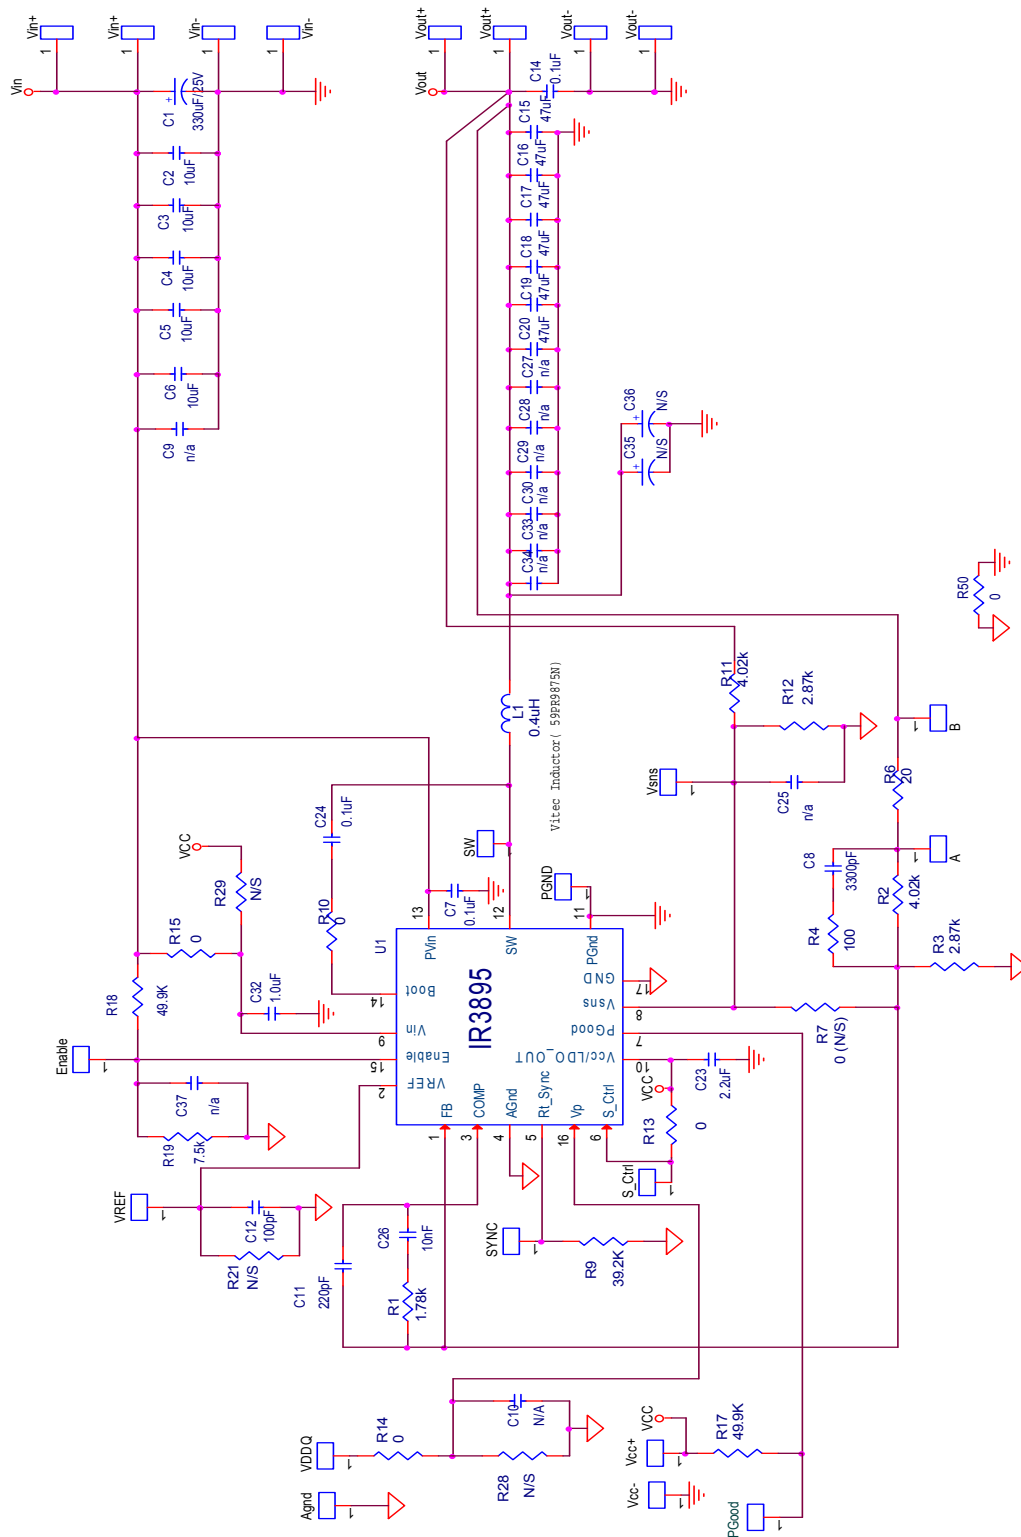


Fig. 6: Schematic of the IR3895 evaluation board

Bill of Materials

| Item | Qty | Part Reference | Value | Description | Manufacturer | Part Number |
|------|-----|-------------------------|--------|---------------------------------|--------------|--------------------|
| 1 | 1 | C1 | 330uF | SMD Electrolytic F size 25V 20% | Panasonic | EEV-FK1E331P |
| 2 | 5 | C2 C3 C4 C5 C6 | 10uF | 1206, 25V, X5R, 20% | TDK | C3216X5R1E106M |
| 3 | 3 | C7 C14 C24 | 0.1uF | 0603, 25V, X7R, 10% | Murata | GRM188R71E104KA01B |
| 4 | 1 | C12 | 100pF | 0603,50V,NP0, 5% | Murata | GRM1885C1H101JA01D |
| 5 | 1 | C8 | 3300pF | 0603,50V,X7R,10% | Murata | GRM188R71H332KA01B |
| 6 | 1 | C11 | 220pF | 0603, 50V, COG, 5% | Murata | GRM1885C1H221JA01D |
| 7 | 6 | C15 C16 C17 C18 C19 C20 | 47uF | 0805, 6.3V, X5R, 20% | TDK | C2012X5R0J476M |
| 8 | 1 | C23 | 2.2uF | 0603, 16V, X5R, 20% | TDK | C1608X5R1C225M |
| 9 | 1 | C26 | 10nF | 0603, 25V, X7R, 10% | Murata | GRM188R71E103KA01J |
| 10 | 1 | C32 | 1.0uF | 0603, 25V, X5R, 10% | Murata | GRM188R61E105KA12D |
| 11 | 1 | L1 | 0.4uH | SMD 11.0x7.2x7.5mm,0.29mΩ | Vitec | 59PR9875N |
| 12 | 1 | R1 | 1.78k | Thick Film, 0603, 1/10W, 1% | Panasonic | ERJ-3EKF17801V |
| 13 | 2 | R2 R11 | 4.02k | Thick Film, 0603, 1/10W, 1% | Panasonic | ERJ-3EKF4021V |
| 14 | 2 | R3 R12 | 2.87k | Thick Film, 0603, 1/10W, 1% | Panasonic | ERJ-3EKF2871V |
| 15 | 1 | R4 | 100 | Thick Film, 0603, 1/10W, 1% | Panasonic | ERJ-3EKF1000V |
| 16 | 1 | R6 | 20 | Thick Film, 0603, 1/10W, 1% | Panasonic | ERJ-3EKF20R0V |
| 17 | 1 | R9 | 39.2k | Thick Film, 0603, 1/10W, 1% | Panasonic | ERJ-3EKF3922V |
| 18 | 5 | R10 R13 R14 R15 R50 | 0 | Thick Film, 0603, 1/10W | Panasonic | ERJ-3GEY0R00V |
| 19 | 2 | R17 R18 | 49.9k | Thick Film, 0603, 1/10W, 1% | Panasonic | ERJ-3EKF4992V |
| 20 | 1 | R19 | 7.5k | Thick Film, 0603, 1/10W, 1% | Panasonic | ERJ-3EKF7551V |
| 21 | 1 | U1 | IR3895 | PQFN 5x6mm | IR | IR3895MPBF |

TYPICAL OPERATING WAVEFORMS

$V_{in}=12.0V$, $V_o=1.2V$, $I_o=0-16A$, Room Temperature, no airflow

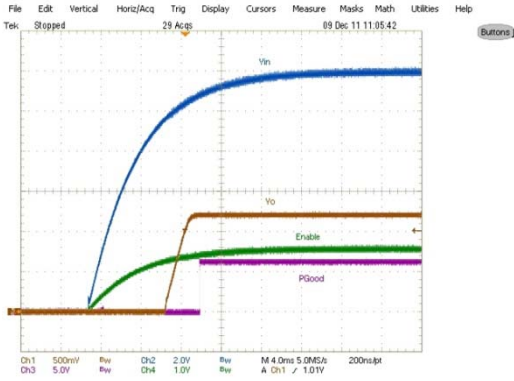


Fig. 7: Start up at 16A Load
Ch₁:V_{out}, Ch₂:V_{in}, Ch₃:PGood, Ch₄:Enable

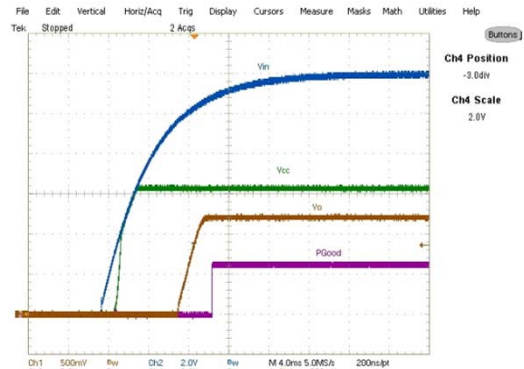


Fig. 8: Start up at 16A Load
Ch₁:V_{out}, Ch₂:V_{in}, Ch₃:PGood, Ch₄:Vcc

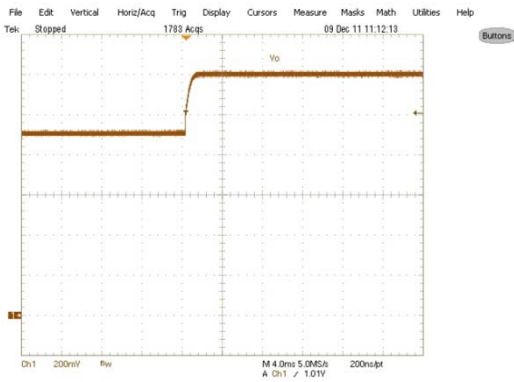


Fig. 9: Start up with Pre Bias , 0A Load,
Ch₁:V_o

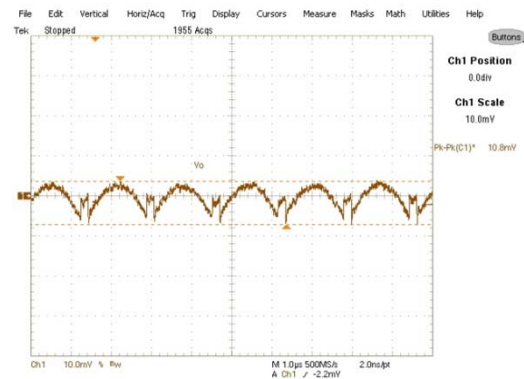


Fig. 10: Output Voltage Ripple, 16A load
Ch₁: V_{out}

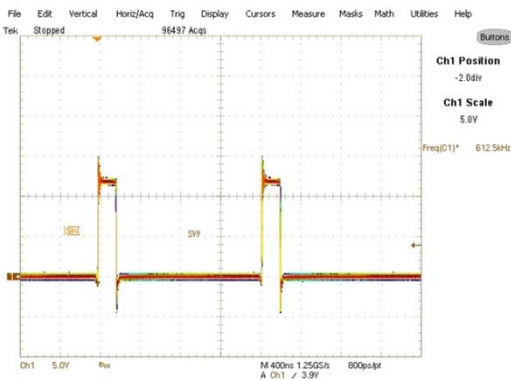


Fig. 11: Inductor node at 16A load
Ch₁:Switch Node

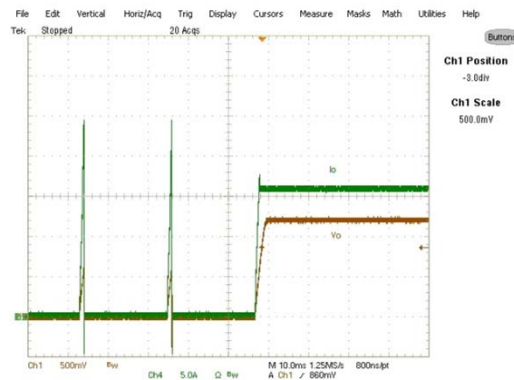


Fig. 12: Short circuit (Hiccup) Recovery
Ch₁:V_{out}, Ch₄:Iout

TYPICAL OPERATING WAVEFORMS

$V_{in}=12.0V$, $V_o=1.2V$, $I_o=0-16A$, Room Temperature, no air flow

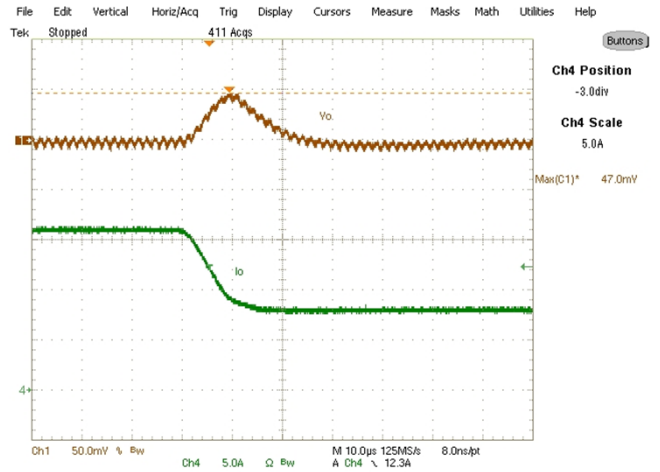
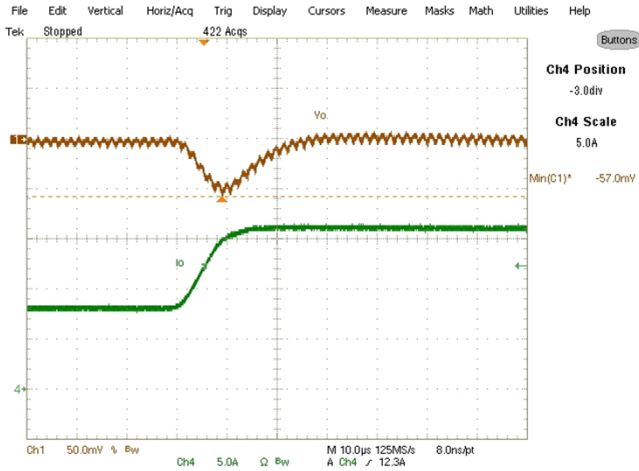
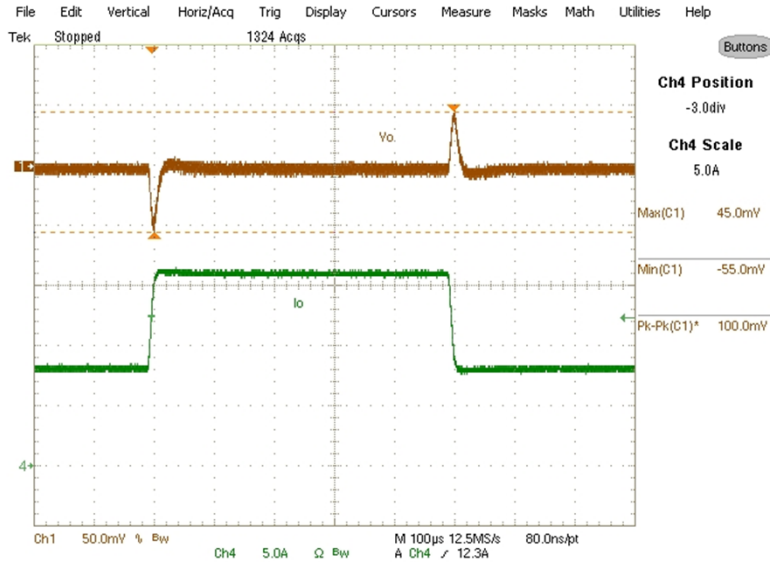


Fig. 13: Transient Response, 8A to 16A step @2.5A/usec slew rate
Ch₁: V_{out} Ch4: I_{out}

TYPICAL OPERATING WAVEFORMS
Vin=12.0V, Vo=1.2V, Io=0-16A, Room Temperature

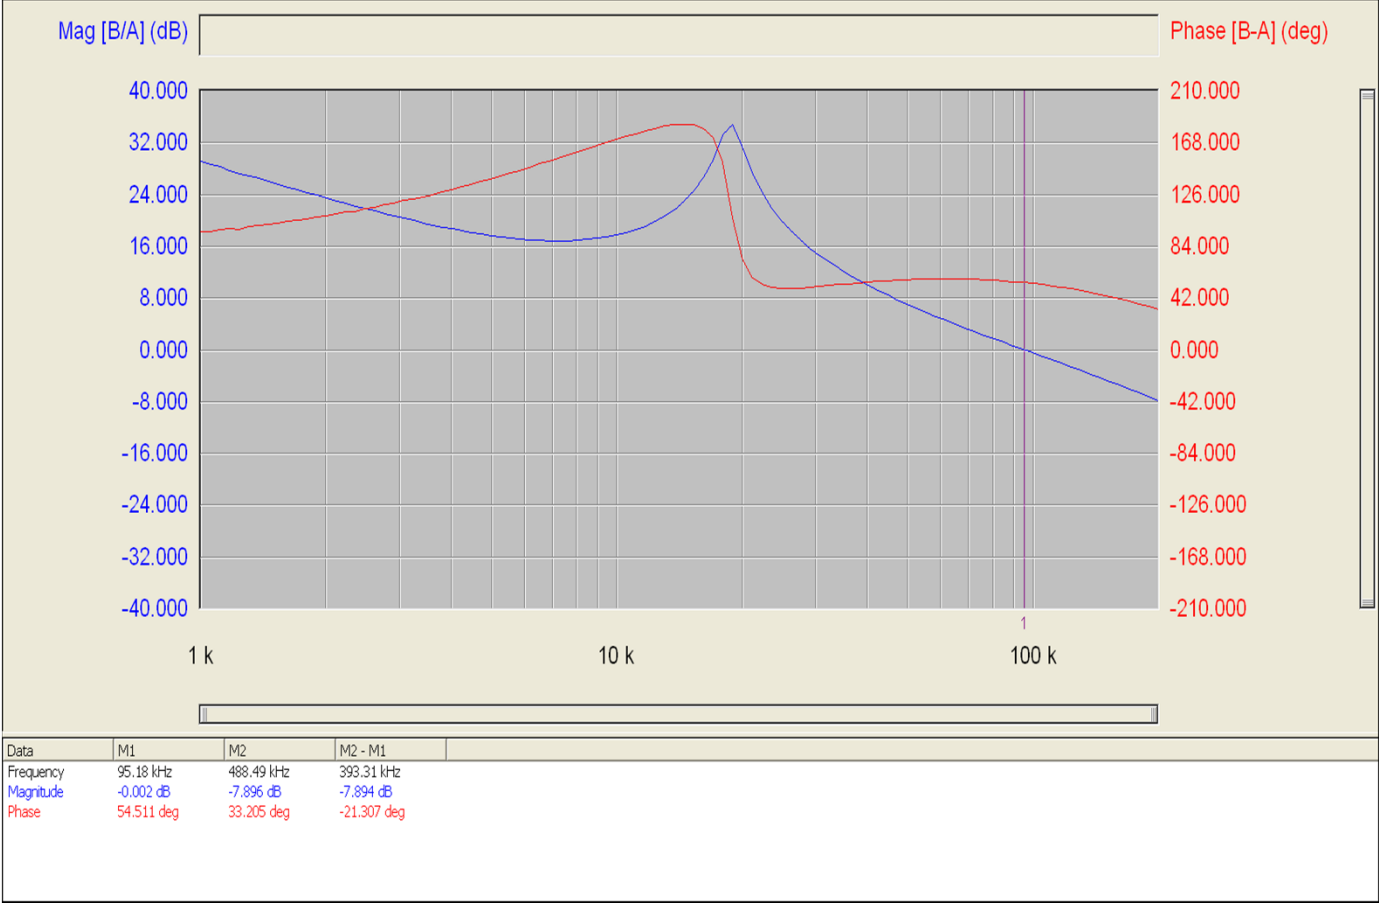


Fig. 14: Bode Plot at 16A load shows a bandwidth of 95.2kHz and phase margin of 54.5°

TYPICAL OPERATING WAVEFORMS

V_{in}=12.0V, V_o=1.2V, I_o=0-16A, Room Temperature, no air flow

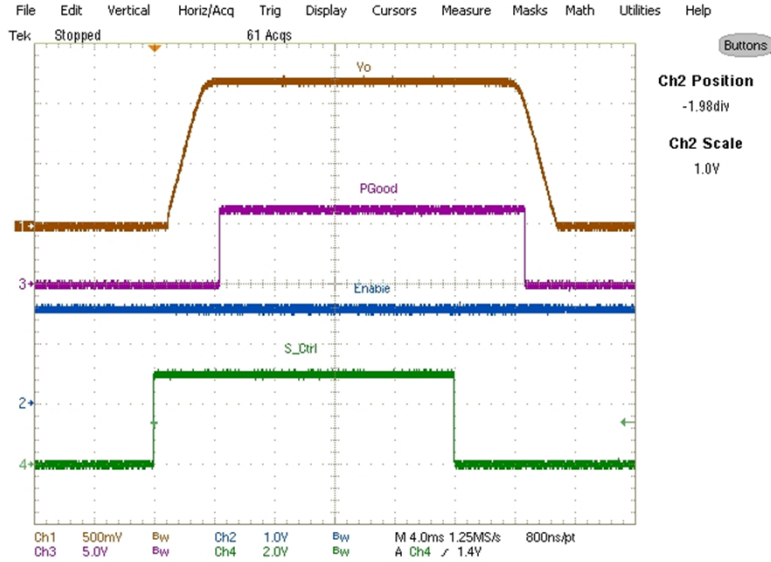


Fig (15) Soft start and soft stop using S_Ctrl pin

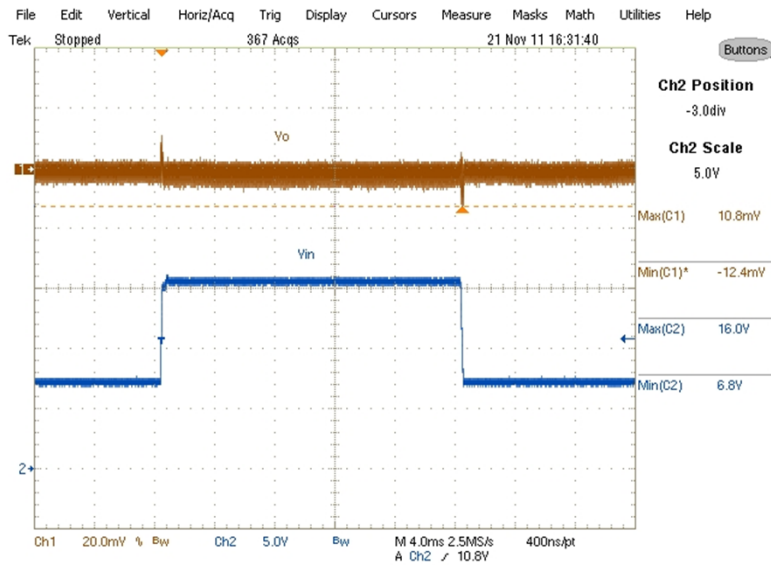


Fig (16) Feed Forward for Vin change from 6.8 to 16V and back to 6.8V
 Ch₁-V_{out} Ch₄-V_{in}

TYPICAL OPERATING WAVEFORMS

Vin=12.0V, Vo=1.2V, Io=0-16A, Room Temperature, no air flow

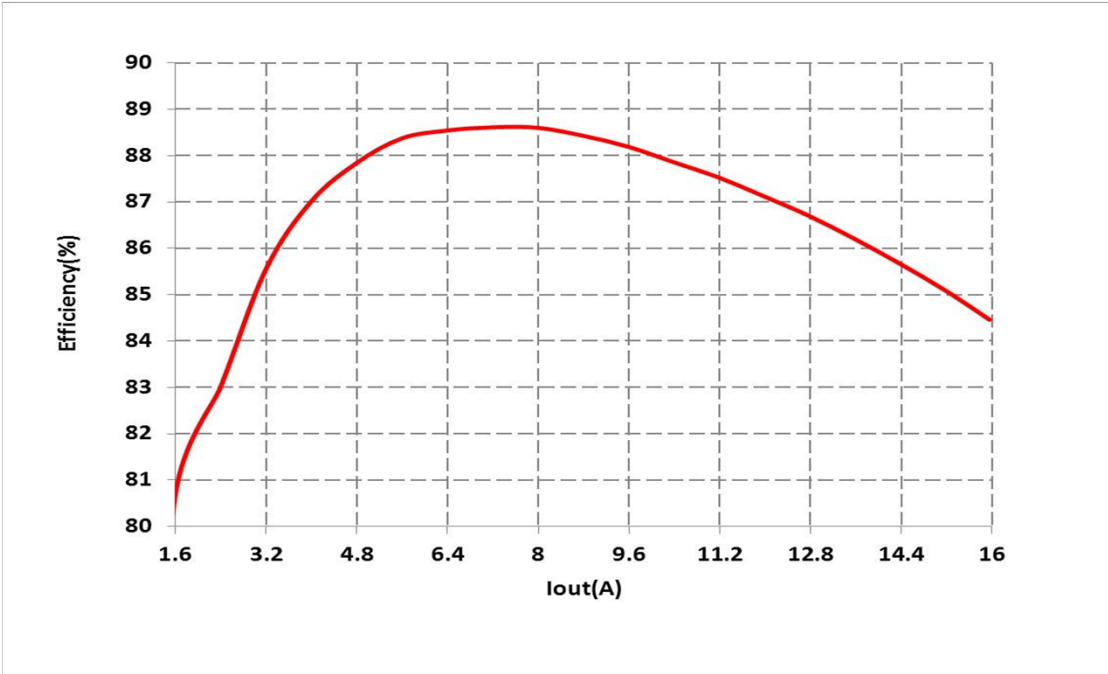


Fig.17: Efficiency versus load current

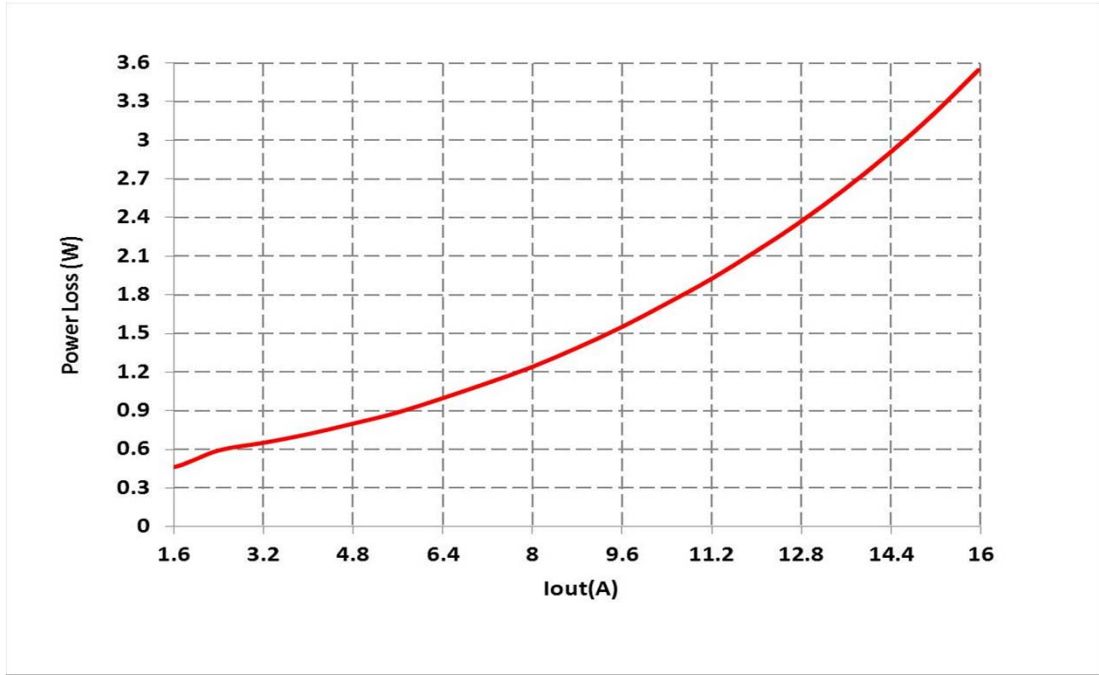


Fig.18: Power loss versus load current

THERMAL IMAGES

Vin=12.0V, Vo=1.2V, Io=0-16A, Room Temperature, No Air flow

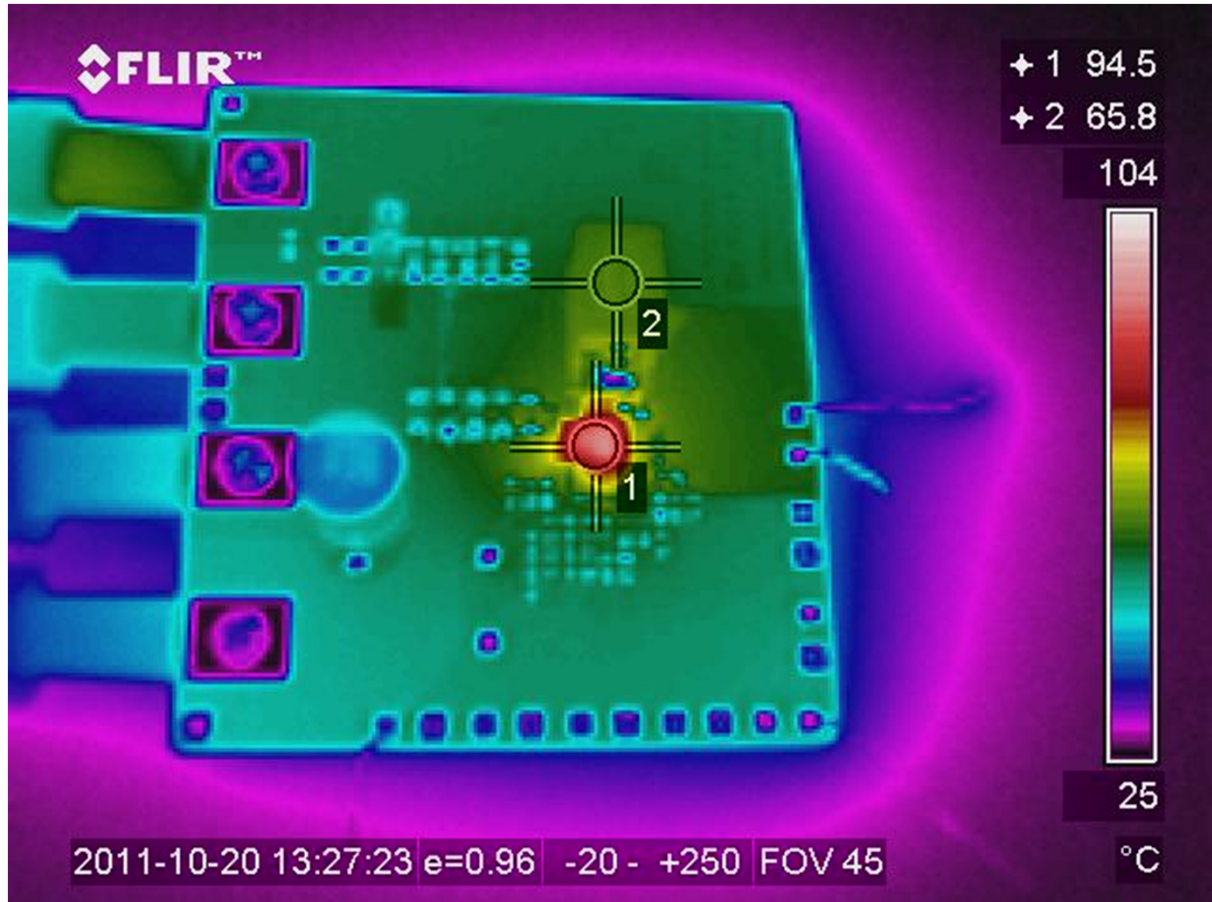


Fig. 19: Thermal Image of the board at 16A load
Test point 1 is IR3895
Test point 2 is inductor

PACKAGE INFORMATION

| DIM | MILIMITERS | | INCHES | | DIM | MILIMITERS | | INCHES | |
|-----|-------------|-------|--------------|--------|------------|-------------|-------|--------------|--------|
| | MIN | MAX | MIN | MAX | | MIN | MAX | MIN | MAX |
| A | 0.800 | 1.000 | 0.0315 | 0.0394 | L | 0.350 | 0.450 | 0.0138 | 0.0177 |
| A1 | 0.000 | 0.050 | 0.0000 | 0.0020 | M | 2.441 | 2.541 | 0.0961 | 0.1000 |
| b | 0.375 | 0.475 | 0.1477 | 0.1871 | N | 0.703 | 0.803 | 0.0277 | 0.0316 |
| b1 | 0.250 | 0.350 | 0.0098 | 0.1379 | O | 2.079 | 2.179 | 0.0819 | 0.0858 |
| c | 0.203 REF. | | 0.008 REF. | | P | 3.242 | 3.342 | 0.1276 | 0.1316 |
| D | 5.000 BASIC | | 1.969 BASIC | | Q | 1.265 | 1.365 | 0.0498 | 0.0537 |
| E | 6.000 BASIC | | 2.362 BASIC | | R | 2.644 | 2.744 | 0.1041 | 0.1080 |
| e | 1.033 BASIC | | 0.0407 BASIC | | S | 1.500 | 1.600 | 0.0591 | 0.0630 |
| e1 | 0.650 BASIC | | 0.0256 BASIC | | t1, t2, t3 | 0.401 BASIC | | 0.016 BACIS | |
| e2 | 0.852 BASIC | | 0.0335 BASIC | | t4 | 1.153 BASIC | | 0.045 BASIC | |
| | | | | | t5 | 0.727 BASIC | | 0.0286 BASIC | |

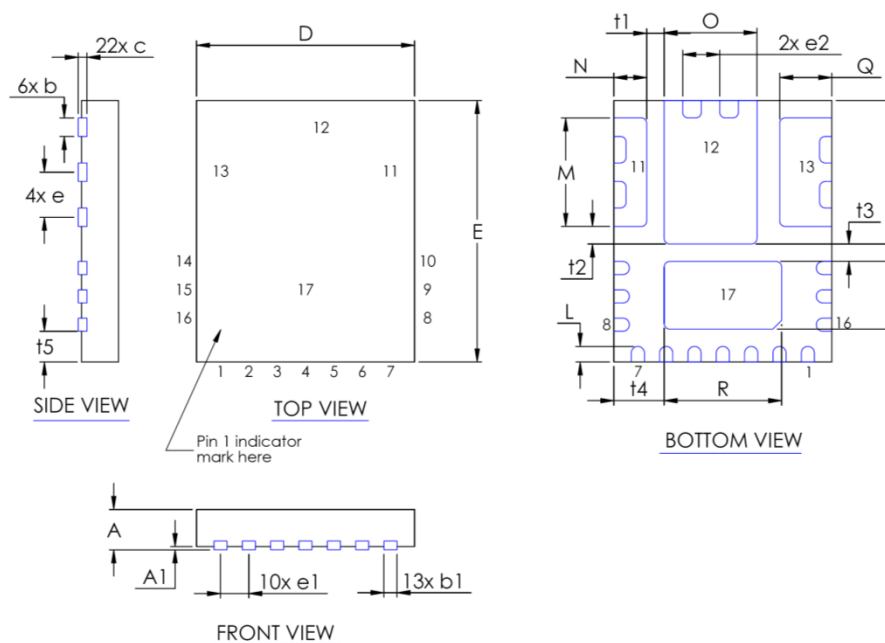


Figure 20: Package Dimensions

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105

TAC Fax: (310) 252-7903

This product has been designed and qualified for the Industrial market

Visit us at www.irf.com for sales contact information

Data and specifications subject to change without notice. 12/11

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А