

## 6x8 MATRIX LED DRIVER

### DESCRIPTION

The IS32FL3738 is an automotive grade general purpose 6x8 LEDs matrix driver with 1/12 cycle rate. The device can be programmed via an I2C compatible interface. Each LED can be dimmed individually with 8-bit × 4 PWM data which allowing 512 steps of linear dimming.

IS32FL3738 features 3 Auto Breathing Modes which are noted as ABM-1, ABM-2 and ABM-3. For each Auto Breathing Mode, there are 4 timing characters which include current rising / holding / falling / off time and 3 loop characters which include Loop-Beginning / Loop-Ending / Loop-Times. Every LED can be configured to be any Auto Breathing Mode or No-Breathing Mode individually.

### FEATURES

- Up to 48 LEDs (6x8) in dot matrix
- Programmable 6x8 (16 RGBs) matrix size with de-ghost function
- Selectable 3 Auto Breath Modes for each dot
- Auto Breath Loop Features interrupt pin inform MCU Auto Breath Loop completed
- Auto Breath offers 128 steps gamma current, interrupt and state look up registers
- 256 steps Global Current Setting
- Individual 512 PWM control steps
- Individual Auto Breath Mode select
- Individual open and short error detect function

### QUICK START



Figure 1: Photo of IS32FL3738 Evaluation Board

(V01A board with 12V DC input please refer to Appendix I)

### RECOMMENDED EQUIPMENT

- 5.0V, 2A Micro USB
- Arduino IDE, [www.arduino.cc/en/Main/Software](http://www.arduino.cc/en/Main/Software)
- Arduino code download from ISSI website

### ABSOLUTE MAXIMUM RATINGS

- ≤ 5.5V Micro USB DC power supply

**Caution: Do not exceed the conditions listed above, otherwise the board will be damaged.**

### PROCEDURE

The IS32FL3738 evaluation board is fully assembled, tested and comes programmed with evaluation software. Follow the steps listed below to verify board operation.

**Caution: Do not turn on the power supply until all connections are completed.**

- 1) Connect the 5VDC USB power to the Micro USB.
- 2) Press K1 to cycle through a display mode.

### EVALUATION BOARD OPERATION

The IS32FL3738 evaluation board drives 16 RGB LEDs located underneath the light dispersing filter. Every press of the K1 switch will cycle through one of the 8 pre-programmed lighting sequences below:

- 1) White LED
- 2) Rainbow bar
- 3) Red color breath
- 4) Green color breath
- 5) Blue color breath
- 6) Pink color breath
- 7) Yellow color breath
- 8) Cyan color breath

**Note: IS32FL3738 solely controls the FxLED function on the evaluation board.**

### ORDERING INFORMATION

| Part No.           | Temperature Range            | Package              |
|--------------------|------------------------------|----------------------|
| IS32FL3738-ZLA3-EB | -40°C to +125°C (Automotive) | eTSSOP-28, Lead-free |


Table 1: Ordering Information

For pricing, delivery, and ordering information, please contact ISSI's analog marketing team at [analog@issi.com](mailto:analog@issi.com) or (408) 969-6600.

### SOFTWARE CONTROL

The evaluation board comes with an Arduino compatible microcontroller circuit preloaded with IS32FL3738 demonstration firmware, called a sketch. This allows the functionality of the IS32FL3738 to be verified before starting firmware development.

The Arduino hardware consists of an Atmel microcontroller with a bootloader allowing quick firmware updates. First download the latest Arduino Integrated Development Environment IDE (1.6.12 or greater) from [www.arduino.cc/en/Main/Software](http://www.arduino.cc/en/Main/Software). Then download the latest IS32FL3738 firmware (sketch) from the ISSI website [www.issi.com/US/product-analog-automotive.shtml](http://www.issi.com/US/product-analog-automotive.shtml). When using the Arduino environment, please select Genuino UNO as shown below, then select the serial port. Follow the standard procedure to upload the latest IS32FL3738 firmware into the Arduino; then use the IDE to modify it. There is no additional software required to run the eval board.

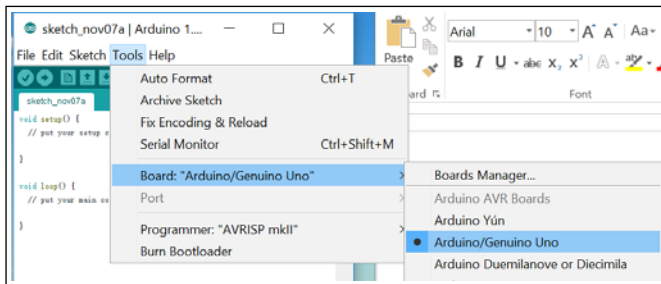

### EXT-SOFTWARE CONTROL

The IS32FL3738 can also be driven by an external IIC source.

Follow the steps below to configure the eval board for external control.

- 1) Open the two pins of J7 on the right side, to disable the onboard Arduino and enable external control (the SDA SCL and SDB become high impedance).
- 2) Default VIO is 5V, if you use a 3.3V IO, connect 3.3V to VIO pin in J7.
- 3) Connect SDB to VIO or high level IO
- 4) Connect external IIC to the IIC pins of J7
- 5) Start external IIC control.

*Please refer to the datasheet to get more information about IS32FL3738*

# 6x8 MATRIX LED DRIVER

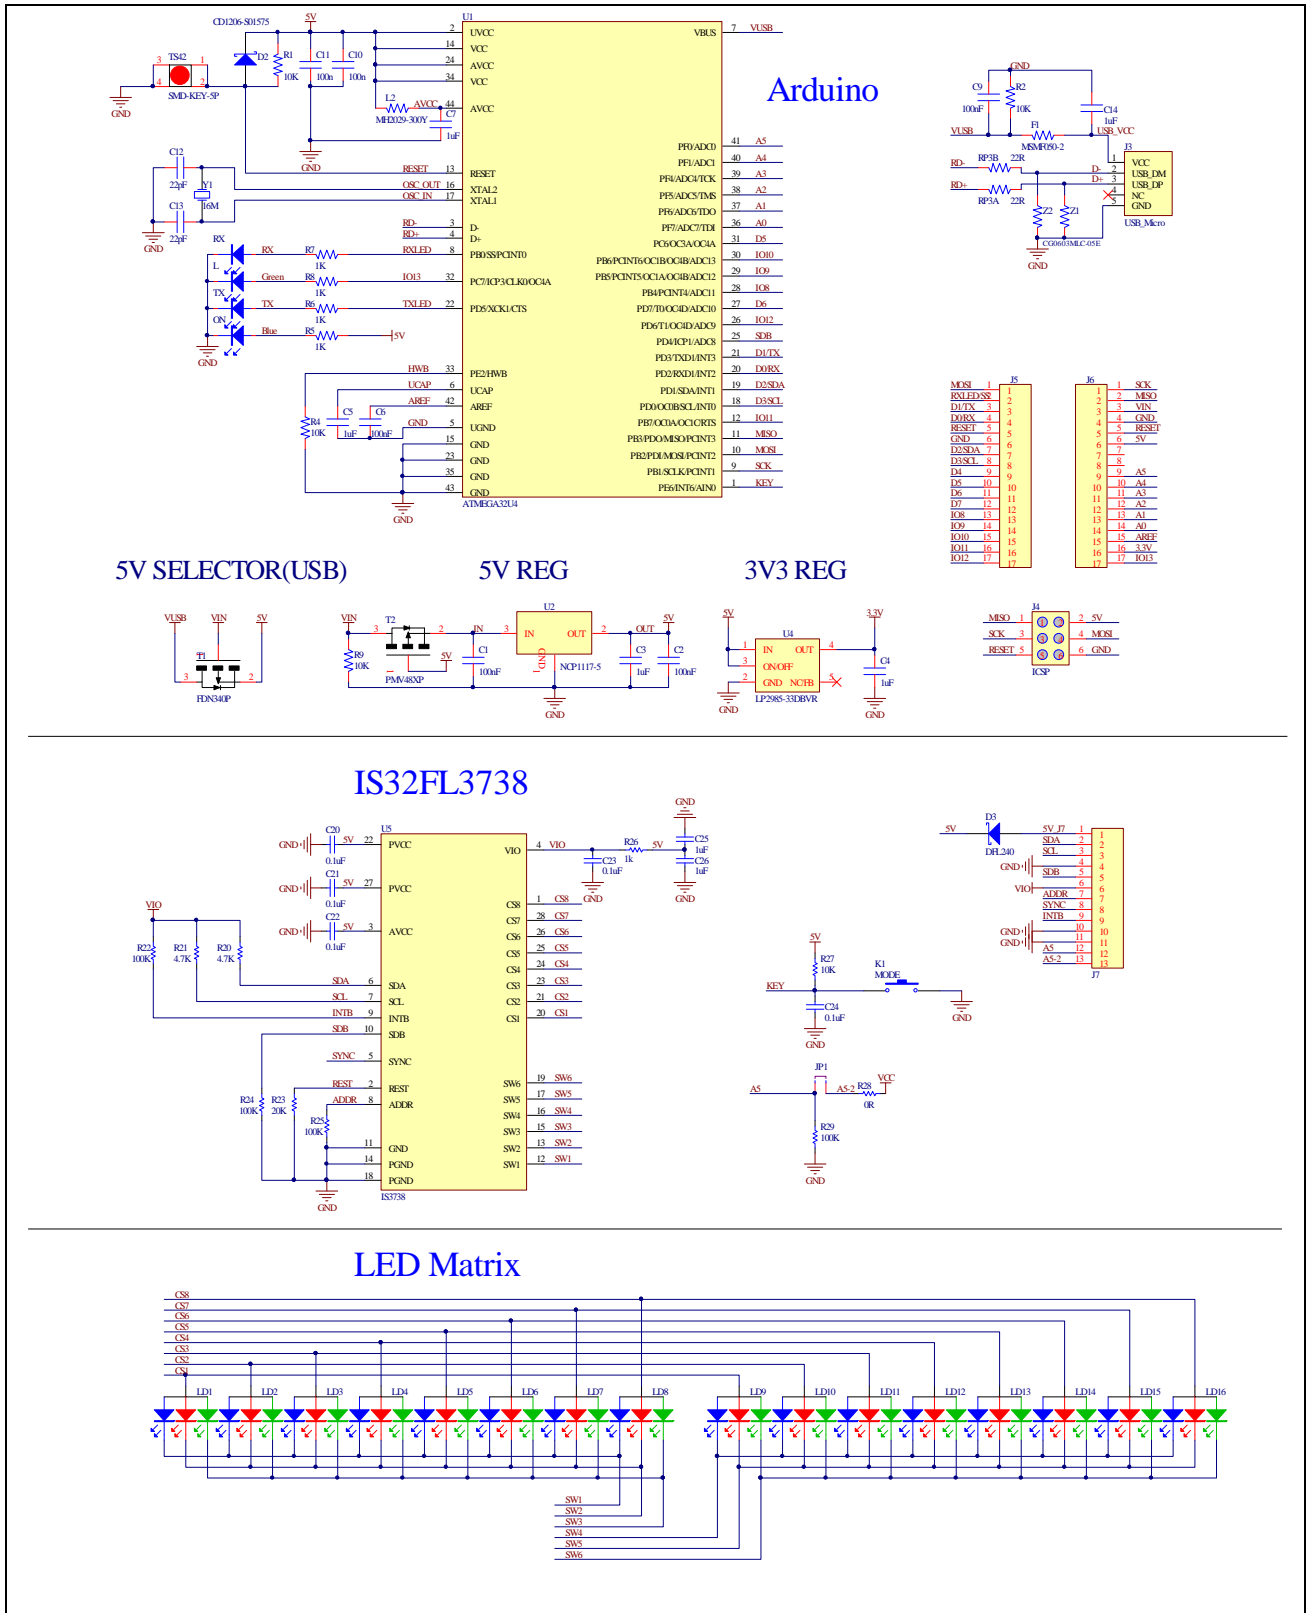


Figure 2: IS32FL3738 Application Schematic

## 6x8 MATRIX LED DRIVER

### BILL OF MATERIALS - Arduino

| Name      | Symbol              | Description            | Qty | Supplier  | Part No.          |
|-----------|---------------------|------------------------|-----|-----------|-------------------|
| MCU       | U1                  | Microcontroller        | 1   | ATM       | ATMEGA32U4        |
| LDO       | U2                  | Reduced voltage        | 1   | ON        | NCP1117-5         |
| LDO       | U4                  | Reduced voltage        | 1   | TI        | LP2985-33DBVR     |
| Triode    | T1                  | FET                    | 1   | FAIRCHILD | FDN340P           |
| Triode    | T2                  | FET                    | 1   | NXP       | PMV48XP           |
| Crystal   | Y1                  | Crystal, 16MHz         | 1   | Risym     | 3225 16MHz        |
| Button    | K1                  | Button SMD             | 1   | MT        | SMD-KEY-5P        |
| LED       | ON,TX,RX            | LED, SMD Blue          | 3   | EVERLIGHT | 0603              |
| LED       | L                   | LED, SMD Green         | 1   | EVERLIGHT | 0603              |
| F1        | F1                  | SMD Fuse               | 1   | MF        | MSMF050-2         |
| Beads     | L2                  | Beads                  | 1   | BOURNS    | MH2029-300Y       |
| Diode     | D2                  | Diode, SMD             | 1   | BOURNS    | CD1206-S01575     |
| Varistor  | Z1,Z2               | Varistor               | 2   | BOURNS    | CG0603MLC-05E     |
| Resistor  | RP3A,PR3B           | RES,22R,1/16W,±5%,SMD  | 2   | Yageo     | RC0603JR-0722RL   |
| Resistor  | R5,R6,R7,R8         | RES,1k,1/16W,±5%,SMD   | 4   | Yageo     | RC0603JR-071KL    |
| Resistor  | R1,R2,R4,R9         | RES,10k,1/16W,±5%,SMD  | 4   | Yageo     | RC0603JR-0710KL   |
| Capacitor | C12,C13             | CAP,22pF,16V,±20%,SMD  | 2   | Yageo     | CC0603KKX7R9BB22  |
| Capacitor | C1,C2,C6,C9,C10,C11 | CAP,100nF,16V,±20%,SMD | 6   | Yageo     | CC0603KKX7R9BB101 |
| Capacitor | C3,C4,C5,C7,C14     | CAP,1µF,16V, ±20%,SMD  | 4   | Yageo     | CC0603KKX7R9BB105 |

### BILL OF MATERIALS – IS32FL3738

| Name       | Symbol              | Description            | Qty | Supplier | Part No.          |
|------------|---------------------|------------------------|-----|----------|-------------------|
| LED Driver | U5                  | Matrix LED Driver      | 1   | ISSI     | IS32FL3738        |
| RGB LED    | LD1~LD16            | RGB LED, SMD           | 16  | ROHM     | SMLV56RGB1W1      |
| Diode      | D3                  | Diode, SMD             | 1   | DIODES   | DFLS240           |
| Resistor   | R20,R21             | RES,4.7k,1/16W,±5%,SMD | 2   | Yageo    | RC0603JR-074K7L   |
| Resistor   | R22,R24,R25,R29     | RES,100k,1/16W,±5%,SMD | 4   | Yageo    | RC0603JR-07100KL  |
| Resistor   | R23                 | RES,20k,1/16W,±5%,SMD  | 1   | Yageo    | RC0603JR-0720KL   |
| Resistor   | R26                 | RES,1k,1/16W,±5%,SMD   | 1   | Yageo    | RC0603JR-071KL    |
| Resistor   | R27                 | RES,10k,1/16W,±5%,SMD  | 1   | Yageo    | RC0603JR-0710KL   |
| Resistor   | R28                 | RES,0k,1/16W,±5%,SMD   | 1   | Yageo    | RC0603JR-070KL    |
| Capacitor  | C20,C21,C22,C23,C24 | CAP,0.1µF,16V,±20%,SMD | 5   | Yageo    | CC0603KKX7R9BB104 |
| Capacitor  | C25,C26             | CAP,1µF,16V,±20%,SMD   | 2   | Yageo    | CC0603KKX7R9BB105 |
| Button     | K1(Bottom)          | Button                 | 1   |          |                   |

Bill of Materials, refer to Figure 1 above.

# 6x8 MATRIX LED DRIVER

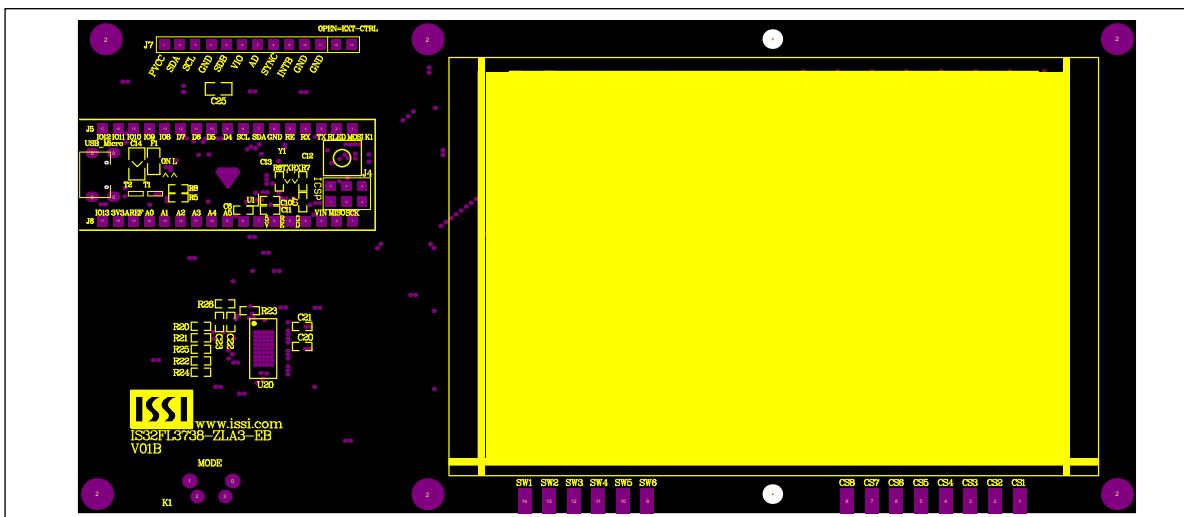


Figure 3: Board Component Placement Guide - Top Layer

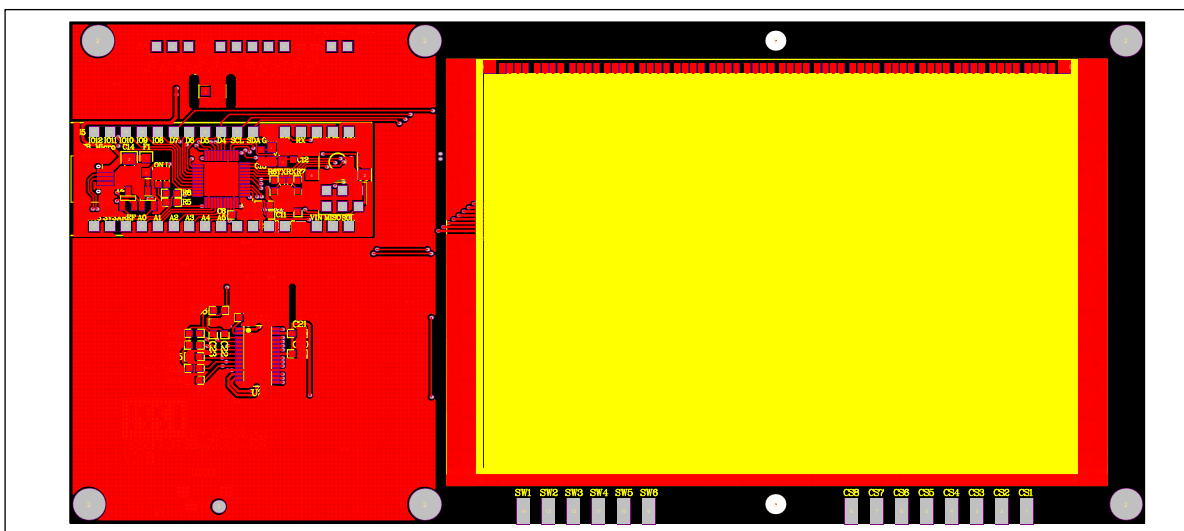


Figure 4: Board PCB Layout - Top Layer

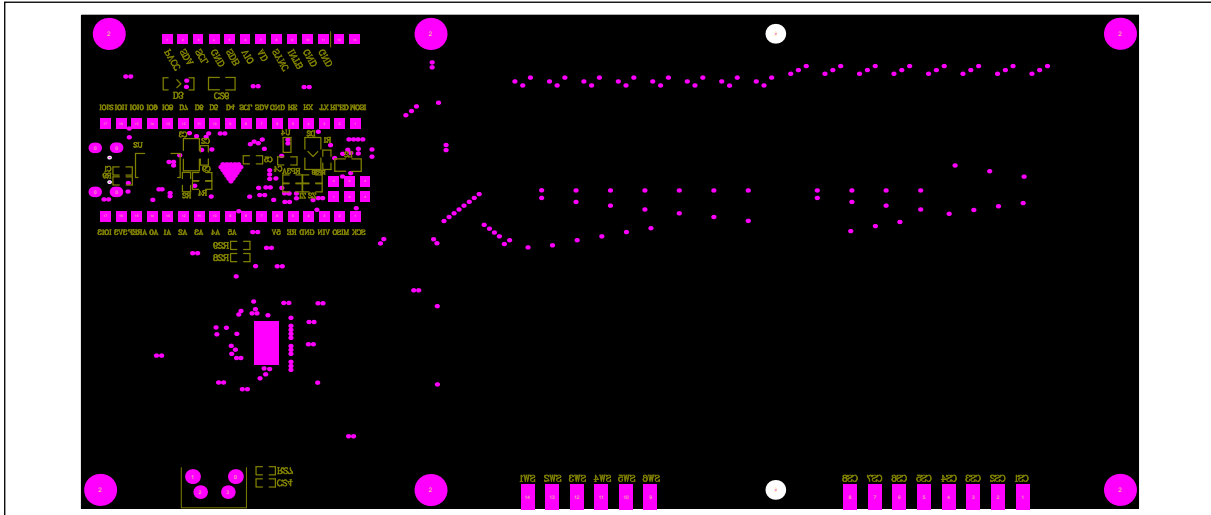


Figure 5: Board Component Placement Guide - Bottom Layer

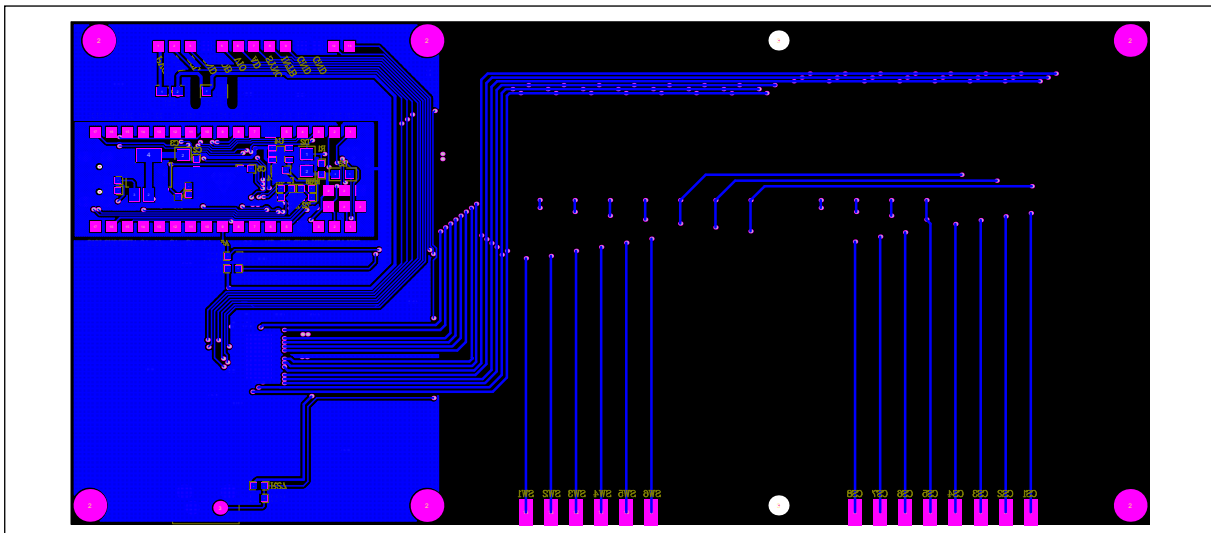


Figure 6: Board PCB Layout - Bottom Layer

Copyright © 2017 Integrated Silicon Solution, Inc. All rights reserved. ISSI reserves the right to make changes to this specification and its products at any time without notice. ISSI assumes no liability arising out of the application or use of any information, products or services described herein. Customers are advised to obtain the latest version of this device specification before relying on any published information and before placing orders for products. Integrated Silicon Solution, Inc. does not recommend the use of any of its products in life support applications where the failure or malfunction of the product can reasonably be expected to cause failure of the life support system or to significantly affect its safety or effectiveness. Products are not authorized for use in such applications unless Integrated Silicon Solution, Inc. receives written assurance to its satisfaction, that:

- a.) the risk of injury or damage has been minimized;
- b.) the user assume all such risks; and
- c.) potential liability of Integrated Silicon Solution, Inc is adequately protected under the circumstances



## 6x8 MATRIX LED DRIVER

---

### REVISION HISTORY

---

| Revision | Detail Information  | Date       |
|----------|---|------------|
| A        | Initial release   | 2016.09.18 |
| B        | 1. Deleted 12V, 1A power supply.<br>2. Update schematic and PCB.<br>3. Update bill of materials | 2016.11.04 |
| C        | Correct the PWM level to 512 levels, please check datasheet for more information.               | 2017.03.22 |

## APPENDIX I : V01A GUIDE

### QUICK START

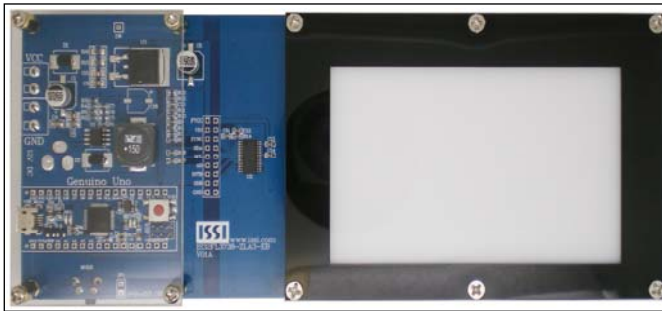


Figure 7: Photo of IS32FL3738 Evaluation Board

### RECOMMENDED EQUIPMENT V01A

- 5.0V, 2A Micro USB or 12V, 1A power supply

### ABSOLUTE MAXIMUM RATINGS V01A

- ≤ 17V DC power supply
- ≤ 5.5V Micro USB DC power supply

**Caution:** Do not exceed the conditions listed above, otherwise the board will be damaged.

### PROCEDURE V01A

The IS32FL3738 evaluation board is fully assembled and tested. Follow the steps listed below to verify board operation.

**Caution:** Do not turn on the power supply until all connections are completed.

- 1) Connect the 12VDC power to the connector or 5VDC USB power to the Micro USB.
- 2) Turn on the power supply, pay attention to the supply current. If the current exceeds 1A, please check for circuit fault.

### EVALUATION BOARD OPERATION V01A

The IS32FL3738 evaluation board has three animation display modes. Press K1 to switch configurations.


- 1) White LED

- 2) Rainbow bar
- 3) Red LED breath
- 4) Green LED breath
- 5) Blue LED breath
- 6) Red and blue LED breath
- 7) Red and green LED breath
- 8) Blue and green LED breath

**Note:** IS32FL3738 solely controls the FxLED function on the evaluation board.

### SOFTWARE CONTROL

The IS32FL3738 use Arduino as its master controller, if using Arduino environment, please select Genuino UNO. No driver is needed when initial the hardware.

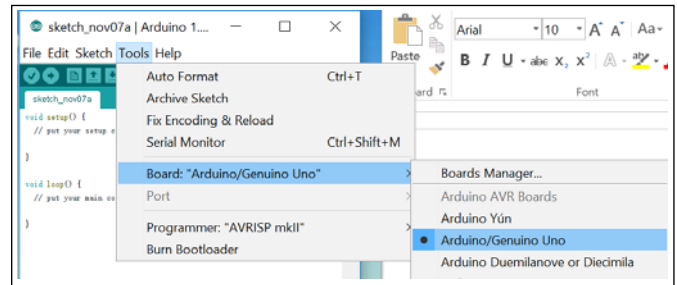

### EXT-SOFTWARE CONTROL V01A

The IS32FL3738 can set its I2C bus interface logic threshold based on the voltage on the VIO pin.

Follow the steps listed below for external control.

- 1) Open JP1 to disconnect the I2C communication, and connect an external MCU VCC to VIO.
- 2) Pull-up the SDB to VIO.
- 3) Connect the 12VDC power to the connector or 5VDC power to the Micro USB.
- 4) Turn on the power supply pay attention to the supply current. If the current exceeds 1A, please check for circuit fault.
- 5) Start external IIC control.

**Please refer to the datasheet to get more information about IS32FL3738**



# 6x8 MATRIX LED DRIVER

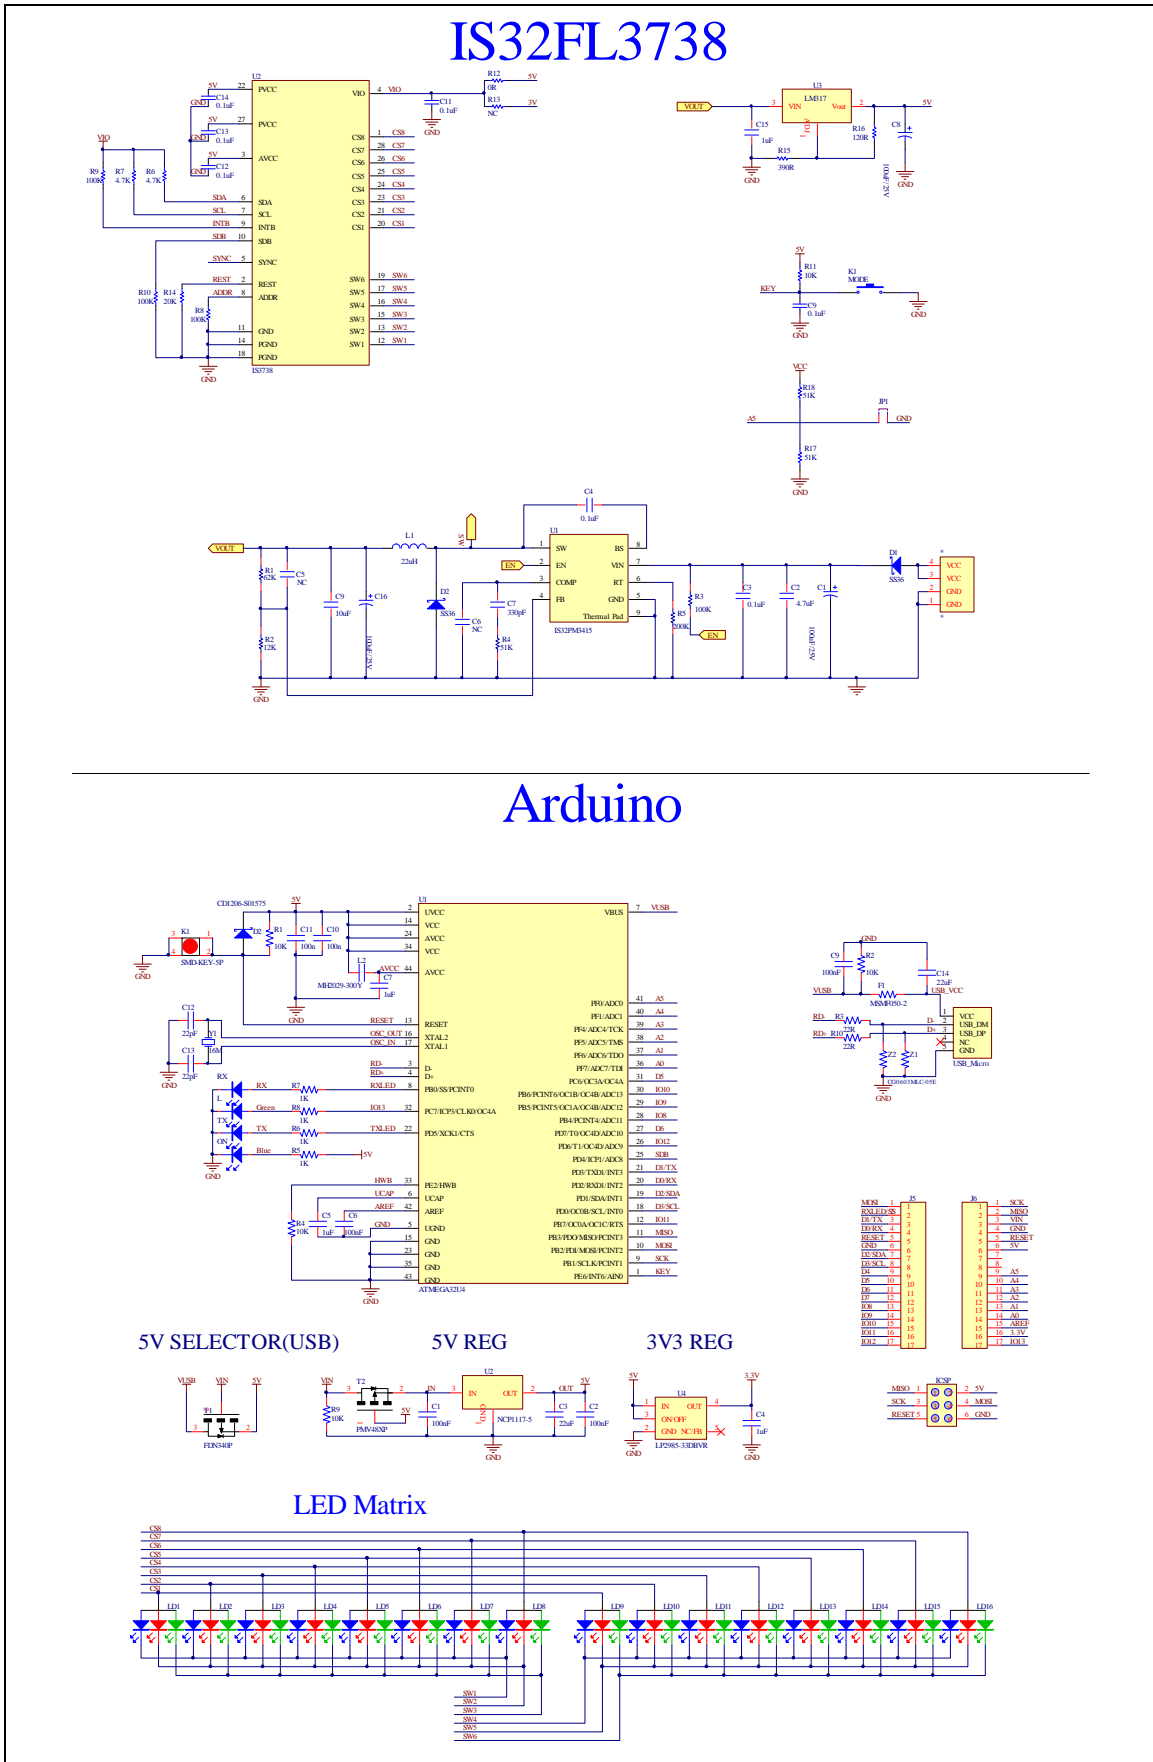


Figure 8: IS32FL3738 Application Schematic: V01A

## 6x8 MATRIX LED DRIVER

### BILL OF MATERIALS (EVB Part)

| Name       | Symbol       | Description             | Qty | Supplier | Part No.          |
|------------|--------------|-------------------------|-----|----------|-------------------|
| Buck Chip  | U1           | Buck Chip               | 1   | ISSI     | IS32PM3415        |
| LED Driver | U2           | Matrix LED Driver       | 1   | ISSI     | IS32FL3738        |
| LDO        | U3           | Reduced voltage         | 1   | ST       | LM317D2T          |
| Diode      | LD1~LD16     | RGB LED, SMD            | 16  | ROHM     | SMLV56RGB1W1      |
| Diode      | D1,D2        | Diode, SMD              | 2   | DIODES   | SS36              |
| Resistor   | R5           | RES,200k,1/16W,±5%,SMD  | 1   | Yageo    | RC0603JR-07200KL  |
| Resistor   | R3,R8,R9,R10 | RES,100k,1/16W,±5%,SMD  | 4   | Yageo    | RC0603JR-07100KL  |
| Resistor   | R1           | RES,62k,1/16W,±5%,SMD   | 1   | Yageo    | RC0603JR-0762KL   |
| Resistor   | R4,R17,R18   | RES,51k,1/16W,±5%,SMD   | 3   | Yageo    | RC0603JR-0751KL   |
| Resistor   | R14          | RES,20k,1/16W,±5%,SMD   | 1   | Yageo    | RC0603JR-0720KL   |
| Resistor   | R2           | RES,12k,1/16W,±5%,SMD   | 1   | Yageo    | RC0603JR-0712KL   |
| Resistor   | R11          | RES,10k,1/16W,±5%,SMD   | 1   | Yageo    | RC0603JR-0710KL   |
| Resistor   | R6,R7        | RES,4.7k,1/16W,±5%,SMD  | 2   | Yageo    | RC0603JR-074K7L   |
| Resistor   | R15          | RES,390R,1/16W,±5%,SMD  | 1   | Yageo    | RC0603JR-07390RL  |
| Resistor   | R16          | RES,120R,1/16W,±5%,SMD  | 1   | Yageo    | RC0603JR-07120RL  |
| Resistor   | R12          | RES,0R,1/16W,±5%,SMD    | 1   | Yageo    | RC0603JR-070RL    |
| Resistor   | R13          | NC                      | 1   |          |                   |
| Capacitor  | C15          | CAP,1µF,16V,±20%,SMD    | 1   | Yageo    | CC0603KKX7R9BB105 |
| Capacitor  | C7           | CAP,330pF,16V,±20%,SMD  | 1   | Yageo    | CC0603KKX7R9BB331 |
| Capacitor  | C4,12        | CAP,4.7µF,16V, ±20%,SMD | 2   | Yageo    | CC0603KKX7R9BB476 |
| Capacitor  | C6,C7        | CAP,33pF,16V,±20%,SMD   | 2   | Yageo    | CC0603KKX7R9BB330 |
| Capacitor  | C8,C9,C10    | CAP,0.1µF,16V,±20%,SMD  | 3   | Yageo    | CC0603KKX7R9BB104 |
| Button     | K1           | Button SMD              | 1   |          |                   |

## 6x8 MATRIX LED DRIVER

### BILL OF MATERIALS (Genuino Uno Part)

| Name      | Symbol                  | Description            | Qty | Supplier  | Part No.          |
|-----------|-------------------------|------------------------|-----|-----------|-------------------|
| MCU       | U1                      | Microcontroller        | 1   | ATM       | ATMEGA32U4        |
| LDO       | U2                      | Reduced voltage        | 1   | ON        | NCP1117-5         |
| LDO       | U4                      | Reduced voltage        | 1   | TI        | LP2985-33DBVR     |
| Triode    | T1                      | FET                    | 1   | FAIRCHILD | FDN340P           |
| Triode    | T2                      | FET                    | 1   | NXP       | PMV48XP           |
| Crystal   | Y1                      | Crystal, 16MHz         | 1   | Risym     | 3225 16MHz        |
| Button    | K1                      | Button SMD             | 1   | MT        | SMD-KEY-5P        |
| LED       | ON,TX,RX                | LED, SMD Blue          | 3   | EVERLIGHT | 0603              |
| LED       | L                       | LED, SMD Greed         | 1   | EVERLIGHT | 0603              |
| F1        | F1                      | SMD Fuse               | 1   | MF        | MSMF050-2         |
| Beads     | L2                      | Beads                  | 1   | BOURNS    | RC0603JR-0712KL   |
| Varistor  | Z1,Z2                   | Varistor               | 2   | BOURNS    | CG0603MLC-05E     |
| Resistor  | R3,R10                  | RES,22R,1/16W,±5%,SMD  | 2   | Yageo     | RC0603JR-0722RL   |
| Resistor  | R5,R6,R7,R8             | RES,1k,1/16W,±5%,SMD   | 4   | Yageo     | RC0603JR-071KL    |
| Resistor  | R1,R2,R4                | RES,10k,1/16W,±5%,SMD  | 3   | Yageo     | RC0603JR-0710KL   |
| Capacitor | C12,C13                 | CAP,22pF,16V,±20%,SMD  | 2   | Yageo     | CC0603KKX7R9BB22  |
| Capacitor | C1,C2,C6,<br>C9,C10,C11 | CAP,100nF,16V,±20%,SMD | 6   | Yageo     | CC0603KKX7R9BB101 |
| Capacitor | C4,C5                   | CAP,1µF,16V, ±20%,SMD  | 2   | Yageo     | CC0603KKX7R9BB105 |
| Capacitor | C3,C14                  | CAP,22µF,16V,±20%,SMD  | 2   | Yageo     | CC0603KKX7R9BB226 |
| Diode     | D2                      | Diode, SMD             | 1   | BOURNS    | CD1206-S01575     |

*Bill of Materials, refer to Figure 1 above.*

6x8 MATRIX LED DRIVER

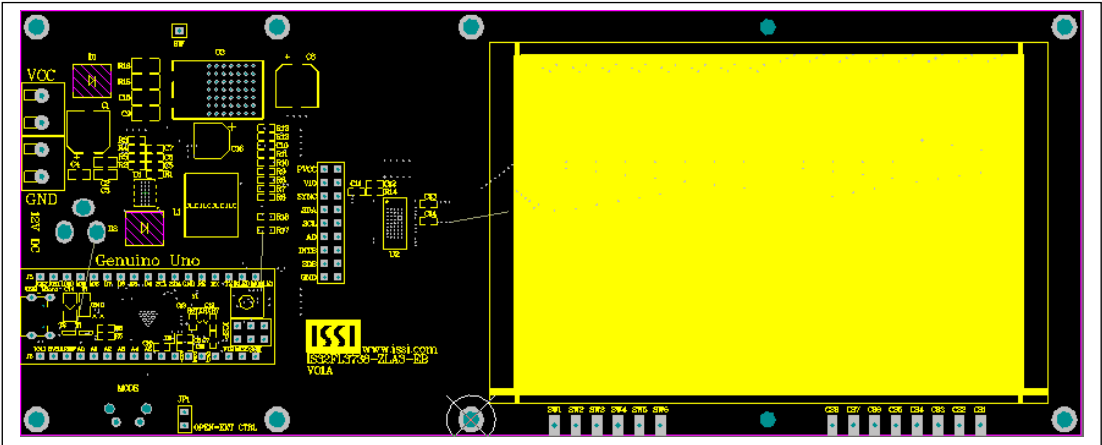


Figure 9: Board Component Placement Guide - Top Layer: V01A

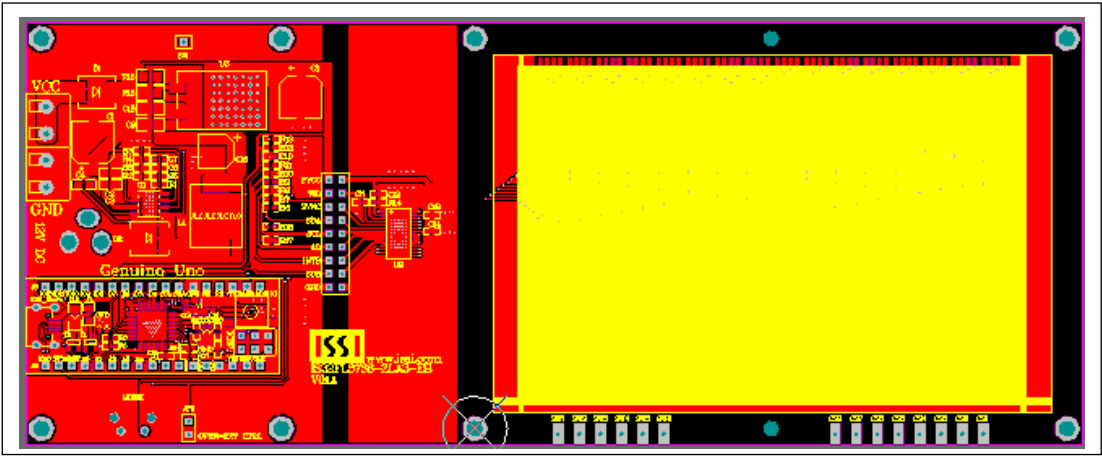


Figure 10: Board PCB Layout - Top Layer: V01A

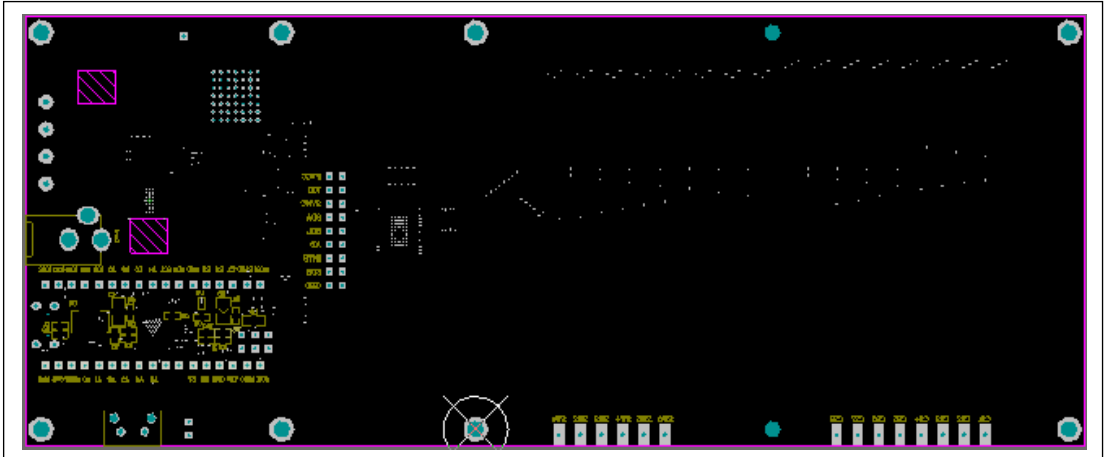


Figure 11: Board Component Placement Guide - Bottom Layer: V01A

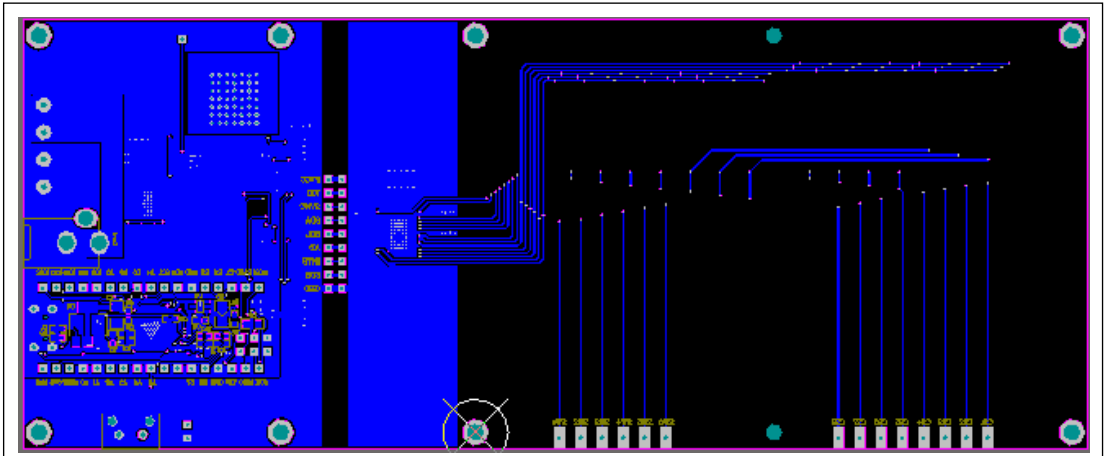


Figure 12: Board PCB Layout - Bottom Layer: V01A

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А