




**NO CONTENT ON THE ATTACHED DOCUMENT HAS CHANGED**

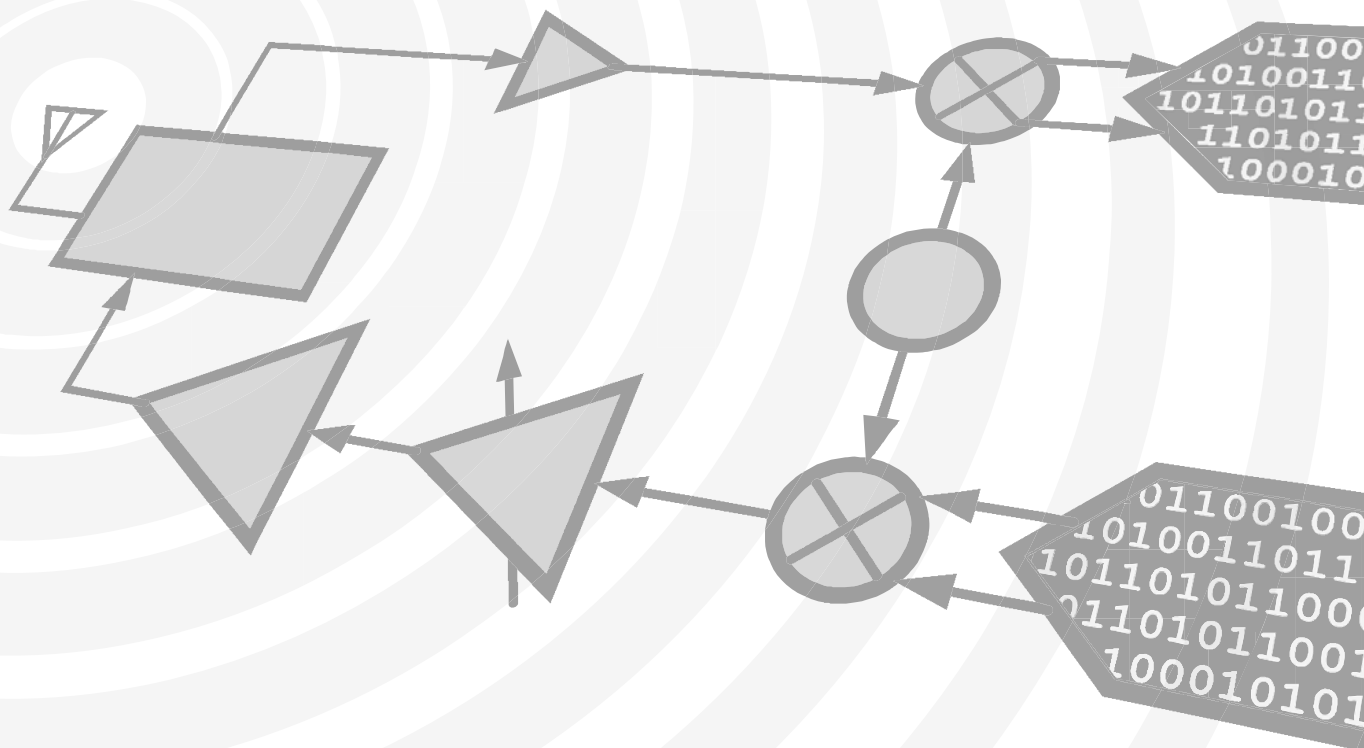

**THIS PAGE INTENTIONALLY LEFT BLANK**


## GaAs PHEMT MMIC LOW NOISE AMPLIFIER, 2 - 4 GHz

### Typical Applications

The HMC609 is ideal for:

- Fixed Microwave
- Point-to-Multi-Point Radios
- Test & Measurement Equipment
- Radar & Sensors
- Military & Space

### Functional Diagram

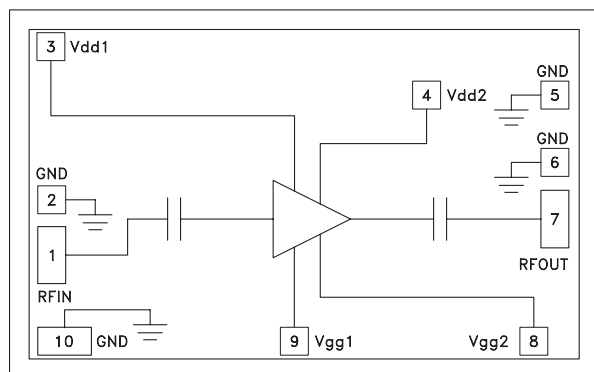

### Features

- Excellent Gain Flatness:  $\pm 0.2$  dB
- High Gain: 20.5 dB
- Low Noise Figure: 3 dB
- Output IP3: +36 dBm
- Output P1dB: +22 dBm
- 50 Ohm Matched Input/Output
- Die Size: 2.1 x 1.3 x 0.1 mm

### General Description

The HMC609 is a GaAs PHEMT MMIC Low Noise Amplifier (LNA) chip which operates from 2 to 4 GHz. The HMC609 features extremely flat performance characteristics including 20 dB of small signal gain, 3.0 dB of noise figure and output IP3 of +36 dBm across the operating band. This versatile LNA is ideal for hybrid and MCM assemblies due to its compact size, consistent output power and DC blocked RF I/O's. All data is measured with the chip in a 50 Ohm test fixture connected via two 0.025 mm (1 mil) diameter bondwires of minimal length 0.31 mm (12 mil).

### Electrical Specifications, $T_A = +25^\circ \text{C}$ , $V_{dd1} = V_{dd2} = +6\text{V}$ , $I_{dd1} + I_{dd2} = 170 \text{ mA}$ \*

| Parameter                                | Min.  | Typ.  | Max. | Units                |
|------------------------------------------|-------|-------|------|----------------------|
| Frequency Range                          | 2 - 4 |       |      | GHz                  |
| Gain                                     | 19    | 20.5  |      | dB                   |
| Gain Variation Over Temperature          |       | 0.005 | 0.01 | dB/ $^\circ\text{C}$ |
| Noise Figure                             |       | 3     | 4    | dB                   |
| Input Return Loss                        |       | 20    |      | dB                   |
| Output Return Loss                       |       | 17    |      | dB                   |
| Output Power for 1 dB Compression (P1dB) | 18    | 21    |      | dBm                  |
| Saturated Output Power (Psat)            |       | 22    |      | dBm                  |
| Output Third Order Intercept (IP3)       |       | 36    |      | dBm                  |
| Supply Current (Idd1 + Idd2)             |       | 170   | 220  | mA                   |


\*Adjust Vgg1 = Vgg2 between -1.5V to -0.5V (typ. -0.9V) to achieve total drain bias of 170mA

**GaAs PHEMT MMIC LOW NOISE  
AMPLIFIER, 2 - 4 GHz**


1

AMPLIFIERS - LOW NOISE - CHIP


**Broadband Gain & Return Loss**

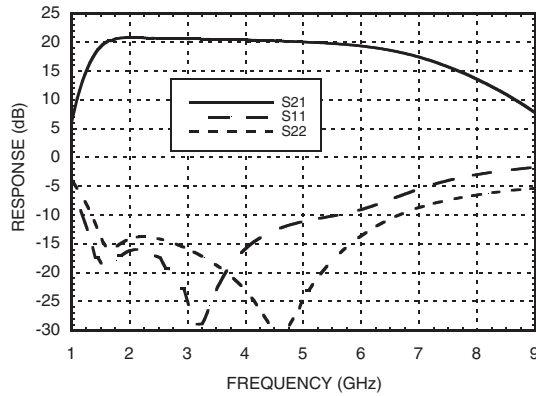


**Gain vs. Temperature**

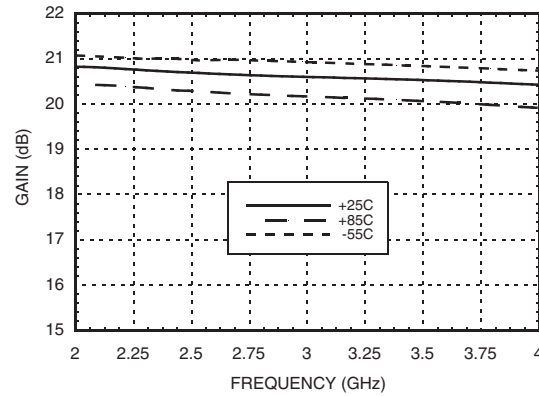


**Input Return Loss vs. Temperature**

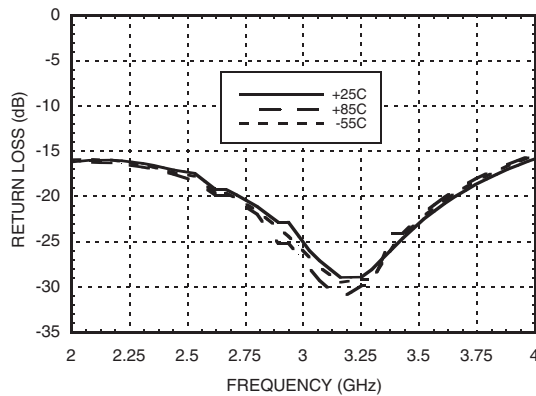


**Output Return Loss vs. Temperature**

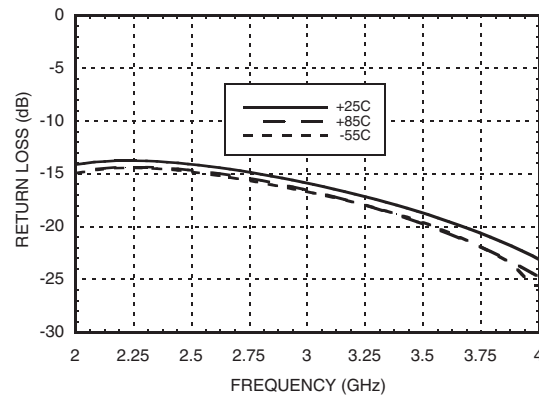

**P1dB vs. Temperature**

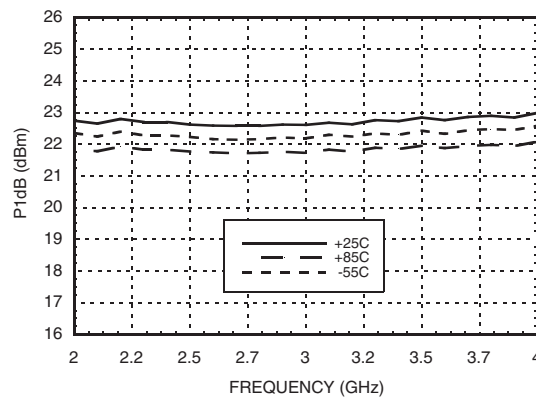

**Psat vs. Temperature**

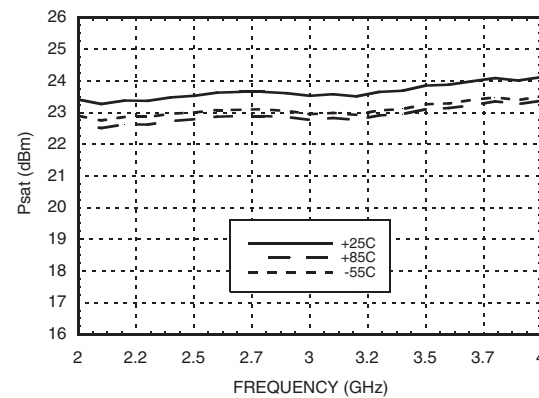


**GaAs PHEMT MMIC LOW NOISE  
AMPLIFIER, 2 - 4 GHz**


1

AMPLIFIERS - LOW NOISE - CHIP


**Power Compression @ 3 GHz**

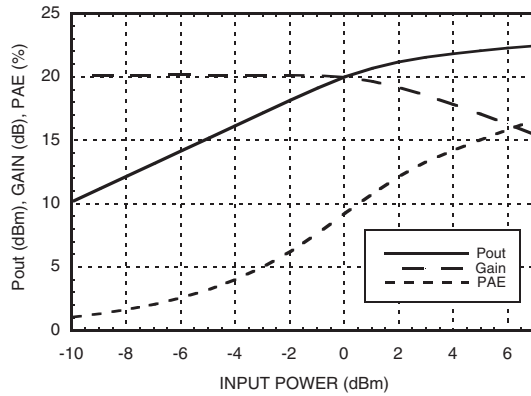


**Output IP3 vs. Temperature**

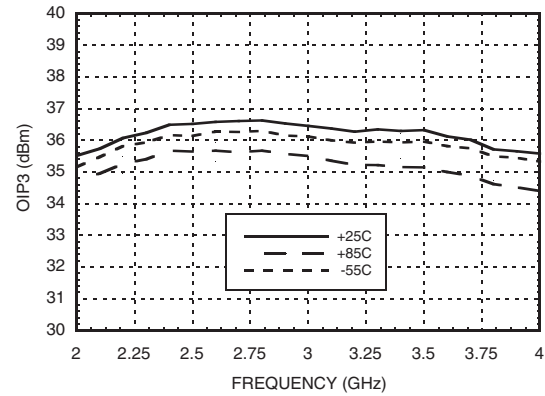

**Noise Figure vs. Temperature**

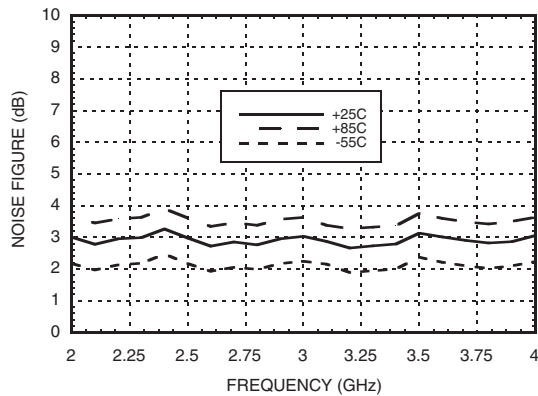

**Reverse Isolation vs. Temperature**

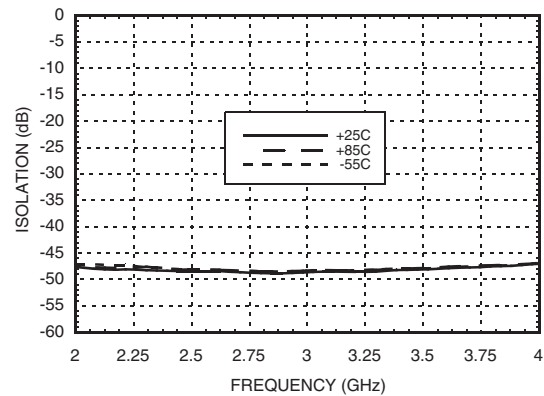

**GaAs PHEMT MMIC LOW NOISE  
AMPLIFIER, 2 - 4 GHz**

**Absolute Maximum Ratings**

|                                                                           |                |
|---------------------------------------------------------------------------|----------------|
| Drain Bias Voltage (Vdd)                                                  | 7 Vdc          |
| RF Input Power (RFIN)(Vdd = +5 Vdc)                                       | +15 dBm        |
| Channel Temperature                                                       | 175 °C         |
| Continuous P <sub>diss</sub> (T = 85 °C)<br>(derate 18 mW/°C above 85 °C) | 1.64 W         |
| Thermal Resistance<br>(channel to ground pad)                             | 55 °C/W        |
| Storage Temperature                                                       | -65 to +150 °C |
| Operating Temperature                                                     | -55 to +85 °C  |

**Typical Supply Current vs. Vdd**


| Vdd (V) | I <sub>dd</sub> (mA) |
|---------|----------------------|
| +5.5    | 160                  |
| +6.0    | 170                  |
| +6.5    | 180                  |

Note: Amplifier will operate over full voltage range shown above



**ELECTROSTATIC SENSITIVE DEVICE  
OBSERVE HANDLING PRECAUTIONS**

**Outline Drawing**

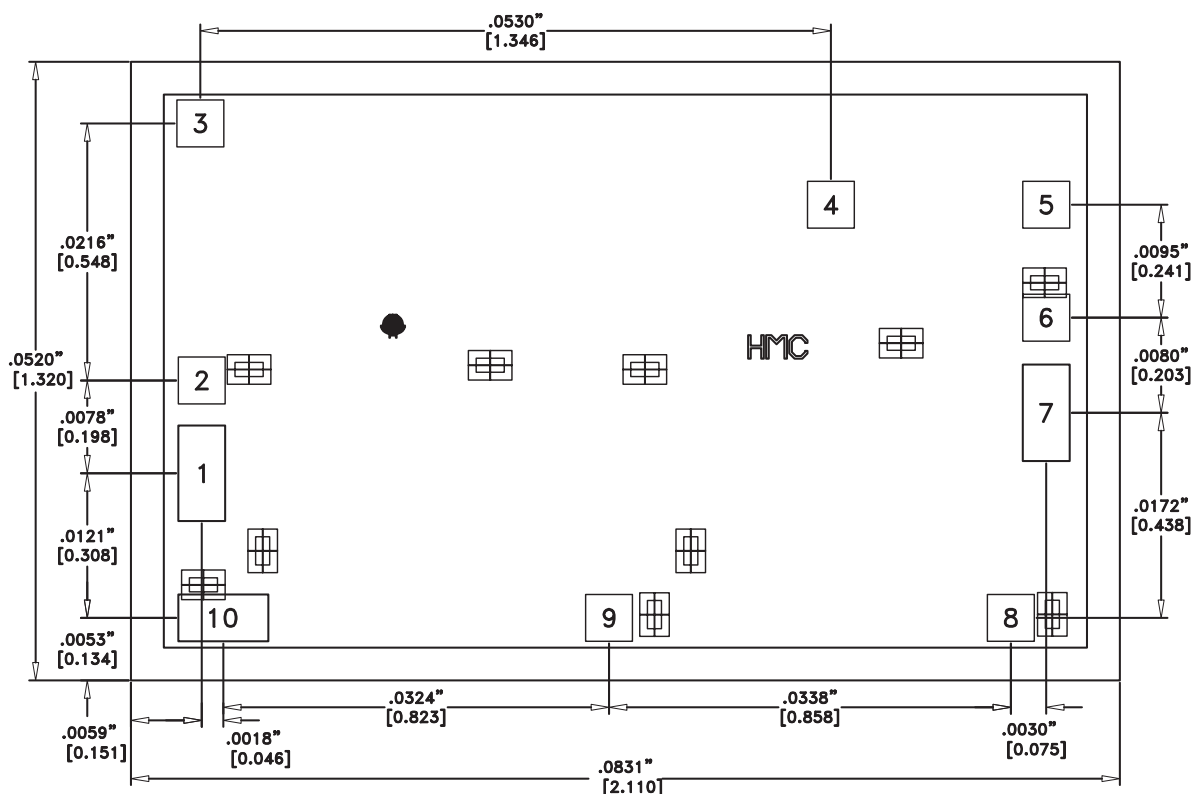

**Die Packaging Information** [1]

| Standard        | Alternate |
|-----------------|-----------|
| GP-2 (Gel Pack) | [2]       |

[1] Refer to the "Packaging Information" section for die packaging dimensions.

[2] For alternate packaging information contact Hittite Microwave Corporation.

**NOTES:**

- ALL DIMENSIONS IN INCHES [MILLIMETERS]
- DIE THICKNESS IS 0.007"
- TYPICAL BOND PAD IS 0.004" SQUARE
- BACKSIDE METALLIZATION: GOLD
- BACKSIDE METAL IS GROUND
- BOND PAD METALLIZATION: GOLD
- NO CONNECTION REQUIRED FOR UNLABELED BOND PADS
- OVERALL DIE SIZE  $\pm 0.002$ "

**GaAs PHEMT MMIC LOW NOISE  
AMPLIFIER, 2 - 4 GHz**


1

AMPLIFIERS - LOW NOISE - CHIP

**Pad Descriptions**

| Pad Number                | Function   | Description                                                                                            | Interface Schematic |
|---------------------------|------------|--------------------------------------------------------------------------------------------------------|---------------------|
| 1                         | RFIN       | This pad is AC coupled and matched to 50 Ohms.                                                         | RFIN ○ —  —         |
| 2, 5, 6, 10<br>Die Bottom | GND        | These pads & die bottom must be connected to RF/DC ground.                                             | ○ GND<br>           |
| 3, 4                      | Vdd1, Vdd2 | Power Supply Voltage for the amplifier.<br>External bypass capacitors of 100 pF & 0.1 μF are required. | Vdd1,<br>Vdd2<br>   |
| 7                         | RFOUT      | This pad is AC coupled and matched to 50 Ohms.                                                         | —  — ○ RFOUT        |
| 8, 9                      | Vgg2, Vgg1 | Gates supply voltage for the amplifier. External bypass capacitors of 100 pF and 0.1 μF are required.  | Vgg1,<br>Vgg2<br>   |

**Assembly Diagram**

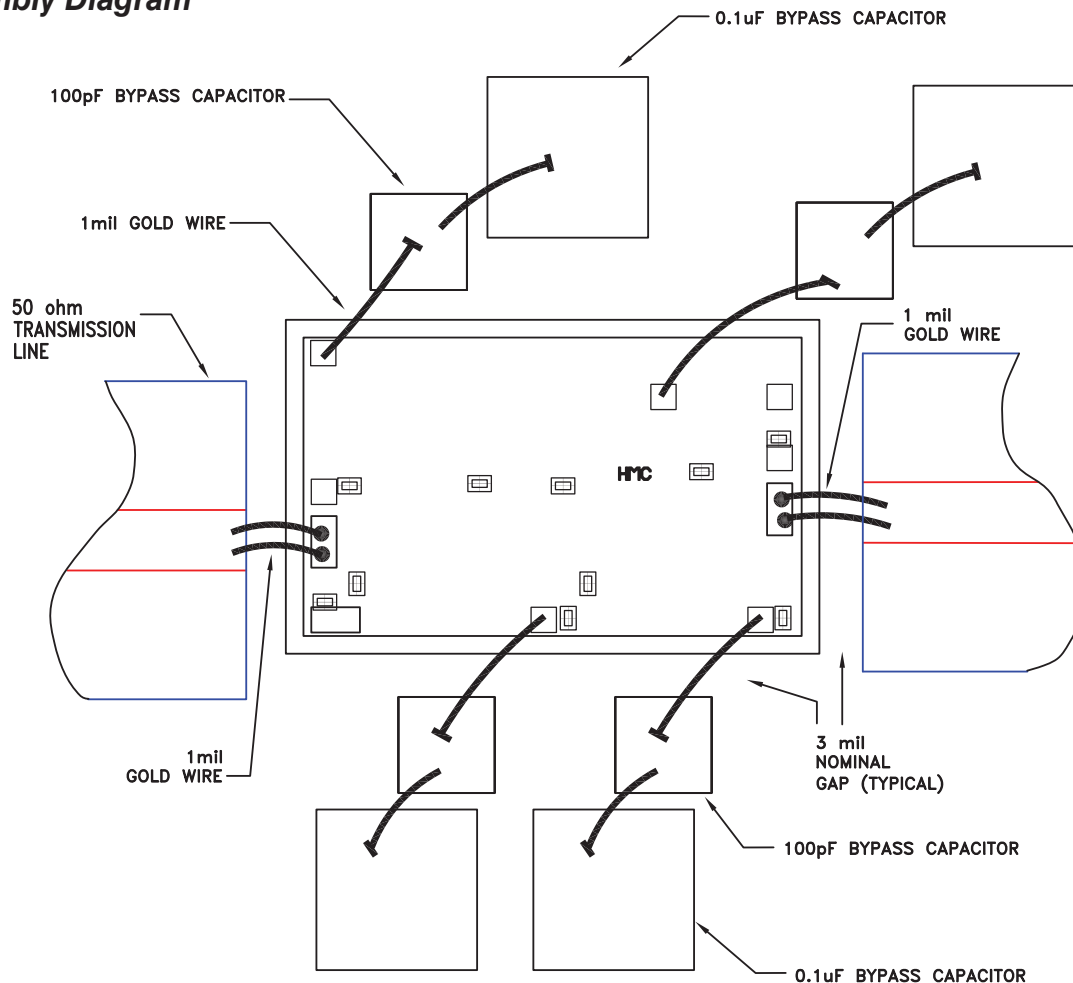

## **GaAs PHEMT MMIC LOW NOISE AMPLIFIER, 2 - 4 GHz**

1

AMPLIFIERS - LOW NOISE - CHIP

### **Mounting & Bonding Techniques for Millimeterwave GaAs MMICs**

The die should be attached directly to the ground plane eutectically or with conductive epoxy (see HMC general Handling, Mounting, Bonding Note).

50 Ohm Microstrip transmission lines on 0.127mm (5 mil) thick alumina thin film substrates are recommended for bringing RF to and from the chip (Figure 1). If 0.254mm (10 mil) thick alumina thin film substrates must be used, the die should be raised 0.150mm (6 mils) so that the surface of the die is coplanar with the surface of the substrate. One way to accomplish this is to attach the 0.102mm (4 mil) thick die to a 0.150mm (6 mil) thick molybdenum heat spreader (moly-tab) which is then attached to the ground plane (Figure 2).

Microstrip substrates should be brought as close to the die as possible in order to minimize bond wire length. Typical die-to-substrate spacing is 0.076mm (3 mils).

### **Handling Precautions**

Follow these precautions to avoid permanent damage.

**Storage:** All bare die are placed in either Waffle or Gel based ESD protective containers, and then sealed in an ESD protective bag for shipment. Once the sealed ESD protective bag has been opened, all die should be stored in a dry nitrogen environment.

**Cleanliness:** Handle the chips in a clean environment. DO NOT attempt to clean the chip using liquid cleaning systems.

**Static Sensitivity:** Follow ESD precautions to protect against  $\pm 250V$  ESD strikes.

**Transients:** Suppress instrument and bias supply transients while bias is applied. Use shielded signal and bias cables to minimize inductive pick-up.

**General Handling:** Handle the chip along the edges with a vacuum collet or with a sharp pair of bent tweezers. The surface of the chip has fragile air bridges and should not be touched with vacuum collet, tweezers, or fingers.

### **Mounting**



The chip is back-metallized and can be die mounted with AuSn eutectic preforms or with electrically conductive epoxy. The mounting surface should be clean and flat.

**Eutectic Die Attach:** A 80/20 gold tin preform is recommended with a work surface temperature of 255 °C and a tool temperature of 265 °C. When hot 90/10 nitrogen/hydrogen gas is applied, tool tip temperature should be 290 °C. DO NOT expose the chip to a temperature greater than 320 °C for more than 20 seconds. No more than 3 seconds of scrubbing should be required for attachment.

**Epoxy Die Attach:** Apply a minimum amount of epoxy to the mounting surface so that a thin epoxy fillet is observed around the perimeter of the chip once it is placed into position. Cure epoxy per the manufacturer's schedule.

### **Wire Bonding**

Ball or wedge bond with 0.025 mm (1 mil) diameter pure gold wire is recommended. Thermosonic wirebonding with a nominal stage temperature of 150 °C and a ball bonding force of 40 to 50 grams or wedge bonding force of 18 to 22 grams is recommended. Use the minimum level of ultrasonic energy to achieve reliable wirebonds. Wirebonds should be started on the chip and terminated on the package or substrate. All bonds should be as short as possible <0.31 mm (12 mils).

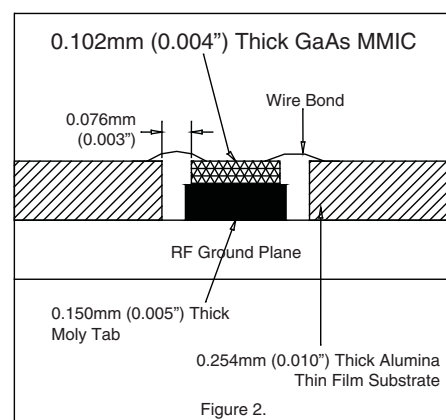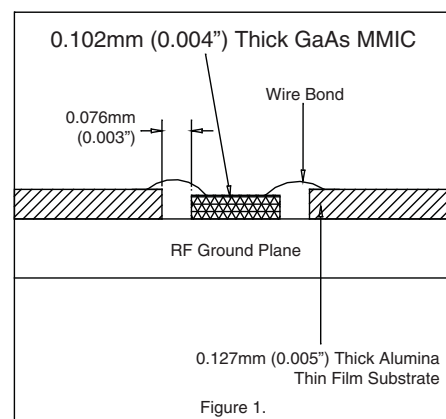



Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А