

LTC3886/LTC3870 60V Dual Output Step-Down DC/DC Controller with Digital Power System Management

DESCRIPTION

Demonstration circuit 2155A is available in two configurations. The DC2155A-A is a dual output synchronous step-down converter featuring the [LTC®3886](#), a dual-phase current mode controller. The DC2155A-B is a single output synchronous step-down converter that operates with four phases: two from the LTC3886 and two from LTC3870, a phase extender. Both versions have a PMBus interface and digital power system management functions.

The DC2155A uses discrete MOSFETs in the power stage. The input range of this board is from 18V to 54V. The output voltage can be programmed from 5V to 12V with an output current of up to 12A per phase. For the DC2155A-A version, the factory default setting for the CH0 output is 12V and CH1 output is 5V. In addition, this demo board has an on-board dynamic load circuit, which makes it easy to evaluate the transient performances.

The DC2155A powers up to default settings and produces power based on configuration resistors or its program file loaded within its onboard EEPROM without the need for any serial bus communication. This allows easy evaluation

of the DC/DC converter aspects of the LTC3886. To fully explore the extensive power system management features of the parts, download the GUI software LTpowerPlay® onto your PC and use LTC's I²C/SMBus/PMBus Dongle DC1613A to connect to the board. LTpowerPlay allows the user to reconfigure the part on the fly and store the configuration in EEPROM, view telemetry of voltage, current, temperature and fault status.

GUI Software Download

The software can be downloaded from:

[LTpowerPlay](#)

For more details and instructions of LTpowerPlay, please visit Help menu in LTpowerPlay.

[Design files for this circuit board are available.](#)

All registered trademarks and trademarks are the property of their respective owners.

PERFORMANCE SUMMARY Specifications are at T_A = 25°C

DC2155A-A Assembly (Dual Output, LTC3886 Only)

| SYMBOL | PARAMETER | CONDITIONS | MIN | TYP | MAX | UNITS |
|-------------------|-------------------------------------|---|-----|------|-----|-------|
| V _{IN} | Input Supply Range | | 18 | 32 | 54 | V |
| FSW | Factory Default Switching Frequency | | | 150 | | kHz |
| V _{OUT0} | CH0 Factory Default Output Voltage | I _{OUT0} = 0A to 12A, V _{IN} = 18V to 54V | | 12 | | V |
| I _{OUT0} | CH0 Output Current Range | | 0 | | 12 | A |
| EFF | CH0 Efficiency | V _{OUT0} = 12V, V _{IN} = 32V, I _{OUT} = 12A, See Figure 6a | | 96.2 | | % |
| V _{OUT1} | CH1 Factory Default Output Voltage | I _{OUT1} = 0A to 12A, V _{IN} = 18V to 54V | | 5 | | V |
| I _{OUT1} | CH1 Output Current Range | | 0 | | 12 | A |
| EFF | CH1 Efficiency | V _{OUT1} = 5V, V _{IN} = 32V, I _{OUT} = 12A, See Figure 6b | | 93.6 | | % |

DEMO MANUAL

DC2155A-A/DC2155A-B

PERFORMANCE SUMMARY Specifications are at $T_A = 25^\circ\text{C}$

DC2155A-B Assembly (Four-Phase Single Output, LTC3886 and LTC3870)

| SYMBOL | PARAMETER | CONDITIONS | MIN | TYP | MAX | UNITS |
|------------|-------------------------------------|--|-----|------|-----|-------|
| V_{IN} | Input Supply Range | | 18 | 32 | 54 | V |
| V_{OUT0} | Factory Default Output Voltage | $I_{OUT} = 0\text{A TO } 48\text{A}$, $V_{IN} = 18\text{V to } 54\text{V}$ | | 12 | | V |
| I_{OUT0} | Output Current Range | | 0 | | 48 | A |
| FSW | Factory Default Switching Frequency | | | 150 | | kHz |
| EFF | Efficiency | $V_{IN} = 32\text{V}$, $V_{OUT} = 12\text{V}$, $I_{OUT} = 48\text{A}$, See Figure 7 | | 96.9 | | % |

QUICK START PROCEDURE

Demonstration circuit 2155A makes it easy to set up to evaluate the performances of the LTC3886. Refer to Figure 1 and Figure 2 for proper measurement equipment setup and follow the procedure below:

NOTE. When measuring the input or output voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the output voltage ripple by touching the probe tip directly across the C10 for CH0 and C26 for CH1. See Figure 5 for proper scope probe technique.

1. Make sure jumpers are in the following positions:

| JUMPER | POSITION | FUNCTION |
|--------|--------------------------------------|--|
| JP1 | ON | EXT 5V (on-board bias supply) for $EXTV_{CC}$ and dynamic load circuit |
| JP2 | NC for DC2155A-A; C for DC2155A-B | $\overline{FAULT0}$ to $\overline{FAULT1}$ |
| JP3 | NC for DC2155A-A; C for DC2155A-B | RUN0 to RUN1 |
| JP5 | INT | External or on-board pulse generator for transient circuit |
| JP6 | OFF | On-board pulse generator ON/OFF |

2. With power off, connect the input power supply to V_{IN} and GND. Connect active load to output.

3. Make sure both RUN switches (SW1, SW2) are OFF.
4. Turn on the power at the input.

NOTE. Make sure that the input voltage does not exceed 54V.

5. Turn on both SW1 (for RUN0), and SW2 (for RUN1) switches, as desired.
6. Check for the correct output voltage from E5 to E6 for CH0, E7 to E8 for CH1. For DC2155A-A version, $V_{OUT0} = 12.0\text{V} \pm 0.5\%$ (11.94V ~ 12.06V), $V_{OUT1} = 5\text{V} \pm 0.5\%$ (4.975V ~ 5.025V). For DC2155A-B version, $V_{OUT0} = 12.0\text{V} \pm 0.5\%$ (11.94V ~ 12.06V).

NOTE. If there is no output, temporarily disconnect the load to make sure that the load is not set too high.

7. Once the proper output voltage is established, adjust the loads within the operating range and observe the output voltage regulation, ripple voltage, efficiency and other parameters.
8. Connect the dongle and control the output voltage from the GUI. See "LTpowerPlay QUICK START" session for details.

QUICK START PROCEDURE

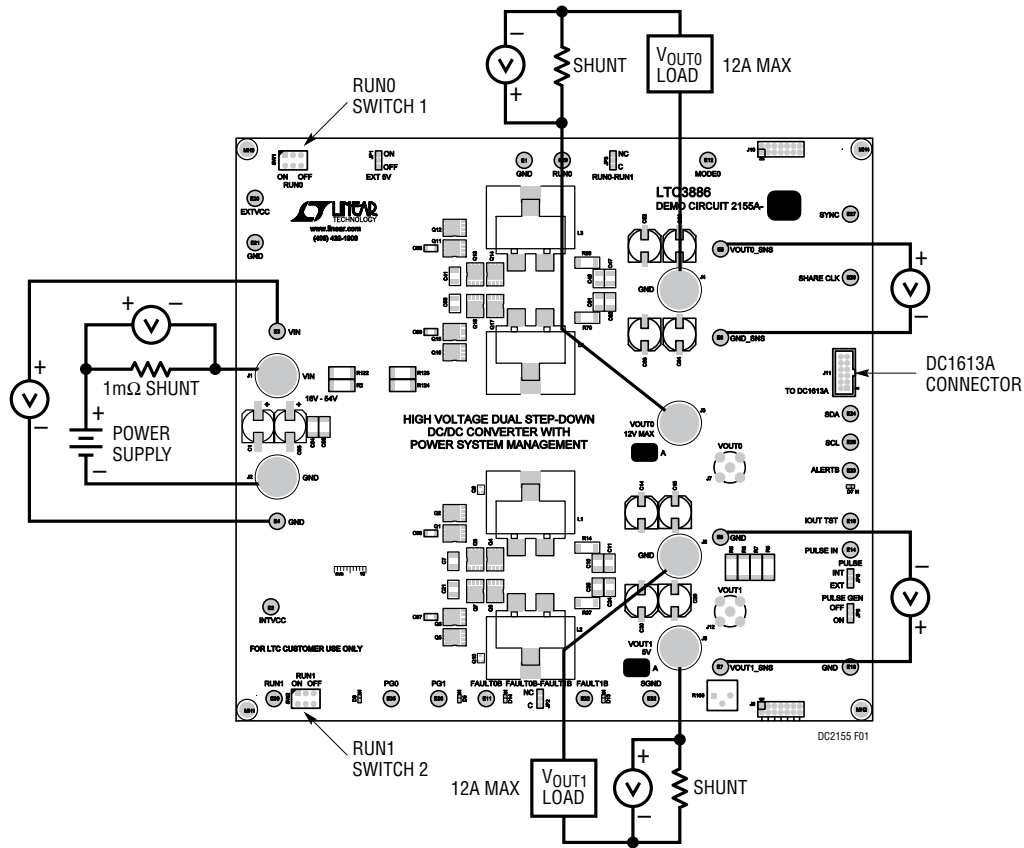


Figure 1. Test Setup for DC2155A-A

DEMO MANUAL

DC2155A-A/DC2155A-B

QUICK START PROCEDURE

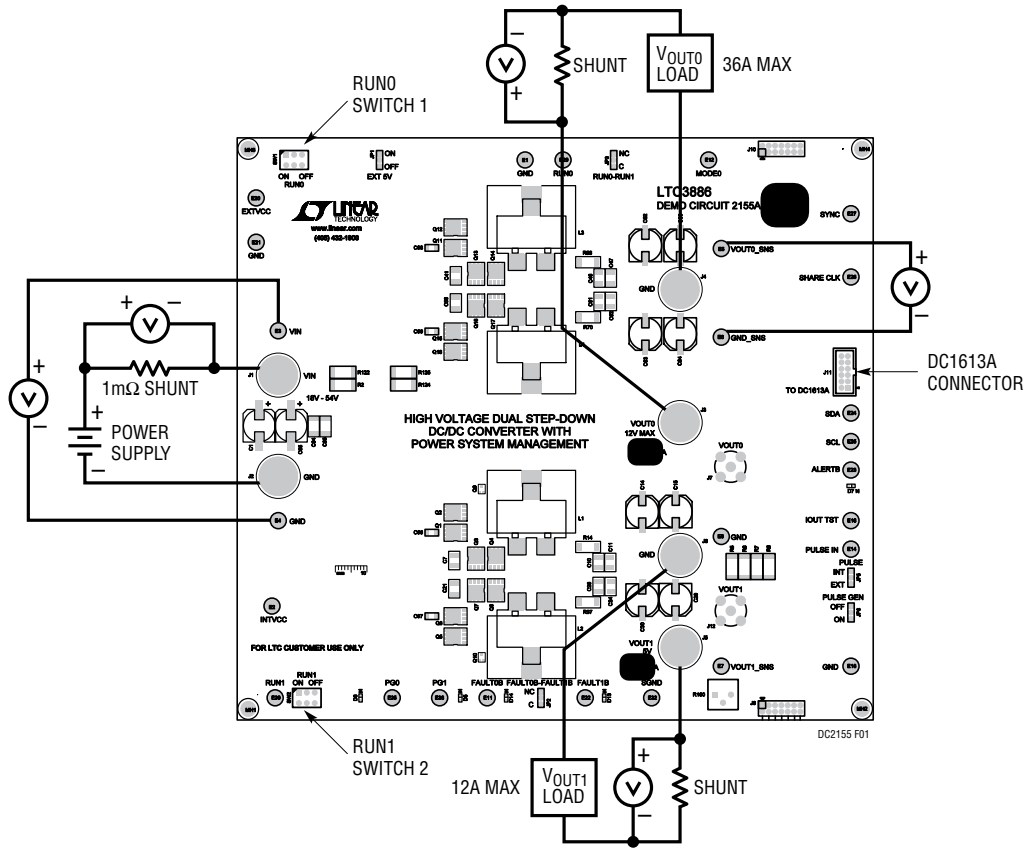


Figure 2. Test Setup for DC2155A-B

QUICK START PROCEDURE

Connecting a PC to DC2155A

You can use a PC to reconfigure the power management features of the LTC3886 such as: nominal V_{OUT} , margin set points, OV/UV limits, temperature fault limits,

sequencing parameters, the fault log, fault responses, GPIO and other functionality. The DC1613A dongle may be plugged in regardless of whether or not V_{IN} is present. Dongle can be hot plugged.

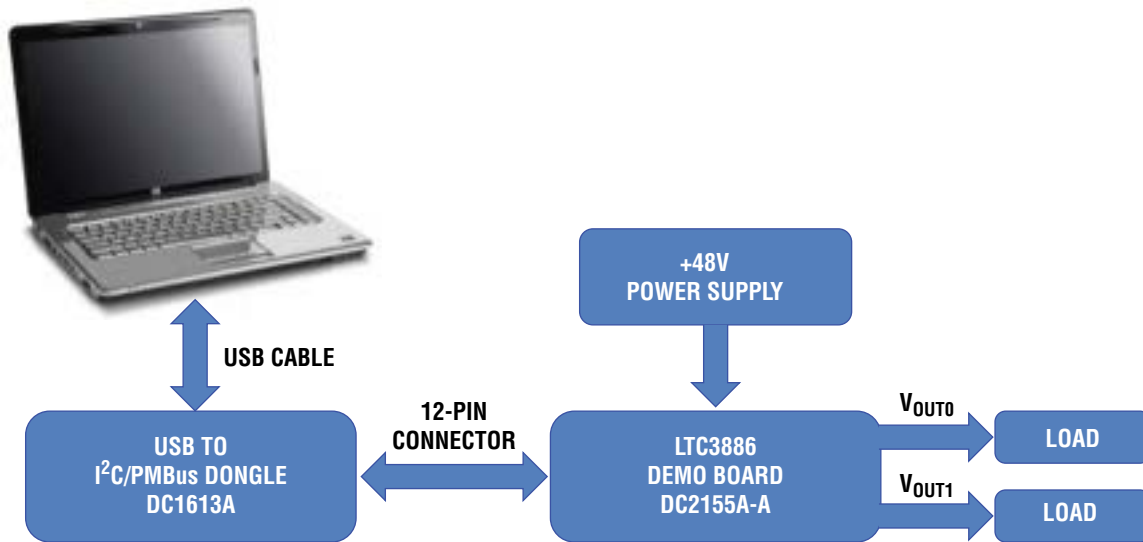


Figure 3. Demo Setup with PC for DC2155A-A

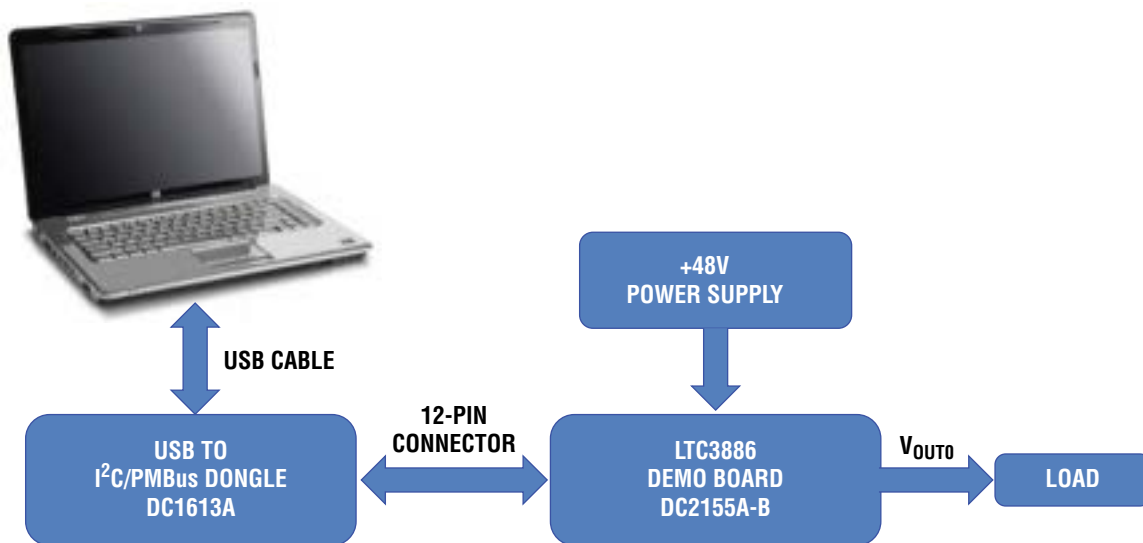


Figure 4. Demo Setup with PC for DC2155A-B

QUICK START PROCEDURE

Measuring Efficiency

To accurately measure efficiency of any configuration, do the following:

- Set JP6 to OFF position to disable the pulse generator circuits.
- DC2155A-A version. Measure V_{IN} across the input ceramic capacitor (C7 for CH0, C21 for CH1). Measure V_{OUT} across the output ceramic capacitor (C10 for CH0, C26 for CH1).

- DC2155A-B version. Measure V_{IN} across the input ceramic capacitor C7. Measure V_{OUT} across the output ceramic capacitor C10.

Measuring Output Ripple Voltage

An accurate ripple measurement may be performed by using the below configuration across C10/C26.


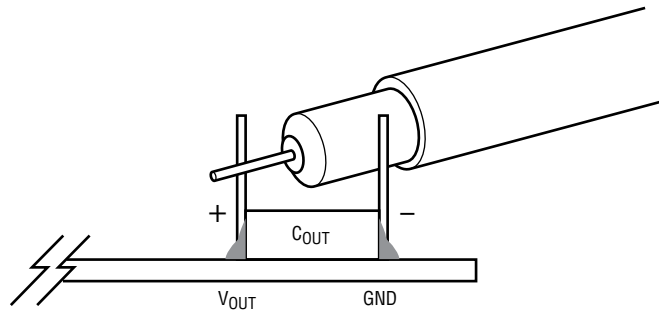



Figure 5. Measuring Output Voltage Ripple

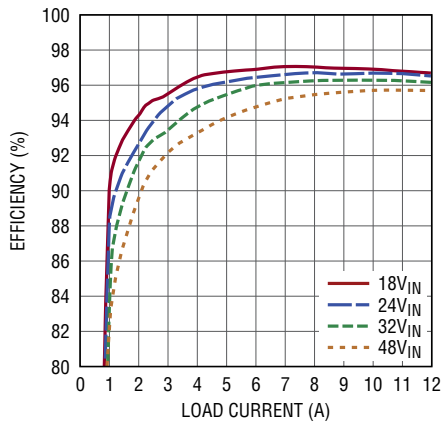

$I_{LOAD} = 0A$ to $12A$
 $f_{SW} = 150kHz$
 $EXTV_{CC} = 12V$ (TIED TO V_{OUT})
 ONE OUTPUT RAIL IS
 ENABLED AT A TIME.

DC2155 F06a

(a) DC2155A-A: Efficiency at 12V_{OUT}

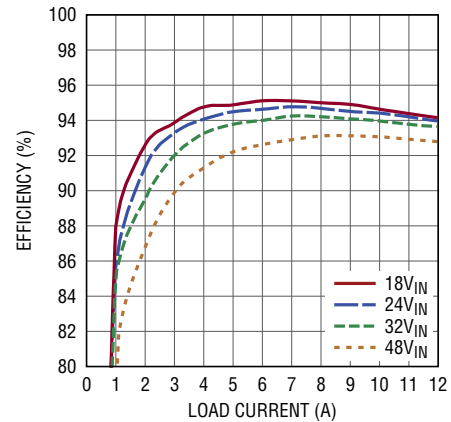

$I_{LOAD} = 0A$ to $12A$
 $f_{SW} = 150kHz$
 $EXTV_{CC} = 5V$ (TIED TO V_{OUT})
 ONE OUTPUT RAIL IS
 ENABLED AT A TIME.

DC2155 F06b

(b) DC2155A-A: Efficiency at 5V_{OUT}

Figure 6.

QUICK START PROCEDURE



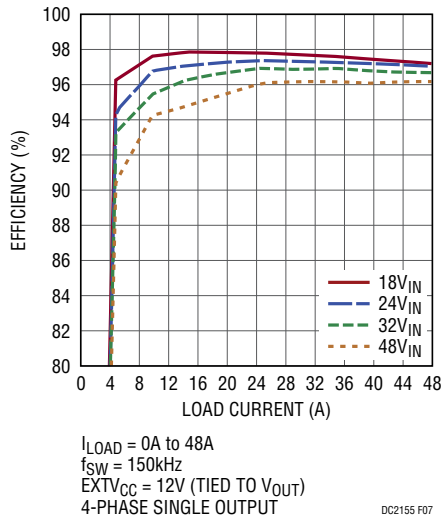


Figure 7. DC2155A-B: Efficiency at 12V_{OUT}

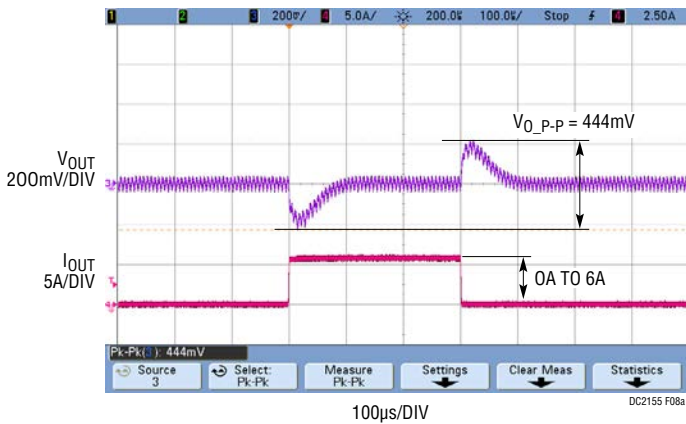

(a) DC2155A-A Load Step Response, 12V_{OUT}

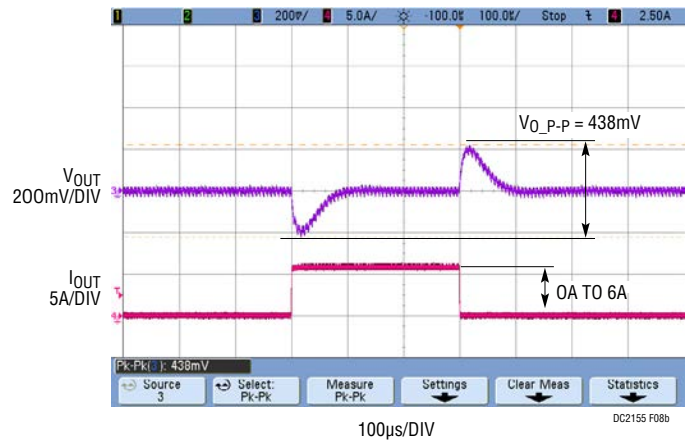


(b) DC2155A-A Load Step Response, 5V_{OUT}

Figure 8. DC2155A-A Load Step Response

DEMO MANUAL


DC2155A-A/DC2155A-B

QUICK START PROCEDURE

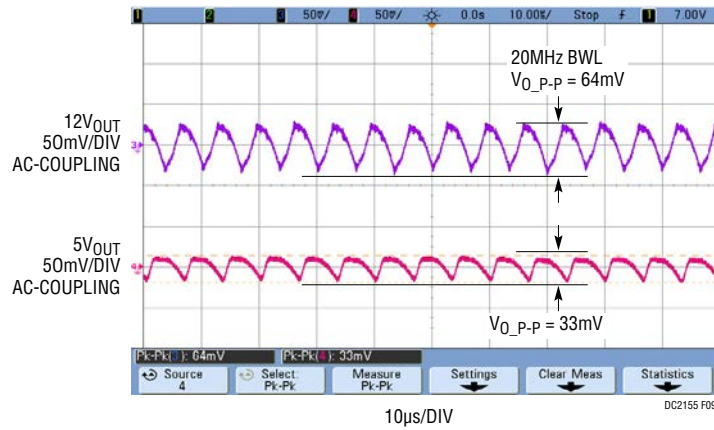

$V_{IN} = 32V$
 $V_{OUT0} = 12V$ AT 12A
 $V_{OUT1} = 5V$ AT 12A
 $f_{SW} = 150kHz$
 (DEFAULT SET-UP)

Figure 9. DC2155A-A Output Ripple Voltages

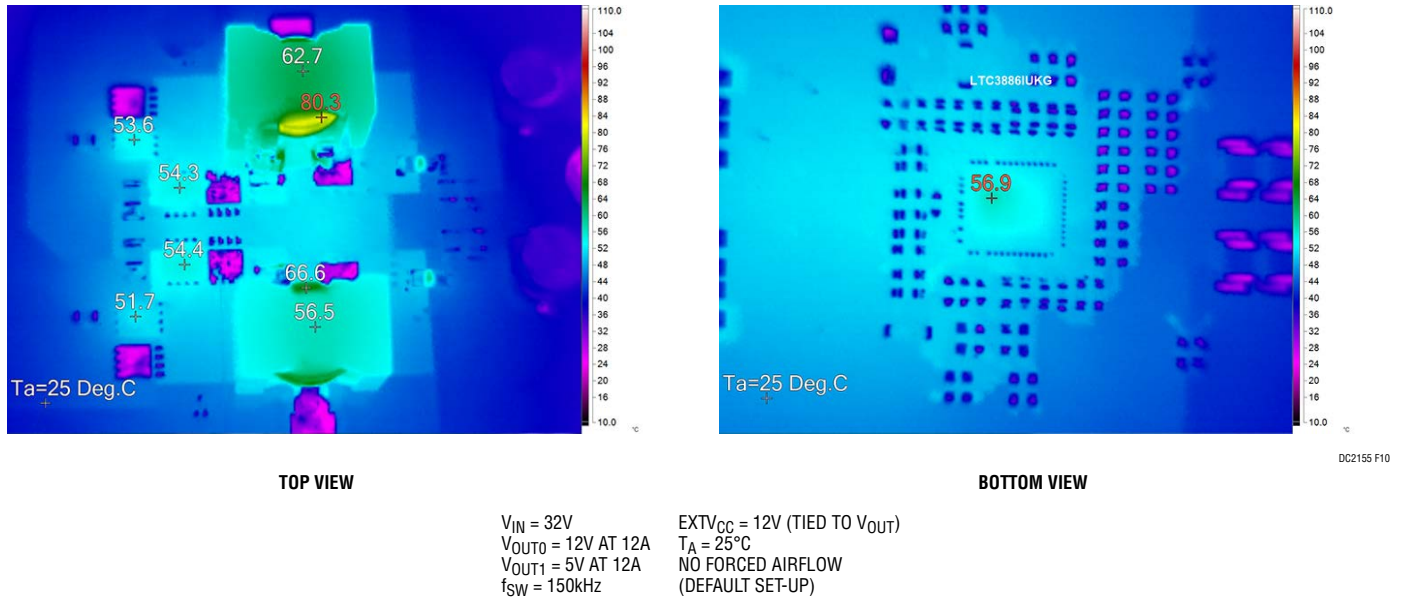

$V_{IN} = 32V$
 $V_{OUT0} = 12V$ AT 12A
 $V_{OUT1} = 5V$ AT 12A
 $f_{SW} = 150kHz$
 $EXTV_{CC} = 12V$ (TIED TO V_{OUT})
 $T_A = 25^{\circ}C$
 NO FORCED AIRFLOW
 (DEFAULT SET-UP)

Figure 10. DC2155A-A Thermal Performance

QUICK START PROCEDURE

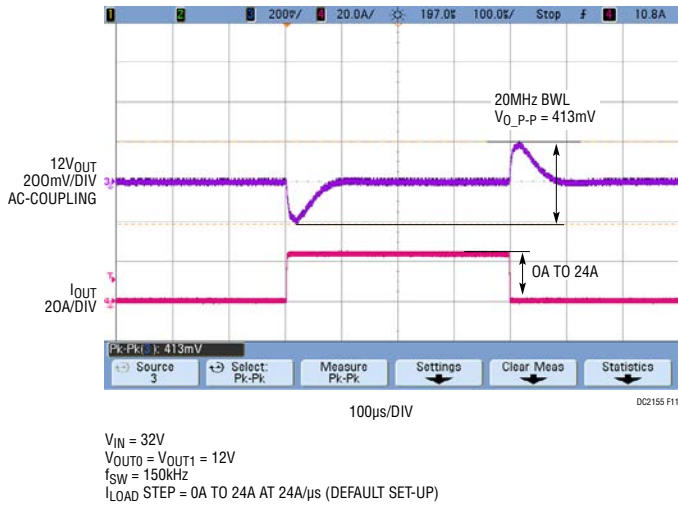


Figure 11. DC2155A-B Load Step Response $V_{IN} = 32V$



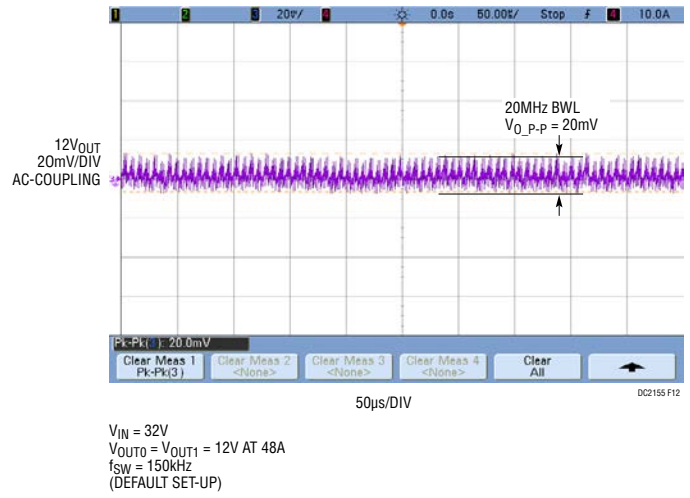


Figure 12. DC2155A-B Output Ripple Voltages

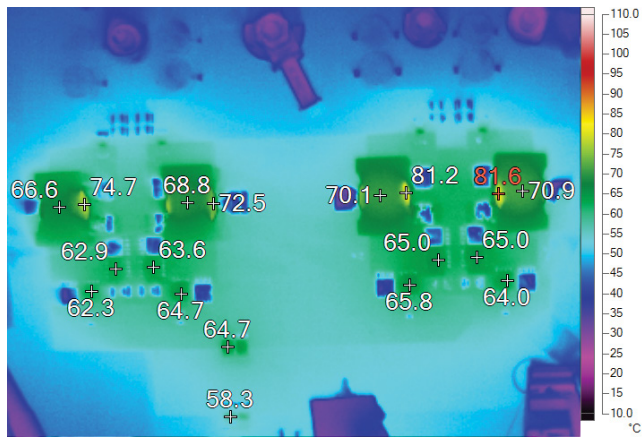

TOP VIEW

$V_{IN} = 32V$
 $V_{OUT0} = V_{OUT1} = 12V$ AT 48A
 $f_{SW} = 150kHz$
 $LTC3886 EXT_{V_{CC}} = 12V$ (TIED TO V_{OUT0})

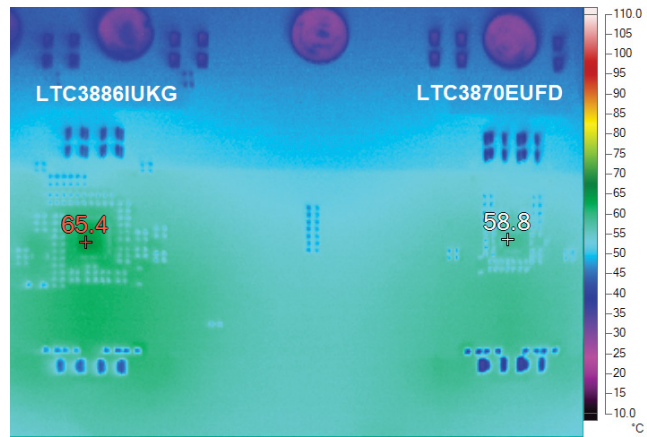

BOTTOM VIEW

$LTC3870 EXT_{V_{CC}} = 5V$ (TIED TO 5V ON-BOARD
 EXTERNAL BIAS SUPPLY VOLTAGE FROM U3)
 $T_A = 25^\circ C$
 NO FORCED AIRFLOW
 (DEFAULT SET-UP)

Figure 13. DC2155A-B Thermal Performance

DEMO MANUAL

DC2155A-A/DC2155A-B

LTpowerPlay SOFTWARE GUI

LTpowerPlay is a powerful Windows based development environment that supports Analog Devices power system management ICs, including the LTC3880, LTC3883, LTC3882, LTC3887 and LTC3886. The software supports a variety of different tasks. You can use LTpowerPlay to evaluate Analog Devices ICs by connecting to a demo board system. LTpowerPlay can also be used in an offline mode (with no hardware present) in order to build a multichip configuration file that can be saved and reloaded at a later time. LTpowerPlay provides unprecedented diagnostic and debug features. It becomes a valuable diagnostic tool during board bring-up to program or tweak the power management scheme in a system, or to diagnose

power issues when bringing up rails. LTpowerPlay utilizes the DC1613A USB-to-SMBus controller to communicate with one of many potential targets, including the LTC3886's DC2155A demo system, or a customer board. The software also provides an automatic update feature to keep the software current with the latest set of device drivers and documentation. The LTpowerPlay software can be downloaded from:

[LTpowerPlay](#)

To access technical support documents for LTC Digital Power Products visit Help. View online help on the LTpowerPlay menu.

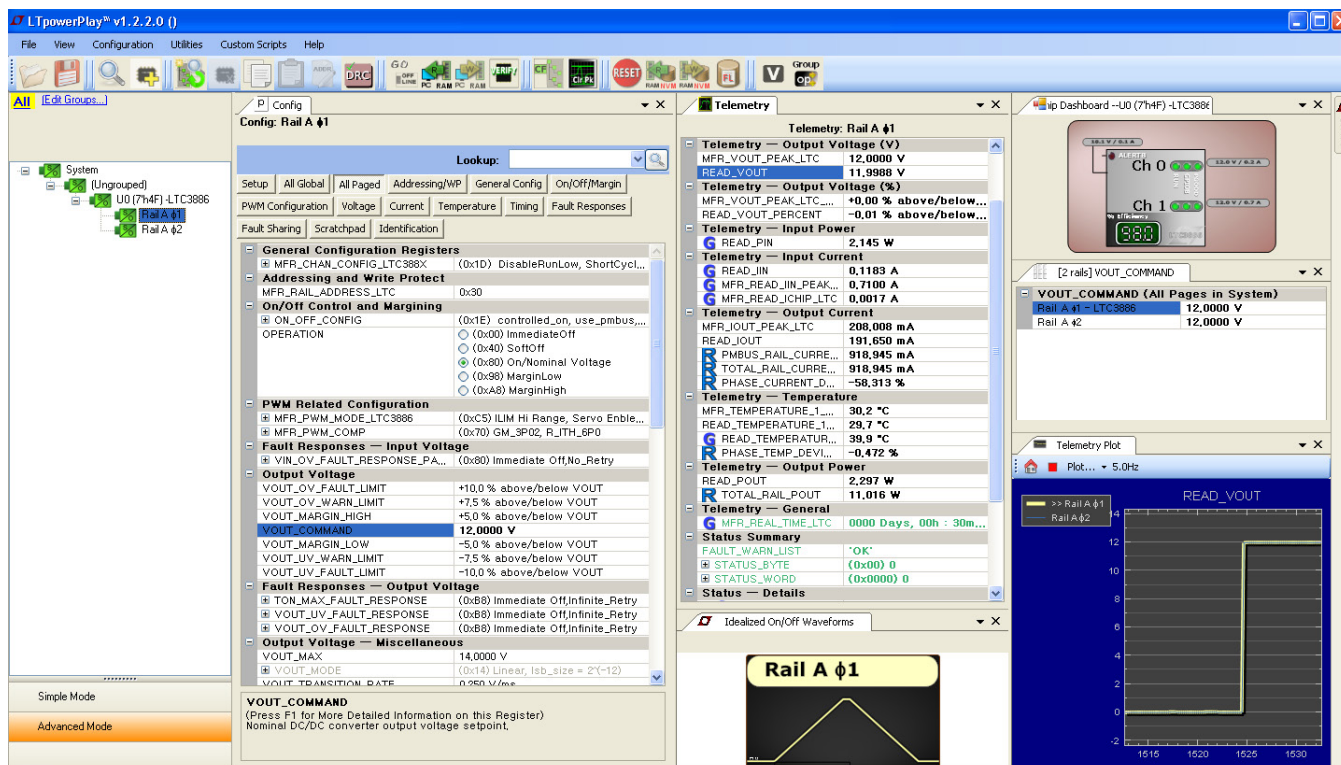


Figure 14. LTpowerPlay Main Interface

LTpowerPlay QUICK START PROCEDURE


The following procedure describes how to use LTpowerPlay to monitor and change the settings of LTC3886.

1. Download and install the LTpowerPlay GUI:


LTpowerPlay

2. Launch the LTpowerPlay GUI.

- a. The GUI should automatically identify the DC2155A. The system tree on the left hand side should look like this:

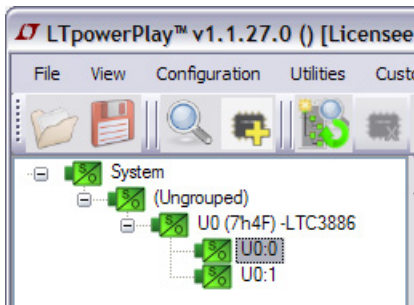


- b. A blue message box shows for a few seconds in the lower left hand corner, confirming that the LTC3886 is communicating:

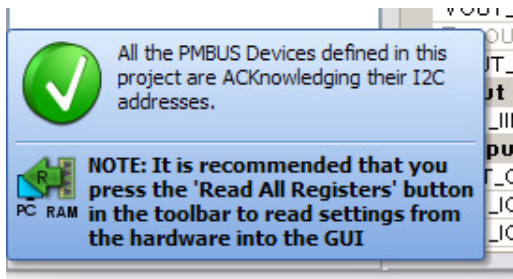

- c. In the Toolbar, click the “R” (RAM to PC) icon to read the RAM from the LTC3886. This reads the configuration from the RAM of LTC3886 and loads it into the GUI.



- d. If you want to change the output voltage to a different value, like 10V: in the Config tab, type in 10 in the VOUT_COMMAND box, like this:

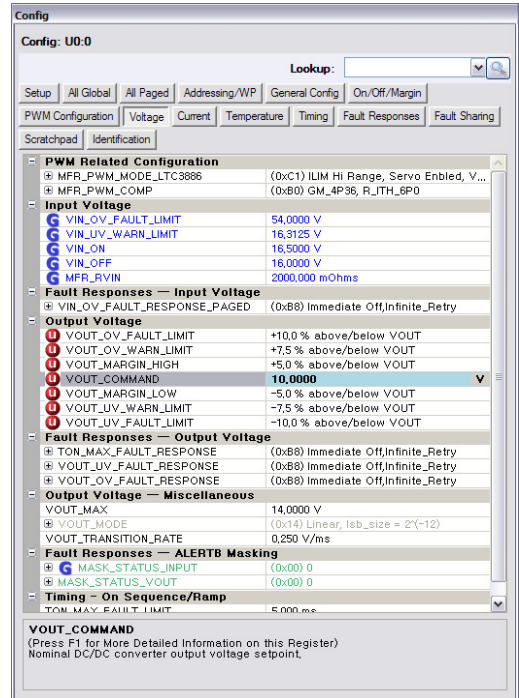

Then, click the “W” (PC to RAM) icon to write these register values to the LTC3886. After finishing this step, you will see the output voltage will change to 10V.



If the write is successful, you will see the following message:



- e. You can save the changes into the NVM. In the tool bar, click “RAM to NVM” button, as following:



- f. Save the demo board configuration to a (*.proj) file. Click the Save icon and save the file with a new file name.

DEMO MANUAL

DC2155A-A/DC2155A-B

PARTS LIST DC2155A-A

| ITEM | QTY | REFERENCE | PART DESCRIPTION | MANUFACTURER/PART NUMBER |
|------------------------------------|-----|--|---|----------------------------------|
| Required Circuit Components | | | | |
| 1 | 2 | C1, C85 | CAP, 56µF 20% 63V ELEC | SUNCON 63HVP56M |
| 2 | 3 | C3, C9, C23 | CAP, 0603 0.1µF 10% 100V X7R | MURATA GRM188R72A104KA35D |
| 3 | 4 | C4, C5, C27, C33 | CAP, 0603 10nF 10% 100V X7R | MURATA GRM188R72A103KA01D |
| 4 | 3 | C6, C13, C28 | CAP, 0603 1nF 10% 100V X7R | AVX 06031C102KAT2A |
| 5 | 5 | C7, C8, C21, C22, C74 | CAP, 1210 2.2µF 10% 100V X7R | MURATA GRM32ER72A225KA35L |
| 6 | 8 | C10, C11, C12, C24, C25, C26, C88, C93 | CAP, 1210 22µF 20% 16V X7R | AVX 1210YC226MAT2A |
| 7 | 4 | C14, C15, C29, C30 | CAP, 150µF 16V ELEC. OS-CON | PANASONIC 16SVP150M |
| 8 | 2 | C18, C34 | CAP, 0603 4.7nF 10% 50V X7R | AVX 06035C472KAT2A |
| 9 | 2 | C20, C36 | CAP, 0603 100pF 5% 50V C0G | AVX 06035A101JAT2A |
| 10 | 2 | C37, C38 | CAP, 0603 2.2µF 10% 16V X5R | AVX 0603YD225KAT2A |
| 11 | 1 | C39 | CAP, 0603 4.7µF 10% 10V X5R | AVX 0603ZD475KAT2A |
| 12 | 1 | C40 | CAP, 0603 4.7µF 10% 16V X5R | MURATA GRM188R61C475KAAJD |
| 13 | 2 | C70, C103 | CAP, 0805 2.2µF 10% 16V X7R | AVX 0805YC225KAT2A |
| 14 | 1 | C72 | CAP, 0603 47nF 10% 25V X7R | AVX 06033C473KAT2A |
| 15 | 1 | C76 | CAP, 0603 0.1µF 10% 25V X7R | AVX 06033C104KAT2A |
| 16 | 1 | C78 | CAP, 0805 220nF 10% 100V X7R | MURATA GRM21AR72A224KAC5L |
| 17 | 2 | C79, C80 | CAP, 1210 100µF 20% 10V X5R | MURATA GRM32ER61A107ME20L |
| 18 | 1 | C81 | CAP, 0603 220pF 10% 50V X7R | AVX 06035C221KAT2A |
| 19 | 2 | C82, C83 | CAP, 0603 10nF 10% 25V X7R | AVX 06033C103KAT2A |
| 20 | 2 | C84, C101 | CAP, 0603 100nF 20% 16V X7R | AVX 0603YC104MAT2A |
| 21 | 2 | C94, C95 | CAP, 1812 10µF 20% 100V X7S | TDK CKG45NX7S2A106M500JH |
| 22 | 2 | C96, C97 | CAP, 1206 2.2µF 10% 100V X7R | MURATA GRM31CR72A225KA73L |
| 23 | 1 | C100 | CAP, 0603 150pF 5% 50V NPO | AVX 06035A151JAT2A |
| 24 | 1 | C102 | CAP, 0603 1µF 20% 25V X5R | AVX 06033D105MAT2A |
| 25 | 2 | D1, D2 | DIODE, SCHOTTKY 100V, 1A | DIODES/ZETEX, DFLS1100-7 |
| 26 | 4 | D5, D6, D13, D14 | LED, 0603 GREEN | OSRAM LG L29K-G2J1-24-Z |
| 27 | 1 | D7 | LED, 0603 RED | OSRAM LS L29K-H1J2-1-Z |
| 28 | 1 | D15 | DIODE, SCHOTTKY, 30V, 250mW, 100mA, SOD-323 | CENTRAL SEMI. CMDSH-3 TR |
| 29 | 26 | E1, E2, E3, E4, E5, E6, E7, E8, E11, E12, E14, E16, E18, E20, E21, E22, E23, E24, E25, E26, E27, E29, E30, E32, E35, E36 | TURRET | MILL-MAX 2501-2-00-80-00-00-07-0 |
| 30 | 2 | L1, L2 | IND, 8.6µH | WURTH ELEKTRONIK 7443630860 |
| 31 | 1 | L5 | IND, 68µH | SUMIDA CDRH105RNP-680NC |
| 32 | 2 | Q1, Q6 | XSTR, MOSFET N-CH 60V 47A 8 PIN PG-TDSON-8 | INFINEON BSC094N06LS5 |
| 33 | 2 | Q3, Q7 | XSTR, MOSFET N-CH 60V 100A 8 PIN PG-TDSON-8 | INFINEON BSC027N06LS5 |
| 34 | 2 | Q9, Q10 | XSTR, PNP GENERAL PURPOSE SOT-323 | DIODES INC. MMST3906-7-F |
| 35 | 1 | Q19 | XSTR., MOSFET, N-CH, 40V, TO-252 (DPAK) | VISHAY SUD50N04-8M8P-4GE3 |
| 36 | 1 | Q20 | XSTR, MOSFET P-CH 20V 5.2A SOT-23 | VISHAY SI2365EDS-T1-GE3 |
| 37 | 4 | Q22, Q23, Q28, Q29 | XSTR, MOSFET N-CH 60V 115mA SOT23 | FAIRCHILD 2N7002A |

DEMO MANUAL

DC2155A-A/DC2155A-B

PARTS LIST DC2155A-A

| ITEM | QTY | REFERENCE | PART DESCRIPTION | MANUFACTURER/PART NUMBER |
|------|-----|---|---|--|
| 38 | 2 | R2, R122 | RES, 2512 0.006Ω 1% 1W | PANASONIC ERJ-M1WSF6MU |
| 39 | 2 | R3, R4 | RES, 0603 1k 5% 1/10W | VISHAY CRCW06031K00JNEA |
| 40 | 4 | R9, R12, R30, R38 | RES, 0603 2Ω 5% 1/10W | VISHAY CRCW06032R00JNEA |
| 41 | 12 | R10, R11, R13, R15, R16, R18, R23, R25, R28, R89, R112, R113 | RES, 0603 10k 5% 1/10W | VISHAY CRCW060310K0JNEA |
| 42 | 2 | R14, R37 | RES, 2010 3mΩ 1% 1W | VISHAY WSL20103L000FEA18 |
| 43 | 14 | R17, R21, R22, R27, R43, R44, R45, R96, R98, R106, R109, R128, R129, R132 | RES, 0603 0Ω JUMPER | VISHAY CRCW06030000Z0EA |
| 44 | 5 | R24, R26, R50, R51, R155 | RES, 0603 100Ω 5% 1/10W | VISHAY CRCW0603100RJNEA |
| 45 | 4 | R87, R88, R171, R172 | RES, 0603 200Ω 5% 1/10W | VISHAY CRCW0603200RJNEA |
| 46 | 1 | R91 | RES, 2010 0.01Ω 1% 2W | VISHAY WSL2010R0100FEK |
| 47 | 1 | R93 | RES, 0603 127Ω 1% 1/10W | VISHAY CRCW0603127RFKEA |
| 48 | 1 | R99 | RES, 0603 220k 5% 1/10W | VISHAY CRCW0603220KJNEA |
| 49 | 2 | R114, R115 | RES, 0603 10Ω 5% 1/10W | VISHAY CRCW060310R0JNEA |
| 50 | 2 | R119, R120 | RES, 0603 4.99k 1% 1/10W | VISHAY CRCW06034K99FKEA |
| 51 | 2 | R124, R125 | RES, 2512 0Ω JUMPER | VISHAY CRCW25120000Z0EG |
| 52 | 1 | R146 | RES, 0805 4.7Ω 1% 0.125W | VISHAY CRCW08054R70FKEA |
| 53 | 1 | R151 | RES, 0603 1MΩ 5% 1/10W | VISHAY CRCW06031M00JNEA |
| 54 | 1 | R152 | RES, 0603 681k 1% 1/10W | VISHAY CRCW0603681KFKEA |
| 55 | 1 | R153 | RES, 0603 3.3Ω 1% 1/10W | VISHAY CRCW06033R30FKEA |
| 56 | 1 | R154 | RES, 0603 82.5Ω 1% 1/10W | VISHAY CRCW060382R5FKEA |
| 57 | 1 | R157 | RES, 0603 2Ω 5% 1/10W | VISHAY CRCW06032R00JNEA |
| 58 | 1 | R158 | RES, 0603 27.4k 1% 1/10W | VISHAY CRCW060327K4FKEA |
| 59 | 1 | R159 | RES, 0603 226K 1% 1/10W | VISHAY CRCW0603226KFKEA |
| 60 | 1 | R160 | RES, VARIABLE 5k | BOURNS 3386P-1-502-LF |
| 61 | 1 | R161 | RES, 0603 20k 5% 1/10W | VISHAY CRCW060320K0JNEA |
| 62 | 1 | R162 | RES, 1206 0Ω JUMPER | VISHAY CRCW12060000Z0EA |
| 63 | 1 | R168 | RES., 4.7Ω, 1%, 1/10W, 0603, AEC-Q200 | VISHAY CRCW06034R70FKEA |
| 64 | 1 | R170 | RES, 0603 340Ω 1% 1/10W | VISHAY CRCW0603340RFKEA |
| 65 | 1 | U1 | IC, 60V DUAL OUTPUT STEP-DOWN CONTROLLER WITH DIGITAL POWER SYSTEM MANAGEMENT | ANALOG DEVICES, INC., LTC3886IUKG#10E2-1PBF-ES |
| 66 | 1 | U3 | IC, SYNCHRONOUS STEP-DOWN CONVERTER | ANALOG DEVICES, INC. LTC3630EMSE#PBF |
| 67 | 1 | U4 | IC, 24LC025/ST | MICROCHIP 24LC025-I/ST |

Additional Demo Board Circuit Components

| | | | | |
|---|---|--|-----------------------|--------|
| 1 | 0 | C16, C17, C31, C32, C51, C53, C65, C66 | CAP, 7343 OPTION | OPTION |
| 2 | 0 | C19, C35, C43, C44, C45, C49, C54, C55, C56, C57, C60, C68, C69, C73 | CAP, 0603 OPTION | OPTION |
| 3 | 0 | C41, C42, C46, C47, C48, C58, C59, C61, C62, C67, C75, C89, C90 | CAP, 1210 OPTION | OPTION |
| 4 | 0 | C50, C52, C63, C64 | CAP, 16V ELEC. OPTION | OPTION |

DEMO MANUAL

DC2155A-A/DC2155A-B

PARTS LIST DC2155A-A

| ITEM | QTY | REFERENCE | PART DESCRIPTION | MANUFACTURER/PART NUMBER |
|------|-----|--|---|--|
| 5 | 0 | C71, C77, C91, C92 | CAP, 0805 OPTION | OPTION |
| 6 | 0 | C86, C87 | CAP, ELEC OPTION | OPTION |
| 7 | 0 | C98, C99 | CAP, 1206 OPTION | OPTION |
| 8 | 0 | D3, D4, D9, D12 | DIODE, OPTION | OPTION |
| 9 | 0 | D8 | DIODE, ZENER OPTION | OPTION |
| 10 | 0 | L3, L4 | IND, OPTION | OPTION |
| 11 | 0 | L7, L9 | IND, 6.8μH OPTION | COILCRAFT SER2915H-682KL OPTION |
| 12 | 0 | Q27 | XSTR, N-CHANNEL DMOS FET OPTION | OPTION |
| 13 | 0 | R5, R6, R7, R8 | RES, 2512 0Ω JUMPER OPTION | RN5326 2512 TEPRO NAKOMA OPTION |
| 14 | 0 | Q2, Q4, Q5, Q8, Q11, Q12, Q13, Q14, Q15, Q16, Q17, Q18 | XSTR, OPTION | OPTION |
| 15 | 0 | R19, R20, R29, R31, R32, R33, R34, R35, R36, R39, R40, R41, R42, R46, R47, R48, R49, R52, R53, R54, R55, R56, R57, R59, R60, R61, R62, R63, R64, R65, R66, R67, R68, R69, R71, R72, R73, R74, R75, R76, R77, R78, R79, R80, R81, R82, R83, R97, R100, R101, R102, R103, R104, R105, R108, R110, R111, R116, R117, R118, R121, R130, R131, R144, R145, R147, R148, R169, R173, R174 | RES, 0603 OPTION | OPTION |
| 16 | 0 | R58, R70 | RES, 2010 OPTION | OPTION |
| 17 | 0 | R90, R92, R94, R95 | RES, 0805 OPTION | OPTION |
| 18 | 0 | R107 | RES, 1206 OPTION | OPTION |
| 19 | 0 | R163 | RES, 1206 0Ω JUMPER OPTION | VISHAY CRCW12060000Z0EA OPTION |
| 20 | 0 | U2 | IC, POLYPHASE STEP-DOWN SLAVE CONTROLLER OPTION | ANALOG DEVICES, INC., LTC3870EUFD#PBF OPTION |

Hardware:

| | | | | |
|----|----|------------------------------|---------------------------------|----------------------------|
| 1 | 5 | JP1, JP2, JP3, JP5, JP6 | HEADER, 3 PIN 2mm | SULLINS NRPN031PAEN-RC |
| 2 | 6 | J1, J2, J3, J4, J5, J6 | STUD, TESTPIN | PEM KFH-032-10 |
| 3 | 2 | J7, J12 | CONN, BNC, 5 PINS | CONNEX 112404 |
| 4 | 1 | J9 | HEADER, 14PIN DUAL ROW R/A | MOLEX 87760-1416 |
| 5 | 1 | J10 | CONN, SOCKET 14PIN DUAL ROW R/A | SULLINSINC. NPPN072FJFN-RC |
| 6 | 1 | J11 | HEADER, 12PIN 2mm STR DL | FCI 98414-G06-12ULF |
| 7 | 6 | J1, J2, J3, J4, J5, J6 | LUG RING, #10 | KEYSTONE 8205 |
| 8 | 4 | MH1, MH2, MH3, MH4 | STANDOFF, SNAP ON | KEYSTONE_8831 |
| 9 | 12 | J1, J2, J3, J4, J5, J6 | NUT, BRASS 10-32 | ANY #10-32 |
| 10 | 2 | SW1, SW2 | SWITCH, SUBMINATURE SLIDE | C&K JS202011CQN |
| 11 | 6 | J1, J2, J3, J4, J5, J6 | WASHER, #10 TIN PLATED BRASS | ANY #10 EXT BZ TN |
| 12 | 5 | XJP1, XJP2, XJP3, XJP5, XJP6 | SHUNT | SAMTEC 2SN-BK-G |

DEMO MANUAL

DC2155A-A/DC2155A-B

PARTS LIST DC2155A-B

| ITEM | QTY | REFERENCE | PART DESCRIPTION | MANUFACTURER/PART NUMBER |
|------------------------------------|-----|--|---|--|
| Required Circuit Components | | | | |
| 1 | 2 | C1, C85 | CAP, 56µF, ALUM. ELECT., 63V, 20%, SMD | SUN ELECTRONIC INDUSTRIES CORP. 63HVP56M |
| 2 | 6 | C3, C9, C23, C44, C54, C60 | CAP, 0603 0.1µF 10% 100V X7R | MURATA GRM188R72A104KA35J |
| 3 | 2 | C4, C5 | CAP, 0603 10nF 10% 100V X7R | AVX 06031C103KAT2A |
| 4 | 5 | C6, C13, C28, C55, C68 | CAP., 1000pF, X7R, 100V, 10%, 0603 | AVX 06031C102KAT2A |
| 5 | 9 | C7, C8, C21, C22, C41, C42, C58, C59, C74 | CAP, 1210 2.2µF 10% 100V X7R | MURATA GRM32ER72A225KA35L |
| 6 | 16 | C10, C11, C12, C24, C25, C26, C46, C47, C48, C61, C62, C67, C88, C89, C90, C93 | CAP, 1210 22µF 20% 16V X7R | MURATA GRM32ER71C226MEA8L |
| 7 | 8 | C14, C15, C29, C30, C50, C52, C63, C64 | CAP, 150µF 16V ELEC. OS-CON | PANASONIC 16SVP150M |
| 8 | 1 | C18 | CAP, 0603 8.2nF 10% 50V X7R | AVX 06035C822KAT2A |
| 9 | 2 | C20, C36 | CAP, 0603 100pF 5% 50V COG | AVX 06035A101JAT2A |
| 10 | 4 | C27, C33, C82, C83 | CAP, 0603 10nF 10% 25V X7R | AVX 06033C103KAT2A |
| 11 | 2 | C37, C38 | CAP, 0603 2.2µF 10% 16V X5R | AVX 0603YD225KAT2A |
| 12 | 2 | C39, C45 | CAP, 0603 4.7µF 10% 10V X5R | AVX 0603ZD475KAT2A |
| 13 | 2 | C40, C43 | CAP, 0603 4.7µF 10% 16V X5R | MURATA GRM188R61C475KAAJD |
| 14 | 2 | C49, C57 | CAP, 0603 10pF 5% 50V COG | AVX 06035A100JAT2A |
| 15 | 2 | C70, C103 | CAP, 0805 2.2µF 10% 16V X7R | AVX 0805YC225KAT2A |
| 16 | 1 | C72 | CAP, 0603 47nF 10% 25V X7R | AVX 06033C473KAT2A |
| 17 | 1 | C76 | CAP, 0603 0.1µF 10% 25V X7R | AVX 06033C104KAT2A |
| 18 | 1 | C78 | CAP, 0805 220nF 10% 100V X7R | MURATA GRM21AR72A224KAC5L |
| 19 | 2 | C79, C80 | CAP, 1210 100µF 20% 10V X5R | MURATA GRM32ER61A107ME20L |
| 20 | 1 | C81 | CAP, 0603 220pF 10% 50V X7R | AVX 06035C221KAT2A |
| 21 | 2 | C84, C101 | CAP, 0603 100nF 20% 16V X7R | AVX 0603YC104MAT2A |
| 22 | 2 | C94, C95 | CAP, 1812 10µF 20% 100V X7S | TDK CKG45NX7S2A106M500JH |
| 23 | 4 | C96, C97, C98, C99 | CAP, 1206 2.2µF 10% 100V X7R | MURATA GRM31CR72A225KA73L |
| 24 | 1 | C100 | CAP, 0603 150pF 5% 50V NPO | AVX 06035A151JAT2A |
| 25 | 1 | C102 | CAP, 0603 1µF 20% 25V X5R | AVX 06033D105MAT2A |
| 26 | 4 | D1, D2, D3, D4 | DIODE, SCHOTTKY 100V, 1A | DIODES/ZETEX, DFLS1100-7 |
| 27 | 4 | D5, D6, D13, D14 | LED, 0603 GREEN | OSRAM LG L29K-G2J1-24-Z |
| 28 | 1 | D7 | LED, 0603 RED | OSRAM LS L29K-H1J2-1-Z |
| 29 | 1 | D15 | DIODE, SCHOTTKY, 30V, 250mW, 100mA, SOD-323 | CENTRAL SEMI. CMDSH-3 TR |
| 30 | 4 | L1, L2, L3, L4 | IND, 8.6µH | WURTH ELEKTRONIK 7443630860 |
| 31 | 1 | L5 | IND, 68µH | SUMIDA CDRH105RNP-680NC |
| 32 | 4 | Q1, Q6, Q11, Q15 | XSTR, MOSFET N-CH 60V 47A 8 PIN PG-TDSON-8 | INFINEON BSC094N06LS5 |
| 33 | 4 | Q3, Q7, Q13, Q18 | XSTR, MOSFET N-CH 60V 100A 8 PIN PG-TDSON-8 | INFINEON BSC027N06LS5 |
| 34 | 2 | Q9, Q10 | XSTR, PNP GENERAL PURPOSE SOT-323 | DIODES INC. MMST3906-7-F |
| 35 | 1 | Q19 | XSTR, MOSFET, N-CH, 40V, TO-252 (DPAK) | VISHAY SUD50N04-8M8P-4GE3 |

DEMO MANUAL

DC2155A-A/DC2155A-B

PARTS LIST DC2155A-B

| ITEM | QTY | REFERENCE | PART DESCRIPTION | MANUFACTURER/PART NUMBER |
|------|-----|---|---|--|
| 36 | 1 | Q20 | XSTR, MOSFET P-CH 20V 5.2A SOT-23 | VISHAY SI2365EDS-T1-GE3 |
| 37 | 4 | Q22, Q23, Q28, Q29 | XSTR, MOSFET N-CH 60V 115mA SOT23 | FAIRCHILD 2N7002A |
| 38 | 2 | R2, R122 | RES, 2512 0.003Ω 1% 1W | PANASONIC ERJ-M1WTF3M0U |
| 39 | 2 | R3, R4 | RES, 0603 1k 5% 1/10W | VISHAY CRCW06031K00JNEA |
| 40 | 6 | R5, R6, R7, R8, R124, R125 | RES, 2512 0Ω JUMPER | VISHAY CRCW25120000Z0EG |
| 41 | 7 | R9, R12, R30, R38, R52, R53, R67 | RES, 0603 2Ω 5% 1/10W | VISHAY CRCW06032R00JNEA |
| 42 | 12 | R10, R11, R13, R15, R16, R18, R23, R25, R28, R89, R112, R113 | RES, 0603 10k 5% 1/10W | VISHAY CRCW060310K0JNEA |
| 43 | 4 | R14, R37, R58, R70 | RES, 2010 3mΩ 1% 1W | VISHAY WSL20103L000FEA18 |
| 44 | 35 | R17, R21, R22, R27, R43, R44, R45, R56, R57, R59, R60, R61, R62, R64, R66, R69, R73, R74, R78, R80, R81, R96, R98, R106, R109, R118, R121, R128, R129, R130, R131, R132, R148, R173, R174 | RES, 0603 0Ω JUMPER | VISHAY CRCW06030000Z0EA |
| 45 | 9 | R24, R26, R50, R51, R63, R65, R75, R76, R155 | RES, 0603 100Ω 5% 1/10W | VISHAY CRCW0603100RJNEA |
| 46 | 1 | R68 | RES, 0603 49.9k 1% 1/10W | VISHAY CRCW060349K9FKEA |
| 47 | 4 | R87, R88, R171, R172 | RES, 0603 200Ω 5% 1/10W | VISHAY CRCW0603200RJNEA |
| 48 | 1 | R91 | RES, 2010 0.01Ω 1% 2W | VISHAY WSLP2010R0100FEA |
| 49 | 1 | R93 | RES, 0603 127Ω 1% 1/10W | VISHAY CRCW0603127RFKEA |
| 50 | 1 | R99 | RES, 0603 220k 5% 1/10W | VISHAY CRCW0603220KJNEA |
| 51 | 2 | R114, R115 | RES, 0603 10Ω 5% 1/10W | VISHAY CRCW060310R0JNEA |
| 52 | 2 | R119, R120 | RES, 0603 4.99k 1% 1/10W | VISHAY CRCW06034K99FKEA |
| 53 | 1 | R146 | RES, 0805 4.7Ω 1% 0.125W | VISHAY CRCW08054R70FKEA |
| 54 | 1 | R151 | RES, 0603 1MΩ 5% 1/10W | VISHAY CRCW06031M00JNEA |
| 55 | 1 | R152 | RES, 0603 681k 1% 1/10W | VISHAY CRCW0603681KFKEA |
| 56 | 1 | R153 | RES, 0603 3.3Ω 1% 1/10W | VISHAY CRCW06033R30FKEA |
| 57 | 1 | R154 | RES, 0603 82.5Ω 1% 1/10W | VISHAY CRCW060382R5FKEA |
| 58 | 1 | R157 | RES, 0603 2Ω 5% 1/10W | VISHAY CRCW06032R00JNEA |
| 59 | 1 | R158 | RES, 0603 27.4k 1% 1/10W | VISHAY CRCW060327K4FKEA |
| 60 | 1 | R159 | RES, 0603 226k 1% 1/10W | VISHAY CRCW0603226KFKEA |
| 61 | 1 | R160 | RES, VARIABLE 5k | BOURNS 3386P-1-502-LF |
| 62 | 1 | R161 | RES, 0603 20K 5% 1/10W | VISHAY CRCW060320K0JNEA |
| 63 | 2 | R162, R163 | RES, 1206 0Ω JUMPER | VISHAY CRCW12060000Z0EA |
| 64 | 1 | R168 | RES., 4.7Ω, 1%, 1/10W, 0603, AEC-Q200 | VISHAY CRCW06034R70FKEA |
| 65 | 1 | R170 | RES, 0603 340Ω 5% 1/10W | VISHAY CRCW0603340RJNEA |
| 66 | 1 | U1 | IC, 60V DUAL OUTPUT STEP-DOWN CONTROLLER WITH DIGITAL POWER SYSTEM MANAGEMENT | ANALOG DEVICES, INC., LTC3886IUKG#10E3-1PBF-ES |
| 67 | 1 | U2 | IC, POLYPHASE STEP-DOWN SLAVE CONTROLLER | ANALOG DEVICES, INC., LTC3870EUFDPBF |
| 68 | 1 | U3 | IC, SYNCHRONOUS STEP-DOWN CONVERTER | ANALOG DEVICES, INC., LTC3630EMSE#PBF |
| 69 | 1 | U4 | IC, 24LC025-I/ST | MICROCHIP 24LC025-I/ST |
| 70 | 1 | U5 | IC, LTC6992IS6-1 | ANALOG DEVICES, INC. LTC6992IS6-1 |

Rev. C

DEMO MANUAL

DC2155A-A/DC2155A-B

PARTS LIST DC2155A-B

| ITEM | QTY | REFERENCE | PART DESCRIPTION | MANUFACTURER/PART NUMBER |
|------|-----|-----------|-------------------|---------------------------------|
| 71 | 1 | U6 | IC, SINGLE OP AMP | ANALOG DEVICES, INC., LT1803IS5 |

Additional Demo Board Circuit Components

| | | | | |
|----|---|--|---------------------------------|--|
| 1 | 0 | C16, C17, C31, C32, C51, C53, C65, C66 | CAP, 7343 OPTION | OPTION |
| 2 | 0 | C19, C34, C35, C56, C69, C73 | CAP, 0603 OPTION | OPTION |
| 3 | 0 | C71, C77, C91, C92 | CAP, 0805 OPTION | OPTION |
| 4 | 0 | C75 | CAP, 1210 OPTION | OPTION |
| 5 | 0 | C86, C87 | CAP, ELEC OPTION | OPTION |
| 6 | 0 | D8 | DIODE, ZENER OPTION | OPTION |
| 7 | 0 | D9, D12 | DIODE, OPTION | OPTION |
| 8 | 0 | L7, L9, L10, L11 | IND, 6.8 μ H OPTION | COILCRAFT SER2915H-682KLOPTION COILCRAFTSER2918H-682KL OPTION |
| 9 | 0 | Q2, Q4, Q5, Q8, Q12, Q14, Q16, Q17 | XSTR, OPTION | OPTION |
| 10 | 0 | Q27 | XSTR, N-CHANNEL DMOS FET OPTION | OPTION |
| 11 | 0 | R19, R20, R29, R31, R32, R33, R34, R35, R36, R39, R40, R41, R42, R46, R47, R48, R49, R54, R55, R71, R72, R77, R79, R82, R83, R97, R100, R101, R102, R103, R104, R105, R108, R110, R111, R116, R117, R144, R145, R147, R169 | RES, 0603 OPTION | OPTION |
| 12 | 0 | R90, R92, R94, R95 | RES, 0805 OPTION | OPTION |
| 13 | 0 | R107 | RES, 1206 OPTION | OPTION |


Hardware:

| | | | | |
|----|----|--|---------------------------------|----------------------------------|
| 1 | 26 | E1, E2, E3, E4, E5, E6, E7, E8, E11, E12, E14, E16, E18, E20, E21, E22, E23, E24, E25, E26, E27, E29, E30, E32, E35, E36 | TURRET | MILL-MAX 2501-2-00-80-00-00-07-0 |
| 2 | 4 | MH1, MH2, MH3, MH4 | STANDOFF, SNAP ON | KEYSTONE_8831 |
| 3 | 12 | J1, J2, J3, J4, J5, J6 | NUT, BRASS 10-32 | ANY #10-32 |
| 4 | 6 | J1, J2, J3, J4, J5, J6 | WASHER, #10 TIN PLATED BRASS | ANY #10 EXT BZ TN |
| 5 | 5 | JP1, JP2, JP3, JP5, JP6 | HEADER, 3 PIN 2mm | SULLINS NRPNO31PAEN-RC |
| 6 | 6 | J1, J2, J3, J4, J5, J6 | STUD, TESTPIN | PEM KFH-032-10 |
| 7 | 2 | J7, J12 | CONN, BNC, 5 PINS | CONNEX 112404 |
| 8 | 1 | J9 | HEADER, 14PIN DUAL ROW R/A | MOLEX 87760-1416 |
| 9 | 1 | J10 | CONN, SOCKET 14PIN DUAL ROW R/A | SULLINS INC. NPPN072FJFN-RC |
| 10 | 1 | J11 | HEADER, 12PIN 2mm STR DL | FCI 98414-G06-12ULF |
| 11 | 6 | J1, J2, J3, J4, J5, J6 | LUG RING, #10 | KEYSTONE 8205 |
| 12 | 2 | SW1, SW2 | SWITCH, SUBMINATURE SLIDE | C&K JS202011CQN |
| 13 | 5 | XJP1, XJP2, XJP3, XJP5, XJP6 | SHUNT | SAMTEC 2SN-BK-G |

DEMO MANUAL

DC2155A-A/DC2155A-B

SCHEMATIC DIAGRAM

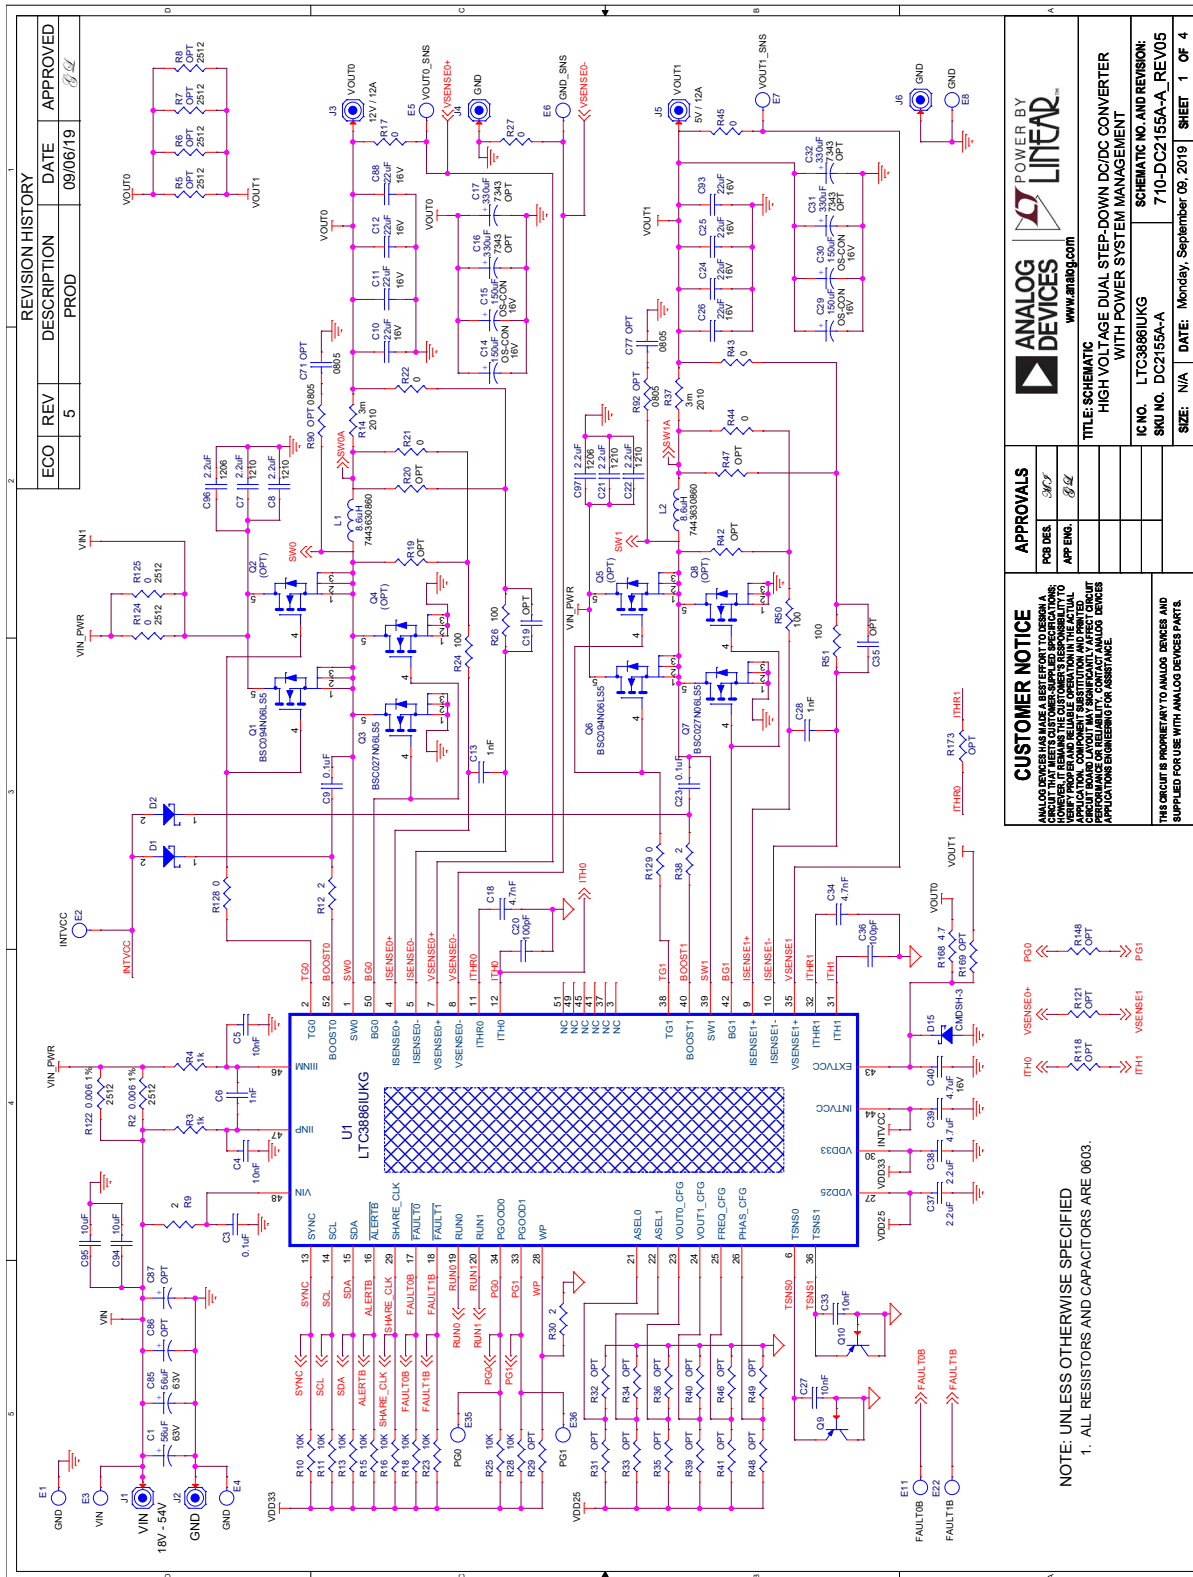

| REVISION HISTORY | | | |
|------------------|-----|-------------|----------|
| ECO | REV | DESCRIPTION | DATE |
| | 5 | PROD | 09/06/19 |
| | | | APPROVED |


| APPROVALS | | POWER BY | |
|---|------|--|--|
| PCB DES | 3/07 | ANALOG DEVICES | |
| APP ENG | 0/02 | www.analog.com | |
| CUSTOMER NOTICE ANALOG DEVICES MAKES NO REPRESENTATION OR WARRANTY, EITHER EXPRESS OR IMPLIED, REGARDING THE SUITABILITY OF THIS SCHEMATIC FOR ANY PARTICULAR APPLICATION. IT IS THE CUSTOMER'S RESPONSIBILITY TO VERIFY THE SCHEMATIC'S ACCURACY AND PERFORMANCE IN THEIR OWN APPLICATION. CONTACT ANALOG DEVICES APPLICATIONS ENGINEERING FOR ASSISTANCE. | | | |
| TITLE: SCHEMATIC HIGH VOLTAGE DUAL STEP-DOWN DC/DC CONVERTER WITH POWER SYSTEM MANAGEMENT | | | |
| IC NO. LTC3886IUKG SKU NO. DC2155A-A | | SCHEMATIC NO. AND REVISION: 7-10-DC2155A-A_REV05 | |
| SIZE: N/A | | DATE: Monday, September 09, 2019 | |
| | | SHEET 1 OF 4 | |

Figure 15a. DC2155A-A Demo Circuit Schematic, Sheet 1

NOTE: UNLESS OTHERWISE SPECIFIED
 1. ALL RESISTORS AND CAPACITORS ARE 0603.

| | | | | |
|----------|------|------|-----|-----|
| ITH0 | R178 | 4.7k | OPT | PGI |
| ITH1 | R179 | 4.7k | OPT | PGI |
| VSENSE0+ | R180 | 4.7k | OPT | PGI |
| VSENSE1+ | R181 | 4.7k | OPT | PGI |

SCHEMATIC DIAGRAM

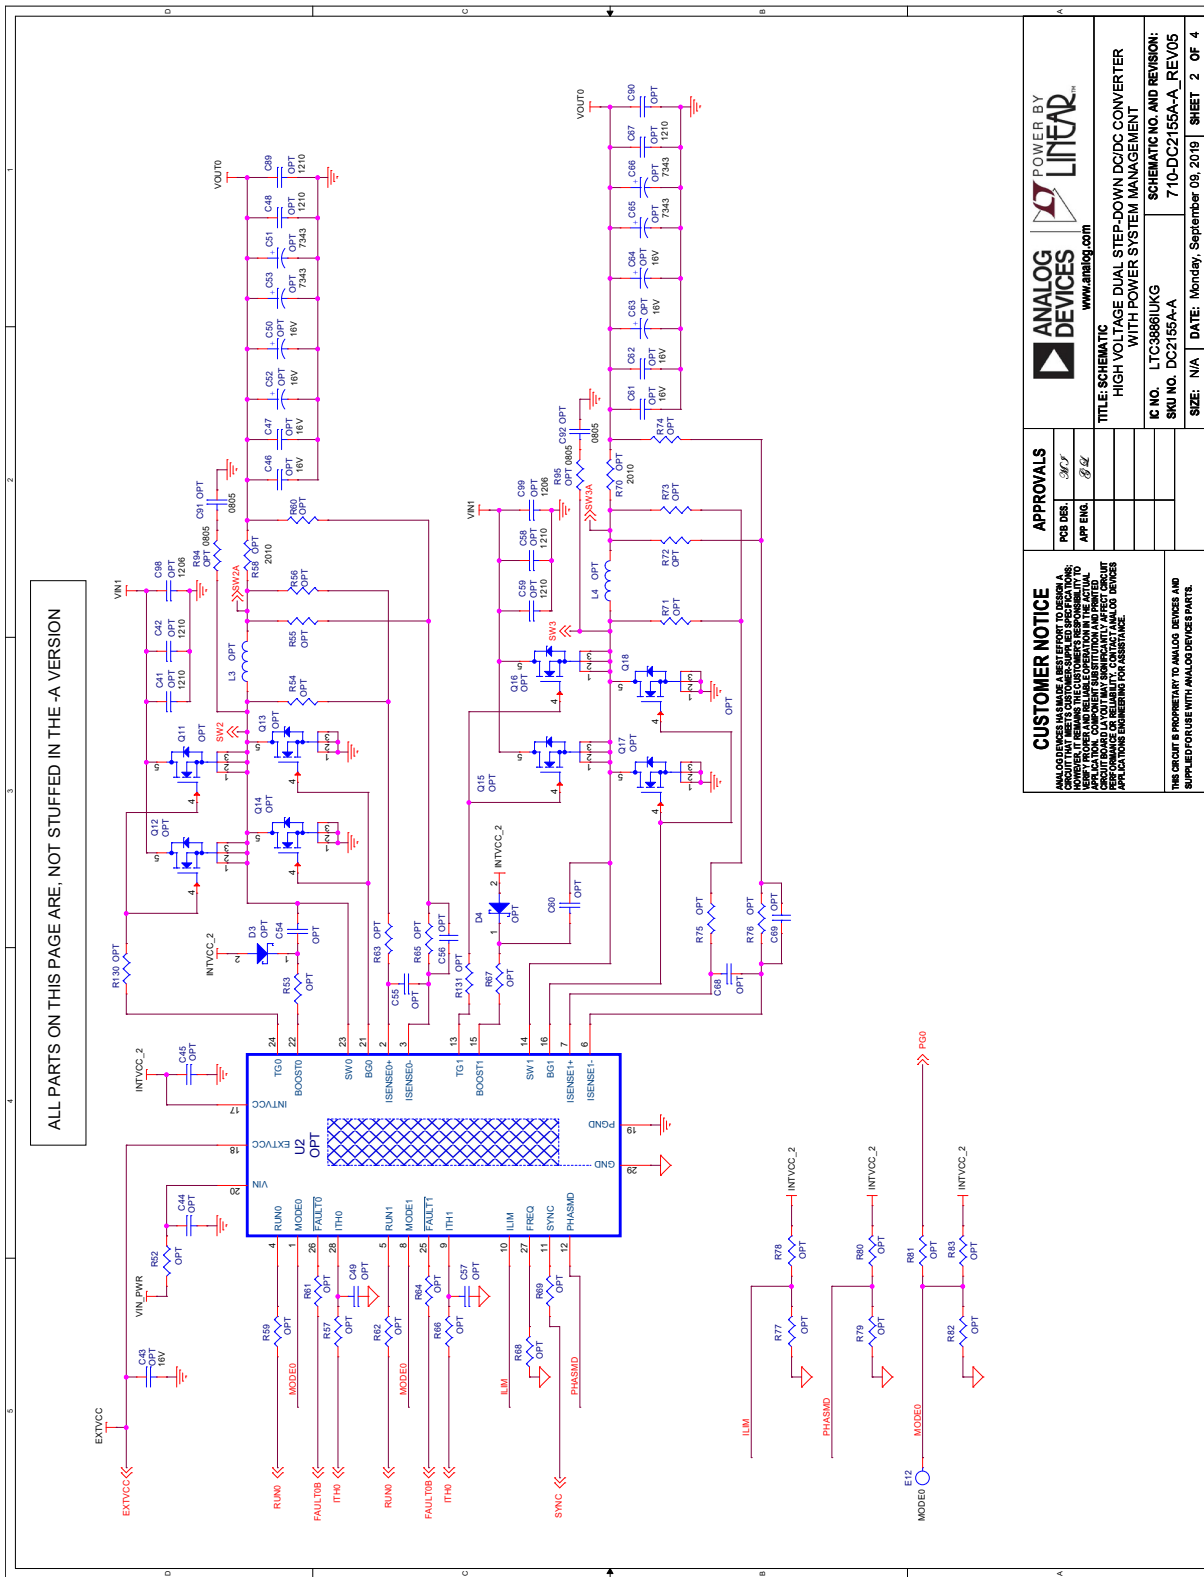

| | | |
|---|---|--|
| CUSTOMER NOTICE ANALOG DEVICES IS A REGISTERED TRADEMARK OF ANALOG DEVICES INC. © 2019 ANALOG DEVICES INC. ALL RIGHTS RESERVED. THIS DOCUMENT IS UNCLASSIFIED. ANY REUSE OF THIS DOCUMENT IS PERMITTED. HOWEVER, REUSE OF THIS DOCUMENT IN ANY MANNER THAT IS NOT AUTHORIZED BY ANALOG DEVICES INC. IS PROHIBITED. CONTACT ANALOG DEVICES INC. FOR MORE INFORMATION. THIS CIRCUIT IS PROPRIETARY TO ANALOG DEVICES AND SUPPLIED FOR USE WITH ANALOG DEVICES PARTS. | APPROVALS PCB DES: [Signature] APP ENG: [Signature] | POWER BY LINEAR www.analog.com |
| | TITLE: SCHEMATIC HIGH VOLTAGE DUAL STEP-DOWN DC/DC CONVERTER WITH POWER SYSTEM MANAGEMENT IC NO: LTC3888LUG SCHEMATIC NO. AND REVISION: 710-DC2155A-A_REV/05 SKU NO: DC2155A-A SIZE: N/A DATE: Monday, September 09, 2019 SHEET: 2 OF 4 | |

Figure 15b. DC2155A-A Demo Circuit Schematic, Sheet 2

DEMO MANUAL DC2155A-A/DC2155A-B

SCHEMATIC DIAGRAM

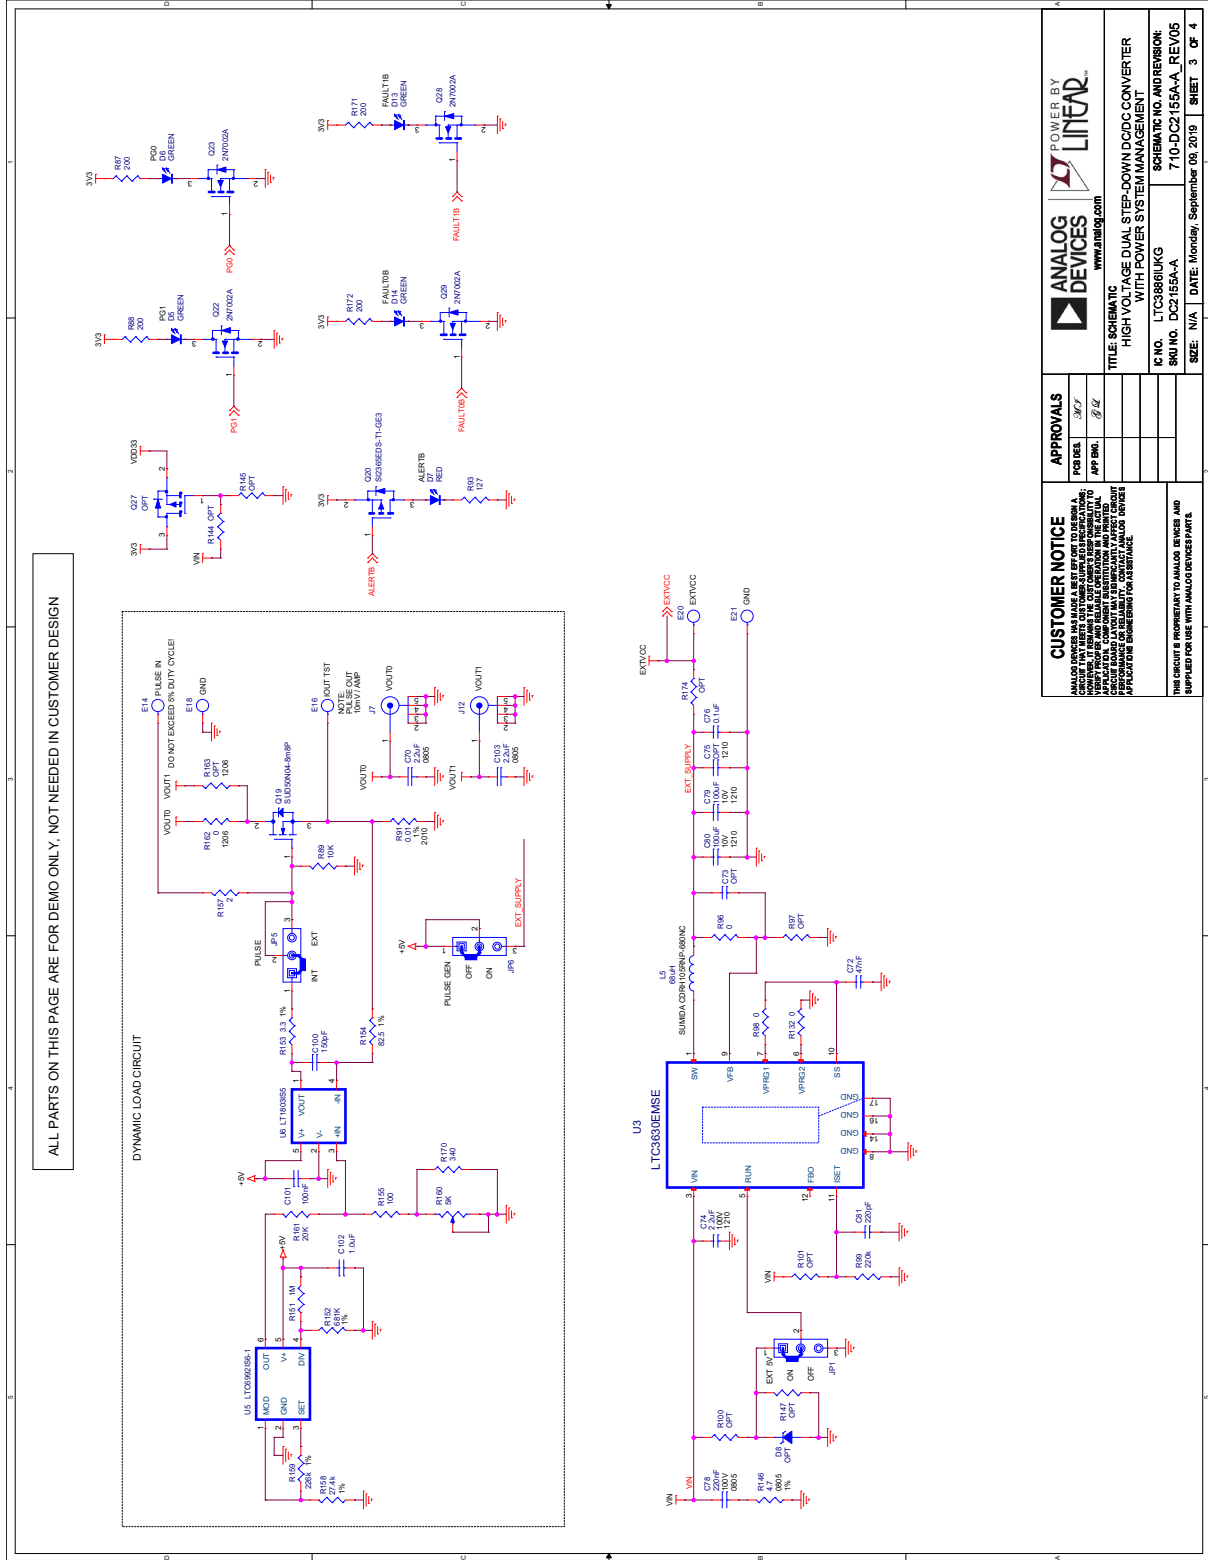


Figure 15c. DC2155A-A Demo Circuit Schematic, Sheet 3

SCHEMATIC DIAGRAM

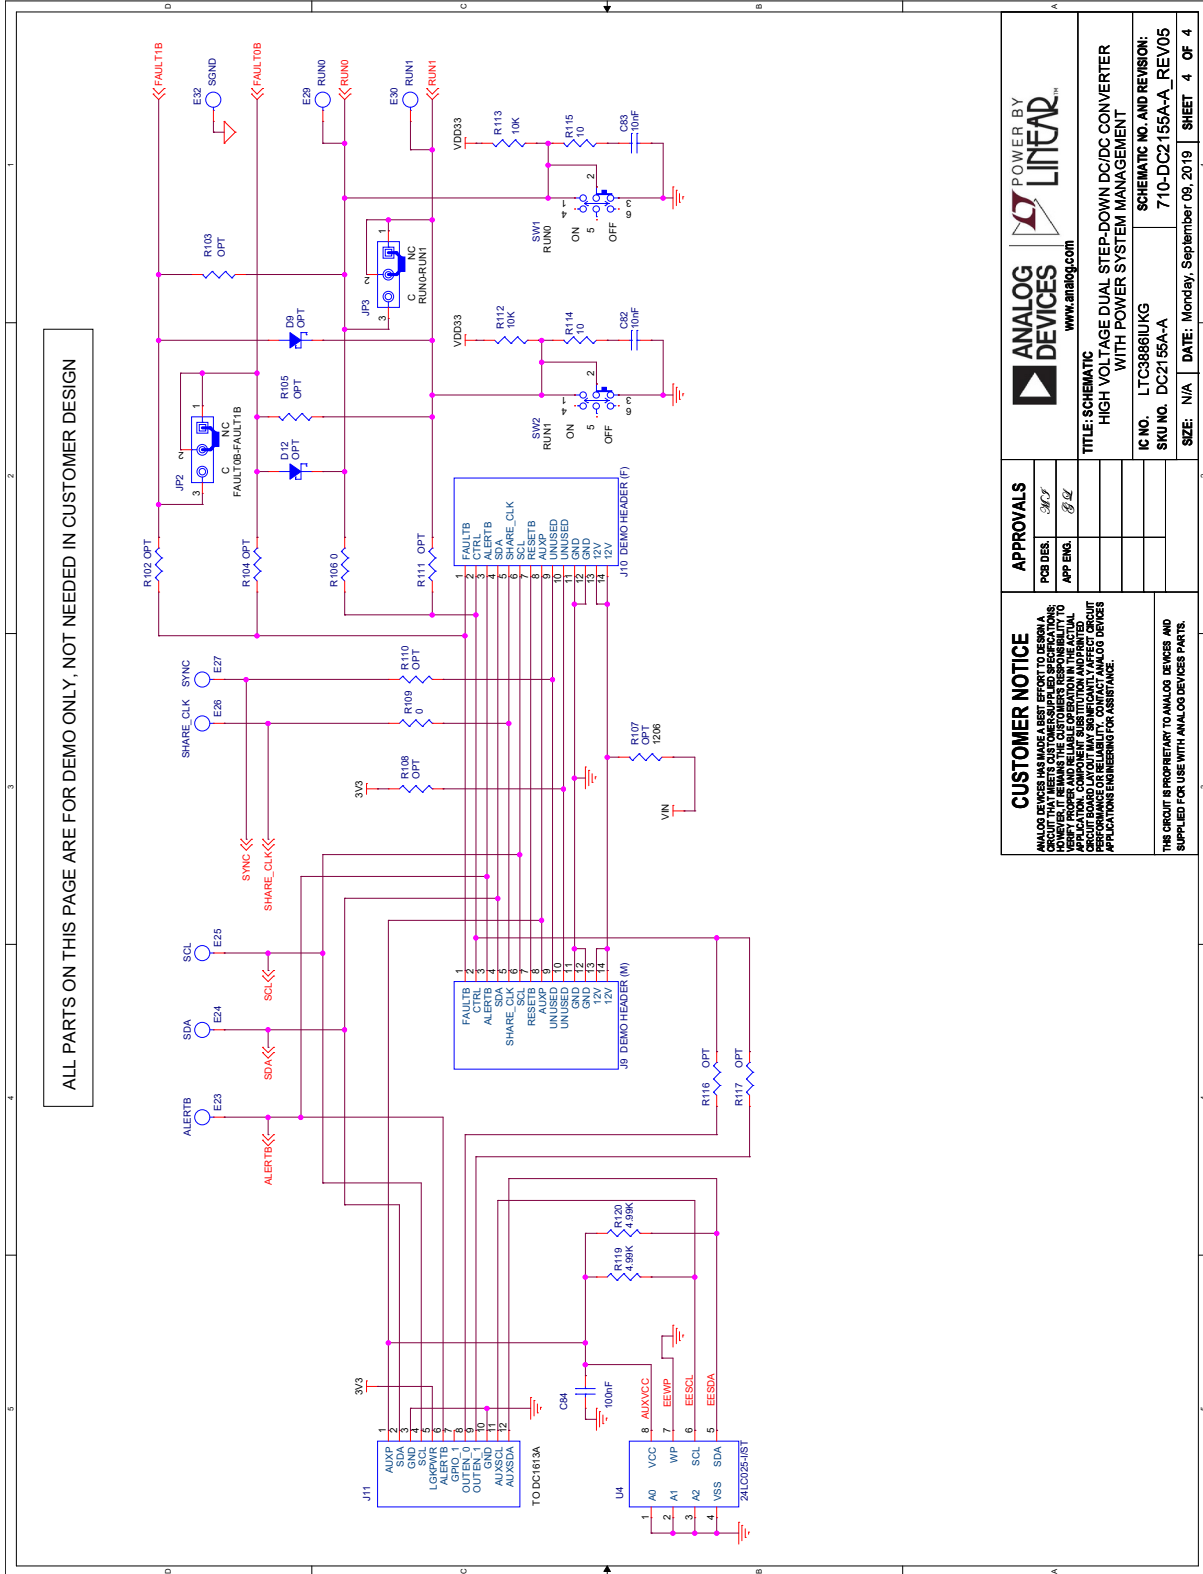


Figure 15d. DC2155A-A Demo Circuit Schematic, Sheet 4

| APPROVALS | | ANALOG DEVICES | | POWER BY LINEAR™ | |
|-----------|------|----------------|--|--|--|
| PCB DES. | 3/17 | www.analog.com | | TITLE: SCHEMATIC | |
| APP. ENG. | β/L | | | HIGH VOLTAGE DUAL STEP-DOWN DC/DC CONVERTER WITH POWER SYSTEM MANAGEMENT | |
| | | | | IC NO. LTC3886IJKG | |
| | | | | SKU NO. DC2155A-A | |
| | | | | SCHEMATIC NO. AND REVISION: 710-DC2155A-A_REV05 | |
| | | | | SIZE: N/A | |
| | | | | DATE: Monday, September 09, 2019 | |
| | | | | SHEET 4 OF 4 | |


CUSTOMER NOTICE
 ANALOG DEVICES MAKES NO REPRESENTATION OR WARRANTY, EITHER EXPRESS OR IMPLIED, THAT THIS CIRCUIT MEETS CUSTOMER SPECIFICATIONS. HOWEVER, IT REMAINS THE CUSTOMER'S RESPONSIBILITY TO VERIFY THAT THE CIRCUIT MEETS THE CUSTOMER'S APPLICATION, COMPONENT SUBSTITUTION, AND PRINTED BOARD FABRICATION REQUIREMENTS. ANALOG DEVICES DOES NOT WARRANT PERFORMANCE OR RELIABILITY. CONTACT ANALOG DEVICES APPLICATIONS ENGINEERING FOR ASSISTANCE.

THIS CIRCUIT IS PROPRIETARY TO ANALOG DEVICES AND SUPPLIED FOR USE WITH ANALOG DEVICES PARTS.

DEMO MANUAL

DC2155A-A/DC2155A-B

SCHEMATIC DIAGRAM

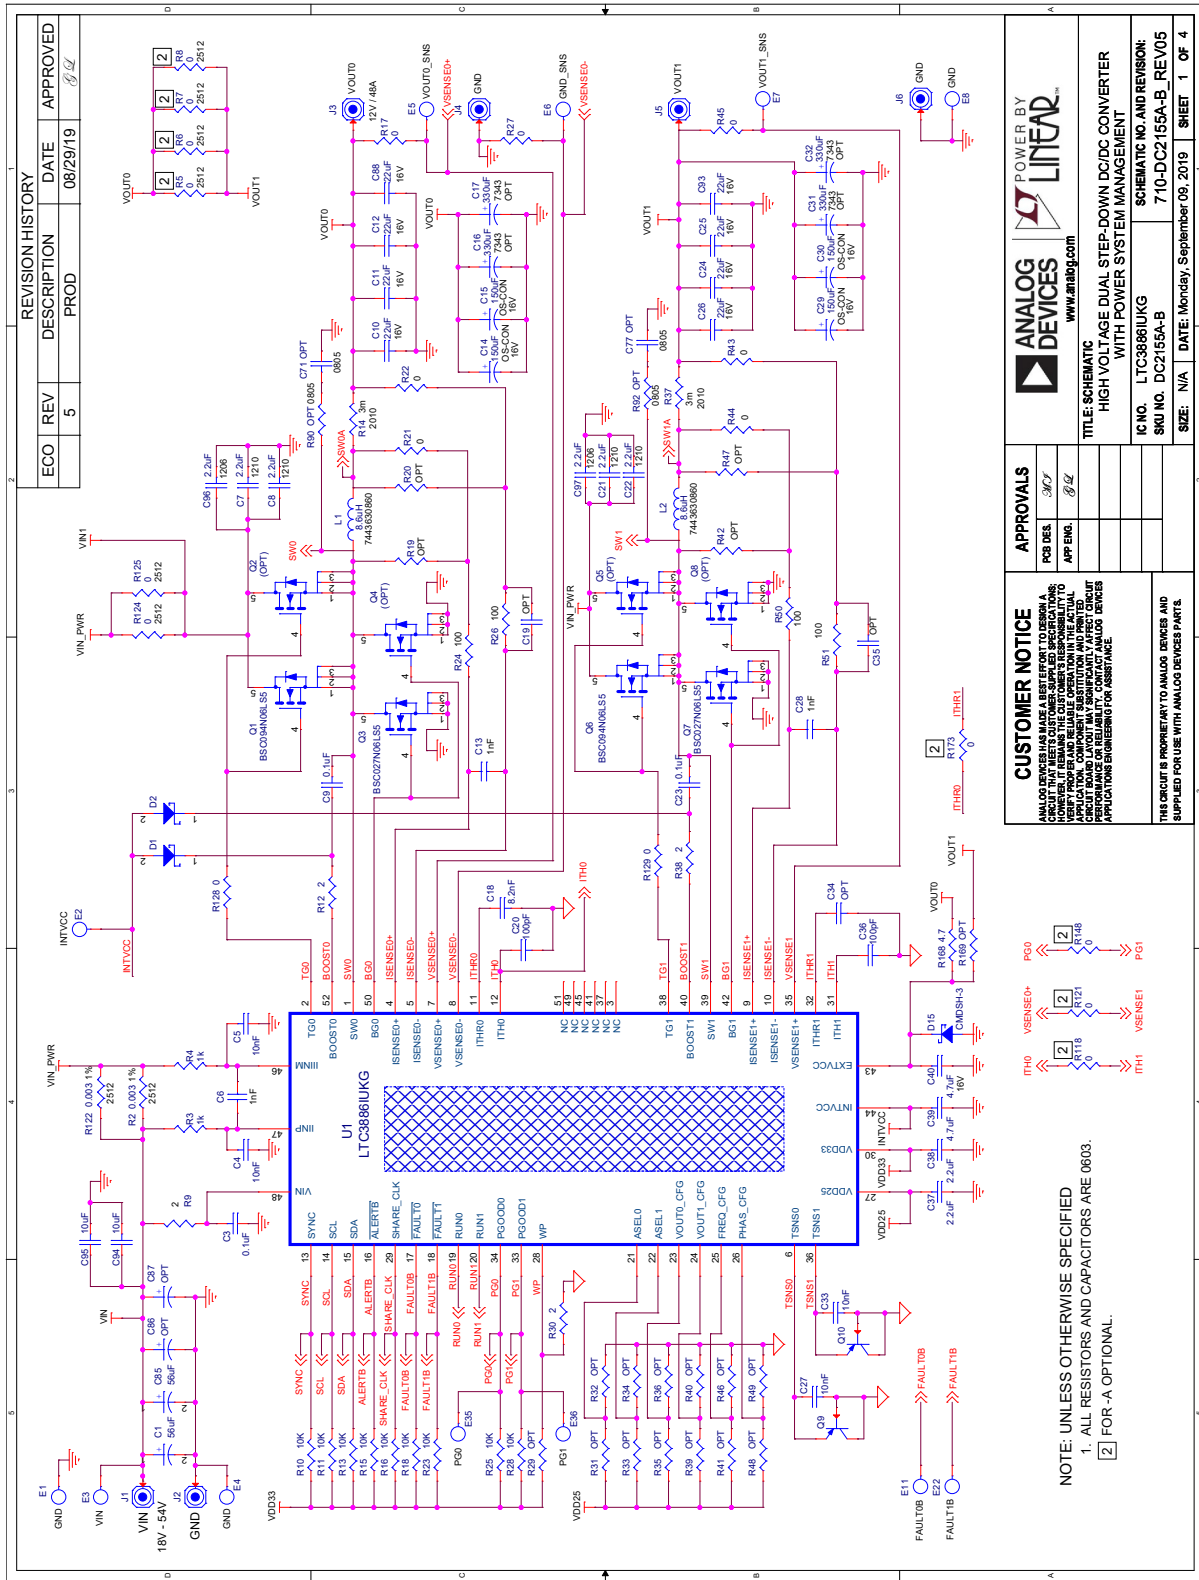

| REVISION HISTORY | | | |
|------------------|-----|-------------|----------|
| ECO | REV | DESCRIPTION | DATE |
| | 5 | PROD | 08/29/19 |

| APPROVALS | |
|-----------|---|
| POB DES. | ✓ |
| APP ENG. | ✓ |

| | |
|---|--|
| CUSTOMER NOTICE ANALOG DEVICES HAS MADE A BEST EFFORT TO DESIGN A BOARD LAYOUT THAT IS EASY TO REPRODUCE. HOWEVER, IT REMAINS THE CUSTOMER'S RESPONSIBILITY TO VERIFY THAT THE BOARD LAYOUT IS APPROPRIATE FOR THEIR APPLICATION. COMPONENT SUBSTITUTION AND TIGHTENED TOLERANCES MAY AFFECT CIRCUIT PERFORMANCE. CONTACT ANALOG DEVICES APPLICATIONS ENGINEERING FOR ASSISTANCE. | |
|---|--|

| | |
|---|----------------------------|
| TITLE: SCHEMATIC HIGH VOLTAGE DUAL STEP-DOWN DC/DC CONVERTER WITH POWER SYSTEM MANAGEMENT | |
| IC NO. | LTC3886IUKG |
| SCHEMATIC NO. AND REVISION: | 710-DC2155A-B_REV05 |
| SKU NO. | DC2155A-B |
| SIZE: | N/A |
| DATE: | Monday, September 09, 2019 |
| SHEET | 1 OF 4 |

NOTE: UNLESS OTHERWISE SPECIFIED
 1. ALL RESISTORS AND CAPACITORS ARE 0603.
 2 FOR -A OPTIONAL.

POWER BY
LINEAR

www.analog.com

APPROVALS

POB DES. ✓

APP ENG. ✓

Figure 16a. DC2155A-B Demo Circuit Schematic, Sheet 1

SCHEMATIC DIAGRAM


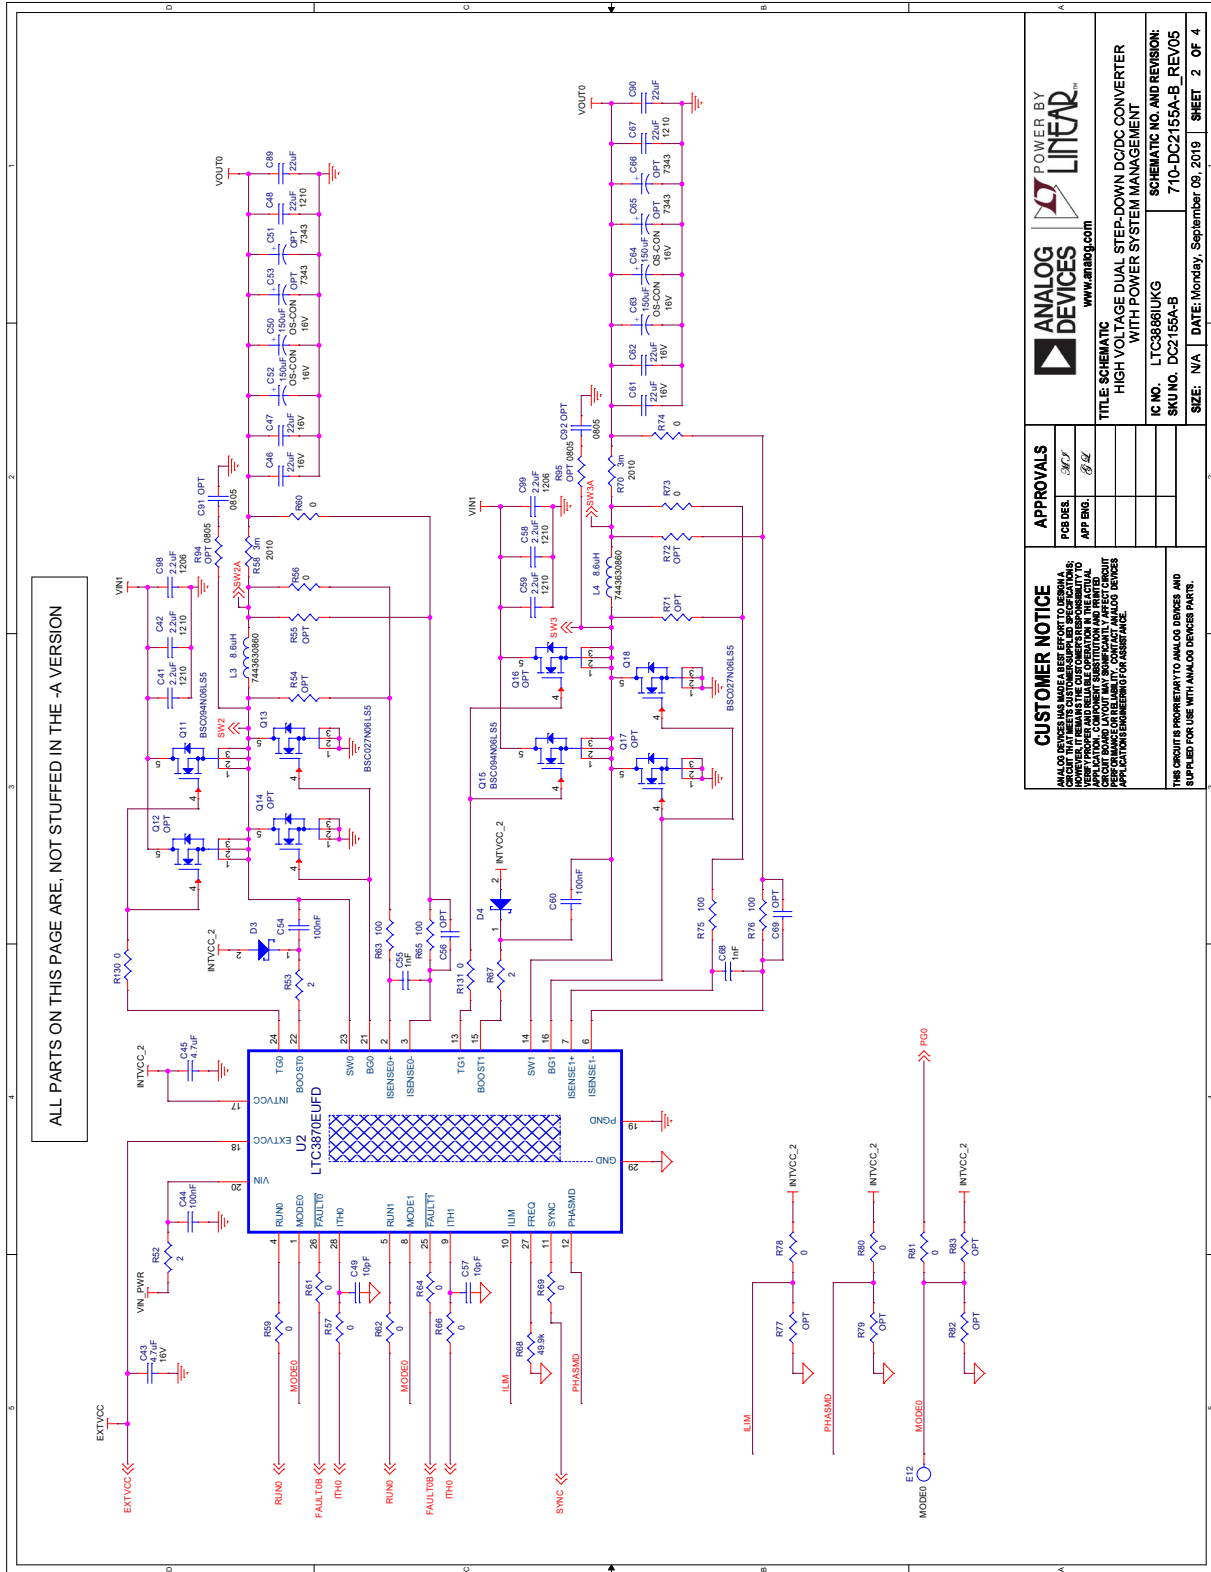


Figure 16b. DC2155A-B Demo Circuit Schematic, Sheet 2

DEMO MANUAL DC2155A-A/DC2155A-B


SCHEMATIC DIAGRAM

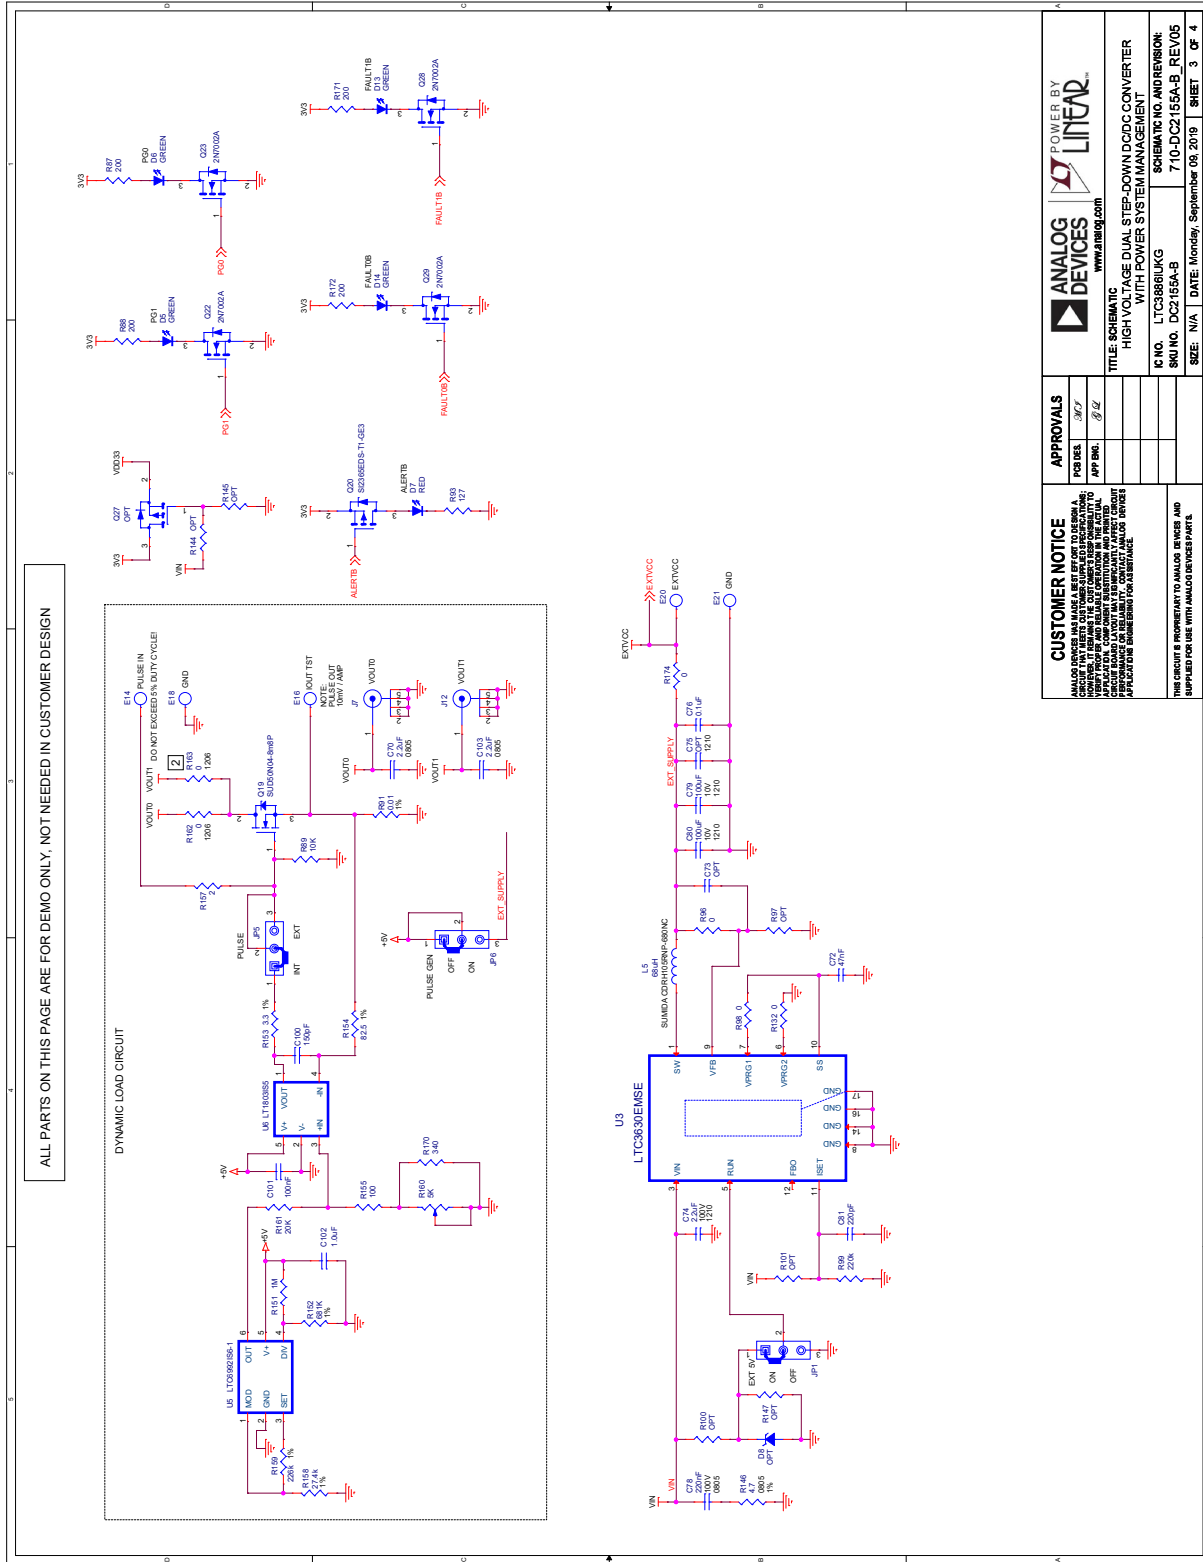

| | | | |
|--|------------------|--|---|
| CUSTOMER NOTICE ALL PARTS ON THIS PAGE ARE FOR DEMO ONLY. NOT NEEDED IN CUSTOMER DESIGN. VERIFY THE PARTS LIST AND ALL PARTS ARE AVAILABLE IN THE ACTUAL APPLICATION LAYOUT IN THE FINAL CUSTOMER DESIGN. APPLICATION ENGINEERING FOR SUPPORT. | APPROVALS | POWER BY ANALOG DEVICES www.analog.com | TITLE: SCHEMATIC IC NO. LTC3888LUK SKU NO. DC2155A-B SCHMATIC NO. AND REVISION: 7-10-DC2155A-B_REV05 |
| | FOR DES: 387 | APP BNO: 02 | |
| THIS SCHEMATIC IS PROPRIETARY TO ANALOG DEVICES AND SUPPLIED FOR USE WITH ANALOG DEVICES PARTS. | | SHEET 3 OF 4 | |

Figure 16c. DC2155A-B Demo Circuit Schematic, Sheet 3

SCHEMATIC DIAGRAM

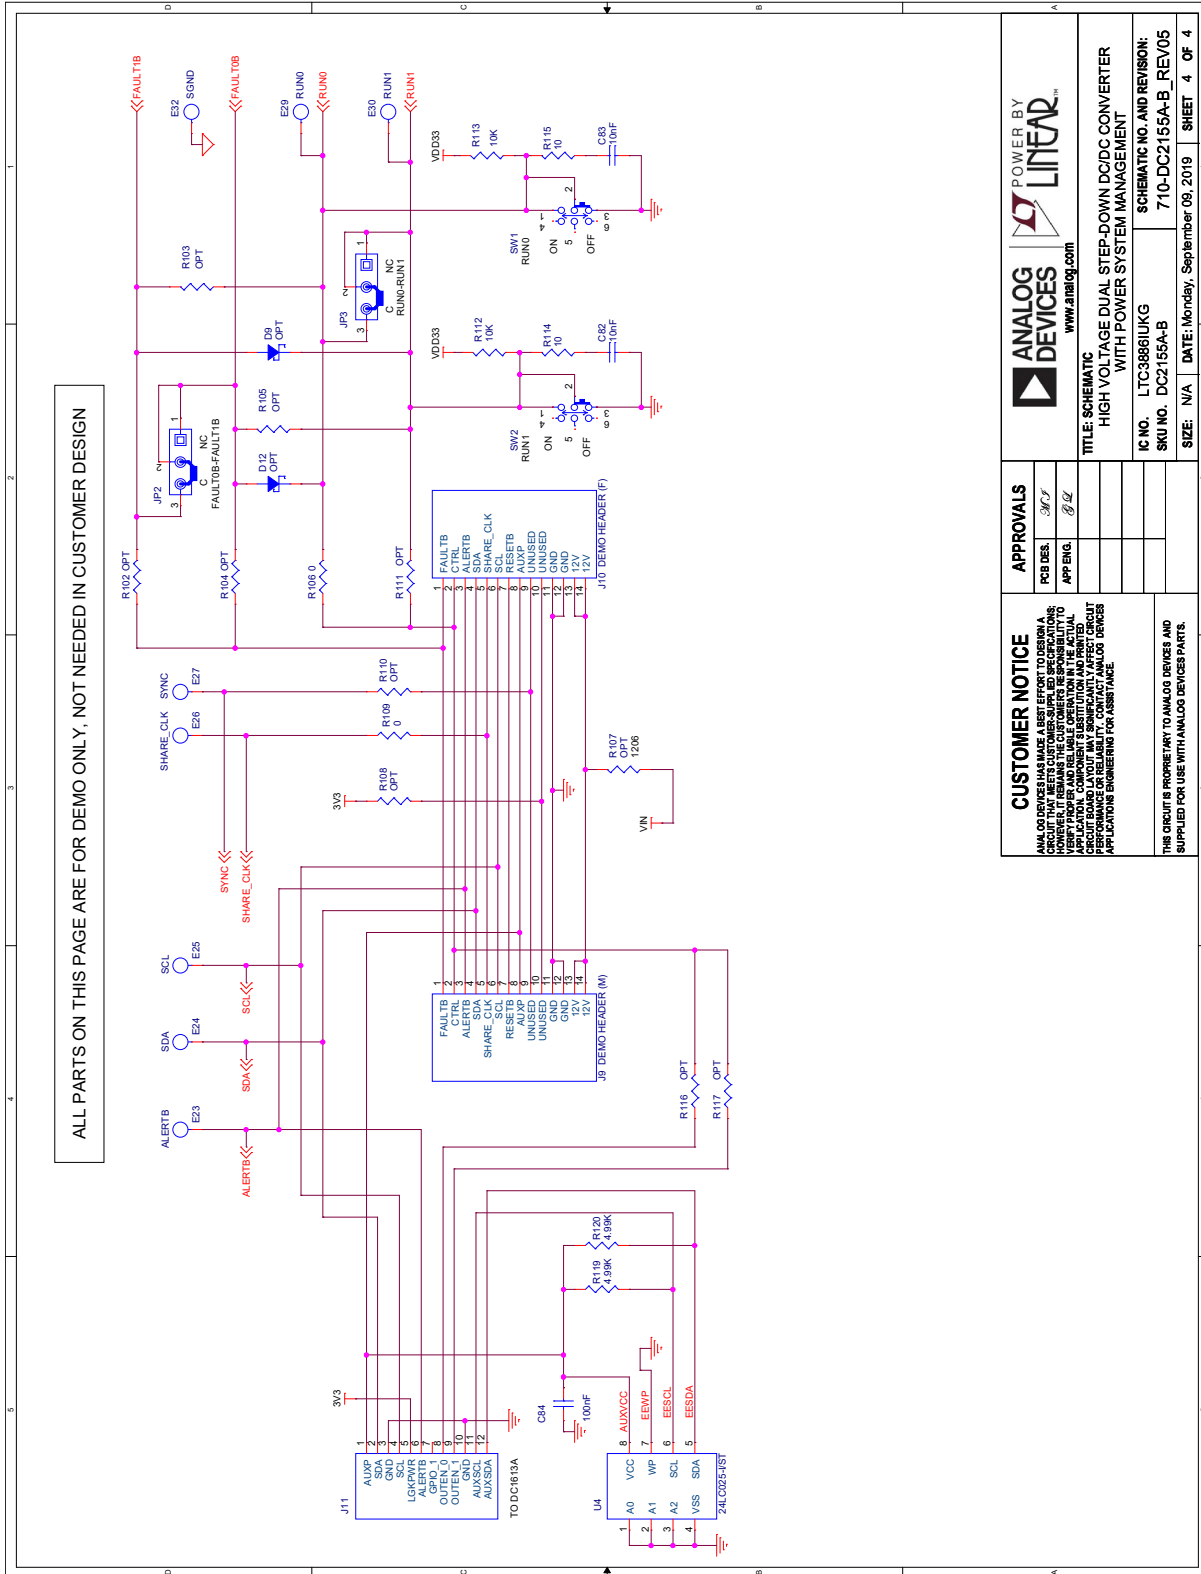

| | | |
|--|---|---|
| CUSTOMER NOTICE ANALOG DEVICES HAS MADE A BEST EFFORT TO DESIGN AND TEST THIS DEMO BOARD. HOWEVER, IT REMAINS THE CUSTOMER'S RESPONSIBILITY TO VERIFY THE BOARD'S PERFORMANCE IN THEIR APPLICATION. CUSTOMERS MUST PROVIDE AN APPLICATION COMPONENT SUBSTITUTION AND PRINTED CIRCUIT BOARD LAYOUT. ANY SOMATICALLY AFFECTING CIRCUIT BOARD LAYOUT MAY SIGNIFICANTLY AFFECT CIRCUIT PERFORMANCE. ANALOG DEVICES PROVIDES APPLICATIONS ENGINEERING FOR ASSISTANCE. | APPROVALS PCB DES. <i>BCJ</i> APP ENG. <i>BL</i> | ANALOG DEVICES www.analog.com POWER BY LINEAR™ |
| | TITLE: SCHEMATIC HIGH VOLTAGE DUAL STEP-DOWN DC/DC CONVERTER WITH POWER SYSTEM MANAGEMENT | |
| IC NO. L7C3886IUJK SKU NO. DC2155A-B | | SCHEMATIC NO. AND REVISION: 710-DC2155A-B_REV05 |
| SIZE: N/A | | DATE: Monday, September 09, 2019 SHEET 4 OF 4 |

Figure 16d. DC2155A-B Demo Circuit Schematic, Sheet 4

DEMO MANUAL

DC2155A-A/DC2155A-B



ESD Caution

ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

Legal Terms and Conditions

By using the evaluation board discussed herein (together with any tools, components documentation or support materials, the "Evaluation Board"), you are agreeing to be bound by the terms and conditions set forth below ("Agreement") unless you have purchased the Evaluation Board, in which case the Analog Devices Standard Terms and Conditions of Sale shall govern. Do not use the Evaluation Board until you have read and agreed to the Agreement. Your use of the Evaluation Board shall signify your acceptance of the Agreement. This Agreement is made by and between you ("Customer") and Analog Devices, Inc. ("ADI"), with its principal place of business at One Technology Way, Norwood, MA 02062, USA. Subject to the terms and conditions of the Agreement, ADI hereby grants to Customer a free, limited, personal, temporary, non-exclusive, non-sublicensable, non-transferable license to use the Evaluation Board FOR EVALUATION PURPOSES ONLY. Customer understands and agrees that the Evaluation Board is provided for the sole and exclusive purpose referenced above, and agrees not to use the Evaluation Board for any other purpose. Furthermore, the license granted is expressly made subject to the following additional limitations: Customer shall not (i) rent, lease, display, sell, transfer, assign, sublicense, or distribute the Evaluation Board; and (ii) permit any Third Party to access the Evaluation Board. As used herein, the term "Third Party" includes any entity other than ADI, Customer, their employees, affiliates and in-house consultants. The Evaluation Board is NOT sold to Customer; all rights not expressly granted herein, including ownership of the Evaluation Board, are reserved by ADI. CONFIDENTIALITY. This Agreement and the Evaluation Board shall all be considered the confidential and proprietary information of ADI. Customer may not disclose or transfer any portion of the Evaluation Board to any other party for any reason. Upon discontinuation of use of the Evaluation Board or termination of this Agreement, Customer agrees to promptly return the Evaluation Board to ADI. ADDITIONAL RESTRICTIONS. Customer may not disassemble, decompile or reverse engineer chips on the Evaluation Board. Customer shall inform ADI of any occurred damages or any modifications or alterations it makes to the Evaluation Board, including but not limited to soldering or any other activity that affects the material content of the Evaluation Board. Modifications to the Evaluation Board must comply with applicable law, including but not limited to the RoHS Directive. TERMINATION. ADI may terminate this Agreement at any time upon giving written notice to Customer. Customer agrees to return to ADI the Evaluation Board at that time. LIMITATION OF LIABILITY. THE EVALUATION BOARD PROVIDED HEREUNDER IS PROVIDED "AS IS" AND ADI MAKES NO WARRANTIES OR REPRESENTATIONS OF ANY KIND WITH RESPECT TO IT. ADI SPECIFICALLY DISCLAIMS ANY REPRESENTATIONS, ENDORSEMENTS, GUARANTEES, OR WARRANTIES, EXPRESS OR IMPLIED, RELATED TO THE EVALUATION BOARD INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, TITLE, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS. IN NO EVENT WILL ADI AND ITS LICENSORS BE LIABLE FOR ANY INCIDENTAL, SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES RESULTING FROM CUSTOMER'S POSSESSION OR USE OF THE EVALUATION BOARD, INCLUDING BUT NOT LIMITED TO LOST PROFITS, DELAY COSTS, LABOR COSTS OR LOSS OF GOODWILL. ADI'S TOTAL LIABILITY FROM ANY AND ALL CAUSES SHALL BE LIMITED TO THE AMOUNT OF ONE HUNDRED US DOLLARS (\$100.00). EXPORT. Customer agrees that it will not directly or indirectly export the Evaluation Board to another country, and that it will comply with all applicable United States federal laws and regulations relating to exports. GOVERNING LAW. This Agreement shall be governed by and construed in accordance with the substantive laws of the Commonwealth of Massachusetts (excluding conflict of law rules). Any legal action regarding this Agreement will be heard in the state or federal courts having jurisdiction in Suffolk County, Massachusetts, and Customer hereby submits to the personal jurisdiction and venue of such courts. The United Nations Convention on Contracts for the International Sale of Goods shall not apply to this Agreement and is expressly disclaimed.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А