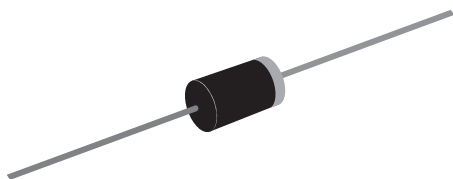


**TRANSZORB® Transient Voltage Suppressors****Case Style 1.5KE****PRIMARY CHARACTERISTICS**

V_{BR} uni-directional	6.8 V to 540 V
V_{BR} bi-directional	6.8 V to 440 V
P_{PPM}	1500 W
P_D	6.5 W
I_{FSM} (uni-directional only)	200 A
T_J max.	175 °C

DEVICES FOR BI-DIRECTION APPLICATIONS

For bi-directional types, use C or CA suffix (e.g. 1.5KE440CA).

Electrical characteristics apply in both directions.

FEATURES

- Glass passivated chip junction
- Available in uni-directional and bi-directional
- 1500 W peak pulse power capability with a 10/1000 μ s waveform, repetitive rate (duty cycle): 0.01 %
- Excellent clamping capability
- Very fast response time
- Low incremental surge resistance
- Solder dip 260 °C, 40 s
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC

**RoHS**
COMPLIANT**TYPICAL APPLICATIONS**

Use in sensitive electronics protection against voltage transients induced by inductive load switching and lighting on ICs, MOSFET, signal lines of sensor units for consumer, computer, industrial, automotive and telecommunication.

MECHANICAL DATA

Case: Molded epoxy body over passivated junction
Molding compound meets UL 94 V-0 flammability rating

Base P/N-E3 - RoHS compliant, commercial grade
Base P/NHE3 - RoHS compliant, high reliability/
automotive grade (AEC Q101 qualified)

Terminals: Matte tin plated leads, solderable per J-STD-002 and JESD22-B102

E3 suffix meets JESD 201 class 1A whisker test, HE3 suffix meets JESD 201 class 2 whisker test

Note:

- 1.5KE250 ~ 1.5KE540A and 1.5KE250C ~ 1.5KE440CA for commercial grade only

Polarity: For uni-directional types the color band denotes cathode end, no marking on bi-directional types

MAXIMUM RATINGS ($T_A = 25$ °C unless otherwise noted)

PARAMETER	SYMBOL	LIMIT	UNIT
Peak pulse power dissipation with a 10/1000 μ s waveform ⁽¹⁾ (Fig. 1)	P_{PPM}	1500	W
Peak pulse current with a 10/1000 μ s waveform ⁽¹⁾	I_{PPM}	See next table	A
Power dissipation on infinite heatsink at $T_L = 75$ °C (Fig. 5)	P_D	6.5	W
Peak forward surge current 8.3 ms single half sine-wave uni-directional only ⁽²⁾	I_{FSM}	200	A
Maximum instantaneous forward voltage at 100 A for uni-directional only ⁽³⁾	V_F	3.5/5.0	V
Operating junction and storage temperature range	T_J, T_{STG}	- 55 to + 175	°C

Notes:

(1) Non-repetitive current pulse, per Fig. 3 and derated above $T_A = 25$ °C per Fig. 2

(2) Measured on 8.3 ms single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minute maximum

(3) $V_F = 3.5$ V for 1.5KE220 (A) and below; $V_F = 5.0$ V for 1.5KE250(A) and above

ELECTRICAL CHARACTERISTICS ($T_A = 25\text{ }^{\circ}\text{C}$ unless otherwise noted)

JEDEC TYPE NUMBER	GENERAL SEMICONDUCTOR PART NUMBER	BREAKDOWN VOLTAGE V_{BR} AT I_T ⁽¹⁾ (V)		TEST CURRENT I_T (mA)	STAND-OFF VOLTAGE V_{WM} (V)	MAXIMUM REVERSE LEAKAGE AT V_{WM} I_D ⁽⁴⁾ (μA)	MAXIMUM PEAK PULSE CURRENT AT I_{PPM} ⁽²⁾ (A)	MAXIMUM CLAMPING VOLTAGE AT I_{PPM} V_C (V)	MAXIMUM TEMP. COEFFICIENT OF V_{BR} (%/°C)
		MIN.	MAX.						
1N6267	(+) $1.5\text{KE}6.8$	6.12	7.48	10	5.50	1000	139	10.8	0.057
1N6267A	(+) $1.5\text{KE}6.8\text{A}$	6.45	7.14	10	5.80	1000	143	10.5	0.057
1N6268	(+) $1.5\text{KE}7.5$	6.75	8.25	10	6.05	500	128	11.7	0.061
1N6268A	(+) $1.5\text{KE}7.5\text{A}$	7.13	7.88	10	6.40	500	133	11.3	0.061
1N6269	(+) $1.5\text{KE}8.2$	7.38	9.02	10	6.63	200	120	12.5	0.065
1N6269A	(+) $1.5\text{KE}8.2\text{A}$	7.79	8.61	10	7.02	200	124	12.1	0.065
1N6270	(+) $1.5\text{KE}9.1$	8.19	10.0	1.0	7.37	50	109	13.8	0.068
1N6270A	(+) $1.5\text{KE}9.1\text{A}$	8.65	9.55	1.0	7.78	50	112	13.4	0.068
1N6271	(+) $1.5\text{KE}10$	9.00	11.0	1.0	8.10	10	100	15.0	0.073
1N6271A	(+) $1.5\text{KE}10\text{A}$	9.50	10.5	1.0	8.55	10	103	14.5	0.073
1N6272	(+) $1.5\text{KE}11$	9.90	12.1	1.0	8.92	5.0	92.6	16.2	0.075
1N6272A	(+) $1.5\text{KE}11\text{A}$	10.5	11.6	1.0	9.40	5.0	96.2	15.6	0.075
1N6273	(+) $1.5\text{KE}12$	10.8	13.2	1.0	9.72	5.0	86.7	17.3	0.076
1N6273A	(+) $1.5\text{KE}12\text{A}$	11.4	12.6	1.0	10.2	5.0	89.8	16.7	0.078
1N6274	(+) $1.5\text{KE}13$	11.7	14.3	1.0	10.5	5.0	78.9	19.0	0.081
1N6274A	(+) $1.5\text{KE}13\text{A}$	12.4	13.7	1.0	11.1	5.0	82.4	18.2	0.081
1N6275	(+) $1.5\text{KE}15$	13.5	16.5	1.0	12.1	1.0	68.2	22.0	0.084
1N6275A	(+) $1.5\text{KE}15\text{A}$	14.3	15.8	1.0	12.8	1.0	70.8	21.2	0.084
1N6276	(+) $1.5\text{KE}16$	14.4	17.6	1.0	12.9	1.0	63.8	23.5	0.086
1N6276A	(+) $1.5\text{KE}16\text{A}$	15.2	16.8	1.0	13.6	1.0	66.7	22.5	0.086
1N6277	(+) $1.5\text{KE}18$	16.2	19.8	1.0	14.5	1.0	56.6	26.5	0.088
1N6277A	(+) $1.5\text{KE}18\text{A}$	17.1	18.9	1.0	15.3	1.0	59.5	25.2	0.089
1N6278	(+) $1.5\text{KE}20$	18.0	22.0	1.0	16.2	1.0	51.5	29.1	0.090
1N6278A	(+) $1.5\text{KE}20\text{A}$	19.0	21.0	1.0	17.1	1.0	54.2	27.7	0.090
1N6279	(+) $1.5\text{KE}22$	19.8	24.2	1.0	17.8	1.0	47.0	31.9	0.092
1N6279A	(+) $1.5\text{KE}22\text{A}$	20.9	23.1	1.0	18.8	1.0	49.0	30.6	0.092
1N6280	(+) $1.5\text{KE}24$	21.6	26.4	1.0	19.4	1.0	43.2	34.7	0.094
1N6280A	(+) $1.5\text{KE}24\text{A}$	22.8	25.2	1.0	20.5	1.0	45.2	33.2	0.094
1N6281	(+) $1.5\text{KE}27$	24.3	29.7	1.0	21.8	1.0	38.4	39.1	0.096
1N6281A	(+) $1.5\text{KE}27\text{A}$	25.7	28.4	1.0	23.1	1.0	40.0	37.5	0.096
1N6282	(+) $1.5\text{KE}30$	27.0	33.0	1.0	24.3	1.0	34.5	43.5	0.097
1N6282A	(+) $1.5\text{KE}30\text{A}$	28.5	31.5	1.0	25.6	1.0	36.2	41.4	0.097
1N6283	(+) $1.5\text{KE}33$	29.7	36.3	1.0	26.8	1.0	31.4	47.7	0.098
1N6283A	(+) $1.5\text{KE}33\text{A}$	31.4	34.7	1.0	28.2	1.0	32.8	45.7	0.098
1N6284	(+) $1.5\text{KE}36$	32.4	39.6	1.0	29.1	1.0	28.8	52.0	0.099
1N6284A	(+) $1.5\text{KE}36\text{A}$	34.2	37.8	1.0	30.8	1.0	30.1	49.9	0.099
1N6285	(+) $1.5\text{KE}39$	35.1	42.9	1.0	31.6	1.0	26.6	56.4	0.100
1N6285A	(+) $1.5\text{KE}39\text{A}$	37.1	41.0	1.0	33.3	1.0	27.8	53.9	0.100
1N6286	(+) $1.5\text{KE}43$	38.7	47.3	1.0	34.8	1.0	24.2	61.9	0.101
1N6286A	(+) $1.5\text{KE}43\text{A}$	40.9	45.2	1.0	36.8	1.0	25.3	59.3	0.101
1N6287	(+) $1.5\text{KE}47$	42.3	51.7	1.0	38.1	1.0	22.1	67.8	0.101
1N6287A	(+) $1.5\text{KE}47\text{A}$	44.7	49.4	1.0	40.2	1.0	23.1	64.8	0.101
1N6288	(+) $1.5\text{KE}51$	45.9	56.1	1.0	41.3	1.0	20.4	73.5	0.102
1N6288A	(+) $1.5\text{KE}51\text{A}$	48.5	53.6	1.0	43.6	1.0	21.4	70.1	0.102
1N6289	(+) $1.5\text{KE}56$	50.4	61.8	1.0	45.4	1.0	18.6	80.5	0.103
1N6289A	(+) $1.5\text{KE}56\text{A}$	53.2	58.8	1.0	47.8	1.0	19.5	77.0	0.103
1N6290	(+) $1.5\text{KE}62$	55.8	68.2	1.0	50.2	1.0	16.9	89.0	0.104
1N6290A	(+) $1.5\text{KE}62\text{A}$	58.9	65.1	1.0	53.0	1.0	17.6	85.0	0.104
1N6291	(+) $1.5\text{KE}68$	61.2	74.8	1.0	55.1	1.0	15.3	98.0	0.104
1N6291A	(+) $1.5\text{KE}68\text{A}$	64.6	71.4	1.0	58.1	1.0	16.3	92.0	0.104
1N6292	(+) $1.5\text{KE}75$	67.5	82.5	1.0	60.7	1.0	13.9	109	0.105
1N6292A	(+) $1.5\text{KE}75\text{A}$	71.3	78.8	1.0	64.1	1.0	14.6	104	0.105



1.5KE6.8 thru 1.5KE540A, 1N6267 thru 1N6303

Vishay General Semiconductor

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)									
JEDEC TYPE NUMBER	GENERAL SEMICONDUCTOR PART NUMBER	BREAKDOWN VOLTAGE V_{BR} AT I_T ⁽¹⁾ (V)		TEST CURRENT I_T (mA)	STAND-OFF VOLTAGE V_{WM} (V)	MAXIMUM REVERSE LEAKAGE AT V_{WM} I_D ⁽⁴⁾ (μA)	MAXIMUM PEAK PULSE CURRENT I_{PPM} ⁽²⁾ (A)	MAXIMUM CLAMPING VOLTAGE AT I_{PPM} V_C (V)	MAXIMUM TEMP. COEFFICIENT OF V_{BR} (%/ $^\circ\text{C}$)
		MIN.	MAX.						
1N6293	(+) $1.5\text{KE}82$	73.8	90.2	1.0	66.4	1.0	12.7	118	0.105
1N6293A	(+) $1.5\text{KE}82\text{A}$	77.9	86.1	1.0	70.1	1.0	13.3	113	0.105
1N6294	(+) $1.5\text{KE}91$	81.9	100.0	1.0	73.7	1.0	11.5	131	0.106
1N6294A	(+) $1.5\text{KE}91\text{A}$	86.5	95.5	1.0	77.8	1.0	12.0	125	0.106
1N6295	(+) $1.5\text{KE}100$	90.0	110	1.0	81.0	1.0	10.4	144	0.106
1N6295A	(+) $1.5\text{KE}100\text{A}$	95.0	105	1.0	85.5	1.0	10.9	137	0.106
1N6296	(+) $1.5\text{KE}110$	99.0	121	1.0	89.2	1.0	9.5	158	0.107
1N6296A	(+) $1.5\text{KE}110\text{A}$	105	116	1.0	94.0	1.0	9.9	152	0.107
1N6297	(+) $1.5\text{KE}120$	108	132	1.0	97.2	1.0	8.7	173	0.107
1N6297A	(+) $1.5\text{KE}120\text{A}$	114	126	1.0	102	1.0	9.1	165	0.107
1N6298	(+) $1.5\text{KE}130$	117	143	1.0	105	1.0	8.0	187	0.107
1N6298A	(+) $1.5\text{KE}130\text{A}$	124	137	1.0	111	1.0	8.4	179	0.107
1N6299	(+) $1.5\text{KE}150$	136	165	1.0	121	1.0	7.0	215	0.108
1N6299A	(+) $1.5\text{KE}150\text{A}$	143	158	1.0	128	1.0	7.2	207	0.106
1N6300	(+) $1.5\text{KE}160$	144	176	1.0	130	1.0	6.5	230	0.106
1N6300A	(+) $1.5\text{KE}160\text{A}$	152	168	1.0	136	1.0	6.8	219	0.108
1N6301	(+) $1.5\text{KE}170$	153	187	1.0	138	1.0	6.1	244	0.108
1N6301A	(+) $1.5\text{KE}170\text{A}$	162	179	1.0	145	1.0	6.4	234	0.108
1N6302	$1.5\text{KE}180$	162	198	1.0	146	1.0	5.8	258	0.108
1N6302A	$1.5\text{KE}180\text{A}$	171	189	1.0	154	1.0	6.1	246	0.108
1N6303	$1.5\text{KE}200$	180	220	1.0	162	1.0	5.2	287	0.108
1N6303A	$1.5\text{KE}200\text{A}^*$	190	210	1.0	171	1.0	5.5	274	0.108
	$1.5\text{KE}220$	198	242	1.0	175	1.0	4.4	344	0.108
	$1.5\text{KE}220\text{A}^*$	209	231	1.0	185	1.0	4.6	328	0.108
	$1.5\text{KE}250$	225	275	1.0	202	1.0	4.2	360	0.110
	$1.5\text{KE}250\text{A}$	237	263	1.0	214	1.0	4.4	344	0.110
	$1.5\text{KE}300$	270	330	1.0	243	1.0	3.5	430	0.110
	$1.5\text{KE}300\text{A}$	285	315	1.0	256	1.0	3.6	414	0.110
	$1.5\text{KE}350$	315	385	1.0	284	1.0	3.0	504	0.110
	$1.5\text{KE}350\text{A}$	333	368	1.0	300	1.0	3.1	482	0.110
	$1.5\text{KE}400$	360	440	1.0	324	1.0	2.6	574	0.110
	$1.5\text{KE}400\text{A}$	380	420	1.0	342	1.0	2.7	548	0.110
	$1.5\text{KE}440$	396	484	1.0	356	1.0	2.4	631	0.110
	$1.5\text{KE}440\text{A}$	418	462	1.0	376	1.0	2.5	602	0.110
	$1.5\text{KE}480$	432	528	1.0	389	1.0	2.19	686	0.110
	$1.5\text{KE}480\text{A}$	456	504	1.0	408	1.0	2.28	658	0.110
	$1.5\text{KE}510$	459	561	1.0	413	1.0	2.06	729	0.110
	$1.5\text{KE}510\text{A}$	485	535	1.0	434	1.0	2.15	698	0.110
	$1.5\text{KE}540$	486	594	1.0	437	1.0	1.94	772	0.110
	$1.5\text{KE}540\text{A}$	513	567	1.0	459	1.0	2.03	740	0.110

Notes:

(1) Pulse test: $t_p \leq 50$ ms

(2) Surge current waveform per Fig. 3 and derate per Fig. 2

(3) All terms and symbols are consistent with ANSI/IEEE CA62.35

(4) For bi-directional types with V_R 10 V and less the I_D limit is doubled

* Bi-directional versions are UL approved under component across the line protection, ULV1414 file number E108274 (1.5KE200CA, 1.5KE220CA)

(+) Underwriters laboratory recognition for the classification of protectors (QVGQ2) under the UL standard for safety 497B and file number E136766 for both uni-directional and bi-directional devices

THERMAL CHARACTERISTICS ($T_A = 25\text{ }^{\circ}\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	VALUE	UNIT
Typical thermal resistance, junction to ambient	$R_{\theta JA}$	75	$^{\circ}\text{C/W}$
Typical thermal resistance, junction to lead	$R_{\theta JL}$	15.4	

ORDERING INFORMATION (Example)

PREFERRED P/N	UNIT WEIGHT (g)	PREFERRED PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
1.5KE6.8A-E3/54	0.968	54	1400	13" diameter paper tape and reel
1.5KE6.8AHE3/54 ⁽¹⁾	0.968	54	1400	13" diameter paper tape and reel

Note:

(1) Automotive grade AEC-Q101 qualified

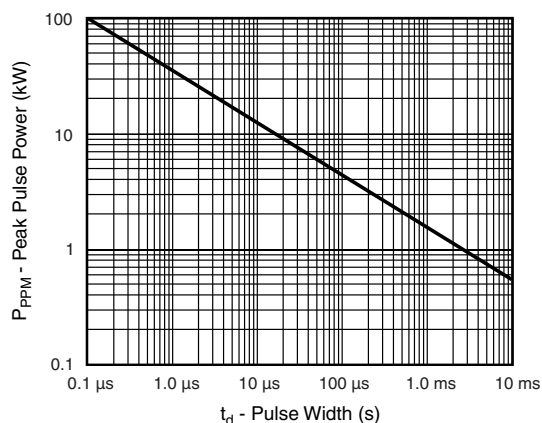
RATINGS AND CHARACTERISTICS CURVES($T_A = 25\text{ }^{\circ}\text{C}$ unless otherwise noted)

Figure 1. Peak Pulse Power Rating Curve

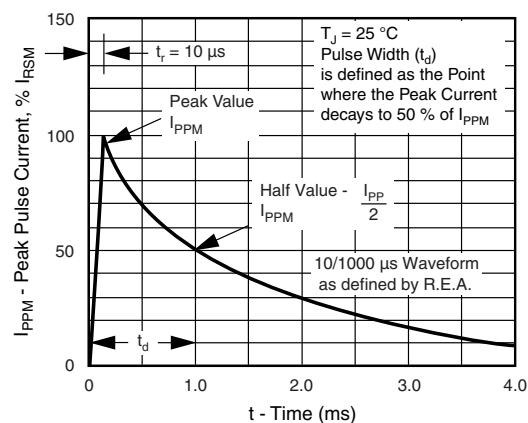


Figure 3. Pulse Waveform

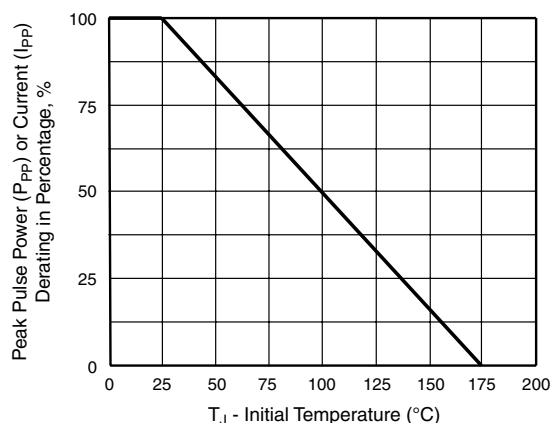


Figure 2. Pulse Power or Current vs. Initial Junction Temperature

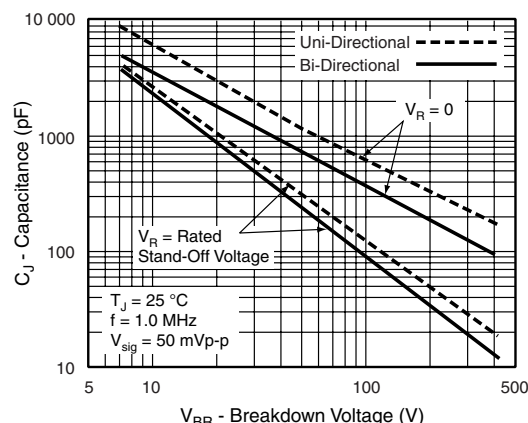


Figure 4. Typical Junction Capacitance

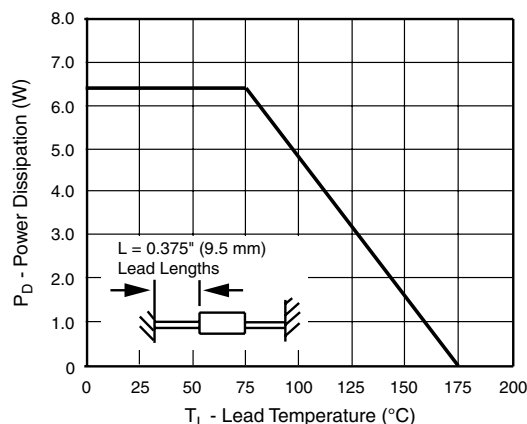


Figure 5. Power Derating Curve

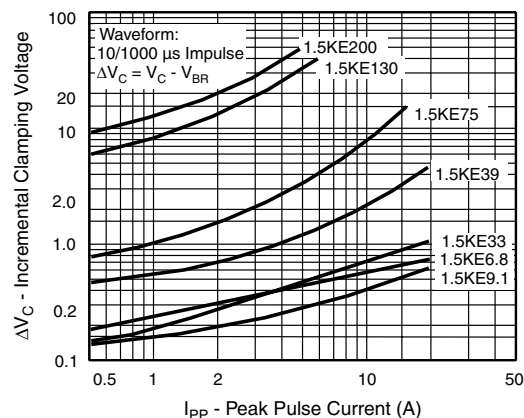


Figure 8. Incremental Clamping Voltage Curve (Uni-Directional)

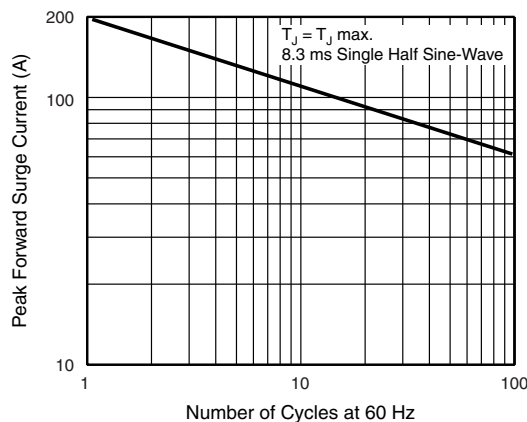


Figure 6. Maximum Non-Repetitive Forward Surge Current
Uni-Directional only

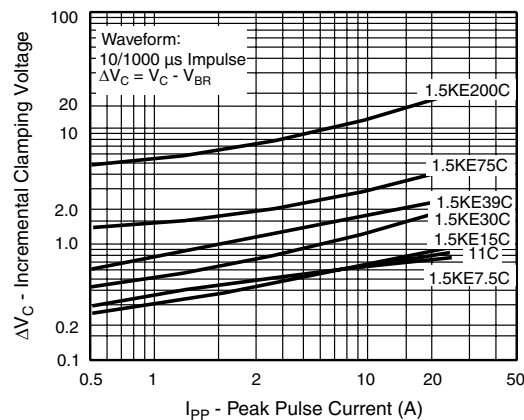


Figure 9. Incremental Clamping Voltage Curve (Bi-directional)

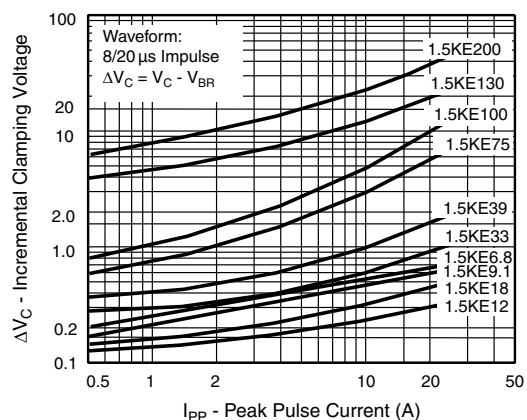


Figure 7. Incremental Clamping Voltage Curve (Uni-Directional)

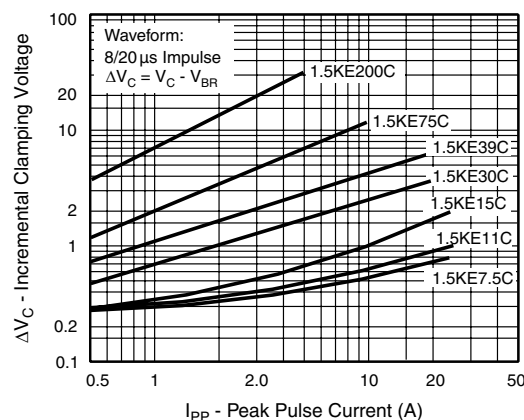


Figure 10. Incremental Clamping Voltage Curve (Bi-Directional)

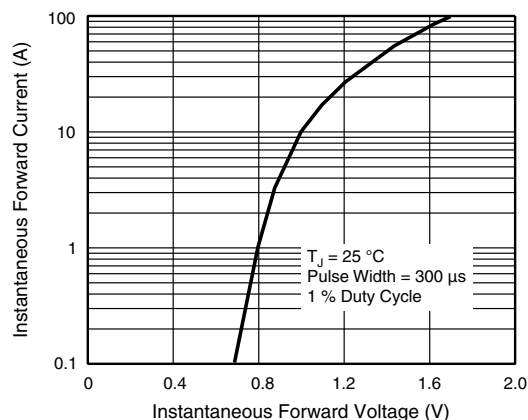


Figure 11. Instantaneous Forward Voltage Characteristics Curve


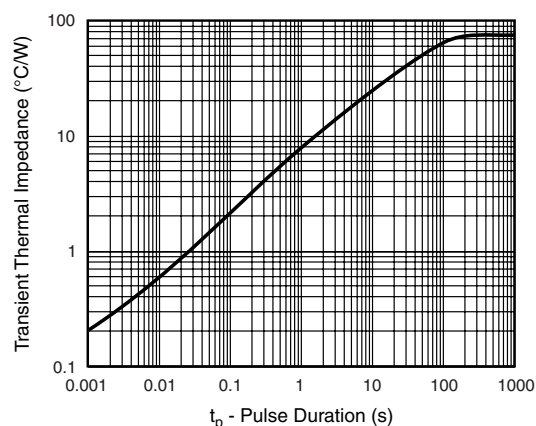


Figure 12. Typical Transient Thermal Impedance

PACKAGE OUTLINE DIMENSIONS in inches (millimeters)

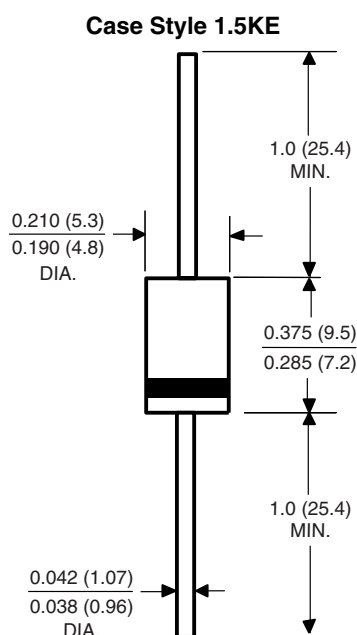

APPLICATION NOTES

- This series of Silicon Transient Suppressors is used in applications where large voltage transients can permanently damage voltage-sensitive components.
- The TVS diode can be used in applications where induced lightning on rural or remote transmission lines presents a hazard to electronic circuitry (ref: R.E.A. specification P.E. 60).
- This Transient Voltage Suppressor diode has a pulse power rating of 1500 W for 1 ms. The response time of TVS diode clamping action is effectively instantaneous (1×10^{-9} s bi-directional); therefore, they can protect integrated circuits, MOS devices, hybrids, and other voltage sensitive semiconductors and components. TVS diodes can also be used in series or parallel to increase the peak power ratings.



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А