### MIC23163/4



# 4MHz, 2A, 100% Duty Cycle Buck Regulator with HyperLight Load<sup>®</sup> and Power Good

### **General Description**

The MIC23163/4 is a high-efficiency, 4MHz, 2A, synchronous buck regulator with HyperLight Load® (HLL) mode and maximum 100% duty cycle. HLL provides veryhigh efficiency at light loads and ultra-fast transient response which makes the MIC23163/4 perfectly suited for supplying processor core voltages. An additional benefit of this proprietary architecture is very low output ripple voltage throughout the entire load range with the use of small output capacitors. The tiny 2.0mm × 2.0mm DFN package saves precious board space and requires only three external components.

The MIC23163/4 is designed for use with a very small 0.47µH inductor and 10µF output capacitor that enables a total solution size, less than 1mm height.

The MIC23163/4 has a very low quiescent current of  $33\mu A$  and achieves as high as 85% efficiency at 1mA. At higher loads, the MIC23163/4 provides a constant switching frequency around 4MHz while achieving peak efficiencies up to 93%. The MIC23164 incorporates an active discharge feature that switches an  $180\Omega$  FET to ground to discharge the output when the part is disabled.

The MIC23163/4 is available in 10-pin 2.0mm  $\times$  2.0mm DFN package with an operating junction temperature range from  $-40^{\circ}$ C to  $+125^{\circ}$ C.

Datasheets and support documentation are available on Micrel's web site at: <a href="https://www.micrel.com">www.micrel.com</a>.


#### **Features**

- Input voltage: 2.7V to 5.5V
- 100% duty cycle
- 2A output current
- Up to 93% peak efficiency
- 85% typical efficiency at 1mA
- Programmable soft-start with pre-bias start-up capability
- Power Good (PG) Indicator
- 4MHz PWM operation in continuous mode
- · Ultra-fast transient response
- · Low ripple output voltage
- Fully-integrated MOSFET switches
- 0.1µA shutdown current
- Thermal shutdown and current-limit protection
- 10-pin 2.0mm x 2.0mm Thin DFN
- -40°C to +125°C junction temperature range
- Disable pull down 180Ω (MIC23164 only)

### **Applications**

- Cellular modems
- Mobile handsets
- Portable media/MP3 players
- Portable navigation devices (GPS)
- WiFi/WiMax/WiBro modules
- Digital cameras
- · Wireless LAN cards

### **Typical Application**

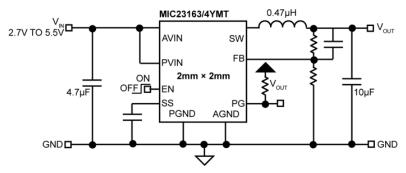

HyperLight Load is a registered trademark of Micrel, Inc.

Micrel Inc. • 2180 Fortune Drive • San Jose, CA 95131 • USA • tel +1 (408) 944-0800 • fax + 1 (408) 474-1000 • http://www.micrel.com

June 29, 2013 Revision 2.0


### **Ordering Information**

Part Number	Marking Code	Output Voltage	Auto Discharge	Junction Temperature Range	Package <sup>(1, 2)</sup>
MIC23163YMT	QAQ	ADJ	No	−40°C to +125°C	10-Pin 2mm × 2mm Thin DFN
MIC23164YMT	KQA	ADJ	Yes	−40°C to +125°C	10-Pin 2mm × 2mm Thin DFN

#### Note:

- 1. DFN is a GREEN, RoHS-compliant package. Mold compound is Halogen Free.
- 2. DFN ▲ = Pin 1 identifier.

## **Pin Configuration**



2mm × 2mm DFN (MT) Adjustable Output Voltage (Top View)

### **Pin Description**

Pin Number	Pin Name	Pin Function
1	SW	Switch (Output): Internal power MOSFET output switches. Disable pull down 180 $\Omega$ (MIC23164 only).
2	EN	Enable (Input): Logic high enables operation of the regulator. Logic low will shut down the device. Do not leave floating.
3	FB	Feedback: Connect a resistor divider from the output to ground to set the output voltage.
4	NC	Not Internally Connected.
5	PG	Power Good: Open drain output for the power good indicator. Use a pull-up resistor from this pin to a voltage source to detect a power good condition.
6	SS	Soft Start: Place a capacitor from this pin to ground to program the soft start time. Do not leave floating, $100pF$ minimum $C_{SS}$ is required.
7	AGND	Analog Ground: Connect to central ground point where all high-current paths meet ( $C_{IN}$ , $C_{OUT}$ , PGND) for best operation.
8	AVIN	Analog Input Voltage: Connect a capacitor to ground to decouple the noise.
9	PVIN	Power Input Voltage: Connect a capacitor to PGND to decouple the noise.
10	PGND	Power Ground.
EP	ePad	Exposed Pad. Connect to GND.

## Absolute Maximum Ratings<sup>(3)</sup>

Supply Voltage (V <sub>AVIN</sub> , V <sub>PVIN</sub> )	–0.3V to 6V
Power Good Voltage (V <sub>PG</sub> )	0.3V to 6V
Output Switch Voltage (V <sub>SW</sub> )	0.3V to 6V
Enable Input Voltage (V <sub>EN</sub> )	0.3V to V <sub>IN</sub>
Junction Temperature (T <sub>J</sub> )	+150°C
Storage Temperature Range (T <sub>S</sub> )	65°C to +150°C
Lead Temperature (soldering, 10s)	
ESD Rating <sup>(5)</sup>	ESD Sensitive

## Operating Ratings<sup>(4)</sup>

Supply Voltage (V <sub>AVIN</sub> , V <sub>PVIN</sub> )	2.7V to 5.5V
Enable Input Voltage (V <sub>EN</sub> )	0V to V <sub>IN</sub>
Feedback Voltage (V <sub>FB</sub> )	0.7V to V <sub>IN</sub>
Junction Temperature Range (T <sub>J</sub> )40°C	$\leq T_J \leq +125^{\circ}C$
Thermal Resistance	
2mm x 2mm Thin DFN -10 $(\theta_{JA})$	90°C/W
2mm x 2mm Thin DFN -10 (θ <sub>JC</sub> )	45°C/W

### Electrical Characteristics<sup>(6)</sup>

 $T_A = 25^{\circ}C$ ;  $V_{IN} = V_{EN} = 3.6V$ ;  $L = 0.47 \mu H$ ;  $C_{OUT} = 10 \mu F$  unless otherwise specified. **Bold** values indicate  $-40^{\circ}C \le T_J \le +125^{\circ}C$ , unless otherwise noted.

Parameter	Condition	Min.	Тур.	Max.	Units
Supply Voltage Range		2.7		5.5	V
Undervoltage Lockout Threshold	(Turn-On)	2.40	2.53	2.65	V
Undervoltage Lockout Hysteresis			75		mV
Quiescent Current	$I_{OUT}$ = 0mA , $V_{SNS}$ > 1.2 x $V_{OUT}$ Nominal		33	55	μA
Shutdown Current	V <sub>EN</sub> = 0V; V <sub>IN</sub> = 5.5V		0.1	5	μA
Output Valtage Assurage	V <sub>IN</sub> = 3.6V if V <sub>OUTNOM</sub> < 2.5V, I <sub>LOAD</sub> = 20mA			.25	0/
Output Voltage Accuracy	$V_{IN} = 4.5V$ if $V_{OUTNOM} \ge 2.5V$ , $I_{LOAD} = 20mA$	<b>-2.5</b>		+2.5	%
Feedback Regulation Voltage		0.68	0.7	0.72	V
Current Limit	$V_{SNS} = 0.9*V_{OUTNOM}$	2.5	3.3		Α
Output Valtage Line Degulation	$V_{IN} = 3.6 \text{V to } 5.5 \text{V if } V_{OUTNOM} < 2.5 \text{V}, I_{LOAD} = 20 \text{mA}$	0.3			%/V
Output Voltage Line Regulation	$V_{IN} = 4.5V$ to 5.5V if $V_{OUTNOM} \ge 2.5V$ , $I_{LOAD} = 20mA$				
	$20mA < I_{LOAD} < 500mA, \ V_{IN} = 3.6V \ if \ V_{OUTNOM} < 2.5V$	0.2			0/
Outrant Valta and Land Danielation	$20mA < I_{LOAD} < 500mA, \ V_{IN} = 5.0V \ if \ V_{OUTNOM} \geq 2.5V$		0.3		
Output Voltage Load Regulation	20mA < I <sub>LOAD</sub> < 1A, V <sub>IN</sub> = 3.6V if V <sub>OUTNOM</sub> < 2.5V				- %
	$20mA < I_{LOAD} < 1A, \ V_{IN} = 5.0V \ if \ V_{OUTNOM} \geq 2.5V$		0.3		
	I <sub>SW</sub> = 100mA PMOS	0.13			Ω
PWM Switch ON-Resistance	I <sub>SW</sub> = -100mA NMOS		0.13		
Switching Frequency	I <sub>OUT</sub> = 120mA		4		MHz
Soft-Start Time	V <sub>OUT</sub> = 90%, C <sub>SS</sub> = 1nF		1000		μs
Soft-Start Current	V <sub>SS</sub> = 0V		2.2		μΑ
Power Good Threshold (Rising)	% of V <sub>NOM</sub>	85	90	95	%

#### Notes:


- 3. Exceeding the absolute maximum ratings may damage the device.
- 4. The device is not guaranteed to function outside its operating ratings.
- 5. Devices are ESD sensitive. Handling precautions are recommended. Human body model, 1.5kΩ in series with 100pF.
- 6. Specification for packaged product only.


## Electrical Characteristics<sup>(6)</sup> (Continued)


 $T_A = 25^{\circ}\text{C}; \ V_{IN} = V_{EN} = 3.6\text{V}; \ L = 0.47\mu\text{H}; \ C_{OUT} = 10\mu\text{F} \ unless otherwise specified}. \ \textbf{Bold} \ values \ indicate -40^{\circ}\text{C} \leq T_J \leq +125^{\circ}\text{C}, \ unless otherwise noted}.$ 


Parameter	Condition	Min.	Тур.	Max.	Units
Power Good Threshold Hysteresis			7		%
Power Good Pull-Down	V <sub>SNS</sub> = 90% V <sub>NOMINAL</sub> , I <sub>PG</sub> = 1mA			200	mV
Enable Threshold	Turn-On	0.5	0.8	1.2	V
Enable Input Current			0.1	2	μA
Overtemperature Shutdown			160		°C
Overtemperature Shutdown Hysteresis			20		°C
SW Pull-Down Resistance (MIC23164 only)	V <sub>EN</sub> = 0V		180		Ω


### **Typical Characteristics**




























### **Typical Characteristics (Continued)**

























## **Typical Characteristics (Continued)**




### **Functional Characteristics**

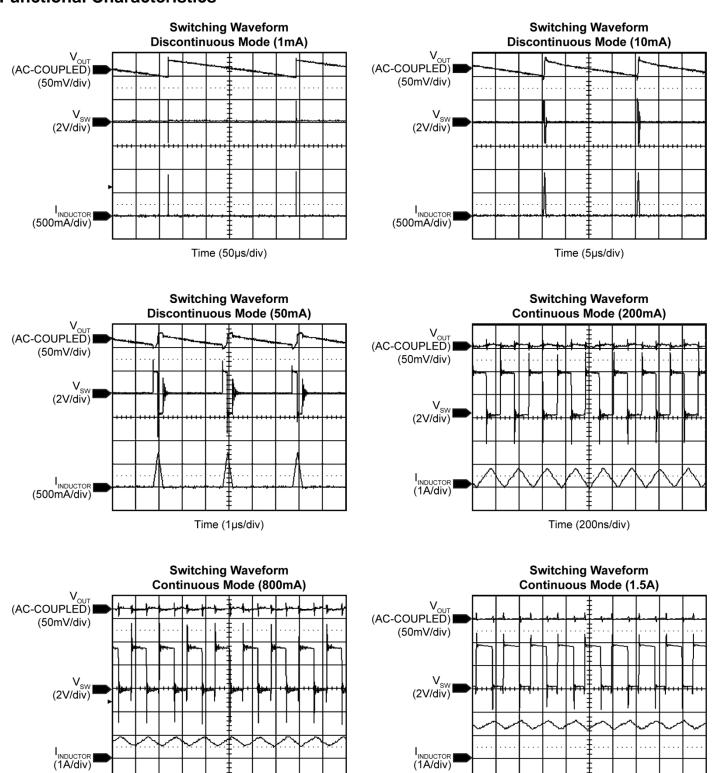


Time (200ns/div)


Time (200ns/div)


### **Functional Characteristics (Continued)**

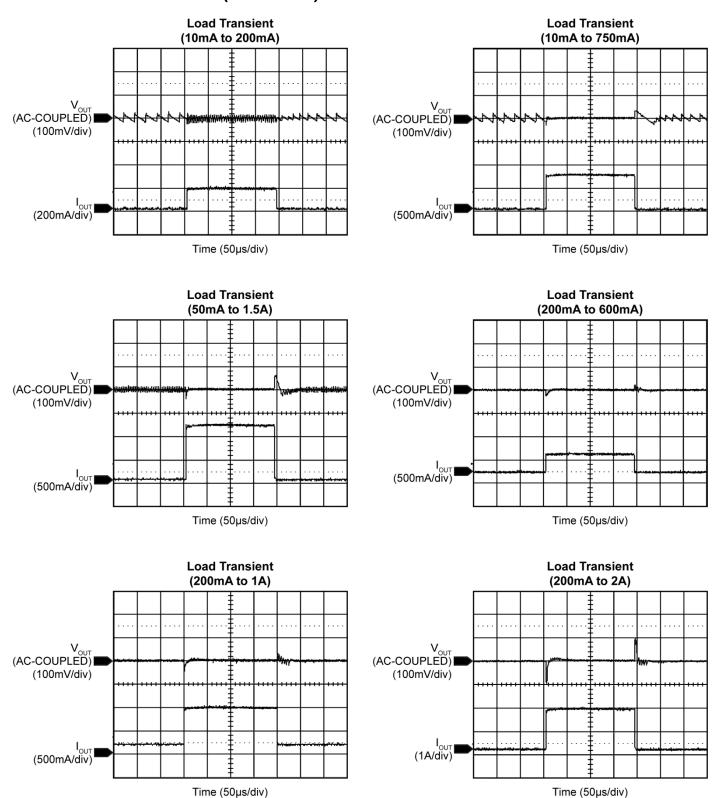

## **Functional Characteristics (Continued)**

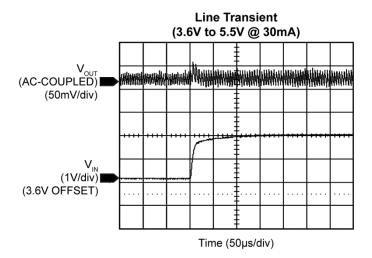

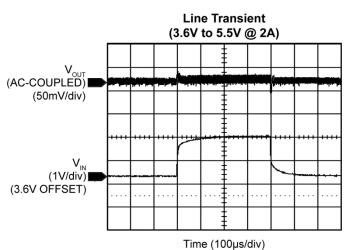

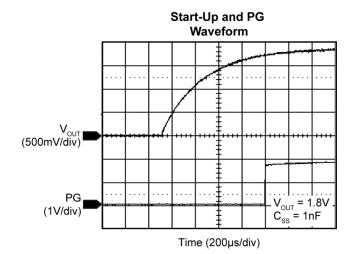

### **Functional Diagram**

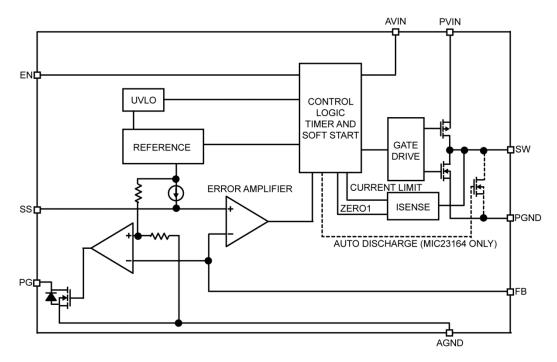


Figure 1. Simplified MIC23163/4 Functional Block Diagram – Adjustable Output Voltage

### **Functional Description**

#### VIN

The input supply (VIN) provides power to the internal MOSFETs for the switch-mode regulator along with the internal control circuitry. The VIN operating range is 2.7V to 5.5V so an input capacitor, with a minimum voltage rating of 6.3V, is recommended. Due to the high switching speed, a minimum 2.2µF bypass capacitor placed close to VIN and the power ground (PGND) pin is required. Refer to the "PCB Layout Recommendations" section for details.

#### **EN/Shutdown**

A logic high signal on the enable pin activates the output voltage of the device. A logic low signal on the enable pin deactivates the output and reduces supply current to 0.1µA. When disabled the MIC23164 switches an internal load of  $180\Omega$  on the regulators switch node to discharge the output. The MIC23163/4 features external soft-start circuitry via the soft start (SS) pin that reduces in-rush current and prevents the output voltage from overshooting at start up. Do not leave the EN pin floating.

#### SW

The switch (SW) connects directly to one end of the inductor and provides the current path during switching cycles. The other end of the inductor is connected to the load, SNS pin and output capacitor. Due to the high-speed switching on this pin, the switch node should be routed away from sensitive nodes whenever possible.

#### **AGND**

The analog ground (AGND) is the ground path for the biasing and control circuitry. The current loop for the signal ground should be separate from the power ground (PGND) loop. Refer to the "PCB Layout Recommendations" section for details.

#### **PGND**

The power ground pin is the ground path for the high current in PWM mode. The current loop for the power ground should be as small as possible and separate from the analog ground (AGND) loop as applicable. Refer to the "PCB Layout Recommendations" section for details.

#### PG

The power good (PG) pin is an open drain output which indicates logic high when the output voltage is typically above 90% of its steady state voltage. A pull-up resistor of more than  $5k\Omega$  should be connected from PG to  $V_{\Omega \cup \Gamma}$ .

#### SS

The soft start (SS) pin is used to control the output voltage ramp up time. The approximate equation for the ramp time in seconds is  $270 \times 10^3 \times \ln(10) \times C_{SS}$ . For example, for a  $C_{SS} = 1$ nF,  $T_{RISE} \sim 600$ µs. The minimum recommended value for  $C_{SS}$  is 1nF.

#### FB

The feedback (FB) pin is provided for the adjustable voltage option (no internal connection for fixed options). This is the control input for programming the output voltage. A resistor divider network is connected to this pin from the output and is compared to the internal 0.7V reference within the regulation loop.

The output voltage can be programmed between 0.7V and  $V_{\text{IN}}$  using Equation 1:

$$V_{OUT} = V_{REF} \times \left(1 + \frac{R1}{R2}\right)$$
 Eq. 1

where:

R1 is the top resistor, R2 is the bottom resistor.

Table 1. Example Feedback Resistor Values

V <sub>OUT</sub>	R1	R2
1.2V	215k	301k
1.5V	301k	261k
1.8V	340k	215k
2.5V	274k	107k
3.3V	383k	102k
3.6V	422k	102k

### **Application Information**

The MIC23163/4 is a high-performance DC/DC step-down regulator offering a small solution size. Supporting an output current up to 2A inside a tiny 2mm × 2mm DFN package, the IC requires only three external components while meeting today's miniature portable electronic device needs. Using the HyperLight Load (HLL) switching scheme, the MIC23163/4 is able to maintain high efficiency throughout the entire load range while providing ultra-fast load transient response. The following sections provide additional device application information.

#### **Input Capacitor**

A 2.2 $\mu$ F ceramic capacitor or greater should be placed close to the VIN pin and PGND pin for bypassing. A Murata GRM188R60J475ME84D, size 0603, 4.7 $\mu$ F ceramic capacitor is recommended based on performance, size, and cost. A X5R or X7R temperature rating is recommended for the input capacitor. Y5V temperature rating capacitors, aside from losing most of their capacitance over temperature, can also become resistive at high frequencies. This reduces their ability to filter out high-frequency noise.

#### **Output Capacitor**

The MIC23163/4 is designed for use with a 10µF or greater ceramic output capacitor. Increasing the output capacitance will lower output ripple and improve load transient response but could also increase solution size or cost. A low equivalent series resistance (ESR) ceramic output capacitor such as the GRM188R60J106ME84D, size 0603, 10µF capacitor is recommended based upon performance, size and cost. Both the X7R or X5R temperature rating capacitors are recommended. The Y5V and Z5U temperature rating capacitors are not recommended due to their wide variation in capacitance over temperature and increased resistance at high frequencies.

#### **Inductor Selection**

When selecting an inductor, it is important to consider the following factors (not necessarily in the order of importance):

- Rated current value
- Size requirements
- DC resistance (DCR)

The MIC23163/4 is designed for use with a  $0.47\mu H$  inductor. This allows for rapid output voltage recovery during line and load transients.

Maximum current ratings of the inductor are generally given in two methods; permissible DC current and saturation current. Permissible DC current can be rated either for a 40°C temperature rise or a 10% to 20% loss in inductance. Ensure the inductor selected can handle the maximum operating current. When saturation current is specified, make sure that there is enough margin so that the peak current does not cause the inductor to saturate. Peak current can be calculated as illustrated in Equation 2:

$$I_{PEAK} = \left[I_{OUT} + V_{OUT} \left(\frac{1 - V_{OUT}/V_{IN}}{2 \times f \times L}\right)\right]$$
 Eq. 2

As shown by Equation 2, the peak inductor current is inversely proportional to the switching frequency and the inductance; the lower the switching frequency or the inductance the higher the peak current. As input voltage increases, the peak current also increases.

The size of the inductor depends on the requirements of the application. Refer to the "Typical Application Circuit" and "Bill of Materials" sections for details.

DC resistance (DCR) is also important. While DCR is inversely proportional to size, DCR can represent a significant efficiency loss. Refer to the "Efficiency Considerations" section for more details.

The transition between high loads (CCM) to HLL mode is determined by the inductor ripple current and the load current.




Figure 2. Signals for High-Side Switch Drive (HSD) for T<sub>ON</sub> Control, Inductor Current, and Low-Side Switch Drive (LSD) for T<sub>OFF</sub> Control

In HLL mode, the inductor is charged with a fixed Ton pulse on the high-side switch (HSD). After this, the LSD is switched on and current falls at a rate  $V_{\text{OUT}}/L$ . The controller remains in HLL mode while the inductor falling current is detected to cross approximately -50mA. When the LSD (or  $T_{\text{OFF}}$ ) time reaches its minimum and the inductor falling current is no longer able to reach this -50mA threshold, the part is in CCM mode and switching at a virtually constant frequency.

Once in CCM mode, the T<sub>OFF</sub> time will not vary.

#### Compensation

The MIC23163/4 is designed to be stable with a  $0.47\mu H$  inductor with a  $10\mu F$  ceramic (X5R) output capacitor. A feed-forward capacitor in the range of 15pF to 68pF is essential across the top feedback resistor.

#### **Duty Cycle**

The maximum duty cycle of the MIC23163/4 is 100%, allowing operation in dropout to extend battery life.


#### **Efficiency Considerations**

Efficiency is defined as the amount of useful output power, divided by the amount of power supplied, as shown in Equation 3:

Efficiency % = 
$$\left(\frac{V_{OUT} \times I_{OUT}}{V_{IN} \times I_{IN}}\right) \times 100$$
 Eq. 3

Maintaining high efficiency serves two purposes. It reduces power dissipation in the power supply, reducing the need for heat sinks and thermal design considerations and it reduces consumption of current for battery-powered applications. Reduced current draw from a battery increases the device's operating time and is critical in handheld devices.

There are two types of losses in switching converters; DC losses and switching losses. DC losses are simply the power dissipation of I<sup>2</sup>R. Power is dissipated in the high side switch during the on cycle. Power loss is equal to the high side MOSFET R<sub>DSON</sub> multiplied by the switch current squared. During the off cycle, the low side N-channel MOSFET conducts, also dissipating power. Device operating current also reduces efficiency. The product of the quiescent (operating) current and the supply voltage represents another DC loss. The current required driving the gates on and off at a constant 4MHz frequency and the switching transitions make up the switching losses.






Figure 3. Efficiency under Load

Figure 3 shows an efficiency curve. From no load to 100mA, efficiency losses are dominated by quiescent current losses, gate drive and transition losses. By using the HLL mode, the MIC23163/4 is able to maintain high efficiency at low output currents.

Over 100mA, efficiency loss is dominated by MOSFET  $R_{DSON}$  and inductor losses. Higher input supply voltages will increase the gate-to-source threshold on the internal MOSFETs, thereby reducing the internal  $R_{DSON}$ . This improves efficiency by reducing DC losses in the device. All but the inductor losses are inherent to the device. In which case, inductor selection becomes increasingly critical in efficiency calculations. As the inductors are reduced in size, the DC resistance (DCR) can become quite significant. The DCR losses can be calculated as in Equation 4:

$$P_{DCR} = I_{OUT}^2 \times DCR$$
 Eq. 4

From that, the loss in efficiency due to inductor resistance can be calculated as in Equation 5:

$$\label{eq:efficiency_loss} \begin{aligned} & \text{Efficiency Loss} = \left[1 - \left(\frac{V_{\text{OUT}} \times I_{\text{OUT}}}{V_{\text{OUT}} \times I_{\text{OUT}} + P_{\text{DCR}}}\right)\right] \times 100 \end{aligned}$$

Efficiency loss due to DCR is minimal at light loads and gains significance as the load is increased. Inductor selection becomes a trade-off between efficiency and size in this case.

#### **HyperLight Load Mode**

MIC23163/4 uses a minimum on and off time proprietary control loop (PCL) patented by Micrel called HyperLight Load (HLL). When the output voltage falls below the regulation threshold, the error comparator begins a switching cycle that turns the PMOS on and keeps it on for the duration of the minimum-on-time. This increases the output voltage. If the output voltage is over the regulation threshold, then the error comparator turns the PMOS off for a minimum-off-time until the output drops below the threshold. The NMOS acts as an ideal rectifier that conducts when the PMOS is off. Using a NMOS switch instead of a diode allows for lower voltage drop across the switching device when it is on. The asynchronous switching combination between the PMOS and the NMOS allows the control loop to work in discontinuous mode for light load operations. In discontinuous mode, the MIC23163/4 works in pulse frequency modulation (PFM) to regulate the output. As the output current increases, the off-time decreases, thus provides more energy to the output. This switching scheme improves the efficiency of MIC23163/4 during light load currents by only switching when it is needed. As the load current increases, the MIC23163/4 goes into continuous conduction mode (CCM) and switches at a frequency centered at 4MHz. The equation to calculate the load when the MIC23163/4 goes into continuous conduction mode may be approximated by Equation 6:

$$I_{LOAD} > \left(\frac{(V_{IN} - V_{OUT}) \times D}{2L \times f}\right)$$
 Eq. 6

As shown in Equation 6, the load at which the MIC23163/4 transitions from HLL mode to PWM mode is a function of the input voltage ( $V_{\text{IN}}$ ), output voltage ( $V_{\text{OUT}}$ ), duty cycle (D), inductance (L) and frequency (f). As shown in Figure 4, as the output current increases, the switching frequency also increases until the MIC23163/4 goes from HLL mode to PWM mode at approximately 120mA. The MIC23163/4 will switch at a relatively constant frequency around 4MHz once the output current is over 120mA.





Figure 4. SW Frequency vs. Output Current

### **Typical Application Circuit**

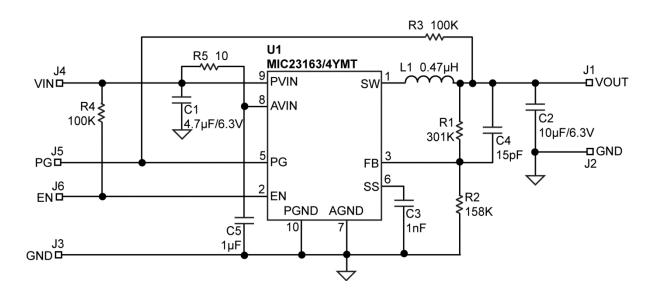

#### **Bill of Materials**

Item	Part Number	Manufacturer	Description	Qty.	
C4	C1608X5R0J475K	TDK <sup>(7)</sup>	4.7./F C 21/ VED Ci-2 0002	1	
GRM188R60J475KE19D		Murata <sup>(8)</sup>	4.7μF, 6.3V, X5R, Size 0603		
00	C1608X5R0J106K080AB	TDK	40E 0.0V VED 0: 0000	1	
C2	GRM188R60J106ME84D	Murata	10μF, 6.3V, X5R, Size 0603		
00	GRM188R71H102MA01D	Murata	4. E/E0V VZD 0000	1	
C3	06035C102KAT2A	AVX <sup>(9)</sup>	1 nF/50V, X7R, 0603		
C4 06035A150KAT2A GRM1885C1H150JA01D		AVX	45-5 50// 0000	1	
		Murata	15pF, 50V, 0603		
L1	FLF3215T-R47N	TDK	0.47μH, 2.8A, 21mΩ, L3.2mm × W2.5mm × H1.55mm	1	
LI	LQH32PNR47NNC	Murata	0.47μH, 2.9A, 24mΩ, L3.2mm × W2.5mm × H1.55mm	1	
R1	CRCW0603301KFKEA	Vishay(10)	301kΩ, 1%, 1/10W, Size 0603	1	
R2	CRCW0603158KFKEA	Vishay	158kΩ, 1%, 1/10W, Size 0603	1	
R3, R4	CRCW0603100KFKEA	Vishay	100kΩ, 1%, 1/10W, Size 0603	1	
R5	CRCW060310R0FKEA	Vishay	10Ω, 1%, 1/10W, Size 0603	1	
114	MIC23163YMT	Micrel, Inc. <sup>(11)</sup>	4MHz, 2A, 100% Duty Cycle Buck Regulator with		
MIC23164YMT		wildrei, inc.	HyperLight Load <sup>®</sup> and Power Good	1	

#### Notes:

7. TDK: www.tdk.com.


8. Murata: <u>www.murata.com</u>.

9. AVX: www.avx.com.


10. Vishay: www.vishay.com.

11. Micrel, Inc.: www.micrel.com.

### **PCB Layout Recommendations**

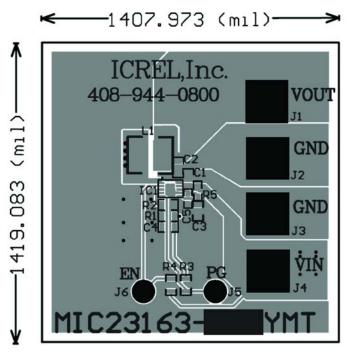


**Top Layer** 

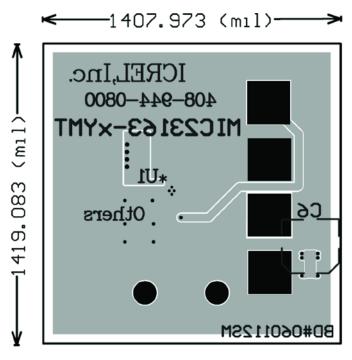

**Bottom Layer** 

MIC23163/4 Micrel, Inc.

## Package Information<sup>(12)</sup> and Recommended Landing Pattern

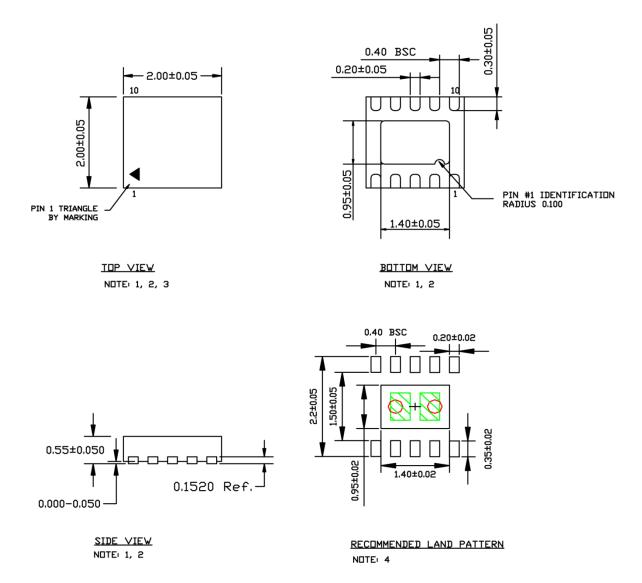

#### NOTE:

- NUTE:
  1. MAX PACKAGE WARPAGE IS 0.05MM
  2. MAX ALLOWABLE BURR IS 0.076MM IN ALL DIRECTIONS
  3. PIN #1 IS ON TOP WILL BE LASER MARKED
  4. GREEN RECTANGLES (SHADED AREA) INDICATE STENCIL OPENING ON EXPOSED AREA. SIZE IS 0.6X0.4MM, SPACING IS 0.2MM.
- 13 OFFICE REPRESENT THERMAL VIAS AND SHOULD BE CONNECTED TO GND FOR MAX PERFORMANCE. 0.30 0.35 MM RECOMMENDED DIAMETER, 0.80 MM PITCH.

#### 10-Pin 2mm × 2mm DFN (MT)

12. Package information is correct as of the publication date. For updates and most current information, go to <a href="www.micrel.com">www.micrel.com</a>.

#### MICREL, INC. 2180 FORTUNE DRIVE SAN JOSE, CA 95131 USA

TEL +1 (408) 944-0800 FAX +1 (408) 474-1000 WEB http://www.micrel.com

Micrel makes no representations or warranties with respect to the accuracy or completeness of the information furnished in this data sheet. This information is not intended as a warranty and Micrel does not assume responsibility for its use. Micrel reserves the right to change circuitry, specifications and descriptions at any time without notice. No license, whether express, implied, arising by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Micrel's terms and conditions of sale for such products, Micrel assumes no liability whatsoever, and Micrel disclaims any express or implied warranty relating to the sale and/or use of Micrel products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright or other intellectual property right.

Micrel Products are not designed or authorized for use as components in life support appliances, devices or systems where malfunction of a product can reasonably be expected to result in personal injury. Life support devices or systems are devices or systems that (a) are intended for surgical implant into the body or (b) support or sustain life, and whose failure to perform can be reasonably expected to result in a significant injury to the user. A Purchaser's use or sale of Micrel Products for use in life support appliances, devices or systems is a Purchaser's own risk and Purchaser agrees to fully indemnify Micrel for any damages resulting from such use or sale.

© 2013 Micrel, Incorporated.



Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

#### Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



**«JONHON»** (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«**FORSTAR**» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: http://oceanchips.ru/

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А