

## Product Specification

### 10Gb/s DWDM 80km Multi-Rate Tunable SFP+ Transceiver

#### E-temp versions: FTLX6871MNC and FTLX6872MNC

#### PRODUCT FEATURES

- Hot-pluggable SFP+ footprint
- Supports 8.5 and 9.95 to 11.3 Gb/s
- Up to 80km link length
- 50GHz ITU-based channel spacing (C-Band) with a wavelength locker
- -5 /+85°C case temperature range
- Single 3.3V power supply
- Monolithic MZM Tunable TOSA
- Linear or Limiting electrical interface receiver
- Duplex LC connector
- Built-in digital diagnostic functions
- RoHS-6 compliant (lead-free)



#### APPLICATIONS

- DWDM 80km point to point links:
  - 8G Fibre Channel
  - 10Gb/s SONET/SDH
  - 10G Ethernet
  - 10G Fibre Channel
- ITU-T G.698.1 DS100S1-2Dz(C)
- ITU-T G.709

Finisar's FTLX6871MNC and FTLX6872MNC transceivers are Enhanced Small Form Factor Pluggable Tunable SFP+ transceivers designed for use in 10-Gigabit multi-rate links up to 80km of G.652 single mode fiber. They are compliant with SFF-8431<sup>1</sup>, SFF-8432<sup>2</sup>, SFF-8690<sup>8</sup>, and G.698.1 DS100S1-2Dz(C), and support SONET OC-192, SDH STM-64, 10G Ethernet ZR and 10G Fibre Channel over 80km fiber. Digital diagnostics functions are available via a 2-wire serial interface, as specified in SFF-8472<sup>3</sup>. The transceiver is RoHS compliant and lead free per Directive 2011/65/EU<sup>4</sup>, and Finisar Application Note AN-2038<sup>5</sup>.

#### PRODUCT SELECTION

| Product Part Number | RX Interface |
|---------------------|--------------|
| FTLX6871MNC         | Linear       |
| FTLX6872MNC         | Limiting     |

## I. Pin Descriptions

| Pin | Symbol             | Name/Description   | Ref. |
|-----|--------------------|--|------|
| 1   | V <sub>EET</sub>   | Transmitter Ground   | 1    |
| 2   | T <sub>FAULT</sub> | Transmitter Fault  | 2    |
| 3   | T <sub>DIS</sub>   | Transmitter Disable. Laser output disabled on high or open.    | 3    |
| 4   | SDA                | 2-wire Serial Interface Data Line                              | 2    |
| 5   | SCL                | 2-wire Serial Interface Clock Line                             | 2    |
| 6   | MOD_ABS            | Module Absent. Grounded within the module                      | 2    |
| 7   | NA                 | Not Used   |      |
| 8   | RX_LOS             | Loss of Signal indication. Logic 0 indicates normal operation. | 4    |
| 9   | NA                 | No Used  |      |
| 10  | V <sub>EER</sub>   | Receiver Ground  | 1    |
| 11  | V <sub>EER</sub>   | Receiver Ground  | 1    |
| 12  | RD-                | Receiver Inverted DATA out. AC Coupled.                        |      |
| 13  | RD+                | Receiver Non-inverted DATA out. AC Coupled.                    |      |
| 14  | V <sub>EER</sub>   | Receiver Ground  | 1    |
| 15  | V <sub>CCR</sub>   | Receiver Power Supply  | 5    |
| 16  | V <sub>CCT</sub>   | Transmitter Power Supply                                       | 5    |
| 17  | V <sub>EET</sub>   | Transmitter Ground   | 1    |
| 18  | TD+                | Transmitter Non-Inverted DATA in. AC Coupled.                  |      |
| 19  | TD-                | Transmitter Inverted DATA in. AC Coupled.                      |      |
| 20  | V <sub>EET</sub>   | Transmitter Ground   | 1    |

### Notes:

- Circuit ground is internally isolated from chassis ground.
- T<sub>FAULT</sub> is an open collector/drain output, which should be pulled up with a 4.7k – 10k Ohms resistor on the host board if intended for use. Pull up voltage should be between 2.0V to V<sub>cc</sub> + 0.3V. A high output indicates a transmitter fault caused by either the TX bias current or the TX output power exceeding the preset alarm thresholds. A low output indicates normal operation. In the low state, the output is pulled to <0.8V.
- Laser output disabled on T<sub>DIS</sub> >2.0V or open, enabled on T<sub>DIS</sub> <0.8V.
- LOS is open collector output. Should be pulled up with 4.7k – 10kΩ on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.
- Internally connected

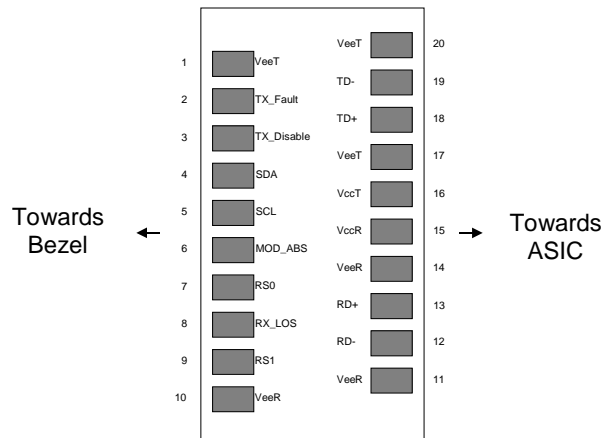


Figure 1. Diagram of Host Board Connector Block Pin Numbers and Names.

## II. Absolute Maximum Ratings

Exceeding the limits below may damage the transceiver module permanently.

| Parameter                         | Symbol               | Min  | Typ | Max | Unit | Ref. |
|-----------------------------------|----------------------|------|-----|-----|------|------|
| Maximum Supply Voltage            | V <sub>CC</sub>      | -0.5 |     | 4.0 | V    |      |
| Storage Temperature               | T <sub>S</sub>       | -40  |     | 85  | °C   |      |
| Relative Humidity                 | RH                   | 0    |     | 85  | %    | 1    |
| Receiver Optical Damage Threshold | R <sub>XDamage</sub> | 5    |     |     | dBm  |      |

### Notes:

1. Non-condensing

## III. Electrical Characteristics (T<sub>OP</sub> = -5 to +85 °C)

| Parameter   | Symbol                              | Min                  | Typ. | Max                   | Unit             | Ref. |
|---|-------------------------------------|----------------------|------|-----------------------|------------------|------|
| Supply Voltage  | V <sub>CC</sub>                     | 3.14                 |      | 3.46                  |                  |      |
| Supply Current  | I <sub>CC</sub>                     |                      |      | 800                   | mA               | 1    |
| Module total power dissipation                                  | P                                   |                      |      | 2.5                   | W                | 2    |
| <b>Transmitter</b>  |                                     |                      |      |                       |                  |      |
| Input differential impedance                                    | R <sub>in</sub>                     | 80                   | 100  | 120                   | Ω                |      |
| Differential data input swing                                   | V <sub>in,pp</sub>                  | 200                  |      | 850                   | mV               | 3    |
| Transmit Disable Voltage  | V <sub>D</sub>                      | V <sub>CC</sub> -0.8 |      | V <sub>CC</sub>       | V                |      |
| Transmit Enable Voltage   | V <sub>EN</sub>                     | V <sub>EE</sub>      |      | V <sub>EE</sub> + 0.8 | V                |      |
| <b>Receiver</b>   |                                     |                      |      |                       |                  |      |
| Output differential impedance                                   | R <sub>out</sub>                    | 80                   | 100  | 120                   | Ω                |      |
| Differential data output swing (Rx input power -18dBm to -7dBm) | V <sub>out,pp</sub>                 | 150                  |      | 850                   | mV               | 4    |
| Output rise time and fall time                                  | T <sub>r</sub> , T <sub>f</sub>     | 28                   |      |                       | ps               | 4,5  |
| LOS asserted  | V <sub>LOS_A</sub>                  | V <sub>CC</sub> -0.8 |      | V <sub>CC</sub>       | V                |      |
| LOS de-asserted   | V <sub>LOS_D</sub>                  | V <sub>EE</sub>      |      | V <sub>EE</sub> +0.8  | V                |      |
| Power Supply Noise Tolerance                                    | V <sub>CC</sub> T/V <sub>CC</sub> R | Per SFF-8431 Rev 4.1 |      |                       | mV <sub>pp</sub> |      |

### Notes:

1. Compliant with the SFP+ Module Power Supply Requirements defined in [1], Tab. 8.
2. Maximum total power value is specified across the full temperature and voltage range.
3. Connected directly to TX data input pins.
4. Into 100Ω differential termination.
5. 20 – 80%. Measured with Module Compliance Test Board and OMA test pattern. Use of four 1's and four 0's sequence in the PRBS 9 is an acceptable alternative. SFF-8431 Rev 4.1.

**IV. Optical Characteristics (TOP = -5 to +85 °C, VCC = 3.14 to 3.46 Volts)**

| Parameter                           |                   | Symbol             | Min  | Typ | Max   | Unit  | Ref. |
|-------------------------------------|-------------------|--------------------|--|-----|-------|-------|------|
| <b>Transmitter (Tx)</b>             |                   |                    |  |     |       |       |      |
| Average Launch Power                |                   | $P_{AVE}$          | -1   |     | +3    | dBm   |      |
| Optical Wavelength                  |                   | $\lambda_c$        | As per ITU-T 694.1,<br>50GHz spacing<br>1528.77 to 1563.86 |     |       | nm    |      |
| Side-Mode Suppression Ratio         |                   | SMSR               | 30   |     |       | dB    |      |
| Optical Extinction Ratio            |                   | ER                 | 8.2  |     |       | dB    |      |
| Average Launch power when Tx is OFF |                   | $P_{OFF}$          |  |     | -30   | dBm   |      |
| Tx Jitter 20kHz - 80MHz             |                   | $T_{Xj1}$          |  |     | 0.3   | UI    |      |
| Tx Jitter 4MHz - 80MHz              |                   | $T_{Xj2}$          |  |     | 0.1   | UI    |      |
| Relative Intensity Noise            |                   | RIN                |  |     | -128  | dB/Hz |      |
| Center Wavelength                   | Beginning of Life | $\lambda_{c\_BOL}$ | z-1.5  | z   | z+1.5 | GHz   |      |
|                                     | End of Life       | $\lambda_{c\_EOL}$ | z-2.5  | z   | z+2.5 | GHz   |      |
| <b>Receiver (Rx) at 0ps/nm</b>      |                   |                    |  |     |       |       |      |
| Bit rate                            | BER               |                    |  |     |       |       |      |
| 8.5, 9.95                           | <1E-12            | $R_{SENS1}$        |  |     | -24.0 | dBm   | 1,2  |
| 10.7 Gb/s                           | <1E-12            | $R_{SENS2}$        |  |     | -23.0 | dBm   | 1,2  |
| 11.1 Gb/s                           | <1E-4             | $R_{SENS3}$        |  |     | -27.0 | dBm   |      |
| 11.3 Gb/s                           | <1E-4             | $R_{SENS4}$        |  |     | -27.0 | dBm   |      |
| Overload (Average Power)            |                   | $P_{AVE}$          |  |     | -7    | dBm   |      |
| Optical Center Wavelength           |                   | $\lambda_c$        | 1260   |     | 1600  | nm    |      |
| LOS De-Assert                       |                   | $LOS_D$            |  |     | -25   | dBm   |      |
| LOS Assert                          |                   | $LOS_A$            | -34  |     | -27   | dBm   |      |
| LOS Hysteresis                      |                   | $LOS_H$            | 0.5  |     |       | dB    |      |
| Receiver Reflectance                |                   | $R_{rx}$           |  |     | -27   | dB    |      |

| FTLX6871/72MNC                          |       |                    |  |  |                           |
|---|-------|--------------------|--|--|---------------------------|
| <b>Receiver Sensitivity<sup>3</sup></b> |       |                    |  |  |                           |
| Data rate (Gb/s)                        | BER   | Dispersion (ps/nm) | Sensitivity back-to-back at OSNR>30dB (dBm)          | Dispersion Penalty at OSNR>30dB (dB)         | Threshold Adjust Required |
| 9.95                                    | 1e-12 | -300 to 1450       | -24  | 2  | No <sup>5</sup>           |
| 10.3                                    | 1e-12 | -300 to 1450       | -23  | 2.5  | No <sup>5</sup>           |
| 10.7                                    | 1e-4  | -300 to 1300       | -27  | 3  | Yes <sup>6</sup>          |
| 11.1                                    | 1e-4  | -300 to 1300       | -27  | 3  | Yes <sup>6</sup>          |
| 11.3                                    | 1e-4  | -300 to 1300       | -27  | 3.5  | Yes <sup>6</sup>          |
| <b>OSNR Performance<sup>4</sup></b>     |       |                    |  |  |                           |
| Data rate (Gb/s)                        | BER   | Dispersion (ps/nm) | Min OSNR Back-to-back at Power: -18dBm to -7dBm (dB) | Max OSNR Penalty at Power: -18 to -7dBm (dB) | Threshold Adjust Required |
| 9.95                                    | 1e-12 | -300 to 1450       | 24   | 4  | Yes <sup>6</sup>          |
| 10.3                                    | 1e-12 | -300 to 1450       | 24   | 4  | Yes <sup>6</sup>          |
| 10.7                                    | 1e-4  | -300 to 1300       | 16   | 4  | Yes <sup>6</sup>          |
| 11.1                                    | 1e-4  | -300 to 1300       | 16   | 4  | Yes <sup>6</sup>          |
| 11.3                                    | 1e-4  | -300 to 1300       | 17   | 4  | Yes <sup>6</sup>          |

**Notes:**

1. Measured with worst ER=8.2dB; BER<10<sup>-12</sup>; 2<sup>31</sup> – 1 PRBS.
2. For 10G Ethernet application, -24dBm is equivalent to an OMA of -22.09dBm for an ER = 8.2 dB.
3. Measured at 1528-1600nm with worst ER; PRBS31.
4. All OSNR measurements are performed with 0.1nm resolution.
5. Linecard SerDes input threshold adjustment required (set to 50%) at 9.95 and 10.3Gb for AGC ROSA only
6. Linecard SerDes input threshold adjustment required for AGC ROSA. RxDTV control required for Limiting ROSA

## V. General Specifications

| Parameter                  | Symbol           | Min | Typ | Max     | Units | Ref. |
|----------------------------|------------------|-----|-----|---------|-------|------|
| Bit Rate                   | BR               | 8.5 |     | 11.3168 | Gb/s  | 1    |
| Max. Supported Link Length | L <sub>MAX</sub> |     |     | 80      | km    | 2    |

### Notes:

1. Tested with a  $2^{31} - 1$  PRBS pattern at the BER defined in Table IV.
2. Over G.652 single mode fiber.

## VI. Timing Parameters

| Parameter                        | Symbol            | Min | Max | Units | Ref. |
|----------------------------------|-------------------|-----|-----|-------|------|
| Time to initialize cooled module | t_start_up_cooled |     | 90  | s     |      |

## VII. Environmental Specifications

Finisar FTLX6871/72MNC transceivers have an operating temperature range from -5°C to +85°C case temperature.

| Parameter                  | Symbol           | Min | Typ | Max | Units | Ref. |
|----------------------------|------------------|-----|-----|-----|-------|------|
| Case Operating Temperature | T <sub>op</sub>  | -5  |     | 85  | °C    |      |
| Storage Temperature        | T <sub>sto</sub> | -40 |     | 85  | °C    |      |

## VII. Regulatory Compliance

Finisar transceivers are Class 1 Laser Products and comply with US FDA regulations. These products are certified by TÜV and CSA to meet the Class 1 eye safety requirements of EN (IEC) 60825 and the electrical safety requirements of EN (IEC) 60950. Copies of certificates are available at Finisar Corporation upon request.

## VIII. Digital Diagnostic Functions

Finisar FTLX6871/72MNC Tunable SFP+ transceivers support the 2-wire serial communication protocol as defined in the SFP MSA<sup>1</sup>. It is very closely related to the memory map defined in the GBIC standard, with the same electrical specifications.

The standard SFP serial ID provides access to identification information that describes the transceiver's capabilities, standard interfaces, manufacturer, and other information.

Additionally, Finisar T-SFP+ transceivers provide an enhanced digital diagnostic monitoring interface, which allows real-time access to device operating parameters such as transceiver temperature, laser bias current, transmitted optical power, received optical power and transceiver supply voltage. It also defines a sophisticated system of alarm and warning flags, which alerts end-users when particular operating parameters are outside of a factory set normal range.

The SFP MSA defines a 256-byte memory map that is accessible over a 2-wire serial interface at the 8 bit address 1010000X (A0h). The digital diagnostic monitoring interface makes use of the 8 bit address 1010001X (A2h), so the originally defined serial ID memory map remains unchanged. The interface is identical to, and is thus fully backward compatible with both the GBIC Specification and the SFP Multi Source Agreement.

The operating and diagnostics information is monitored and reported by a Digital Diagnostics Transceiver Controller (DDTC) inside the transceiver, which is accessed through a 2-wire serial interface. When the serial protocol is activated, the serial clock signal (SCL, Mod Def 1) is generated by the host. The positive edge clocks data into the SFP transceiver into those segments of the E<sup>2</sup>PROM that are not write-protected. The negative edge clocks data from the SFP transceiver. The serial data signal (SDA, Mod Def 2) is bi-directional for serial data transfer. The host uses SDA in conjunction with SCL to mark the start and end of serial protocol activation. The memories are organized as a series of 8-bit data words that can be addressed individually or sequentially.

**IX. Digital Diagnostic Specifications**

FTLX6871/72MNC transceivers can be used in host systems that require either internally or externally calibrated digital diagnostics.


| Parameter                            | Symbol                | Units | Min | Max | Accuracy | Ref. |
|--------------------------------------|-----------------------|-------|-----|-----|----------|------|
| <b>Accuracy</b>                      |                       |       |     |     |          |      |
| Transceiver temperature              | $\Delta_{DD}Temp$     | °C    | -10 | +90 | ±5°C     | 1    |
| Transceiver supply voltage           | $\Delta_{DD}Voltage$  | V     | 2.8 | 4.0 | ±3%      |      |
| Transmitter bias current             | $\Delta_{DD}Bias$     | mA    | 0   | 127 | ±10%     | 2    |
| Transmitter output power             | $\Delta_{DD}Tx-Power$ | dBm   | -1  | +5  | ±2dB     |      |
| Receiver average optical input power | $\Delta_{DD}Rx-Power$ | dBm   | -28 | -5  | ±2dB     |      |

Notes:

1. Internally measured
2. The accuracy of the Tx bias current is 10% of the actual current from the laser driver to the laser

**X. Start-Up Sequence**

The FTLX6871/72MNC modules adhere to MSA SFF-8690 for wavelength / channel selection of these tunable modules. The module behavior is described in the flowchart below:

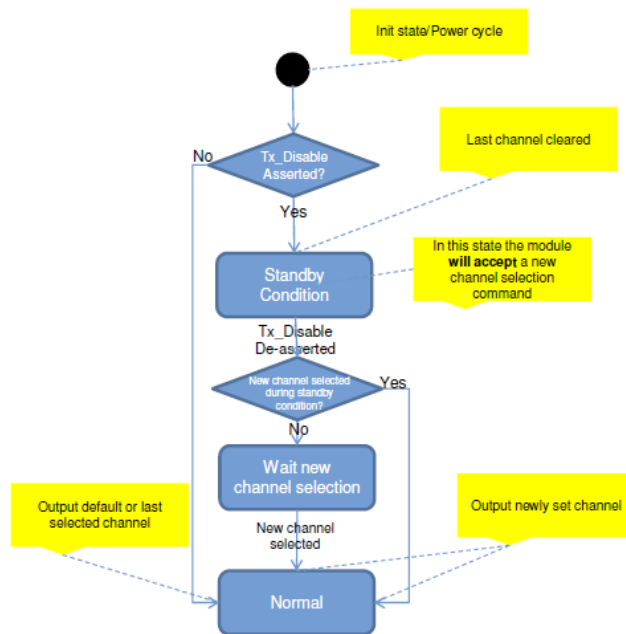



**Alarm and Warning Threshold Values (A2h)**

| Address | Parameter             | Threshold Values | UNITS |
|---------|-----------------------|------------------|-------|
| 00-01   | Temp High Alarm       | 90               | C     |
| 02-03   | Temp Low Alarm        | -15              | C     |
| 04-05   | Temp High Warning     | 88               | C     |
| 06-07   | Temp Low Warning      | -10              | C     |
| 08-09   | Voltage High Alarm    | 3.56             | V     |
| 10-11   | Voltage Low Alarm     | 3.04             | V     |
| 12-13   | Voltage High Warning  | 3.46             | V     |
| 14-15   | Voltage Low Warning   | 3.14             | V     |
| 16-17   | Bias High Alarm       | 130              | mA    |
| 18-19   | Bias Low Alarm        | 5                | mA    |
| 20-21   | Bias High Warning     | 120              | mA    |
| 22-23   | Bias Low Warning      | 10               | mA    |
| 24-25   | TX Power High Alarm   | 6.5              | dBm   |
| 26-27   | TX Power Low Alarm    | -3               | dBm   |
| 28-29   | TX Power High Warning | 6                | dBm   |
| 30-31   | TX Power Low Warning  | -1.5             | dBm   |
| 32-33   | RX Power High Alarm   | -4               | dBm   |
| 34-35   | RX Power Low Alarm    | -31              | dBm   |
| 36-37   | RX Power High Warning | -5               | dBm   |
| 38-39   | RX Power Low Warning  | -25              | dBm   |
| 40-55   | Reserved              |                  |       |

**XI.** The FTLX6871/72MNC modules do not contain Internal CDRs.

**XII. SFF-8431 Power-up Sequence**

The typical power consumption of the FTLX6871/72MNC exceeds the limit of 1.5W specified in the SFF-8431 for the Power Level II device, for which the SFF-8431 recommends a power-up sequence. Per the SFF-8431, at the power-on a Power Level II transceiver can stay in Power Level I until the host enables the transceiver to complete its power-up sequence, reaching its operating power consumption into Power Level Mode II. Please, refer to SFF-8431 and Finisar Application Note AN-2076<sup>7</sup> for additional details. The FTLX6871/72MNC is factory set to power-up directly to its operating conditions in Power Level Mode II. Upon request, it can be factory set to follow the above power-up sequence at the power-on. In power level I, the FTLX6871/72MNC does not carry traffic, but the 2-wire serial communication is active.

**XIII. Mechanical Specifications**

Finisar FTLX6871/72MNC SFP+ transceivers are compatible with the SFF-8432 specification for improved pluggable form factor, and shown here for reference purposes only. Bail color is green.

| ITEM | DIM (mm) | TOL (mm) |
|------|----------|----------|
| A    | 9.00     | ± 0.3    |
| B    | 9.60     | ± 0.5    |
| C    | 11.90    | ± 0.5    |
| D    | 13.85    | ± 0.15   |
| E    | 13.65    | ± 0.15   |
| F    | 2.80     | ± 0.2    |
| G    | 1.00     | ± 0.2    |
| H    | 4.00     | REF      |
| J    | 2.00     | ± 0.2    |
| K    | 56.50    | REF      |
| L    | 1.60     | ± 0.5    |
| M    | 2.25     | ± 0.1    |
| N    | 1.80     | ± 0.1    |
| P    | 37.10    | ± 0.3    |
| Q    | 9.15     | ± 0.15   |
| R    | 1.00     | ± 0.1    |
| S    | 8.55     | ± 0.15   |
| T    | 47.50    | ± 0.2    |
| V    | 2.55     | ± 0.1    |
| W    | 43.00    | ± 0.2    |
| X    | 14.70    | ± 0.5    |
| Z    | 0.55     | ± 0.15   |

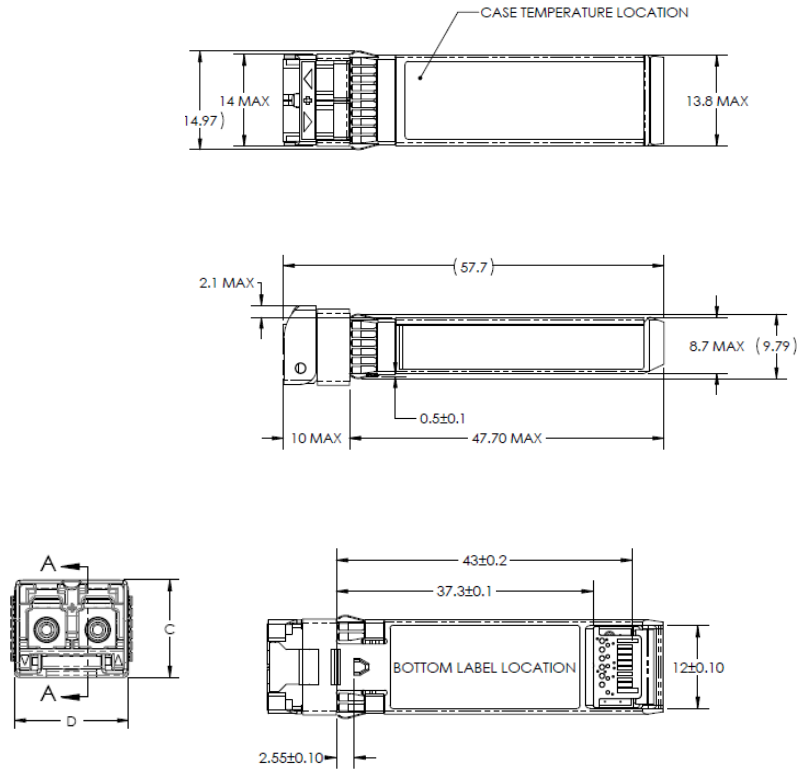


Figure 2. Mechanical Dimensions

**Connector Recommendations**

**Product Label and Box Label**

These are “subject to change without notice” and being used as a guideline for the format.





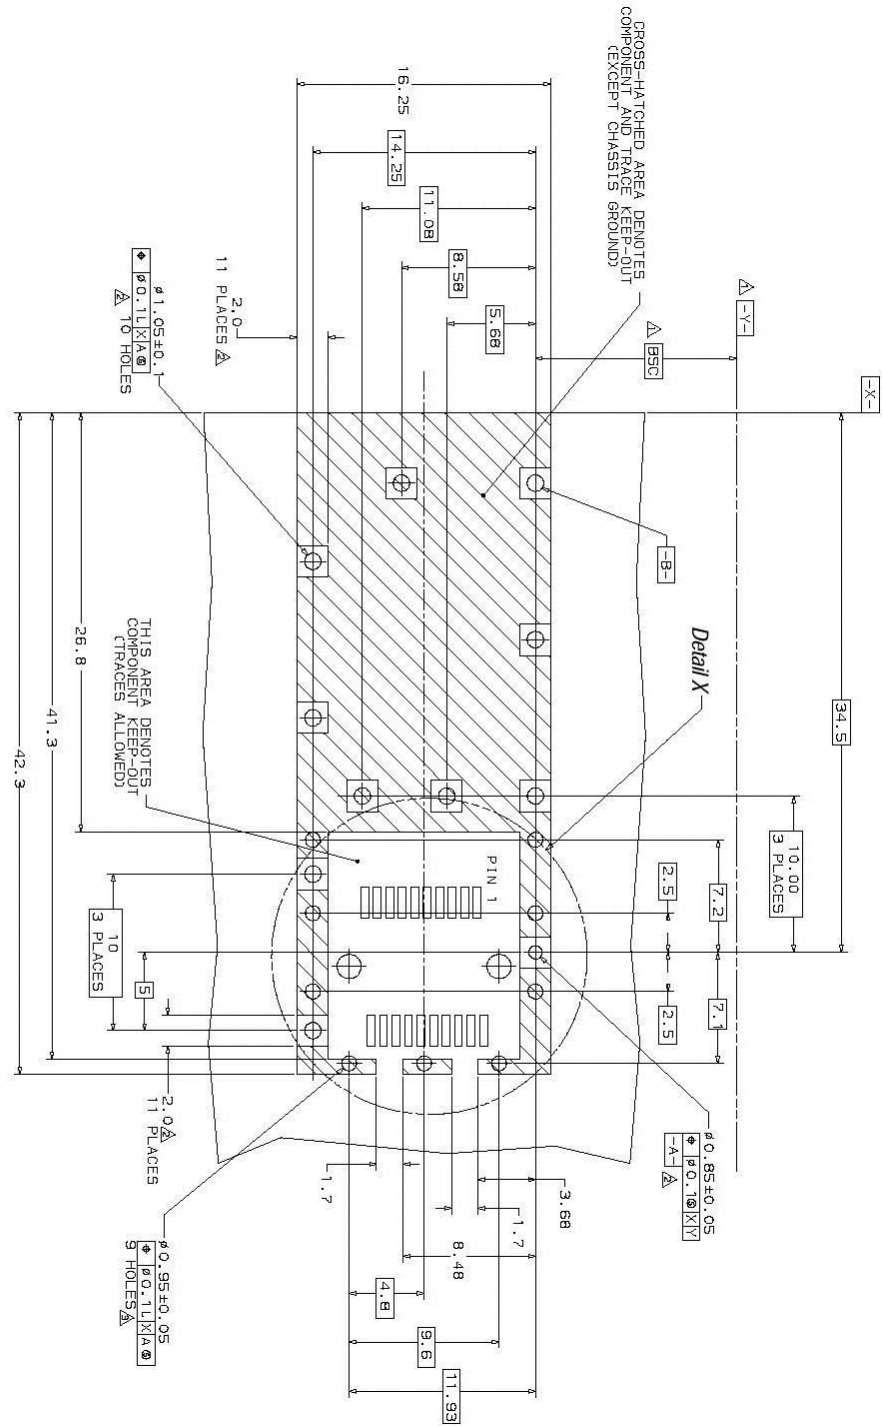


Figure 3. PCB Layout and Bezel Recommendations, as per [9]

- △ Datum and Basic Dimension Established by Customer
- ▴ Pads and Vias are Chassis Ground, 11 Places
- ▽ Through Holes are Unplated

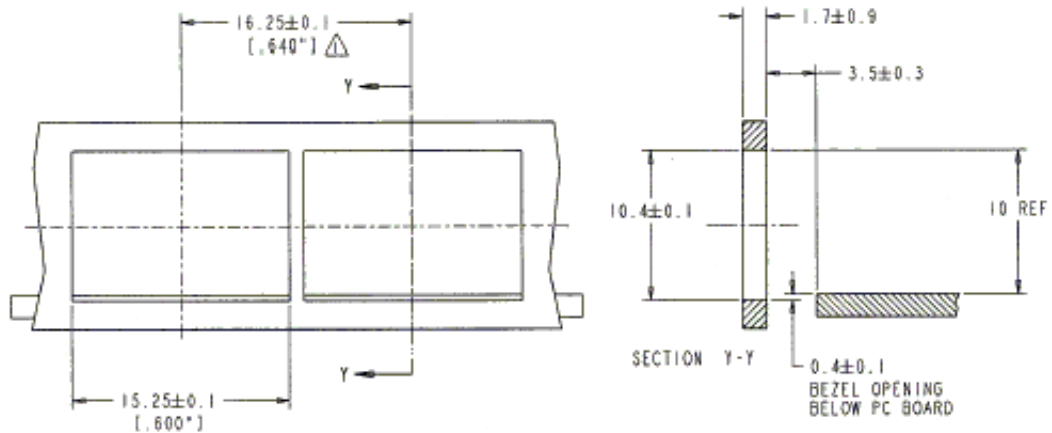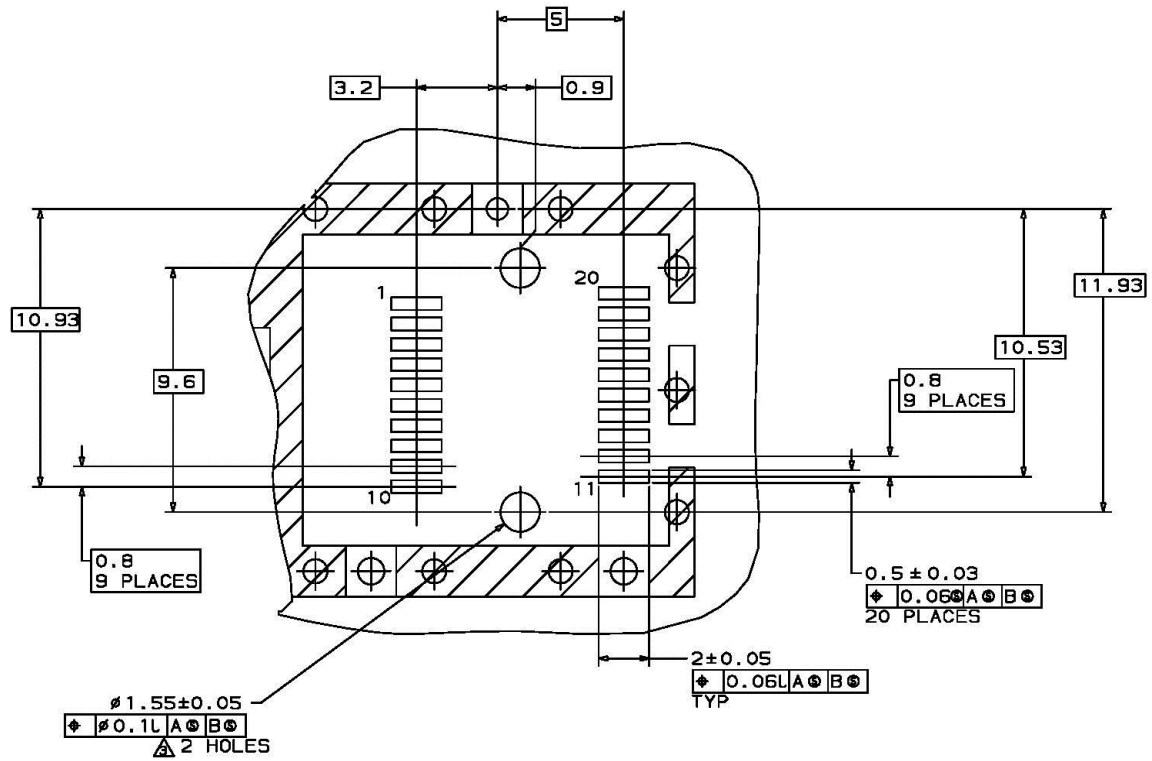

NOTES:

1. MINIMUM PITCH ILLUSTRATED, ENGLISH DIMENSIONS ARE FOR REFERENCE ONLY

2. NOT RECOMMENDED FOR PCI EXPANSION CARD APPLICATIONS

Figure 4

## XV. Host-Module Interface Diagram

To Be Provided in future release.

**Figure 5**

## XVI. References

1. “Specifications for Enhanced 8.5 and 10 Gigabit Small Form Factor Pluggable Module ‘SFP+ ’”, SFF Document Number SFF-8431, Revision 4.1 (or later).
2. “Improved Pluggable Form factor”, SFF Document Number SFF-8432, Revision 4.2, April 18, 2007 (or later).
3. “Digital Diagnostics Monitoring Interface for Optical Transceivers”. SFF Document Number SFF-8472, Revision 11.3, (or later).
4. Directive 2011/65/EU of the European Council Parliament and of the Council, “on the restriction of the use of certain hazardous substances in electrical and electronic equipment”
5. “Application Note AN-2038: Finisar Implementation of RoHS Compliant Transceivers”, Finisar Corporation, January 21, 2005.
6. Small Form-factor Pluggable (SFP) Transceiver Multi-Source Agreement (MSA)
7. “Application Note AN-2076: SFP+ Level II Power Up Sequence”, Rev B
8. Tunable SFP+ MSA; SFF-8690

**XVII. Revision History**

| <b>Revision</b> | <b>Date</b> | <b>Description</b>   |
|-----------------|-------------|--|
| A00             | 8/18/2015   | Initial Release  |
| A01             | 12/08/2015  | Change the product image on page 1.<br>Add product and box label samples on mechanical Specifications section. |
| A02             | March 2017  | Corrected Max current to support 2.5W total power consumption of module.                                       |
| A03             | April 2017  | Corrected RoHS statements to reference 2011 directive  |
|                 |             |  |

**XVIII. For More Information**

Finisar Corporation  
1389 Moffett Park Drive  
Sunnyvale, CA 94089-1133  
Tel. 1-408-548-1000  
Fax 1-408-541-6138  
[sales@finisar.com](mailto:sales@finisar.com)  
[www.finisar.com](http://www.finisar.com)

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А