

Radial Leaded PTC - Nickel Thin Film Linear Thermistors



DESCRIPTION

These thermistors are based on a Nickel thin film resistor technology as thermal sensitive material. The device consists of a thin film ceramic chip with two tinned copper clad steel wire leads.

FEATURES

- Nickel thin film PTC element
- High stability over the entire temperature range
- cUL recognized component: File E148885
- Epoxy coated UL 94 V-0 approved
- Compliant to RoHS Directive 2002/95/EC and in accordance to WEEE 2002/96/EC



RoHS
COMPLIANT

APPLICATIONS

Temperature measurement, sensing, compensation and control in industrial and consumer applications. For on-board or remote sensing.

MARKING

The thermistors are laser marked with value and tolerance reference on an epoxy based coating.
(Example: 102F = 10 x 10² = 1000 Ω 1 %)

MOUNTING

By soldering or welding in any position.

| QUICK REFERENCE DATA | | | |
|---|-------------------------------|-----------|-------|
| PARAMETER | VALUE | | UNIT |
| DESCRIPTION | TFPTL10 | TFPTL15 | |
| Resistance value at 25 °C ⁽²⁾ | 100 to 1K | 100 to 5K | Ω |
| Tolerance on R ₂₅ -value ⁽²⁾ | ± 1; ± 5 | | % |
| TCR at 25 °C | 4110 | | ppm/K |
| Tolerance on TCR at 25 °C ⁽¹⁾ | ± 400 | | ppm/K |
| Operating temperature range: at rated power at zero dissipation | - 55 to + 70 - 55 to + 150 | | °C |
| Response time (in oil) | ≈ 1.1 | ≈ 1.6 | s |
| Dissipation factor δ (for information only) | 2.9 | 3.4 | mW/K |
| Maximum rated power at 70 °C (P ₇₀) | 75 | 100 | mW |
| Maximum working voltage RCWV ⁽³⁾ | 30 | 40 | V |
| Climatic category (LCT/UCT/days) | 55/150/56 | | - |
| Weight | 0.12 | 0.14 | g |


| STANDARD RESISTANCE VALUES at 25 °C in Ω ⁽²⁾ | | | | | | | | | | |
|---|-----|-----|-----|-----|-----|------|------|------|------|------|
| 100 | 150 | 220 | 330 | 470 | 680 | 1K | 1.5K | 2.2K | 3.3K | 4.7K |
| 120 | 180 | 270 | 390 | 560 | 820 | 1.2K | 1.8K | 2.7K | 3.9K | 5.0K |

Notes

- (1) Contact Vishay if closer TCR lot tolerance is desired
- (2) Other R₂₅-values and tolerances are available upon request
- (3) Rated continuous working voltage is maximum working voltage or $\sqrt{P_{70} \times R}$, whichever is less

| GLOBAL PART NUMBER INFORMATION | | | | | | | | | | | | | | | |
|---|----------|----------------|---|---------------------------------------|---|---|------------------------|--------------------|---|--|---|---|---|---|---|
| Global Part Numbering: TFPTL10L1001FL2B | | | | | | | | | | | | | | | |
| T | F | P | T | L | 1 | 0 | L | 1 | 0 | 0 | 1 | F | L | 2 | B |
| PRODUCT TYPE | SIZE | CHARACTERISTIC | | RESISTANCE VALUE | | | TOLERANCE | LEAD CONFIGURATION | | PACKAGING | | | | | |
| TFPT Leaded | 10 15 | L = Linear | | 1000 = 100R 1001 = 1K 5001 = 5K | | | F = ± 1 % J = ± 5 % | L2 H5 | | B = Bulk (500 pieces) U = Ammopack (2500 pieces) T = T/R (4000 pieces) | | | | | |


DIMENSIONS

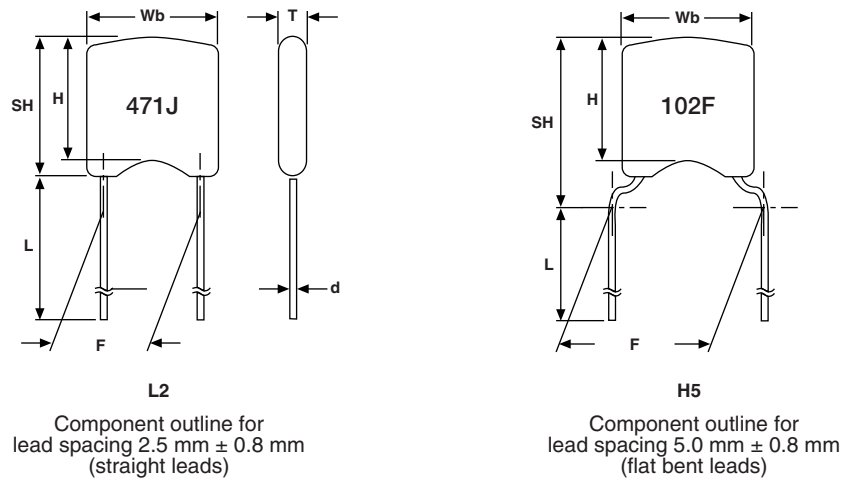

| TFPTL DIMENSIONS in millimeters | | | | |
|-------------------------------------|------------|-----------|-----------|-----------|
| | SIZE L10 | | SIZE L15 | |
| | L2 | H5 | L2 | H5 |
| Wb _{max.} | 3.6 | | 4.0 | |
| H _{max.} | 3.5 | | 3.8 | |
| SH _{max.} (seating height) | 5.0 | 6.2 | 5.2 | 6.5 |
| d | 0.5 ± 10 % | | | |
| L | 25 min. | | | |
| F | 2.5 ± 0.8 | 5.0 ± 0.8 | 2.5 ± 0.8 | 5.0 ± 0.8 |
| T _{max.} | 2.2 | | 2.4 | |

Notes

- Bulk packed types have a standard lead length L = 25 mm minimum
- Thickness is defined as "T"

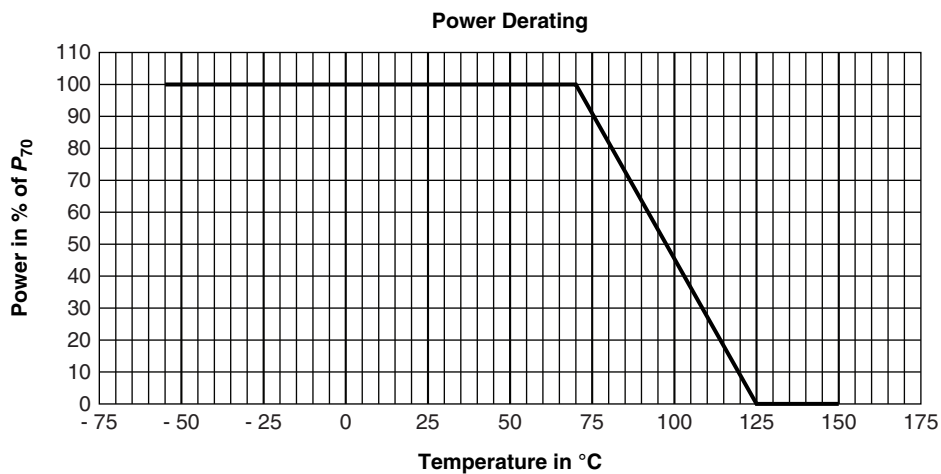

Note

- Zero power is considered as measuring power max. 1 % of rated power P₇₀



| PERFORMANCE | |
|--|------------------------------------|
| TEST | MAXIMUM $\Delta R_{25}/R_{25}$ (1) |
| Storage dry heat (5000 h at 125 °C) | ± 0.25 % |
| High temperature exposure (1000 h at 150 °C) | ± 0.3 % |
| Damp heat steady state, unloaded (1344 h at 40 °C/95 % RH) | ± 0.2 % |
| Thermal cycling (15 min at - 55 °C, 15 min at 150 °C, 100 cycles) | ± 0.2 % |
| Thermal cycling (15 min at - 55 °C, 15 min at 125 °C, 1000 cycles) | ± 0.2 % |
| Short time overload (2.5 x P_{70} for 60s at 70 °C) | ± 0.2 % |
| Long term dissipation (1000 h rated power at 70 °C) | ± 0.2 % |
| Resistance to soldering heat (10 s at 260 °C) | ± 0.25 % |

Note

(1) TFPTs are ESD sensitive

| AVERAGE RATIO R/R_{25} TFPTL ALL SIZES AND VALUES | | | | | | | | | |
|---|------------|-------|------------|-----------|--------------|-------|------------|-------|------------|
| TEMP. | R/R_{25} | TEMP. | R/R_{25} | TEMP. | R/R_{25} | TEMP. | R/R_{25} | TEMP. | R/R_{25} |
| - 20 | 0.825 | 20 | 0.980 | 60 | 1.150 | 100 | 1.337 | 140 | 1.541 |
| - 19 | 0.828 | 21 | 0.984 | 61 | 1.155 | 101 | 1.342 | 141 | 1.547 |
| - 18 | 0.832 | 22 | 0.988 | 62 | 1.159 | 102 | 1.347 | 142 | 1.552 |
| - 17 | 0.836 | 23 | 0.992 | 63 | 1.164 | 103 | 1.352 | 143 | 1.557 |
| - 16 | 0.839 | 24 | 0.996 | 64 | 1.168 | 104 | 1.357 | 144 | 1.563 |
| - 55 | 0.702 | - 15 | 0.843 | 25 | 1.000 | 65 | 1.173 | 105 | 1.362 |
| - 54 | 0.705 | - 14 | 0.847 | 26 | 1.004 | 66 | 1.177 | 106 | 1.367 |
| - 53 | 0.708 | - 13 | 0.851 | 27 | 1.008 | 67 | 1.182 | 107 | 1.372 |
| - 52 | 0.712 | - 12 | 0.854 | 28 | 1.012 | 68 | 1.186 | 108 | 1.377 |
| - 51 | 0.715 | - 11 | 0.858 | 29 | 1.017 | 69 | 1.191 | 109 | 1.382 |
| - 50 | 0.719 | - 10 | 0.862 | 30 | 1.021 | 70 | 1.196 | 110 | 1.387 |
| - 49 | 0.722 | - 9 | 0.866 | 31 | 1.025 | 71 | 1.200 | 111 | 1.392 |
| - 48 | 0.725 | - 8 | 0.869 | 32 | 1.029 | 72 | 1.205 | 112 | 1.397 |
| - 47 | 0.729 | - 7 | 0.873 | 33 | 1.033 | 73 | 1.209 | 113 | 1.402 |
| - 46 | 0.732 | - 6 | 0.877 | 34 | 1.037 | 74 | 1.214 | 114 | 1.407 |
| - 45 | 0.736 | - 5 | 0.881 | 35 | 1.042 | 75 | 1.219 | 115 | 1.412 |
| - 44 | 0.739 | - 4 | 0.885 | 36 | 1.046 | 76 | 1.223 | 116 | 1.417 |
| - 43 | 0.743 | - 3 | 0.889 | 37 | 1.050 | 77 | 1.228 | 117 | 1.422 |
| - 42 | 0.746 | - 2 | 0.892 | 38 | 1.054 | 78 | 1.232 | 118 | 1.427 |
| - 41 | 0.749 | - 1 | 0.896 | 39 | 1.059 | 79 | 1.237 | 119 | 1.432 |
| - 40 | 0.753 | 0 | 0.900 | 40 | 1.063 | 80 | 1.242 | 120 | 1.437 |
| - 39 | 0.756 | 1 | 0.904 | 41 | 1.067 | 81 | 1.246 | 121 | 1.442 |
| - 38 | 0.760 | 2 | 0.908 | 42 | 1.071 | 82 | 1.251 | 122 | 1.448 |
| - 37 | 0.763 | 3 | 0.912 | 43 | 1.076 | 83 | 1.256 | 123 | 1.453 |
| - 36 | 0.767 | 4 | 0.916 | 44 | 1.080 | 84 | 1.261 | 124 | 1.458 |
| - 35 | 0.771 | 5 | 0.920 | 45 | 1.084 | 85 | 1.265 | 125 | 1.463 |
| - 34 | 0.774 | 6 | 0.924 | 46 | 1.089 | 86 | 1.270 | 126 | 1.468 |
| - 33 | 0.778 | 7 | 0.927 | 47 | 1.093 | 87 | 1.275 | 127 | 1.473 |
| - 32 | 0.781 | 8 | 0.931 | 48 | 1.097 | 88 | 1.280 | 128 | 1.478 |
| - 31 | 0.785 | 9 | 0.935 | 49 | 1.102 | 89 | 1.284 | 129 | 1.484 |
| - 30 | 0.788 | 10 | 0.939 | 50 | 1.106 | 90 | 1.289 | 130 | 1.489 |
| - 29 | 0.792 | 11 | 0.943 | 51 | 1.110 | 91 | 1.294 | 131 | 1.494 |
| - 28 | 0.796 | 12 | 0.947 | 52 | 1.115 | 92 | 1.299 | 132 | 1.499 |
| - 27 | 0.799 | 13 | 0.951 | 53 | 1.119 | 93 | 1.303 | 133 | 1.505 |
| - 26 | 0.803 | 14 | 0.955 | 54 | 1.124 | 94 | 1.308 | 134 | 1.510 |
| - 25 | 0.806 | 15 | 0.959 | 55 | 1.128 | 95 | 1.313 | 135 | 1.515 |
| - 24 | 0.810 | 16 | 0.963 | 56 | 1.133 | 96 | 1.318 | 136 | 1.520 |
| - 23 | 0.814 | 17 | 0.967 | 57 | 1.137 | 97 | 1.323 | 137 | 1.526 |
| - 22 | 0.817 | 18 | 0.971 | 58 | 1.141 | 98 | 1.328 | 138 | 1.531 |
| - 21 | 0.821 | 19 | 0.975 | 59 | 1.146 | 99 | 1.333 | 139 | 1.536 |

RATIO FORMULA

$$R_T = R_{25} \times (9.0014 \times 10^{-1} + 3.87235 \times 10^{-3} (\text{°C})^{-1} \times T + 4.86825 \times 10^{-6} (\text{°C})^{-2} \times T^2 + 1.37559 \times 10^{-9} (\text{°C})^{-3} \times T^3)$$



$$T(\text{°C}) = 28.54 \times (R_T/R_{25})^3 - 158.5 \times (R_T/R_{25})^2 + 474.8 \times (R_T/R_{25}) - 319.85$$

| RATIO TOLERANCES | | |
|------------------|------------|---------|
| LOW TEMP. | HIGH TEMP. | TOL. |
| - 55 °C | + 150 °C | ± 4 % |
| - 40 °C | + 125 °C | ± 3 % |
| - 20 °C | + 85 °C | ± 2 % |
| 0 °C | + 55 °C | ± 1 % |
| + 12 °C | + 40 °C | ± 0.5 % |

Ratio Tolerance Examples:

At 40 °C, ratio = 1.063 ± 0.5 % (0.005)
so, ratio = 1.058 to 1.068

At 125 °C, ratio = 1.460 ± 3 % (0.044)
so, ratio = 1.416 to 1.504

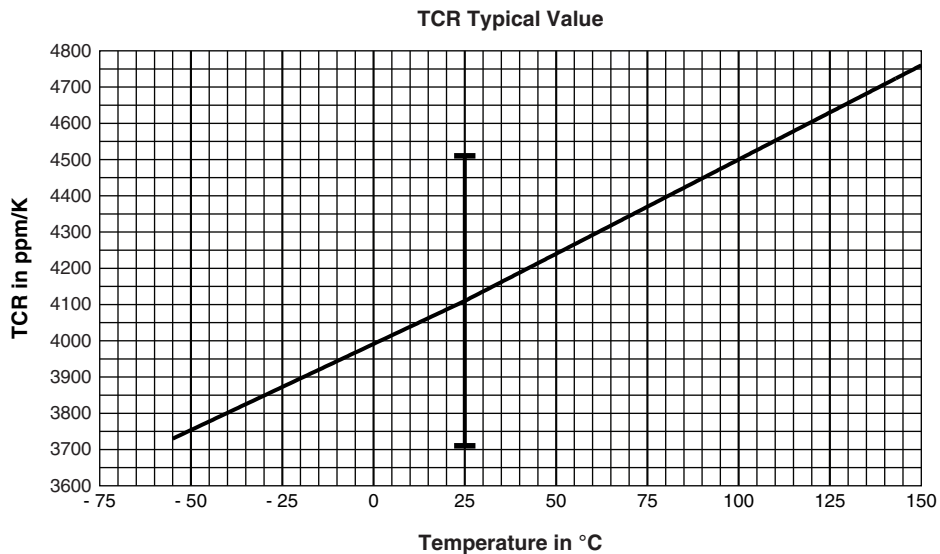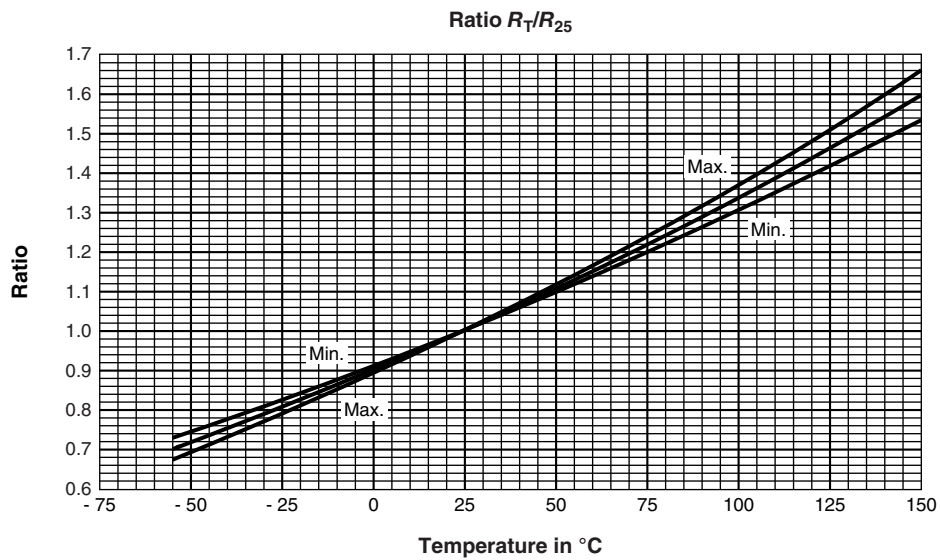



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Material Category Policy

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.

Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А