



Dual PCI Express Equalizer/Redriver

General Description

The MAX4950A dual PCI Express® (PCIe) equalizer/redriver operates from a single +3.3V supply. This device improves signal integrity at the receiver through programmable input equalization and redrive circuitry with output deemphasis to correct for high-frequency losses. This device permits optimal placement of key PCIe components and longer runs of stripline, microstrip, or cable.

The MAX4950A contains two identical channels capable of equalizing PCIe Gen I (2.5GT/s) and Gen II (5.0GT/s) signals. The MAX4950A features electrical idle and receiver detection on each channel and a power-saving mode.

The MAX4950A is available in a small 36-pin (6.0mm x 6.0mm) TQFN package with flowthrough traces for optimal layout and minimal space requirements. The MAX4950A is specified over the 0°C to +70°C commercial operating temperature range.

Applications

Servers
Industrial PCs
Test Equipment
Computers
External Graphics Applications
Communications Switchers
Storage Area Networks

PCI Express is a registered trademark of PCI-SIG Corp.

Features

- ◆ Single +3.3V Supply Operation
- ◆ PCIe Gen I (2.5GT/s) and Gen II (5.0GT/s) Capable
Excellent Differential Return Loss:
≥ 8dB (f = 1.25GHz to 2.5GHz)
- ◆ Very Low Latency with 280ps (typ) Propagation Delay
- ◆ Individual Lane Detection
- ◆ Three-Level Programmable Input Equalization
- ◆ Three-Level Programmable Output Deemphasis
- ◆ Standard, -2.5dB Programmable Output Levels
- ◆ On-Chip 50Ω Input/Output Terminations
- ◆ Space-Saving, 6.0mm x 6.0mm TQFN Package

Ordering Information


| PART | TEMP RANGE | PIN-PACKAGE |
|---------------|--------------|-------------|
| MAX4950ACTX+T | 0°C to +70°C | 36 TQFN-EP* |

+ Denotes a lead(Pb)-free/RoHS-compliant package.

*EP = Exposed pad.

T = Tape and reel.

Pin Configuration

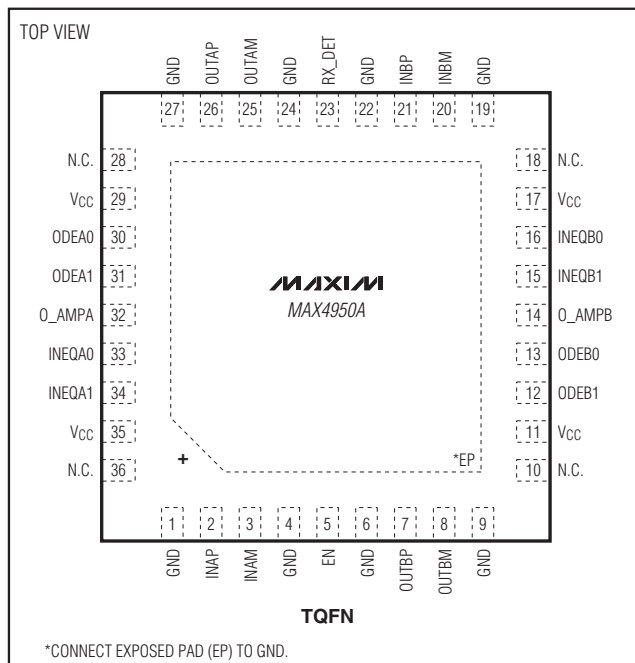

Dual PCI Express Equalizer/Redriver

ABSOLUTE MAXIMUM RATINGS

(Voltages referenced to GND.)

| | |
|--|-----------------------------------|
| V _{CC} | -0.3V to +4.0V |
| All Other Pins (Note 1)..... | -0.3V to (V _{CC} + 0.3V) |
| Continuous Current IN _P , IN _M , OUT _P , OUT _M | ±30mA |
| Peak Current IN _P , IN _M , OUT _P , OUT _M (pulsed for 1μs, 1% duty cycle)..... | ±100mA |
| Continuous Power Dissipation (T _A = +70°C) 36-Pin TQFN (derate 35.7mW/°C above +70°C)..... | 2857mW |

Junction-to-Case Thermal Resistance (θ_{JC}) (Note 2)

36-Pin TQFN.....1°C/W

Junction-to-Ambient Thermal Resistance (θ_{JA}) (Note 2)

36-Pin TQFN.....28°C/W

Operating Temperature Range.....0°C to +70°C

Junction Temperature Range.....-40°C to +150°C

Storage Temperature Range.....-65°C to +150°C

Lead Temperature (soldering, 10s).....+300°C

Note 1: All I/O pins are clamped by internal diodes.

Note 2: Package thermal resistances were obtained using the method described in JEDEC specification JESD51-7, using a four-layer board. For detailed information on package thermal considerations, refer to www.maxim-ic.com/thermal-tutorial.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS

(V_{CC} = +3.0V to +3.6V, C_{CL} = 75nF coupling capacitor on each output, R_L = 50Ω resistor on each output, T_A = 0°C to +70°C, unless otherwise noted. Typical values are at V_{CC} = +3.3V and T_A = +25°C.) (Note 3)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|---|---|--|-----|-----|-----|-------|
| DC PERFORMANCE | | | | | | |
| Power-Supply Range | V _{CC} | | 3.0 | | 3.6 | V |
| Supply Current | I _{CC} | EN = V _{CC} , V _{O_AMP_A} = V _{GND} , V _{O_AMP_B} = V _{GND} (Note 4) | | 130 | 165 | mA |
| Differential Input Impedance | Z _{RX-DIFF-DC} | DC | 80 | 100 | 120 | Ω |
| Differential Output Impedance | Z _{TX-DIFF-DC} | DC | 80 | 100 | 120 | Ω |
| Common-Mode Resistance to GND | Z _{RX-HIGH-IMP-DC-POS} | V _{IN_P} = V _{IN_M} = 0 to +200mV, input terminations not powered | 50 | | | kΩ |
| Common-Mode Resistance to GND | Z _{RX-HIGH-IMP-DC-NEG} | V _{IN_P} = V _{IN_M} = -150mV to 0, input terminations not powered | 1 | | | kΩ |
| Common-Mode Resistance to GND, Input Terminations Powered | Z _{RX-DC} | | 40 | 50 | 60 | Ω |
| Output Short-Circuit Current | I _{TX-SHORT} | Single-ended | | | 90 | mA |
| Common-Mode Delta Between Active and Idle States | V _{TX-CM-DC-ACTIVE-IDLE-DELTA} | V _{O_AMP_} = V _{GND} | | | 100 | mV |
| DC Output Offset During Active State | V _{TX-CM-DC-LINE-DELTA} | V _{OUT_P} - V _{OUT_M} | | | 25 | mV |
| DC Output Offset During Electrical Idle | V _{TX-IDLE-DIFF-DC} | V _{OUT_P} - V _{OUT_M} | | | 10 | mV |
| AC PERFORMANCE | | | | | | |
| Differential Input Return Loss (Note 5) | RL _{RX-DIFF} | f = 0.05GHz to 1.25GHz | 10 | | | dB |
| | | f = 1.25GHz to 2.5GHz | 8 | | | |
| Common-Mode Input Return Loss (Note 5) | RL _{RX-CM} | f = 0.05GHz to 2.5GHz | 6 | | | dB |

Dual PCI Express Equalizer/Redriver

MAX4950A

ELECTRICAL CHARACTERISTICS (continued)

($V_{CC} = +3.0V$ to $+3.6V$, $C_{CL} = 75nF$ coupling capacitor on each output, $R_L = 50\Omega$ resistor on each output, $T_A = 0^\circ C$ to $+70^\circ C$, unless otherwise noted. Typical values are at $V_{CC} = +3.3V$ and $T_A = +25^\circ C$.) (Note 3)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|--|-----------------------------------|---|-----|------|------|-------------------|
| Differential Output Return Loss (Note 5) | RLTX-DIFF | f = 0.05GHz to 1.25GHz | 10 | | | dB |
| | | f = 1.25GHz to 2.5GHz | 8 | | | |
| Common-Mode Output Return Loss (Note 5) | RLTX-CM | f = 0.05GHz to 2.5GHz | 6 | | | dB |
| Redriver-Operation Differential Input Signal Range | VRX-DIFF-PP | f = 0.05GHz to 2.5GHz | 120 | | 1200 | mV _{P-P} |
| Full-Swing No-Deemphasis Differential Output Voltage | VTX-DIFF-PP | ABSIV _{OUT_P} - V _{OUT_M} ; O_AMP_ = GND | 800 | 1000 | 1200 | mV _{P-P} |
| Low-Swing No-Deemphasis Differential Output Voltage | VTX-DIFF-PP-LOW | ABSIV _{OUT_P} - V _{OUT_M} ; O_AMP_ = V _{CC} | 600 | 750 | 900 | mV _{P-P} |
| Output Deemphasis Ratio, 0dB | VTX-DE-RATIO-0dB | f = 2.5GHz, ODE_1 = GND, ODE_0 = GND, Figure 1 (see Table 3) | | 0 | | dB |
| Output Deemphasis Ratio, 3.5dB | VTX-DE-RATIO-3.5dB | f = 2.5GHz, ODE_1 = GND, ODE_0 = V _{CC} , Figure 1 (see Table 3) | | 3.5 | | dB |
| Output Deemphasis Ratio, 6dB | VTX-DE-RATIO-6dB | f = 2.5GHz, ODE_1 = V _{CC} , ODE_0 = V _{CC} or GND, Figure 1 (see Table 3) | | 6 | | dB |
| Input Equalization, 0dB (Note 6) | VRX-EQ-0dB | f = 2.5GHz, INEQ_1 = GND, INEQ_0 = GND (see Table 2) | | 0 | | dB |
| Input Equalization, 3.5dB (Note 6) | VRX-EQ-3.5dB | f = 2.5GHz, INEQ_1 = GND, INEQ_0 = V _{CC} (see Table 2) | | 3.5 | | dB |
| Input Equalization, 6dB (Note 6) | VRX-EQ-6dB | f = 2.5GHz, INEQ_1 = V _{CC} , INEQ_0 = V _{CC} or GND (see Table 2) | | 6 | | dB |
| Output Common-Mode Voltage | VTX-CM-AC-PP | MAX(V _{OUT_P} + V _{OUT_M})/2 - MIN(V _{OUT_P} + V _{OUT_M})/2 | | | 100 | mV _{P-P} |
| Propagation Delay (Note 5) | TPD | f = 2.5GHz | 160 | 280 | 400 | ps |
| Rise/Fall Time | T _{TX-RISE-FALL} | (Note 7) | 30 | | | ps |
| Rise/Fall Time Mismatch | T _{TX-RF-MIISMATCH} | (Note 7) | | | 20 | ps |
| Same-Pair Output Skew (Note 5) | T _{SK} | f = 2.5GHz | | 10 | 15 | ps |
| Lane-to-Lane Output Skew (Note 5) | T _{SKL} | f = 2.5GHz | -50 | | +50 | ps |
| Deterministic Jitter (Note 5) | T _{TX-DJ-DD} | K28.5± pattern, 5.0GT/s, AC coupled, R _L = 50Ω, effects of deemphasis deembedded | | | 15 | ps _{P-P} |
| Random Jitter | T _{TX-RJ-DD} | DIO.2 pattern | | | 1.4 | ps _{RMS} |
| Electrical Idle Entry Delay | T _{TX-IDLE-SET-TO-IDLE} | From input to output | | 15 | | ns |
| Electrical Idle Exit Delay | T _{TX-IDLE-TO-DIFF-DATA} | From input to output | | 12 | | ns |

Dual PCI Express Equalizer/Redriver

ELECTRICAL CHARACTERISTICS (continued)

($V_{CC} = +3.0V$ to $+3.6V$, $C_{CL} = 75nF$ coupling capacitor on each output, $R_L = 50\Omega$ resistor on each output, $T_A = 0^\circ C$ to $+70^\circ C$, unless otherwise noted. Typical values are at $V_{CC} = +3.3V$ and $T_A = +25^\circ C$.) (Note 3)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|---|-------------------------|---|-----|-----|-----|-------------------|
| Electrical Idle Detect Threshold | $V_{TX-IDLE-THRESH}$ | | 65 | 95 | 120 | mV _{p-p} |
| Output Voltage During Electrical Idle (AC) | $V_{TX-IDLE-DIFF-AC-P}$ | $ABS(V_{OUT_P} - V_{OUT_M})$, $f = 500MHz$ | | | 25 | mV _{p-p} |
| Receiver Detect Pulse Amplitude (Note 5) | $V_{TX-RCV-DETECT}$ | Voltage change in positive direction | | | 600 | mV |
| Receiver Detect Pulse Width | | | | 100 | | ns |
| Receiver Detect Retry Period | | | | 200 | | ns |
| CONTROL LOGIC (INEQ_1, INEQ_0, ODE_1, ODE_0, EN, RX_DET, O_AMP_) | | | | | | |
| Input Logic-Level Low | V_{IL} | | | | 0.6 | V |
| Input Logic-Level High | V_{IH} | | 1.4 | | | V |
| Input Logic Hysteresis | V_{HYST} | | | 130 | | mV |
| Input Leakage Current | I_{IN} | $V_{CONTROL_LOGIC} = +0.5V$ or $+1.5V$ | -50 | | +50 | μA |

Note 3: All devices are 100% production tested at $T_A = +70^\circ C$. Specifications for all temperature limits are guaranteed by design.

Note 4: Currents are applicable for both PCIe Generation I and Generation II speeds. Table 5 summarizes the predicted power consumption.

Note 5: Guaranteed by design, unless otherwise noted.

Note 6: Equivalent to the same amount of deemphasis driving the output.

Note 7: Rise and fall times are measured using 20% and 80% levels.

Timing Diagram

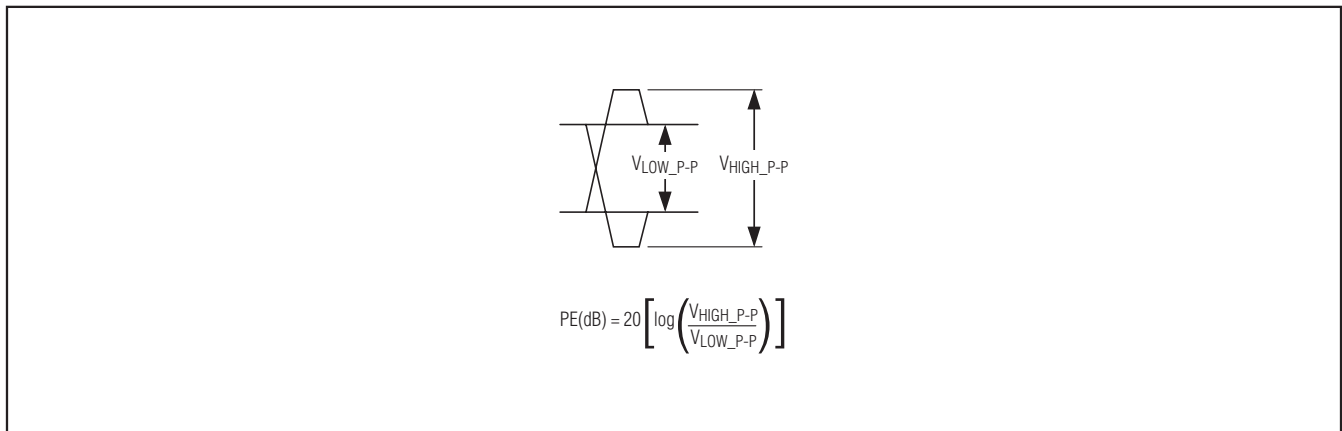








Figure 1. Illustration of Output Deemphasis

Dual PCI Express Equalizer/Redriver

Typical Operating Characteristics

($V_{CC} = +3.3V$, $T_A = +25^\circ C$, unless otherwise noted.)

MAX4950A

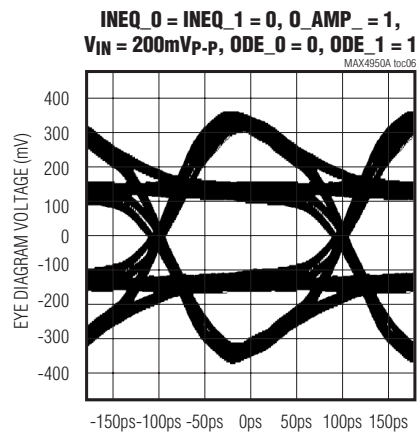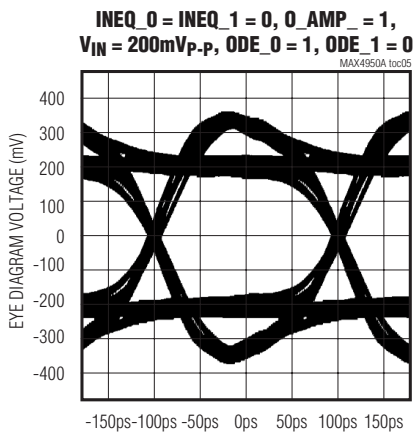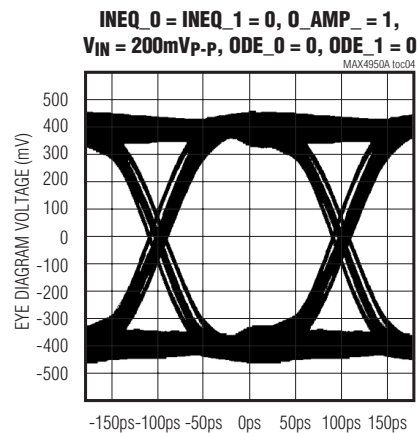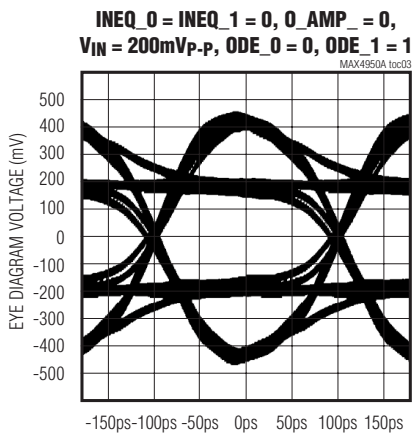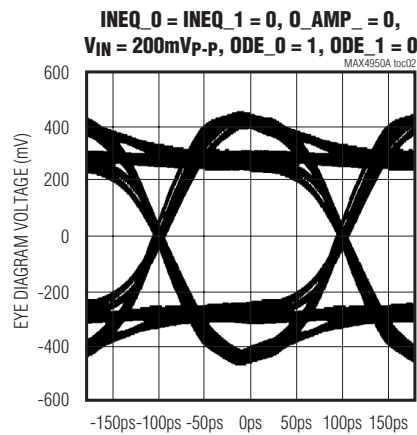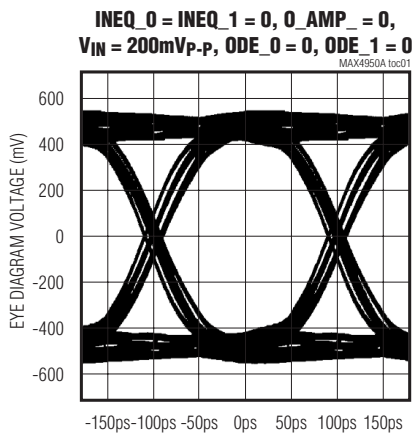


Dual PCI Express Equalizer/Redriver


Typical Operating Characteristics (continued)

($V_{CC} = +3.3V$, $T_A = +25^\circ C$, unless otherwise noted.)


**INEQ_0 = 1, INEQ_1 = 0, O_AMP_ = 0, $V_{IN} = 500mV_{P-P}$,
WITH 6in STRIPLINE ODE_0 = ODE_1 = 0**

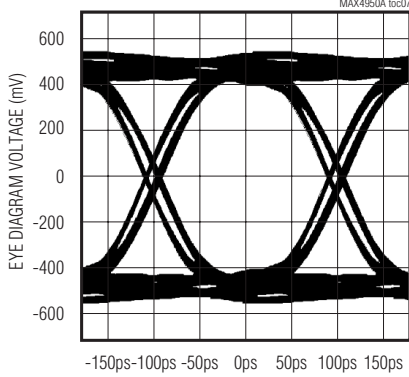


**INEQ_0 = 0, INEQ_1 = 1, O_AMP_ = 0, $V_{IN} = 500mV_{P-P}$,
WITH 19in STRIPLINE ODE_0 = ODE_1 = 0**

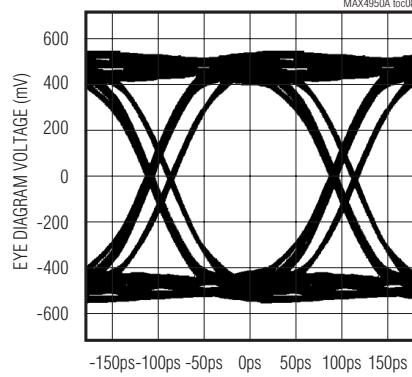


**INEQ_0 = INEQ_1 = 0, O_AMP_ = 0, $V_{IN} = 500mV_{P-P}$,
WITH 19in STRIPLINE ODE_0 = ODE_1 = 0**

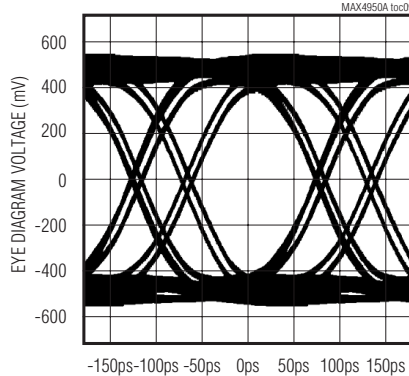


**INEQ_0 = INEQ_1 = 0, O_AMP_ = 1, $V_{IN} = 200mV_{P-P}$,
ODE_0 = 1, ODE_1 = 0, OUTPUT AFTER 6in STRIPLINE**

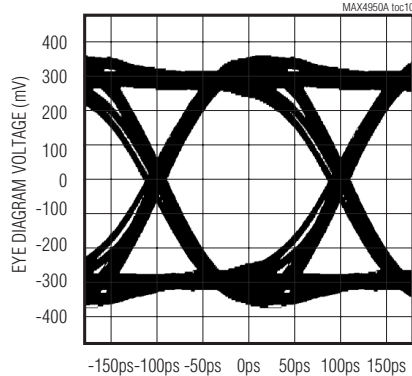

**INEQ_0 = INEQ_1 = 0, O_AMP_ = 0, $V_{IN} = 200mV_{P-P}$,
ODE_0 = 0, ODE_1 = 1, OUTPUT AFTER 19in STRIPLINE**

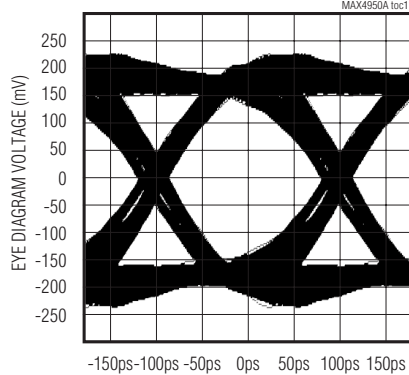

**INEQ_0 = INEQ_1 = 0, O_AMP_ = 0, $V_{IN} = 200mV_{P-P}$,
ODE_0 = 0, ODE_1 = 0, OUTPUT AFTER 19in STRIPLINE**

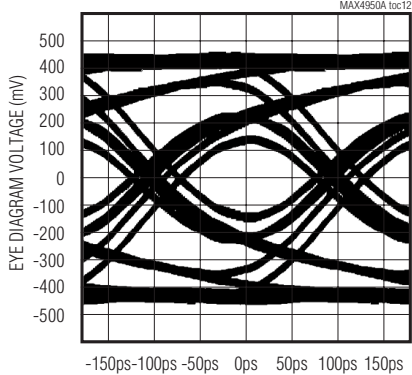

Dual PCI Express Equalizer/Redriver

Pin Description

MAX4950A

| PIN | NAME | FUNCTION |
|----------------------------|-----------------|---|
| 1, 4, 6, 9, 19, 22, 24, 27 | GND | Ground |
| 2 | INAP | Noninverting Input A |
| 3 | INAM | Inverting Input A |
| 5 | EN | Enable Input. Drive EN low for standby mode. Drive EN high for normal mode. EN is internally pulled down by a 50k Ω (typ) resistor. |
| 7 | OUTBP | Noninverting Output B |
| 8 | OUTBM | Inverting Output B |
| 10, 18, 28, 36 | N.C. | No Connection. Not internally connected. |
| 11, 17, 29, 35 | V _{CC} | Power-Supply Input. Bypass V _{CC} to GND with 1 μ F and 0.01 μ F capacitors in parallel as close as possible to the device. |
| 12 | ODEB1 | Output B Deemphasis Control MSB. ODEB1 is internally pulled down by a 50k Ω (typ) resistor. See Table 3. |
| 13 | ODEB0 | Output B Deemphasis Control LSB. ODEB0 is internally pulled down by a 50k Ω (typ) resistor. See Table 3. |
| 14 | O_AMPB | Output B Amplitude Selection Input. O_AMPB is internally pulled down by a 50k Ω (typ) resistor. |
| 15 | INEQB1 | Input B Equalization Control MSB. INEQB1 is internally pulled down by a 50k Ω (typ) resistor. See Table 2. |
| 16 | INEQB0 | Input B Equalization Control LSB. INEQB0 is internally pulled down by a 50k Ω (typ) resistor. See Table 2. |
| 20 | INBM | Inverting Input B |
| 21 | INBP | Noninverting Input B |
| 23 | RX_DET | Receiver-Detection Control Bit. Toggle RX_DET to initiate receiver detection. RX_DET is internally pulled down by a 50k Ω (typ) resistor. |
| 25 | OUTAM | Inverting Output A |
| 26 | OUTAP | Noninverting Output A |
| 30 | ODEA0 | Output A Deemphasis Control LSB. ODEA0 is internally pulled down by a 50k Ω (typ) resistor. See Table 3. |
| 31 | ODEA1 | Output A Deemphasis Control MSB. ODEA1 is internally pulled down by a 50k Ω (typ) resistor. See Table 3. |
| 32 | O_AMPA | Output A Amplitude Selection Input. O_AMPA is internally pulled down by a 50k Ω (typ) resistor. |
| 33 | INEQA0 | Input A Equalization Control LSB. INEQA0 is internally pulled down by a 50k Ω (typ) resistor. See Table 2. |
| 34 | INEQA1 | Input A Equalization Control MSB. INEQA1 is internally pulled down by a 50k Ω (typ) resistor. See Table 2. |
| — | EP | Exposed Pad. Internally connected to GND. Connect EP to a large ground plane to maximize thermal performance. EP is not intended as an electrical connection point. |

Dual PCI Express Equalizer/Redriver

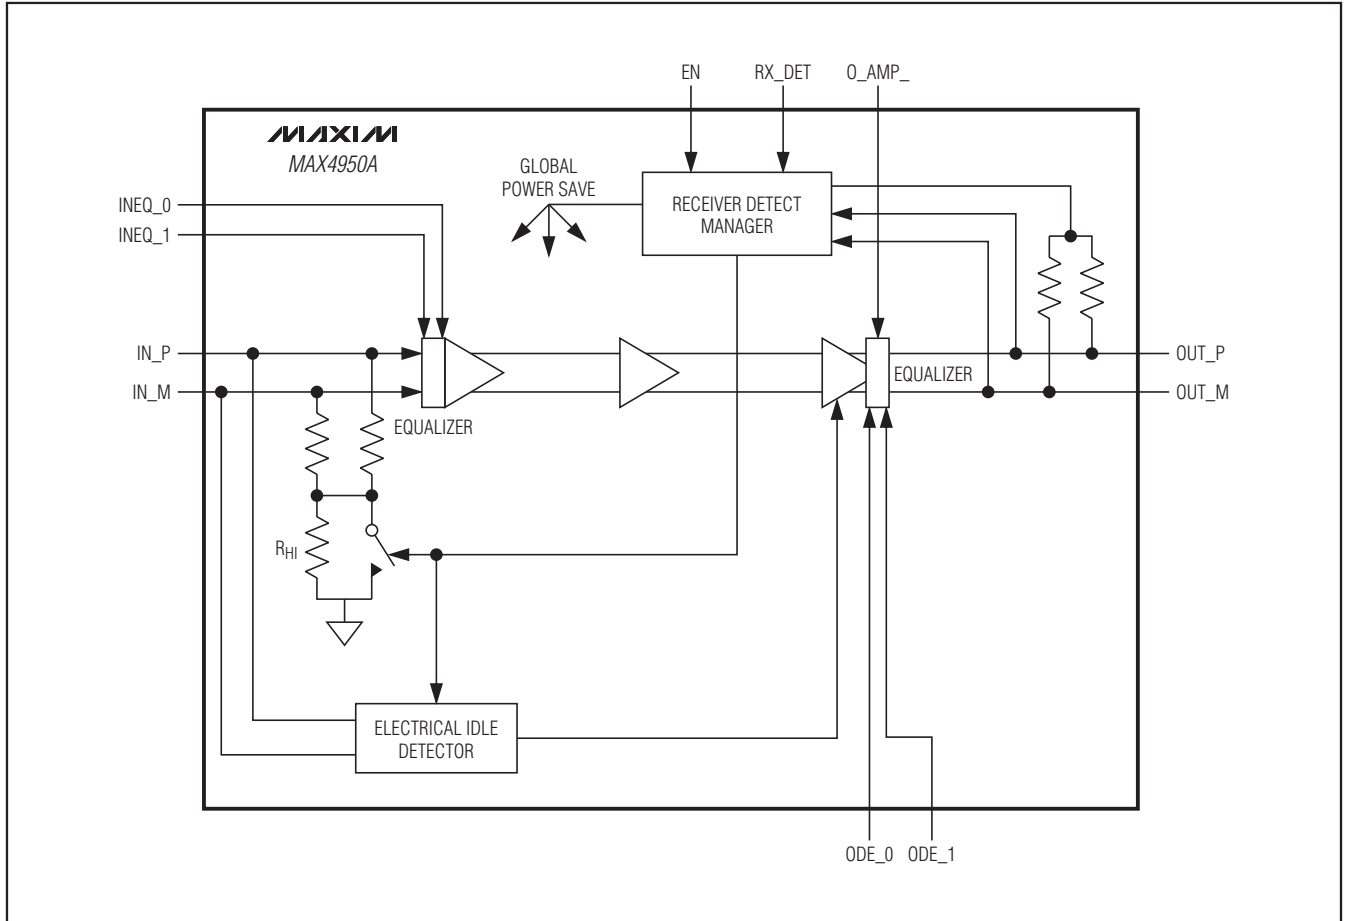


Figure 2. Block Diagram of Each Channel

Dual PCI Express Equalizer/Redriver

Detailed Description

The MAX4950A dual equalizer/redriver is designed to support both Gen I (2.5GT/s) and Gen II (5.0GT/s) PCIe data rates. The device contains two identical drivers with idle/receive detect on each lane and equalization to compensate for circuit-board loss. Signal integrity at the receiver is improved by the use of programmable input equalization circuitry. The MAX4950A features individual channel output amplitude selection inputs, O_AMP_A and O_AMP_B (Table 1), and programmable output deemphasis, permitting optimal placement of key PCIe components and longer runs of stripline, microstrip, or cable.

Table 1. Output Amplitude Selection

| O_AMP_A/ O_AMP_B | DIFFERENTIAL OUTPUT VOLTAGE (mV _{p-p}) |
|---------------------|---|
| 0 | 1000 (typ) |
| 1 | 750 (typ) |

Programmable Input Equalization

The MAX4950A features programmable input equalizers capable of providing 0dB, 3.5dB, or 6dB of high-frequency boost on either channel (see Table 2).

Table 2. Input Equalization

| INEQ_1 | INEQ_0 | INPUT EQUALIZATION (dB) |
|--------|--------|----------------------------|
| 0 | 0 | 0 |
| 0 | 1 | 3.5 (typ) |
| 1 | X | 6 (typ) |

X = Don't care.

Programmable Output Deemphasis

The MAX4950A features programmable output deemphasis on either channel by setting two control bits, ODE_1 and ODE_0, for deemphasis ratios of 0dB, 3.5dB, and 6dB (see Table 3).

Table 3. Output Deemphasis

| ODE_1 | ODE_0 | OUTPUT DEEMPHASIS RATIO (dB) |
|-------|-------|---------------------------------|
| 0 | 0 | 0 |
| 0 | 1 | 3.5 (typ) |
| 1 | X | 6 (typ) |

X = Don't care.

Receiver Detection

The MAX4950A features receiver detection on each channel. Upon initial power-up, if EN is high, receiver detection initializes. Receiver detection can also be initiated on a rising or falling edge of the RX_DET input when EN is high. During this time, the part remains in low-power standby mode and the outputs are squelched, despite the logic-high state of EN. Once started, receiver detection repeats indefinitely on each channel. Once a receiver is detected on one of the channels, up to three more attempts are made on the other channel. Upon receiver detection, channel output and electrical idle detection are enabled (see Table 4).

Table 4. Receiver-Detection Input Function

| RX_DET | EN | DESCRIPTION |
|------------------------|----|--|
| X | 0 | Receiver detection inactive |
| 0 | 1 | Following a rising or falling edge, indefinite retry until receiver detected |
| Rising or Falling Edge | 1 | Initiate receiver detection |
| 1 | 1 | Following a rising or falling edge, indefinite retry until receiver detected |

X = Don't care.

Electrical Idle Detection

The MAX4950A features electrical idle detection to prevent unwanted noise from being redriven at the output. If the MAX4950A detects that the differential input has fallen below V_{TX-IDLE-THRESH}, the MAX4950A squelches the output. For differential input signals that are above V_{TX-IDLE-THRESH}, the MAX4950A turns on the output and redrives the signal.

Power-Saving Features

The MAX4950A features an enable input (EN) to shut down the device and reduce supply current. To place the device in shutdown mode, drive EN low. To enable the device, drive EN high. During normal operation, supply current can also be reduced by reducing the channel output amplitudes. Table 5 shows typical power consumption differences between shutdown mode and normal operation with different output redrive strengths.

Dual PCI Express Equalizer/Redriver

Table 5. Quiescent Power Dissipation with Equalization and Deemphasis

| EN | O_AMPB | O_AMP A | QUIESCENT POWER SUPPLY CURRENT (typ) (mA) | QUIESCENT POWER SUPPLY CURRENT (max) (mA) | QUIESCENT POWER DISSIPATION (3.3V, typ) (mW) | QUIESCENT POWER DISSIPATION (3.6V, max) (mW) |
|----|--------|---------|---|---|--|--|
| 0 | 0 | 0 | 60 | 75 | 198 | 270 |
| 0 | 0 | 1 | 55 | 68 | 182 | 243 |
| 0 | 1 | 0 | 55 | 68 | 182 | 243 |
| 0 | 1 | 1 | 50 | 60 | 165 | 216 |
| 1 | 0 | 0 | 130 | 165 | 429 | 594 |
| 1 | 0 | 1 | 125 | 157 | 413 | 565 |
| 1 | 1 | 0 | 125 | 157 | 413 | 565 |
| 1 | 1 | 1 | 120 | 150 | 396 | 540 |

Applications Information

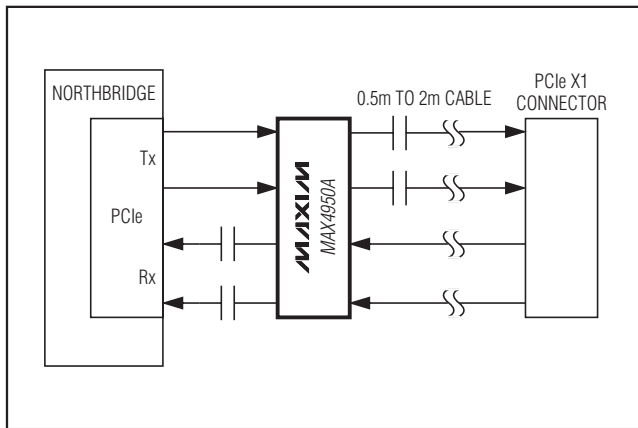


Figure 3. Typical Application Circuit—MAX4950A Used as X1 Lane Cable Driver

Layout

Circuit-board layout and design can significantly affect the performance of the MAX4950A. Use good high-frequency design techniques, including minimizing ground inductance and using controlled-impedance transmission lines on data signals. It is recommended to run receive and transmit on different layers to minimize crosstalk and to place power-supply decoupling capacitors as close as possible to VCC. Always connect VCC to a power plane.

Exposed Pad Package

The exposed-pad, 36-pin, TQFN package incorporates features that provide a very low thermal resistance path for heat removal from the IC. The exposed pad on the MAX4950A must be soldered to the circuit-board ground plane for proper thermal performance. For more information on exposed-pad packages, refer to Maxim Application Note HFAN-08.1: *Thermal Considerations of QFN and Other Exposed-Paddle Packages*.

Power-Supply Sequencing

Caution: Do not exceed the absolute maximum ratings because stresses beyond the listed ratings may cause permanent damage to the device.

Proper power-supply sequencing is recommended for all devices. Always apply GND then VCC before applying signals, especially if the signal is not current limited.

Chip Information

PROCESS: BiCMOS

Package Information

For the latest package outline information and land patterns, go to www.maxim-ic.com/packages.

| PACKAGE TYPE | PACKAGE CODE | DOCUMENT NO. |
|--------------|--------------|-------------------------|
| 36 TQFN | T3666+2 | 21-0141 |

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

10 **Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600**

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А