

Buck-Boost transformers are small, single phase, dry type distribution transformers designed and shipped as insulating/isolating transformers. They have a dual voltage primary and a dual voltage secondary. These transformers can be connected for a wide range of voltage combinations. The most common use is to buck (lower) or boost (raise) the supply voltage a small amount, usually 5 to 27%. Buck-boost transformers are in compliance with NEC Article 210.9, Exception 1 when field connected as an autotransformer.

The major advantages of Buck-boost transformers are their low cost, compact size and light weight. They are also more efficient and cost less than equivalent isolation transformers. When connected as an autotransformer, they can handle loads up to 20 times the nameplate rating. A buck-boost transformer is the ideal solution for changing line voltage by small amounts.

When a buck-boost has the primary and secondary windings connected, per recommended instructions, it becomes an autotransformer. Now, only the secondary windings are transforming voltage and current. The majority of the kVA load passes directly from the supply to the load. This is the reason buck-boost transformers can supply a load with a much larger kVA rating than the nameplate indicates.

Low voltage lighting control applications

SolaHD buck-boost transformers are designed to supply power to low voltage lighting circuits, control panels or other systems requiring 12, 16, 24, 32, or 48 Volts. When connected as an insulating transformer (by following the wiring diagram located after the specification tables on the inside of the transformer case), the transformer's capacity matches the nameplate kVA rating.

SolaHD buck-boost transformers are also suited for low voltage landscape lighting. They are UL Listed for outdoor service and their compact size makes them the perfect solution for providing power to accent lighting applications. Electrical Connection diagrams are shown at the end of this section.

Use dimmers on the output of the transformer that are designed and rated for use with magnetic loads. We strongly recommend contacting the dimmer manufacturer for advice on your specific lighting application.

Certifications and Compliances

-  Listed
 - UL 506
 - CSA C22.2 No. 66



Accessories

- Surge Protective Devices
- Active Tracking[®] Filters

Selection Steps

1. Input Line Voltage

Measure the supply voltage with a voltmeter.

2. Voltage Required for the Load

Check the load equipment to determine the voltage requirement.

3. kVA or Ampere Rating of the Load

Find either the load kVA or the load amperage requirements. This information is listed on the nameplate of the load equipment.

4. Frequency

Either 50 or 60 Hz. The frequency of the transformer must match the frequency of the load.

5. Number of Phases


Single or three phase line and load must match. (A transformer cannot convert single to three phase.) A common application is to make a single phase connection from a three phase supply by using one phase of the three phase supply circuit. Be careful not to overload that phase of the three phase supply. For buck-boost applications the supply must provide load kVA – not just the nameplate rating of the buck-boost. Refer to the Selection Tables on the following pages.

Three phase, buck-boost applications require two or three transformers. Check the "Quantity Required" column of the Three Phase Selection Tables for the exact quantity.

Fusing Buck-Boost Transformers

For determining the correct size of breaker or fuse for a given range of input or output ampere ratings, refer to Section 450.4, of the National Electric Code (NEC).

Where an overcurrent protection device is required, the electrical connections and selection tables will reference appropriately.

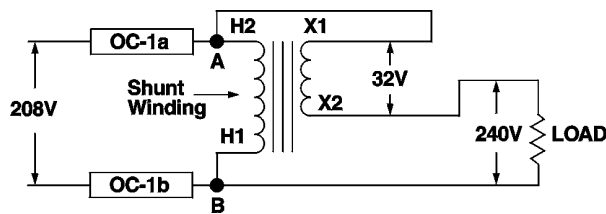

Overcurrent devices OC-1a and OC-1b are shown correctly installed in accordance with NEC 450.4. Locating an overcurrent device in series with the shunt winding anywhere between A and B is not permitted. The shunt winding is the winding common to both the input and the output circuits.

Using the Selection Tables

1. Determine if you are trying to Boost (raise) or Buck (lower) your voltage. Select an input/output voltage combination that comes closest to matching your application from the appropriate single or three phase charts on the following pages.
2. Move across your selected input/output voltage row to the amperage or kVA rating closest to, but greater than the rating required by your load.
3. Reading the top of the column will give you the catalog number of the exact buck-boost transformer you need. See the Specification Tables on the next page.
4. Connect the transformers according to the diagram indicated. See the Electrical Connections section at the end of this section. Connection diagrams are packed with each transformer.

Specification Tables

Group 1 – 120 x 240 Volt Primary, 12/24 Volt Secondary

| KVA | Catalog Number | Maximum Secondary Amperage | | Height in (mm) | Width in (mm) | Depth in (mm) | Approx. Ship Weight lbs (kg) | Design Style | Elec Conn |
|--|----------------|----------------------------|-------|-------------------|------------------|------------------|---------------------------------|-----------------|--------------|
| | | 12 V | 24 V | | | | | | |
| Non-Encapsulated – 50/60 Hz, Single Phase | | | | | | | | | |
| 0.05 | HS19B50 | 4.16 | 2.08 | 6.00 (152.4) | 4.00 (101.6) | 3.00 (76.2) | 2.0 (0.91) | 2 | 1 |
| 0.1 | HS19B100 | 8.33 | 4.16 | 6.00 (152.4) | 4.00 (101.6) | 3.00 (76.2) | 4.0 (1.82) | 2 | 1 |
| 0.15 | HS19B150 | 12.5 | 6.25 | 7.50 (190.5) | 4.00 (101.6) | 4.00 (101.6) | 5.0 (2.27) | 2 | 1 |
| 0.25 | HS19B250 | 20.8 | 10.4 | 7.50 (190.5) | 4.00 (101.6) | 4.00 (101.6) | 8.0 (3.64) | 2 | 1 |
| Encapsulated – 60 Hz, Single Phase | | | | | | | | | |
| 0.5 | HS19F500B | 41.6 | 20.8 | 10.00 (254.0) | 6.00 (152.4) | 5.00 (127.0) | 22.0 (10.00) | 3 | 1 |
| 0.75 | HS19F750B | 62.5 | 31.2 | 10.00 (254.0) | 6.00 (152.4) | 5.00 (127.0) | 27.0 (12.27) | 3 | 1 |
| 1 | HS19F1B | 83.3 | 41.6 | 10.00 (254.0) | 6.00 (152.4) | 5.00 (127.0) | 28.0 (12.73) | 3 | 1 |
| 1.5 | HS19F1.5A | 125 | 62.5 | 12.00 (304.8) | 10.00 (254.0) | 7.00 (177.8) | 38.0 (17.27) | 4 | 1 |
| 2 | HS19F2A | 166.6 | 83.3 | 12.00 (304.8) | 10.00 (254.0) | 7.00 (177.8) | 45.0 (20.45) | 4 | 1 |
| 3 | HS19F3A | 250 | 125 | 12.00 (304.8) | 10.00 (254.0) | 7.00 (177.8) | 55.0 (25.00) | 4 | 1 |
| 5 | HS19F5A | 416.5 | 208.3 | 17.00 (431.8) | 14.00 (355.6) | 9.00 (228.6) | 100.0 (45.45) | 4 | 1 |
| 7.5 | HS19F7.5A | 625 | 312.5 | 17.00 (431.8) | 14.00 (355.6) | 9.00 (228.6) | 135.0 (61.36) | 4 | 1 |

Group 2 – 120 x 240 Volt Primary, 16/32 Volt Secondary

| KVA | Catalog Number | Maximum Secondary Amperage | | Height in (mm) | Width in (mm) | Depth in (mm) | Approx. Ship Weight lbs (kg) | Design Style | Elec Conn |
|--|----------------|----------------------------|------|-------------------|------------------|------------------|---------------------------------|-----------------|--------------|
| | | 16 V | 32 V | | | | | | |
| Non-Encapsulated – 50/60 Hz, Single Phase | | | | | | | | | |
| 0.15 | HS20B150 | 9.38 | 4.69 | 8.00 (203.2) | 4.00 (101.6) | 4.00 (101.6) | 6.0 (2.73) | 2 | 2 |
| 0.25 | HS20B250 | 15.6 | 7.81 | 8.00 (203.2) | 4.00 (101.6) | 4.00 (101.6) | 8.0 (3.64) | 2 | 2 |
| Encapsulated – 60 Hz, Single Phase | | | | | | | | | |
| 0.5 | HS20F500B | 31.2 | 15.6 | 10.00 (254.0) | 6.00 (152.4) | 5.00 (127.0) | 22.0 (10.00) | 3 | 2 |
| 0.75 | HS20F750B | 46.8 | 23.4 | 10.00 (254.0) | 6.00 (152.4) | 5.00 (127.0) | 27.0 (12.27) | 3 | 2 |
| 1 | HS20F1B | 62.5 | 31.2 | 10.00 (254.0) | 6.00 (152.4) | 5.00 (127.0) | 28.0 (12.73) | 3 | 2 |
| 1.5 | HS20F1.5A | 93.7 | 46.8 | 12.00 (304.8) | 10.00 (254.0) | 7.00 (177.8) | 38.0 (17.27) | 4 | 2 |
| 2 | HS20F2A | 125 | 62.5 | 12.00 (304.8) | 10.00 (254.0) | 7.00 (177.8) | 45.0 (20.45) | 4 | 2 |
| 3 | HS20F3A | 187.5 | 93.7 | 12.00 (304.8) | 10.00 (254.0) | 7.00 (177.8) | 55.0 (25.00) | 4 | 2 |
| 5 | HS20F5A | 312 | 156 | 17.00 (431.8) | 14.00 (355.6) | 9.00 (228.6) | 100.0 (45.45) | 4 | 2 |
| 7.5 | HS20F7.5A | 468 | 234 | 17.00 (431.8) | 14.00 (355.6) | 9.00 (228.6) | 135.0 (61.36) | 4 | 2 |

Note: Weights and dimensions may change and should not be used for construction purposes.

Specification Tables – continued

Group 3 – 240 x 480 Volt Primary, 24/48 Volt Secondary

| KVA | Catalog Number | Maximum Secondary Amperage | | Height in (mm) | Width in (mm) | Depth in (mm) | Approx. Ship Weight lbs (kg) | Design Style | Elec Conn |
|--|------------------|----------------------------|------|----------------|---------------|---------------|------------------------------|--------------|-----------|
| | | 24 V | 48 V | | | | | | |
| Non-Encapsulated – 50/60 Hz, Single Phase | | | | | | | | | |
| 0.15 | HS22B150 | 6.25 | 3.13 | 8.00 (203.2) | 4.00 (101.6) | 3.00 (76.2) | 5.0 (2.27) | 2 | 3 |
| 0.25 | HS22B250 | 10.4 | 5.2 | 8.00 (203.2) | 4.00 (101.6) | 3.00 (76.2) | 8.0 (3.64) | 2 | 3 |
| Encapsulated – 60 Hz, Single Phase | | | | | | | | | |
| 0.5 | HS22F500B | 20.8 | 10.4 | 8.00 (203.2) | 6.00 (152.4) | 5.00 (127.0) | 22.0 (10.00) | 3 | 3 |
| 0.75 | HS22F750B | 31.2 | 15.6 | 10.00 (254.0) | 6.00 (152.4) | 5.00 (127.0) | 27.0 (12.27) | 3 | 3 |
| 1 | HS22F1B | 41.6 | 20.8 | 10.00 (254.0) | 6.00 (152.4) | 5.00 (127.0) | 28.0 (12.73) | 3 | 3 |
| 1.5 | HS22F1.5A | 62.5 | 31.2 | 12.00 (304.8) | 10.00 (254.0) | 7.00 (177.8) | 38.0 (17.27) | 4 | 3 |
| 2 | HS22F2A | 83.3 | 41.6 | 12.00 (304.8) | 10.00 (254.0) | 7.00 (177.8) | 45.0 (20.45) | 4 | 3 |
| 3 | HS22F3A | 125 | 62.5 | 12.00 (304.8) | 10.00 (254.0) | 7.00 (177.8) | 55.0 (25.00) | 4 | 3 |
| 5 | HS22F5A | 208 | 104 | 17.00 (431.8) | 14.00 (355.6) | 9.00 (228.6) | 100.0 (45.45) | 4 | 3 |
| 7.5 | HS22F7.5A | 312 | 156 | 17.00 (431.8) | 14.00 (355.6) | 9.00 (228.6) | 135.0 (61.36) | 4 | 3 |

Note: Weights and dimensions may change and should not be used for construction purposes.

Electrical Connections for Low Voltage Applications

= Earth Ground

120 X 240 Volt Primary,
12/24 Volt Secondary
Taps: None

1

| Primary Voltage | Interconnect | Connect Lines To |
|-------------------|----------------------|------------------|
| 240 | H2 to H3 | H1 & H4 |
| 120 | H1 to H3 H2 to H4 | H1 & H4 |
| Secondary Voltage | Interconnect | Connect Lines To |
| 24 | X2 to X3 | X1 & X4 |
| 12-0-12 | X2 to X3 X2 to | X1-X2-X4 |
| 12 | X1 to X3 X2 to X4 | X1 & X4 |

HS19 and S19 Series

120 X 240 Volt Primary,
16/32 Volt Secondary
Taps: None

2

| Primary Voltage | Interconnect | Connect Lines To |
|-------------------|----------------------|------------------|
| 240 | H2 to H3 | H1 & H4 |
| 120 | H1 to H3 H2 to H4 | H1 & H4 |
| Secondary Voltage | Interconnect | Connect Lines To |
| 32 | X2 to X3 | X1 & X4 |
| 16-0-16 | X2 to X3 X2 to | X1-X2-X4 |
| 16 | X1 to X3 X2 to X4 | X1 & X4 |

HS20 and S20 Series

240 X 480 Volt Primary,
24/48 Volt Secondary
Taps: None


3

| Primary Voltage | Interconnect | Connect Lines To |
|-------------------|----------------------|------------------|
| 480 | H2 to H3 | H1 & H4 |
| 240 | H1 to H3 H2 to H4 | H1 & H4 |
| Secondary Voltage | Interconnect | Connect Lines To |
| 48 | X2 to X3 | X1 & X4 |
| 24-0-24 | X2 to X3 X2 to | X1-X2-X4 |
| 24 | X1 to X3 X2 to X4 | X1 & X4 |


HS22 and S22 Series

Design Styles

Custom Design Styles

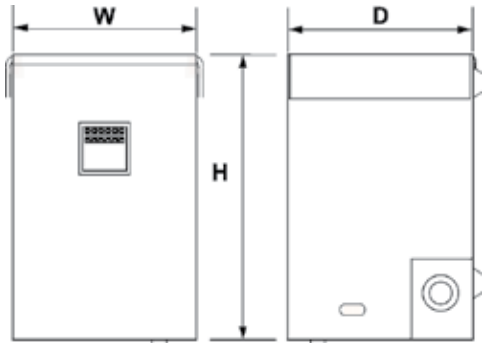


Style 2 - Non-Encapsulated

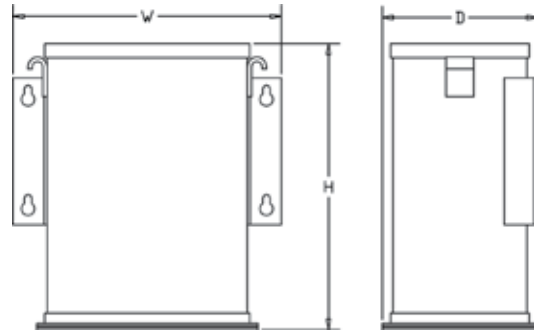


Style 5 - Encapsulated

Available for all encapsulated kVA sizes (For Type 4, 12 and 4X)

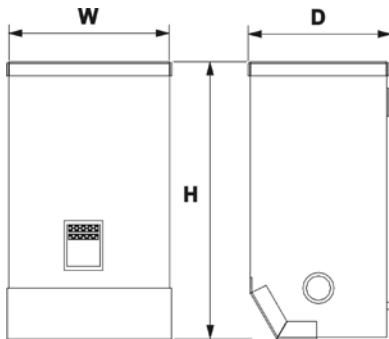

Style 3 - Encapsulated

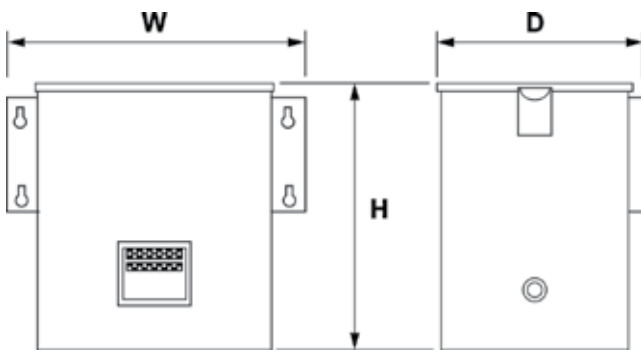

Style 4 - Encapsulated

Selection Tables: Single Phase

Table 1: Using Group 1 (120 x 240 V Primary, 12/24 V Secondary) Transformers

| Input Voltage | Output Voltage | Quantity Req'd | Connection Diagram * | Application Data | Catalog Number | | | | | | | |
|-----------------|----------------|----------------|----------------------|------------------|----------------|----------|----------|----------|-----------|-----------|---------|--|
| | | | | | HS19B50 | HS19B100 | HS19B150 | HS19B250 | HS19F500B | HS19F750B | HS19F1B | |
| BOOSTING | | | | | | | | | | | | |
| 100 | 120 | 1 | B1 | kVA | 0.25 | 0.5 | 0.75 | 1.25 | 2.5 | 3.75 | 5.0 | |
| | | | | Load Amps | 2.08 | 4.16 | 6.25 | 10.4 | 20.8 | 31.2 | 41.6 | |
| | | | | Fuse Size | 6.0 | 10.0 | 15.0 | 25.0 | 35.0 | 50.0 | 70.0 | |
| 109 | 120 | 1 | A1 | kVA | 0.5 | 1.0 | 1.5 | 2.5 | 5.0 | 7.5 | 10.0 | |
| | | | | Load Amps | 4.16 | 8.33 | 12.5 | 20.8 | 41.6 | 62.5 | 83.3 | |
| | | | | Fuse Size | 10.0 | 15.0 | 20.0 | 30.0 | 60.0 | 90.0 | 125.0 | |
| 189 | 208 | 1 | D1 | kVA | 0.43 | 0.87 | 1.3 | 2.16 | 4.33 | 6.49 | 8.65 | |
| | | | | Load Amps | 2.08 | 4.16 | 6.25 | 10.4 | 20.8 | 31.2 | 41.6 | |
| | | | | Fuse Size | 6.0 | 10.0 | 15.0 | 15.0 | 30.0 | 45.0 | 60.0 | |
| 197 | 208 | 1 | C1 | kVA | 0.87 | 1.73 | 2.6 | 4.33 | 8.65 | 13.0 | 17.3 | |
| | | | | Load Amps | 4.16 | 8.33 | 12.5 | 20.8 | 41.6 | 62.5 | 83.3 | |
| | | | | Fuse Size | 6.0 | 15.0 | 20.0 | 30.0 | 60.0 | 90.0 | 110.0 | |
| 208 | 229 | 1 | D1 | kVA | 0.48 | 0.95 | 1.43 | 2.38 | 4.77 | 7.15 | 9.54 | |
| | | | | Load Amps | 2.08 | 4.16 | 6.25 | 10.4 | 20.8 | 31.2 | 41.6 | |
| | | | | Fuse Size | 6.0 | 10.0 | 15.0 | 15.0 | 30.0 | 45.0 | 60.0 | |
| 218 ** | 240 | 1 | D1 | kVA | 0.5 | 1.0 | 1.5 | 2.5 | 5.0 | 7.5 | 10.0 | |
| | | | | Load Amps | 2.08 | 4.16 | 6.25 | 10.4 | 20.8 | 31.2 | 41.6 | |
| | | | | Fuse Size | 6.0 | 10.0 | 15.0 | 15.0 | 30.0 | 45.0 | 60.0 | |
| 229 | 240 | 1 | C1 | kVA | 1.0 | 2.0 | 3.0 | 5.0 | 10.0 | 15.0 | 20.0 | |
| | | | | Load Amps | 4.16 | 8.33 | 12.5 | 20.8 | 41.6 | 62.5 | 83.3 | |
| | | | | Fuse Size | 6.0 | 15.0 | 20.0 | 30.0 | 60.0 | 90.0 | 110.0 | |
| BUCKING | | | | | | | | | | | | |
| 132 ** | 120 | 1 | A2 | kVA | 0.55 | 1.1 | 1.65 | 2.75 | 5.5 | 8.25 | 11.0 | |
| | | | | Load Amps | 4.58 | 9.16 | 13.75 | 22.9 | 45.8 | 68.7 | 91.6 | |
| | | | | Fuse Size | 10.0 | 15.0 | 20.0 | 30.0 | 60.0 | 80 | 110 | |
| 144 ** | 120 | 1 | B2 | kVA | 0.3 | 0.6 | 0.9 | 1.5 | 3.0 | 4.5 | 6.0 | |
| | | | | Load Amps | 2.5 | 5.0 | 7.5 | 12.5 | 25 | 37.5 | 50.0 | |
| | | | | Fuse Size | 6.0 | 10.0 | 15.0 | 15.0 | 30.0 | 40.0 | 60.0 | |
| 229 | 208 | 1 | D2 | kVA | 0.48 | 0.95 | 1.43 | 2.38 | 4.77 | 7.15 | 9.54 | |
| | | | | Load Amps | 2.29 | 4.58 | 6.88 | 11.4 | 22.9 | 34.4 | 45.8 | |
| | | | | Fuse Size | 6.0 | 10.0 | 15.0 | 15.0 | 30.0 | 40.0 | 60.0 | |
| 252 ** | 240 | 1 | C2 | kVA | 1.04 | 2.1 | 3.15 | 5.25 | 10.5 | 15.7 | 21 | |
| | | | | Load Amps | 4.34 | 8.75 | 13.13 | 21.8 | 43.7 | 65.6 | 87.5 | |
| | | | | Fuse Size | 10.0 | 15.0 | 15.0 | 30.0 | 60.0 | 80.0 | 110.0 | |
| 264 ** | 240 | 1 | D2 | kVA | 0.55 | 1.1 | 1.65 | 2.75 | 5.5 | 8.25 | 11.0 | |
| | | | | Load Amps | 2.29 | 4.58 | 6.88 | 11.4 | 22.9 | 34.3 | 45.8 | |
| | | | | Fuse Size | 6.0 | 10.0 | 15.0 | 15.0 | 30.0 | 40.0 | 60.0 | |

* For alternate electrical connection diagrams, refer to the section immediately following the selection tables.

** Shaded items are 60 Hz only (All other ratings shown are 50/60 Hz).

Selection Tables: Single Phase

Table 1: Using Group 1 (120 x 240 V Primary, 12/24 V Secondary) Transformers

| Input Voltage | Output Voltage | Quantity Req'd | Connection Diagram * | Application Data | Catalog Number | | | | |
|-----------------|----------------|----------------|----------------------|------------------|----------------|---------|---------|---------|-----------|
| | | | | | HS19F1.5A | HS19F2A | HS19F3A | HS19F5A | HS19F7.5A |
| BOOSTING | | | | | | | | | |
| 100 | 120 | 1 | B1 | kVA | 7.5 | 10.0 | 15.0 | 25.0 | 37.5 |
| | | | | Load Amps | 62.5 | 83.3 | 125.0 | 208.0 | 312.0 |
| | | | | Fuse Size | 100.0 | 125.0 | 200.0 | 350.0 | 500.0 |
| 109 | 120 | 1 | A1 | kVA | 15.0 | 20.0 | 30.0 | 49.9 | 75.0 |
| | | | | Load Amps | 125.0 | 167.0 | 250.0 | 416.0 | 625.0 |
| | | | | Fuse Size | 175.0 | 250.0 | 350.0 | 600.0 | 1000.0 |
| 189 | 208 | 1 | D1 | kVA | 13.0 | 17.3 | 26.0 | 43.3 | 64.9 |
| | | | | Load Amps | 62.5 | 83.3 | 125.0 | 208.0 | 312.0 |
| | | | | Fuse Size | 90.0 | 125.0 | 175.0 | 300.0 | 450.0 |
| 197 | 208 | 1 | C1 | kVA | 26.0 | 34.7 | 52.0 | 86.5 | 130.0 |
| | | | | Load Amps | 125.0 | 167.0 | 250.0 | 416.0 | 625.0 |
| | | | | Fuse Size | 175.0 | 225.0 | 350.0 | 600.0 | 1000.0 |
| 208 | 229 | 1 | D1 | kVA | 14.3 | 19.1 | 28.6 | 47.6 | 71.4 |
| | | | | Load Amps | 62.5 | 83.3 | 125.0 | 208.0 | 312.0 |
| | | | | Fuse Size | 90.0 | 125.0 | 175.0 | 300.0 | 450.0 |
| 218 ** | 240 | 1 | D1 | kVA | 15.0 | 20.0 | 30.0 | 49.9 | 74.9 |
| | | | | Load Amps | 62.5 | 83.3 | 125.0 | 208.0 | 312.0 |
| | | | | Fuse Size | 90.0 | 125.0 | 175.0 | 300.0 | 450.0 |
| 229 | 240 | 1 | C1 | kVA | 30.0 | 40.1 | 60.0 | 99.8 | 150.0 |
| | | | | Load Amps | 125.0 | 167.0 | 250.0 | 416.0 | 625.0 |
| | | | | Fuse Size | 175.0 | 225.0 | 350.0 | 600.0 | 1000.0 |
| BUCKING | | | | | | | | | |
| 132 ** | 120 | 1 | A2 | kVA | 16.5 | 22.0 | 33.0 | 54.9 | 82.5 |
| | | | | Load Amps | 137.5 | 183.3 | 275.0 | 457.6 | 687.5 |
| | | | | Fuse Size | 175.0 | 225.0 | 350.0 | 600.0 | 800.0 |
| 144 ** | 120 | 1 | B2 | kVA | 9.0 | 12.0 | 18.0 | 30.0 | 44.9 |
| | | | | Load Amps | 75.0 | 100.0 | 150.0 | 249.6 | 374.4 |
| | | | | Fuse Size | 80.0 | 110.0 | 175.0 | 300.0 | 400.0 |
| 229 | 208 | 1 | D2 | kVA | 14.3 | 19.1 | 28.6 | 47.6 | 71.4 |
| | | | | Load Amps | 68.8 | 91.6 | 137.5 | 228.8 | 343.2 |
| | | | | Fuse Size | 80.0 | 110.0 | 175.0 | 300.0 | 400.0 |
| 252 ** | 240 | 1 | C2 | kVA | 31.5 | 42.0 | 63.0 | 104.8 | 157.5 |
| | | | | Load Amps | 131.3 | 174.9 | 262.5 | 436.8 | 656.3 |
| | | | | Fuse Size | 175.0 | 225.0 | 350.0 | 600.0 | 800.0 |
| 264 ** | 240 | 1 | D2 | kVA | 16.5 | 22.0 | 33.0 | 54.9 | 78.6 |
| | | | | Load Amps | 68.8 | 91.6 | 137.5 | 228.8 | 343.2 |
| | | | | Fuse Size | 80.0 | 110.0 | 175.0 | 300.0 | 400.0 |

* For alternate electrical connection diagrams, refer to the section immediately following the selection tables.

** Shaded items are 60 Hz only (All other ratings shown are 50/60 Hz).

Selection Tables: Single Phase

Table 2: Using Group 2 (120 x 240 V Primary, 16/32 V Secondary) Transformers

| Input Voltage | Output Voltage | Quantity Req'd | Connection Diagram * | Application Data | Catalog Number | | | | |
|-----------------|----------------|----------------|----------------------|------------------|----------------|----------|-----------|-----------|---------|
| | | | | | HS20B150 | HS20B250 | HS20F500B | HS20F750B | HS20F1B |
| BOOSTING | | | | | | | | | |
| 95 | 120 | 1 | B1 | kVA | 0.6 | 0.9 | 1.9 | 2.8 | 3.8 |
| | | | | Load Amps | 4.7 | 7.8 | 15.6 | 23.4 | 31.2 |
| | | | | Fuse Size | 10.0 | 15.0 | 25.0 | 40.0 | 50.0 |
| 106 | 120 | 1 | A1 | kVA | 1.1 | 1.9 | 3.7 | 5.6 | 7.5 |
| | | | | Load Amps | 9.4 | 15.6 | 31.2 | 46.8 | 62.5 |
| | | | | Fuse Size | 15.0 | 25.0 | 45.0 | 70.0 | 90.0 |
| 183 | 208 | 1 | D1 | kVA | 1.0 | 1.6 | 3.2 | 4.9 | 6.5 |
| | | | | Load Amps | 4.7 | 7.8 | 15.6 | 23.4 | 31.2 |
| | | | | Fuse Size | 10.0 | 15.0 | 25.0 | 35.0 | 45.0 |
| 195 | 208 | 1 | C1 | kVA | 2.0 | 3.2 | 6.5 | 9.7 | 13.0 |
| | | | | Load Amps | 9.4 | 15.6 | 31.2 | 46.8 | 62.5 |
| | | | | Fuse Size | 15.0 | 25.0 | 45.0 | 70.0 | 90.0 |
| 208 | 236 | 1 | D1 | kVA | 1.1 | 1.8 | 3.7 | 5.5 | 7.4 |
| | | | | Load Amps | 4.7 | 7.8 | 15.6 | 23.4 | 31.2 |
| | | | | Fuse Size | 10.0 | 15.0 | 25.0 | 40.0 | 50.0 |
| 225 | 240 | 1 | C1 | kVA | 2.3 | 3.7 | 7.5 | 11.2 | 15.0 |
| | | | | Load Amps | 9.4 | 15.6 | 31.2 | 46.8 | 62.5 |
| | | | | Fuse Size | 15.0 | 25.0 | 45.0 | 70.0 | 90.0 |
| 240 ** | 272 | 1 | D1 | kVA | 1.3 | 2.1 | 4.2 | 6.4 | 8.5 |
| | | | | Load Amps | 4.7 | 7.8 | 15.6 | 23.4 | 31.2 |
| | | | | Fuse Size | 10.0 | 15.0 | 25.0 | 35.0 | 45.0 |
| BUCKING | | | | | | | | | |
| 136 ** | 120 | 1 | A2 | kVA | 1.3 | 2.1 | 4.2 | 6.4 | 8.5 |
| | | | | Load Amps | 10.6 | 17.7 | 35.4 | 53.2 | 70.8 |
| | | | | Fuse Size | 15.0 | 20.0 | 40.0 | 60.0 | 80.0 |
| 152 ** | 120 | 1 | B2 | kVA | 0.7 | 1.2 | 2.4 | 3.6 | 4.7 |
| | | | | Load Amps | 6.0 | 9.9 | 19.8 | 29.6 | 39.5 |
| | | | | Fuse Size | 10.0 | 15.0 | 20.0 | 30.0 | 40.0 |
| 236 | 208 | 1 | D2 | kVA | 1.1 | 1.8 | 3.7 | 5.5 | 7.4 |
| | | | | Load Amps | 5.3 | 8.9 | 17.7 | 26.5 | 35.4 |
| | | | | Fuse Size | 6.0 | 15.0 | 20.0 | 30.0 | 40.0 |
| 256 ** | 240 | 1 | C2 | kVA | 2.4 | 4.0 | 8.0 | 12.0 | 16.0 |
| | | | | Load Amps | 10.0 | 16.6 | 33.3 | 50.0 | 66.7 |
| | | | | Fuse Size | 15.0 | 20.0 | 40.0 | 60.0 | 80.0 |
| 272 ** | 240 | 1 | D2 | kVA | 1.3 | 2.1 | 4.2 | 6.4 | 8.5 |
| | | | | Load Amps | 5.3 | 8.8 | 17.7 | 26.5 | 35.4 |
| | | | | Fuse Size | 10.0 | 15.0 | 20.0 | 30.0 | 40.0 |

* For alternate electrical connection diagrams, refer to the section immediately following the selection tables.

** Shaded items are 60 Hz only (All other ratings shown are 50/60 Hz).

Selection Tables: Single Phase

Table 2: Using Group 2 (120 x 240 V Primary, 16/32 V Secondary) Transformers

| Input Voltage | Output Voltage | Quantity Req'd | Connection Diagram * | Application Data | Catalog Number | | | | |
|-----------------|----------------|----------------|----------------------|------------------|----------------|---------|---------|---------|-----------|
| | | | | | HS20F1.5A | HS20F2A | HS20F3A | HS20F5A | HS20F7.5A |
| BOOSTING | | | | | | | | | |
| 95 | 120 | 1 | B1 | kVA | 5.6 | 7.5 | 11.2 | 18.7 | 28.0 |
| | | | | Load Amps | 46.8 | 62.5 | 93.7 | 156.0 | 234.0 |
| | | | | Fuse Size | 80.0 | 100.0 | 150.0 | 250.0 | 400.0 |
| 106 | 120 | 1 | A1 | kVA | 11.2 | 15.0 | 22.5 | 37.4 | 56.2 |
| | | | | Load Amps | 93.7 | 125.0 | 187.5 | 312.0 | 468.0 |
| | | | | Fuse Size | 150.0 | 200.0 | 300.0 | 450.0 | 700.0 |
| 183 | 208 | 1 | D1 | kVA | 9.7 | 13.0 | 19.5 | 32.4 | 48.6 |
| | | | | Load Amps | 46.8 | 62.5 | 93.7 | 156.0 | 234.0 |
| | | | | Fuse Size | 70.0 | 90.0 | 150.0 | 225.0 | 350.0 |
| 195 | 208 | 1 | C1 | kVA | 19.5 | 26.0 | 39.0 | 64.9 | 97.3 |
| | | | | Load Amps | 93.7 | 125.0 | 187.5 | 312.0 | 468.0 |
| | | | | Fuse Size | 125.0 | 175.0 | 250.0 | 450.0 | 700.0 |
| 208 | 236 | 1 | D1 | kVA | 11.0 | 14.7 | 22.0 | 36.8 | 55.2 |
| | | | | Load Amps | 46.8 | 62.5 | 93.7 | 156.0 | 234.0 |
| | | | | Fuse Size | 70.0 | 90.0 | 150.0 | 225.0 | 350.0 |
| 225 | 240 | 1 | C1 | kVA | 22.5 | 30.0 | 45.0 | 74.8 | 112.3 |
| | | | | Load Amps | 93.7 | 125.0 | 187.5 | 312.0 | 468.0 |
| | | | | Fuse Size | 125.0 | 175.0 | 250.0 | 450.0 | 700.0 |
| 240 ** | 272 | 1 | D1 | kVA | 12.7 | 17.0 | 25.5 | 42.4 | 63.6 |
| | | | | Load Amps | 46.8 | 62.5 | 93.7 | 156.0 | 234.0 |
| | | | | Fuse Size | 70.0 | 90.0 | 150.0 | 225.0 | 350.0 |
| BUCKING | | | | | | | | | |
| 136 ** | 120 | 1 | A2 | kVA | 12.7 | 17.0 | 25.5 | 42.4 | 63.6 |
| | | | | Load Amps | 106.2 | 141.7 | 212.5 | 353.6 | 530.4 |
| | | | | Fuse Size | 125.0 | 175.0 | 250.0 | 400.0 | 600.0 |
| 152 ** | 120 | 1 | B2 | kVA | 7.1 | 9.5 | 14.3 | 23.7 | 35.6 |
| | | | | Load Amps | 59.4 | 79.2 | 118.8 | 197.6 | 296.4 |
| | | | | Fuse Size | 60.0 | 80.0 | 125.0 | 200.0 | 300.0 |
| 236 | 208 | 1 | D2 | kVA | 11.1 | 14.8 | 22.1 | 36.8 | 55.2 |
| | | | | Load Amps | 53.2 | 70.9 | 106.4 | 177.0 | 265.5 |
| | | | | Fuse Size | 60.0 | 80.0 | 125.0 | 200.0 | 300.0 |
| 256 ** | 240 | 1 | C2 | kVA | 24.0 | 32.0 | 48.0 | 79.9 | 119.8 |
| | | | | Load Amps | 99.9 | 133.3 | 200.0 | 332.8 | 499.2 |
| | | | | Fuse Size | 125.0 | 175.0 | 250.0 | 400.0 | 600.0 |
| 272 ** | 240 | 1 | D2 | kVA | 12.8 | 17.0 | 25.5 | 42.4 | 63.6 |
| | | | | Load Amps | 53.2 | 70.8 | 106.3 | 176.8 | 265.2 |
| | | | | Fuse Size | 60.0 | 80.0 | 125.0 | 200.0 | 300.0 |

* For alternate electrical connection diagrams, refer to the section immediately following the selection tables.

** Shaded items are 60 Hz only (All other ratings shown are 50/60 Hz).

Selection Tables: Single Phase

Table 3: Using Group 3 (240 x 480 V Primary, 24/48 V Secondary) Transformers

| Input Voltage | Output Voltage | Quantity Req'd | Connection Diagram * | Application Data | Catalog Number | | | | |
|-----------------|----------------|----------------|----------------------|------------------|----------------|----------|-----------|-----------|---------|
| | | | | | HS22B150 | HS22B250 | HS22F500B | HS22F750B | HS22F1B |
| BOOSTING | | | | | | | | | |
| 200 | 240 | 1 | B1 | kVA | 0.75 | 1.25 | 2.50 | 3.74 | 4.99 |
| | | | | Load Amps | 3.10 | 5.20 | 10.40 | 15.60 | 20.80 |
| | | | | Fuse Size | 6.00 | 10.00 | 15.00 | 20.00 | 30.00 |
| 230 ** | 277 | 1 | B1 | kVA | 0.87 | 1.44 | 2.88 | 4.22 | 5.76 |
| | | | | Load Amps | 3.10 | 5.20 | 10.40 | 15.60 | 20.80 |
| | | | | Fuse Size | 10.00 | 15.00 | 20.00 | 25.00 | 35.00 |
| 346 | 380 | 1 | D1 | kVA | 1.20 | 1.98 | 3.95 | 5.93 | 7.90 |
| | | | | Load Amps | 3.10 | 5.20 | 10.40 | 15.60 | 20.80 |
| | | | | Fuse Size | 6.00 | 10.00 | 15.00 | 20.00 | 30.00 |
| 362 | 380 | 1 | C1 | kVA | 2.40 | 3.95 | 7.90 | 11.86 | 15.81 |
| | | | | Load Amps | 6.30 | 10.40 | 20.80 | 31.20 | 41.60 |
| | | | | Fuse Size | 10.00 | 15.00 | 30.00 | 40.00 | 60.00 |
| 378 | 416 | 1 | D1 | kVA | 1.30 | 2.16 | 4.33 | 6.49 | 8.65 |
| | | | | Load Amps | 3.10 | 5.20 | 10.40 | 15.60 | 20.80 |
| | | | | Fuse Size | 6.00 | 10.00 | 15.00 | 25.00 | 30.00 |
| 436 | 480 | 1 | D1 | kVA | 1.50 | 2.50 | 4.99 | 7.49 | 9.98 |
| | | | | Load Amps | 3.10 | 5.20 | 10.40 | 15.60 | 20.80 |
| | | | | Fuse Size | 6.00 | 10.00 | 15.00 | 25.00 | 30.00 |
| 458 ** | 480 | 1 | C1 | kVA | 3.00 | 4.99 | 9.98 | 14.98 | 19.97 |
| | | | | Load Amps | 6.30 | 10.40 | 20.80 | 31.20 | 41.60 |
| | | | | Fuse Size | 15.00 | 15.00 | 30.00 | 45.00 | 60.00 |
| BUCKING | | | | | | | | | |
| 277 ** | 230 | 1 | B2 | kVA | 0.86 | 1.44 | 2.88 | 4.33 | 5.76 |
| | | | | Load Amps | 3.80 | 6.26 | 12.53 | 18.79 | 25.05 |
| | | | | Fuse Size | 6.00 | 10.00 | 15.00 | 20.00 | 30.00 |
| 398 | 380 | 1 | C2 | kVA | 2.50 | 4.14 | 8.28 | 12.40 | 16.60 |
| | | | | Load Amps | 6.50 | 10.89 | 21.79 | 32.70 | 43.60 |
| | | | | Fuse Size | 10.00 | 15.00 | 30.00 | 40.00 | 60.00 |
| 418 ** | 380 | 1 | D2 | kVA | 1.30 | 2.18 | 4.35 | 6.52 | 8.69 |
| | | | | Load Amps | 3.40 | 5.72 | 11.40 | 17.20 | 22.90 |
| | | | | Fuse Size | 6.00 | 10.00 | 15.00 | 20.00 | 30.00 |
| 504 ** | 480 | 1 | C2 | kVA | 3.10 | 5.24 | 10.50 | 15.70 | 21.00 |
| | | | | Load Amps | 6.60 | 10.40 | 21.80 | 32.80 | 43.70 |
| | | | | Fuse Size | 15.00 | 15.00 | 30.00 | 45.00 | 60.00 |
| 528 ** | 480 | 1 | D2 | kVA | 1.65 | 2.75 | 5.49 | 8.24 | 11.00 |
| | | | | Load Amps | 3.40 | 5.72 | 11.44 | 17.16 | 22.88 |
| | | | | Fuse Size | 6.00 | 10.00 | 15.00 | 20.00 | 30.00 |

* For alternate electrical connection diagrams, refer to the section immediately following the selection tables.

** Shaded items are 60 Hz only (All other ratings shown are 50/60 Hz).

Selection Tables: Single Phase

Table 3: Using Group 3 (240 x 480 V Primary, 24/48 V Secondary) Transformers

| Input Voltage | Output Voltage | Quantity Req'd | Connection Diagram * | Application Data | Catalog Number | | | | |
|-----------------|----------------|----------------|----------------------|------------------|----------------|---------|---------|---------|-----------|
| | | | | | HS22F1.5A | HS22F2A | HS22F3A | HS22F5A | HS22F7.5A |
| BOOSTING | | | | | | | | | |
| 200 | 240 | 1 | B1 | kVA | 7.49 | 9.98 | 15.0 | 24.96 | 37.44 |
| | | | | Load Amps | 31.2 | 41.6 | 62.5 | 104.0 | 156.0 |
| | | | | Fuse Size | 50.0 | 70.0 | 90.0 | 150.0 | 225.0 |
| 230 ** | 277 | 1 | B1 | kVA | 8.64 | 11.52 | 17.31 | 28.81 | 43.21 |
| | | | | Load Amps | 31.2 | 41.6 | 62.5 | 104.0 | 156.0 |
| | | | | Fuse Size | 50.0 | 70.0 | 100.0 | 175.0 | 250.0 |
| 346 | 380 | 1 | D1 | kVA | 11.86 | 15.81 | 23.75 | 39.52 | 59.28 |
| | | | | Load Amps | 31.2 | 41.6 | 62.5 | 104.0 | 156.0 |
| | | | | Fuse Size | 45.0 | 60.0 | 90.0 | 150.0 | 225.0 |
| 362 | 380 | 1 | C1 | kVA | 23.75 | 31.65 | 47.5 | 79.04 | 118.56 |
| | | | | Load Amps | 62.5 | 83.3 | 125 | 208 | 312.0 |
| | | | | Fuse Size | 90.0 | 110.0 | 175.0 | 300.0 | 450.0 |
| 378 | 416 | 1 | D1 | kVA | 12.98 | 17.31 | 26.0 | 43.26 | 64.9 |
| | | | | Load Amps | 31.2 | 41.6 | 62.5 | 104.0 | 156.0 |
| | | | | Fuse Size | 50.0 | 60.0 | 90.0 | 150.0 | 225.0 |
| 436 | 480 | 1 | D1 | kVA | 14.98 | 19.97 | 30.0 | 49.92 | 74.88 |
| | | | | Load Amps | 31.2 | 41.6 | 62.5 | 104.0 | 156.0 |
| | | | | Fuse Size | 45.0 | 60.0 | 90.0 | 150.0 | 225.0 |
| 458 ** | 480 | 1 | C1 | kVA | 30.0 | 39.98 | 60.0 | 99.84 | 149.76 |
| | | | | Load Amps | 62.5 | 83.3 | 125.0 | 208.0 | 312.0 |
| | | | | Fuse Size | 90.0 | 110.0 | 175.0 | 300.0 | 450.0 |
| BUCKING | | | | | | | | | |
| 277 ** | 230 | 1 | B2 | kVA | 8.64 | 11.5 | 17.3 | 28.8 | 43.2 |
| | | | | Load Amps | 37.6 | 50.1 | 75.3 | 125.3 | 187.9 |
| | | | | Fuse Size | 40.0 | 60.0 | 80.0 | 150.0 | 200.0 |
| 398 | 380 | 1 | C2 | kVA | 24.8 | 33.1 | 49.8 | 82.8 | 124.2 |
| | | | | Load Amps | 65.4 | 87.1 | 130.9 | 217.9 | 326.8 |
| | | | | Fuse Size | 80.0 | 110.0 | 175.0 | 300.0 | 400.0 |
| 418 * | 380 | 1 | D2 | kVA | 13.0 | 17.4 | 26.1 | 43.5 | 65.2 |
| | | | | Load Amps | 34.3 | 45.8 | 68.8 | 114.4 | 171.6 |
| | | | | Fuse Size | 40.0 | 60.0 | 80.0 | 150.0 | 200.0 |
| 504 ** | 480 | 1 | C2 | kVA | 31.4 | 41.9 | 63.0 | 104.8 | 157.2 |
| | | | | Load Amps | 65.5 | 87.4 | 131.3 | 218.4 | 327.6 |
| | | | | Fuse Size | 90.0 | 110.0 | 175.0 | 300.0 | 450.0 |
| 528 ** | 480 | 1 | D2 | kVA | 16.5 | 22.0 | 33.0 | 54.9 | 82.4 |
| | | | | Load Amps | 34.3 | 45.8 | 68.8 | 114.4 | 171.6 |
| | | | | Fuse Size | 40.0 | 60.0 | 80.0 | 150.0 | 200.0 |

* For alternate electrical connection diagrams, refer to the section immediately following the selection tables.

** Shaded items are 60 Hz only (All other ratings shown are 50/60 Hz).

Selection Tables: Three Phase

Table 4: Using Group 1 (120 x 240 V Primary, 12/24 V Secondary) Transformers

| Input Voltage | Output Voltage | Quantity Req'd | Connection Diagram * | Application Data | Catalog Number | | | | | | | |
|-----------------|----------------|----------------|----------------------|------------------|----------------|----------|----------|----------|-----------|-----------|---------|--|
| | | | | | HS19B50 | HS19B100 | HS19B150 | HS19B250 | HS19F500B | HS19F750B | HS19F1B | |
| BOOSTING | | | | | | | | | | | | |
| 188 | 208 | 2 | F1 | kVA | 0.749 | 1.5 | 2.25 | 3.75 | 7.51 | 11.3 | 15.0 | |
| | | | | Load Amps | 2.08 | 4.16 | 6.25 | 10.4 | 20.8 | 31.25 | 41.6 | |
| | | | | Fuse Size | 6.0 | 10.0 | 15.0 | 15.0 | 30.0 | 45.0 | 60.0 | |
| 198 | 208 | 2 | E1 | kVA | 1.5 | 3.0 | 4.5 | 7.51 | 15.0 | 22.5 | 30.0 | |
| | | | | Load Amps | 4.16 | 8.32 | 12.5 | 20.8 | 41.6 | 62.5 | 83.3 | |
| | | | | Fuse Size | 6.0 | 15.0 | 25.0 | 30.0 | 60.0 | 90.0 | 110.0 | |
| 208 | 229 | 2 | F1 | kVA | 0.825 | 1.65 | 2.48 | 4.13 | 8.26 | 12.4 | 16.5 | |
| | | | | Load Amps | 2.08 | 4.16 | 6.25 | 10.4 | 20.8 | 31.25 | 41.6 | |
| | | | | Fuse Size | 6.0 | 10.0 | 15.0 | 15.0 | 30.0 | 45.0 | 60.0 | |
| 208 | 229 | 3 | J1 | kVA | 1.65 | 3.3 | 4.96 | 8.26 | 16.5 | 24.8 | 33.1 | |
| | | | | Load Amps | 4.16 | 8.32 | 12.5 | 20.8 | 41.6 | 62.5 | 83.3 | |
| | | | | Fuse Size | 10.0 | 15.0 | 20.0 | 30.0 | 60.0 | 90.0 | 125.0 | |
| 228 ** | 240 | 2 | E1 | kVA | 1.73 | 3.46 | 5.2 | 8.68 | 17.3 | 26 | 34.6 | |
| | | | | Load Amps | 4.16 | 8.32 | 12.5 | 20.8 | 41.6 | 62.5 | 83.3 | |
| | | | | Fuse Size | 6.0 | 15.0 | 20.0 | 30.0 | 60.0 | 90.0 | 110.0 | |
| 416 | 436 | 3 | L1 | kVA | 3.15 | 6.29 | 9.44 | 15.8 | 31.5 | 47.2 | 62.9 | |
| | | | | Load Amps | 4.16 | 8.32 | 12.5 | 20.8 | 41.6 | 62.5 | 83.3 | |
| | | | | Fuse Size | 6.0 | 15.0 | 20.0 | 30.0 | 60.0 | 90.0 | 110.0 | |
| 416 | 458 | 3 | M1 | kVA | 1.65 | 3.31 | 4.96 | 8.27 | 16.5 | 24.8 | 33 | |
| | | | | Load Amps | 2.08 | 4.16 | 6.25 | 10.4 | 20.8 | 31.25 | 41.6 | |
| | | | | Fuse Size | 3.0 | 6.0 | 10.0 | 15.0 | 30.0 | 45.0 | 60.0 | |
| BUCKING | | | | | | | | | | | | |
| 218 | 208 | 2 | E2 | kVA | 1.57 | 3.14 | 4.73 | 7.85 | 15.7 | 23.6 | 31.4 | |
| | | | | Load Amps | 4.36 | 8.72 | 13.1 | 21.8 | 43.6 | 65.5 | 87.2 | |
| | | | | Fuse Size | 10.0 | 15.0 | 20.0 | 30.0 | 60.0 | 80.0 | 110.0 | |
| 229 | 208 | 2 | F2 | kVA | 0.824 | 1.65 | 2.48 | 4.12 | 8.25 | 12.4 | 16.5 | |
| | | | | Load Amps | 2.29 | 4.58 | 6.88 | 11.4 | 22.9 | 34.4 | 45.8 | |
| | | | | Fuse Size | 6.0 | 10.0 | 15.0 | 15.0 | 30.0 | 40.0 | 60.0 | |
| 252 ** | 240 | 2 | E2 | kVA | 1.82 | 3.63 | 5.46 | 9.08 | 18.2 | 27.3 | 36.3 | |
| | | | | Load Amps | 4.37 | 8.74 | 13.1 | 21.8 | 43.7 | 65.6 | 87.4 | |
| | | | | Fuse Size | 6.00 | 10.00 | 15.00 | 30.00 | 60.00 | 80.00 | 110.00 | |
| 264 ** | 240 | 2 | F2 | kVA | 0.951 | 1.9 | 2.86 | 4.76 | 9.51 | 14.3 | 19.00 | |
| | | | | Load Amps | 2.29 | 4.58 | 6.88 | 11.44 | 22.9 | 34.4 | 45.8 | |
| | | | | Fuse Size | 6.0 | 6.0 | 10.0 | 15.0 | 30.0 | 40.0 | 60.0 | |
| 418 | 378 | 3 | M2 | kVA | 1.5 | 3.0 | 4.5 | 7.49 | 15.0 | 22.5 | 30.0 | |
| | | | | Load Amps | 2.29 | 4.58 | 6.88 | 11.44 | 22.9 | 34.4 | 45.8 | |
| | | | | Fuse Size | 6.0 | 6.0 | 10.0 | 15.0 | 30.0 | 40.0 | 60.0 | |

* For alternate electrical connection diagrams, refer to the section immediately following the selection tables.

** Shaded items are 60 Hz only (All other ratings shown are 50/60 Hz).

Selection Tables: Three Phase

Table 4: Using Group 1 (120 x 240 V Primary, 12/24 V Secondary) Transformers

| Input Voltage | Output Voltage | Quantity Req'd | Connection Diagram * | Application Data | Catalog Number | | | | |
|-----------------|----------------|----------------|----------------------|------------------|----------------|---------|---------|---------|-----------|
| | | | | | HS19F1.5A | HS19F2A | HS19F3A | HS19F5A | HS19F7.5A |
| BOOSTING | | | | | | | | | |
| 188 | 208 | 2 | F1 | kVA | 22.5 | 30.0 | 45.0 | 75.1 | 112.5 |
| | | | | Load Amps | 62.5 | 83.3 | 125.0 | 208.3 | 312.5 |
| | | | | Fuse Size | 90.0 | 125.0 | 175.0 | 300.0 | 450.0 |
| 198 | 208 | 2 | E1 | kVA | 45.0 | 60.0 | 90.1 | 150.1 | 225.2 |
| | | | | Load Amps | 125.0 | 166.6 | 250.0 | 416.6 | 625.0 |
| | | | | Fuse Size | 175.0 | 225.0 | 350.0 | 600.0 | 1000.0 |
| 208 | 229 | 2 | F1 | kVA | 24.8 | 33.1 | 49.6 | 82.6 | 123.9 |
| | | | | Load Amps | 62.5 | 83.3 | 125.0 | 208.3 | 312.5 |
| | | | | Fuse Size | 90.0 | 125.0 | 175.0 | 300.0 | 450.0 |
| 208 | 229 | 3 | J1 | kVA | 49.6 | 66.1 | 99.2 | 165.3 | 247.9 |
| | | | | Load Amps | 125.0 | 166.6 | 250.0 | 416.6 | 625.0 |
| | | | | Fuse Size | 175.0 | 250.0 | 350.0 | 600.0 | 1000.0 |
| 228 ** | 240 | 2 | E1 | kVA | 52.0 | 69.3 | 103.9 | 173.2 | 259.8 |
| | | | | Load Amps | 125.0 | 166.6 | 250.0 | 416.6 | 625.0 |
| | | | | Fuse Size | 175.0 | 250.0 | 350.0 | 600.0 | 1000.0 |
| 416 | 436 | 3 | L1 | kVA | 94.4 | 125.8 | 188.79 | 314.6 | 472.0 |
| | | | | Load Amps | 125.0 | 166.6 | 250.0 | 416.6 | 625.0 |
| | | | | Fuse Size | 175.0 | 250.0 | 350.0 | 600.0 | 1000.0 |
| 416 | 458 | 3 | M1 | kVA | 49.6 | 66.1 | 99.2 | 165.3 | 247.9 |
| | | | | Load Amps | 62.5 | 83.3 | 125.0 | 208.3 | 312.5 |
| | | | | Fuse Size | 90.0 | 125.0 | 175.0 | 300.0 | 450.0 |
| BUCKING | | | | | | | | | |
| 218 | 208 | 2 | E2 | kVA | 47.2 | 62.7 | 94.4 | 157.3 | 236.0 |
| | | | | Load Amps | 131.0 | 174.0 | 262.0 | 436.6 | 655.0 |
| | | | | Fuse Size | 175.0 | 225.0 | 350.0 | 600.0 | 800.0 |
| 229 | 208 | 2 | F2 | kVA | 24.8 | 33.0 | 49.6 | 82.5 | 123.9 |
| | | | | Load Amps | 68.8 | 91.6 | 137.6 | 229.0 | 344.1 |
| | | | | Fuse Size | 80.0 | 110.0 | 175.0 | 300.0 | 400.0 |
| 252 ** | 240 | 2 | E2 | kVA | 54.6 | 72.5 | 109.1 | 181.8 | 272.8 |
| | | | | Load Amps | 131.3 | 174.3 | 262.5 | 437.4 | 656.3 |
| | | | | Fuse Size | 175.0 | 225.0 | 350.0 | 600.0 | 800.0 |
| 264 ** | 240 | 2 | F2 | kVA | 28.6 | 38.0 | 57.2 | 95.1 | 142.9 |
| | | | | Load Amps | 68.8 | 91.5 | 137.5 | 228.8 | 343.8 |
| | | | | Fuse Size | 80.0 | 110.0 | 175.0 | 300.0 | 400.0 |
| 418 | 378 | 3 | M2 | kVA | 45.0 | 59.9 | 90.1 | 149.9 | 225.2 |
| | | | | Load Amps | 68.8 | 91.6 | 137.6 | 228.9 | 343.9 |
| | | | | Fuse Size | 80.0 | 110.0 | 175.0 | 300.0 | 400.0 |

* For alternate electrical connection diagrams, refer to the section immediately following the selection tables.

** Shaded items are 60 Hz only (All other ratings shown are 50/60 Hz).

Selection Tables: Three Phase

Table 5: Using Group 2 (120 x 240 V Primary, 16/32 V Secondary) Transformers

| Input Voltage | Output Voltage | Quantity Req'd | Connection Diagram * | Application Data | Catalog Number | | | | |
|-----------------|----------------|----------------|----------------------|------------------|----------------|----------|-----------|-----------|---------|
| | | | | | HS20B150 | HS20B250 | HS20F500B | HS20F750B | HS20F1B |
| BOOSTING | | | | | | | | | |
| 184 | 208 | 2 | F1 | kVA | 1.69 | 2.81 | 5.63 | 8.44 | 11.3 |
| | | | | Load Amps | 4.69 | 7.8 | 15.6 | 23.4 | 31.2 |
| | | | | Fuse Size | 10.0 | 15.0 | 25.0 | 35.0 | 45.0 |
| 195 | 208 | 2 | E1 | kVA | 3.38 | 5.63 | 11.3 | 16.9 | 22.5 |
| | | | | Load Amps | 9.38 | 15.6 | 31.2 | 46.9 | 62.5 |
| | | | | Fuse Size | 15.0 | 25.0 | 45.0 | 70.0 | 90.0 |
| 208 | 236 | 2 | F1 | kVA | 1.92 | 3.19 | 6.39 | 9.58 | 12.8 |
| | | | | Load Amps | 4.69 | 7.8 | 15.6 | 23.4 | 31.2 |
| | | | | Fuse Size | 10.0 | 15.0 | 25.0 | 35.0 | 45.0 |
| 208 | 236 | 3 | J1 | kVA | 3.83 | 6.38 | 12.8 | 19.2 | 25.6 |
| | | | | Load Amps | 9.38 | 15.6 | 31.2 | 46.9 | 62.5 |
| | | | | Fuse Size | 15.0 | 25.0 | 45.0 | 70.0 | 90.0 |
| 225 | 240 | 2 | E1 | kVA | 3.9 | 6.5 | 13.0 | 19.5 | 26.0 |
| | | | | Load Amps | 9.38 | 15.6 | 31.2 | 46.9 | 62.5 |
| | | | | Fuse Size | 15.0 | 25.0 | 45.0 | 70.0 | 90.0 |
| 416 | 443 | 3 | L1 | kVA | 7.2 | 12.0 | 24.0 | 36.0 | 48.0 |
| | | | | Load Amps | 9.38 | 15.6 | 31.2 | 46.9 | 62.5 |
| | | | | Fuse Size | 15.0 | 25.0 | 45.0 | 70.0 | 90.0 |
| 416 | 471 | 3 | M1 | kVA | 3.83 | 6.37 | 12.8 | 19.1 | 25.5 |
| | | | | Load Amps | 4.69 | 7.8 | 15.6 | 23.4 | 31.2 |
| | | | | Fuse Size | 10.0 | 15.0 | 25.0 | 35.0 | 45.0 |
| BUCKING | | | | | | | | | |
| 222 | 208 | 2 | E2 | kVA | 3.61 | 6.0 | 12.0 | 18.0 | 24.0 |
| | | | | Load Amps | 10.0 | 16.6 | 33.3 | 50.1 | 66.7 |
| | | | | Fuse Size | 15.0 | 20.0 | 40.0 | 60.0 | 80.0 |
| 236 | 208 | 2 | F2 | kVA | 1.92 | 3.19 | 6.38 | 9.56 | 12.8 |
| | | | | Load Amps | 5.32 | 8.85 | 17.7 | 26.5 | 35.4 |
| | | | | Fuse Size | 10.0 | 10.0 | 20.0 | 30.0 | 40.0 |
| 256 ** | 240 | 2 | E2 | kVA | 4.16 | 6.92 | 13.8 | 20.8 | 27.7 |
| | | | | Load Amps | 10.1 | 16.6 | 33.3 | 50.0 | 66.7 |
| | | | | Fuse Size | 15.0 | 20.0 | 40.0 | 60.0 | 80.0 |
| 272 ** | 240 | 2 | F2 | kVA | 2.21 | 3.67 | 7.35 | 11.0 | 14.7 |
| | | | | Load Amps | 5.32 | 8.84 | 17.7 | 26.5 | 35.4 |
| | | | | Fuse Size | 10.0 | 15.0 | 20.0 | 30.0 | 40.0 |
| 432 | 380 | 3 | M2 | kVA | 3.51 | 5.84 | 11.7 | 17.5 | 23.3 |
| | | | | Load Amps | 5.33 | 8.87 | 17.7 | 26.6 | 35.5 |
| | | | | Fuse Size | 10.0 | 10.0 | 20.0 | 30.0 | 40.0 |

* For alternate electrical connection diagrams, refer to the section immediately following the selection tables.

** Shaded items are 60 Hz only (All other ratings shown are 50/60 Hz).

Selection Tables: Three Phase

Table 5: Using Group 2 (120 x 240 V Primary, 16/32 V Secondary) Transformers

| Input Voltage | Output Voltage | Quantity Req'd | Connection Diagram * | Application Data | Catalog Number | | | | |
|-----------------|----------------|----------------|----------------------|------------------|----------------|---------|---------|---------|-----------|
| | | | | | HS20F1.5A | HS20F2A | HS20F3A | HS20F5A | HS20F7.5A |
| BOOSTING | | | | | | | | | |
| 184 | 208 | 2 | F1 | kVA | 16.9 | 22.5 | 33.8 | 56.3 | 84.4 |
| | | | | Load Amps | 46.9 | 62.5 | 93.8 | 156.0 | 234.0 |
| | | | | Fuse Size | 60.0 | 90.0 | 150.0 | 225.0 | 350.0 |
| 195 | 208 | 2 | E1 | kVA | 33.8 | 45.0 | 67.6 | 112.6 | 168.9 |
| | | | | Load Amps | 93.7 | 125.0 | 187.5 | 312.0 | 468.0 |
| | | | | Fuse Size | 125.0 | 175.0 | 250.0 | 450.0 | 700.0 |
| 208 | 236 | 2 | F1 | kVA | 19.2 | 25.6 | 38.2 | 63.9 | 95.8 |
| | | | | Load Amps | 46.9 | 62.5 | 93.7 | 156.0 | 234.0 |
| | | | | Fuse Size | 70.0 | 90.0 | 150.0 | 225.0 | 350.0 |
| 208 | 236 | 3 | J1 | kVA | 38.2 | 51.1 | 76.6 | 127.7 | 191.6 |
| | | | | Load Amps | 93.7 | 125.0 | 187.5 | 312.0 | 468.0 |
| | | | | Fuse Size | 150.0 | 200.0 | 300.0 | 450.0 | 700.0 |
| 225 | 240 | 2 | E1 | kVA | 71.9 | 52.0 | 77.9 | 129.9 | 194.0 |
| | | | | Load Amps | 93.7 | 125.0 | 187.5 | 312.0 | 468.0 |
| | | | | Fuse Size | 125.0 | 175.0 | 250.0 | 450.0 | 700.0 |
| 416 | 443 | 3 | L1 | kVA | 71.9 | 95.9 | 143.9 | 239.8 | 359.7 |
| | | | | Load Amps | 93.7 | 125 | 187.5 | 312.0 | 468.0 |
| | | | | Fuse Size | 125.0 | 175.0 | 250.0 | 450.0 | 700.0 |
| 416 | 471 | 3 | M1 | kVA | 38.2 | 51.0 | 76.5 | 127.5 | 191.2 |
| | | | | Load Amps | 46.9 | 62.5 | 93.8 | 156.0 | 234.0 |
| | | | | Fuse Size | 70.0 | 90.0 | 150.0 | 225.0 | 350.0 |
| BUCKING | | | | | | | | | |
| 222 | 208 | 2 | E2 | kVA | 36.0 | 48.1 | 72.1 | 120.0 | 179.9 |
| | | | | Load Amps | 100.0 | 133.4 | 200.1 | 333.0 | 499.5 |
| | | | | Fuse Size | 125.0 | 175.0 | 250.0 | 400.0 | 600.0 |
| 236 | 208 | 2 | F2 | kVA | 19.2 | 25.5 | 38.8 | 63.8 | 95.6 |
| | | | | Load Amps | 53.2 | 70.9 | 106.4 | 177.0 | 265.5 |
| | | | | Fuse Size | 60.0 | 80.0 | 125.0 | 200.0 | 300.0 |
| 256 ** | 240 | 2 | E2 | kVA | 41.5 | 55.4 | 83.1 | 138.3 | 207.5 |
| | | | | Load Amps | 99.9 | 133.3 | 200.0 | 332.8 | 499.2 |
| | | | | Fuse Size | 125.0 | 175.0 | 250.0 | 400.0 | 600.0 |
| 272 ** | 240 | 2 | F2 | kVA | 22.1 | 29.4 | 44.2 | 73.5 | 110.2 |
| | | | | Load Amps | 53.2 | 70.8 | 106.3 | 176.8 | 265.2 |
| | | | | Fuse Size | 60.0 | 80.0 | 125.0 | 200.0 | 300.0 |
| 432 | 380 | 3 | M2 | kVA | 35.1 | 46.8 | 70.2 | 116.7 | 175.1 |
| | | | | Load Amps | 53.3 | 71.1 | 106.6 | 177.3 | 266.0 |
| | | | | Fuse Size | 60.0 | 80.0 | 125.0 | 200.0 | 300.0 |

* For alternate electrical connection diagrams, refer to the section immediately following the selection tables.

** Shaded items are 60 Hz only (All other ratings shown are 50/60 Hz).

Selection Tables: Three Phase

Table 6: Using Group 3 (240 x 480 V Primary, 24/48 V Secondary) Transformers

| Input Voltage | Output Voltage | Quantity Req'd | Connection Diagram * | Application Data | Catalog Number | | | | |
|-----------------|----------------|----------------|----------------------|------------------|----------------|----------|-----------|-----------|---------|
| | | | | | HS22B150 | HS22B250 | HS22F500B | HS22F750B | HS22F1B |
| BOOSTING | | | | | | | | | |
| 173 | 208 | 2 | G1 | kVA | 1.12 | 1.88 | 3.75 | 5.63 | 7.5 |
| | | | | Load Amps | 3.12 | 5.2 | 10.4 | 15.6 | 20.8 |
| | | | | Fuse Size | 6.0 | 10.0 | 20.0 | 25.0 | 35.0 |
| 200 | 240 | 2 | G1 | kVA | 1.3 | 2.16 | 4.33 | 6.5 | 8.66 |
| | | | | Load Amps | 3.12 | 5.2 | 10.4 | 15.6 | 20.8 |
| | | | | Fuse Size | 6.0 | 10.0 | 20.0 | 25.0 | 35.0 |
| 362 | 380 | 2 | E1 | kVA | 3.91 | 6.52 | 13 | 19.6 | 26.1 |
| | | | | Load Amps | 6.24 | 10.4 | 20.8 | 31.2 | 41.6 |
| | | | | Fuse Size | 10.0 | 15.0 | 30.0 | 45.0 | 60.0 |
| 346 | 416 | 3 | K1 | kVA | 2.25 | 3.75 | 7.5 | 11.3 | 15.0 |
| | | | | Load Amps | 3.12 | 5.2 | 10.4 | 15.6 | 20.8 |
| | | | | Fuse Size | 6.0 | 10.0 | 20.0 | 25.0 | 35.0 |
| 400 | 480 | 3 | K1 | kVA | 2.59 | 4.33 | 8.65 | 13.0 | 17.3 |
| | | | | Load Amps | 3.12 | 5.2 | 10.4 | 15.6 | 20.8 |
| | | | | Fuse Size | 10.0 | 15.0 | 20.0 | 25.0 | 35.0 |
| 436 | 480 | 2 | F1 | kVA | 2.59 | 4.33 | 8.65 | 13 | 17.3 |
| | | | | Load Amps | 3.12 | 5.2 | 10.4 | 15.6 | 20.8 |
| | | | | Fuse Size | 6.0 | 10.0 | 15.0 | 25.0 | 30.0 |
| 468 | 492 | 2 | E1 | kVA | 5.2 | 8.66 | 17.3 | 26.0 | 34.6 |
| | | | | Load Amps | 6.24 | 10.4 | 20.8 | 31.2 | 41.6 |
| | | | | Fuse Size | 15.0 | 15.0 | 30.0 | 45.0 | 60.0 |
| BUCKING | | | | | | | | | |
| 250 | 208 | 2 | G2 | kVA | 1.35 | 2.25 | 4.5 | 6.75 | 9.01 |
| | | | | Load Amps | 3.75 | 6.25 | 12.5 | 18.7 | 25.0 |
| | | | | Fuse Size | 6.0 | 10.0 | 15.0 | 20.0 | 30.0 |
| 457 | 380 | 3 | K2 | kVA | 2.47 | 4.12 | 8.23 | 12.3 | 16.5 |
| | | | | Load Amps | 3.75 | 6.25 | 12.5 | 18.8 | 25.0 |
| | | | | Fuse Size | 6.0 | 10.0 | 15.0 | 20.0 | 30.0 |
| 499 | 416 | 3 | K2 | kVA | 2.7 | 4.49 | 8.99 | 13.5 | 18.0 |
| | | | | Load Amps | 3.74 | 6.24 | 12.5 | 18.7 | 24.9 |
| | | | | Fuse Size | 6.0 | 10.0 | 15.0 | 20.0 | 30.0 |
| 504 ** | 480 | 2 | E2 | kVA | 5.45 | 9.08 | 18.2 | 27.2 | 36.3 |
| | | | | Load Amps | 6.56 | 10.9 | 21.8 | 32.8 | 43.7 |
| | | | | Fuse Size | 15.0 | 15.0 | 30.0 | 40.0 | 60.0 |
| 528 ** | 480 | 2 | F2 | kVA | 2.85 | 4.76 | 9.51 | 14.3 | 19.0 |
| | | | | Load Amps | 3.43 | 5.72 | 11.4 | 17.2 | 22.9 |
| | | | | Fuse Size | 6.0 | 10.0 | 15.0 | 20.0 | 30.0 |

* For alternate electrical connection diagrams, refer to the section immediately following the selection tables.

** Shaded items are 60 Hz only (All other ratings shown are 50/60 Hz).

Selection Tables: Three Phase

Table 6: Using Group 3 (240 x 480 V Primary, 24/48 V Secondary) Transformers

| Input Voltage | Output Voltage | Quantity Req'd | Connection Diagram * | Application Data | Catalog Number | | | | |
|-----------------|----------------|----------------|----------------------|------------------|----------------|---------|---------|---------|-----------|
| | | | | | HS22F1.5A | HS22F2A | HS22F3A | HS22F5A | HS22F7.5A |
| BOOSTING | | | | | | | | | |
| 173 | 208 | 2 | G1 | kVA | 11.3 | 15 | 22.5 | 37.5 | 56.3 |
| | | | | Load Amps | 31.2 | 41.6 | 62.5 | 104.0 | 156.0 |
| | | | | Fuse Size | 50.0 | 70.0 | 100.0 | 175.0 | 250.0 |
| 200 | 240 | 2 | G1 | kVA | 13.0 | 17.3 | 26.0 | 43.3 | 65.0 |
| | | | | Load Amps | 31.2 | 41.6 | 62.5 | 104.0 | 156.0 |
| | | | | Fuse Size | 50.0 | 70.0 | 100.0 | 175.0 | 250.0 |
| 362 | 380 | 2 | E1 | kVA | 39.1 | 52.2 | 78.4 | 130.4 | 195.6 |
| | | | | Load Amps | 62.4 | 83.2 | 125 | 208.0 | 312.0 |
| | | | | Fuse Size | 90.0 | 125.0 | 175.0 | 300.0 | 450.0 |
| 346 | 416 | 3 | K1 | kVA | 22.5 | 30.0 | 45.0 | 75.1 | 112.6 |
| | | | | Load Amps | 31.2 | 41.6 | 62.5 | 104.0 | 156.0 |
| | | | | Fuse Size | 50.0 | 70.0 | 100.0 | 175.0 | 250.0 |
| 400 | 480 | 3 | K1 | kVA | 26.0 | 34.6 | 52.0 | 86.6 | 129.9 |
| | | | | Load Amps | 31.2 | 41.6 | 62.5 | 104.0 | 156.0 |
| | | | | Fuse Size | 50.0 | 70.0 | 100.0 | 175.0 | 250.0 |
| 436 | 480 | 2 | F1 | kVA | 26.0 | 34.6 | 52.0 | 86.6 | 129.9 |
| | | | | Load Amps | 31.2 | 41.6 | 62.5 | 104.0 | 156.0 |
| | | | | Fuse Size | 45.0 | 60.0 | 90.0 | 150.0 | 225.0 |
| 468 | 492 | 2 | E1 | kVA | 52.0 | 69.3 | 103.9 | 173.2 | 259.8 |
| | | | | Load Amps | 62.4 | 83.2 | 125.0 | 208.0 | 312.0 |
| | | | | Fuse Size | 90.0 | 110.0 | 175.0 | 300.0 | 450.0 |
| BUCKING | | | | | | | | | |
| 250 | 208 | 2 | G2 | kVA | 13.5 | 18.0 | 27.1 | 45.0 | 67.5 |
| | | | | Load Amps | 37.5 | 50.0 | 75.1 | 125.0 | 187.5 |
| | | | | Fuse Size | 40.0 | 60.0 | 80.0 | 150.0 | 200.0 |
| 457 | 380 | 3 | K2 | kVA | 24.7 | 32.9 | 49.5 | 82.3 | 123.5 |
| | | | | Load Amps | 37.5 | 50.0 | 75.2 | 125.1 | 187.6 |
| | | | | Fuse Size | 40.0 | 60.0 | 80.0 | 150.0 | 200.0 |
| 499 | 416 | 3 | K2 | kVA | 27.0 | 36.0 | 54.0 | 89.9 | 134.8 |
| | | | | Load Amps | 37.4 | 49.9 | 75.0 | 124.7 | 187.1 |
| | | | | Fuse Size | 40.0 | 60.0 | 80.0 | 150.0 | 200.0 |
| 504 ** | 480 | 2 | E2 | kVA | 54.5 | 72.6 | 109.1 | 181.6 | 272.4 |
| | | | | Load Amps | 65.5 | 87.4 | 131.3 | 218.4 | 327.6 |
| | | | | Fuse Size | 80.0 | 110.0 | 175.0 | 300.0 | 400.0 |
| 528 ** | 480 | 2 | F2 | kVA | 28.5 | 38.0 | 57.2 | 95.1 | 142.7 |
| | | | | Load Amps | 34.3 | 45.8 | 68.8 | 114.4 | 171.6 |
| | | | | Fuse Size | 40.0 | 60.0 | 80.0 | 150.0 | 200.0 |

* For alternate electrical connection diagrams, refer to the section immediately following the selection tables.

** Shaded items are 60 Hz only (All other ratings shown are 50/60 Hz).

Alternate Electrical Connections for Buck-Boost Applications

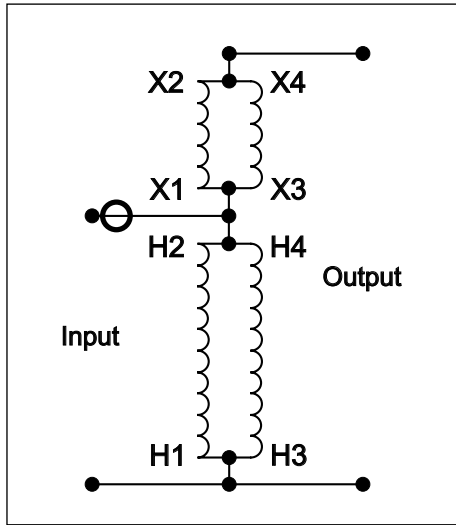


Diagram A1 - Boosting

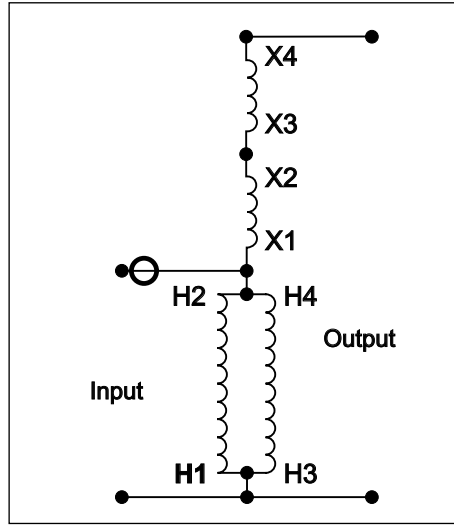


Diagram B1 - Boosting

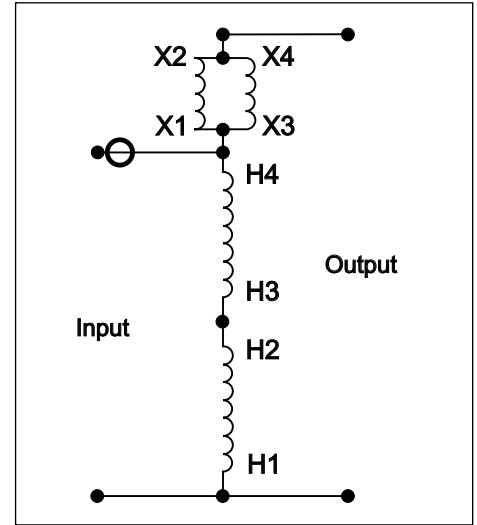


Diagram C1 - Boosting

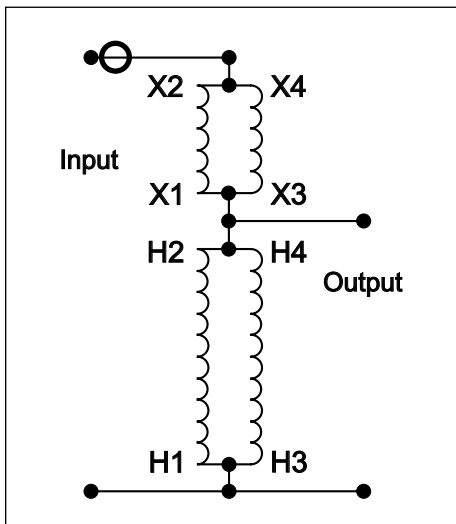


Diagram A2 - Bucking

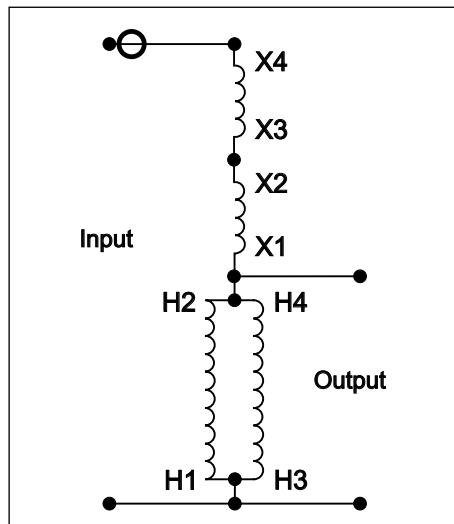


Diagram B2 - Bucking

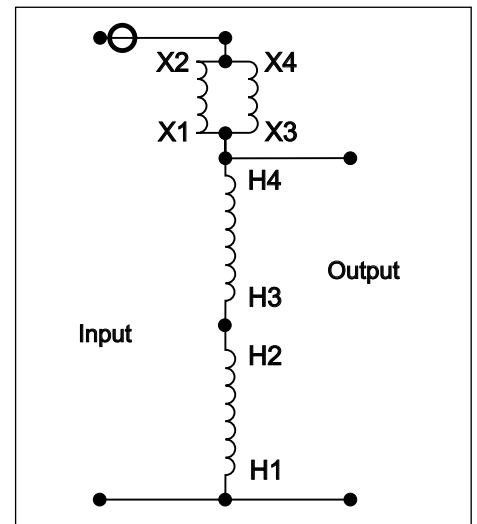


Diagram C2 - Bucking

The o symbol shown on these connection diagrams indicates where fuses or breakers should be field installed for line to neutral applications. For line to line applications, fuses or breakers should be installed on both lines.

Application Note: On all auto-wye connections, the source neutral must be present and connected to the transformer bank. If source neutral is not present, do not use an auto-wye connection.

Alternate Electrical Connections for Buck-Boost Applications

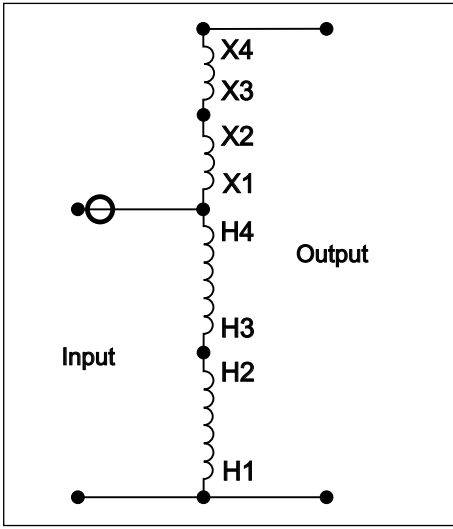


Diagram D1 – Boosting

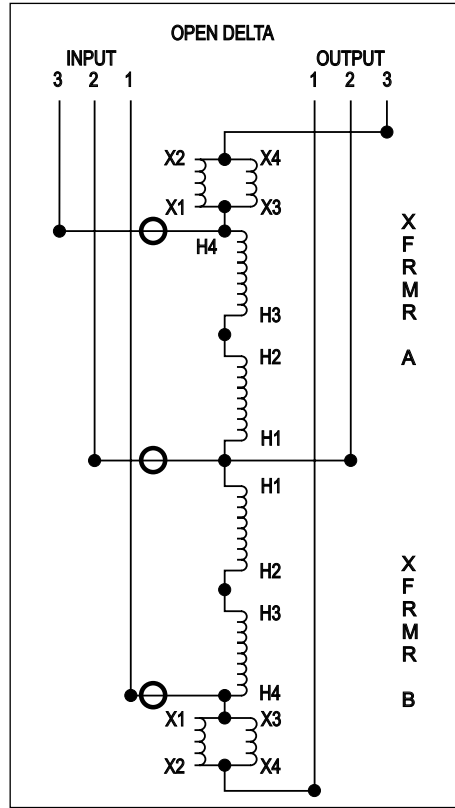


Diagram E1 – Boosting

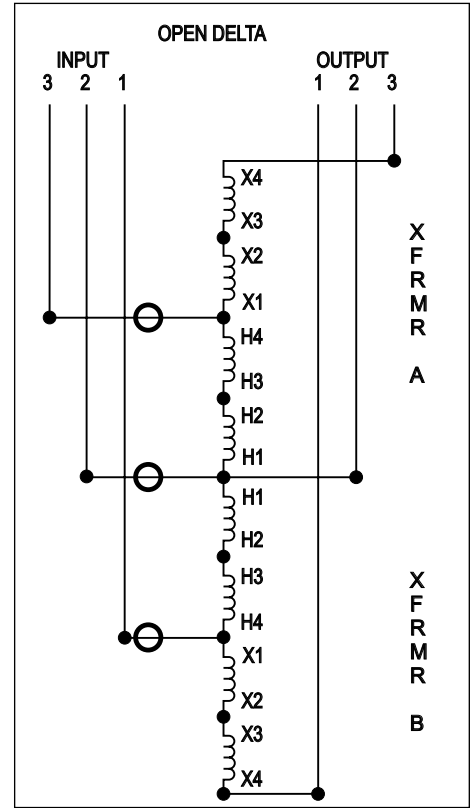


Diagram F1 – Boosting

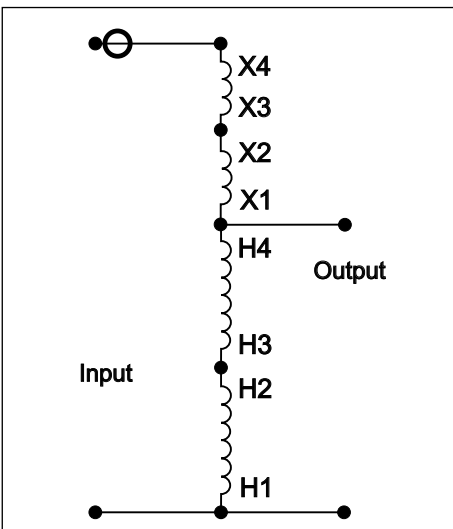


Diagram D2 – Bucking

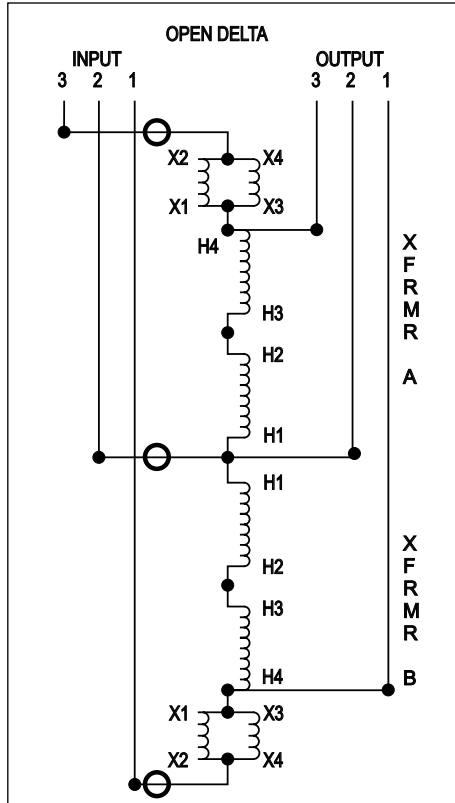


Diagram E2 – Bucking

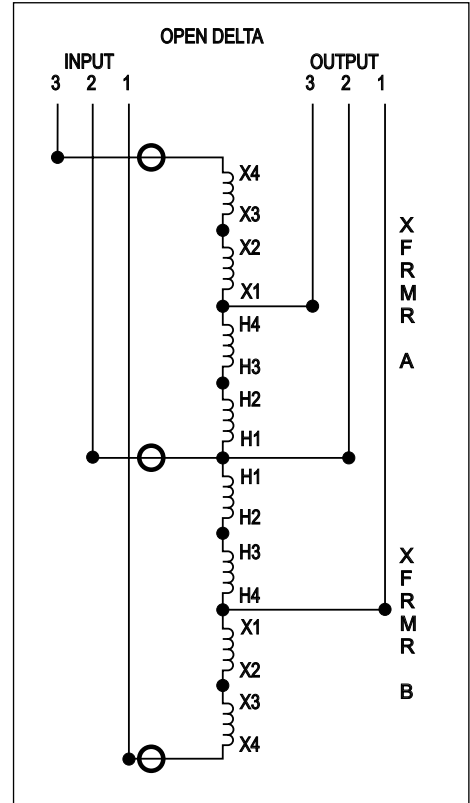


Diagram F2 – Bucking

Alternate Electrical Connections for Buck-Boost Applications

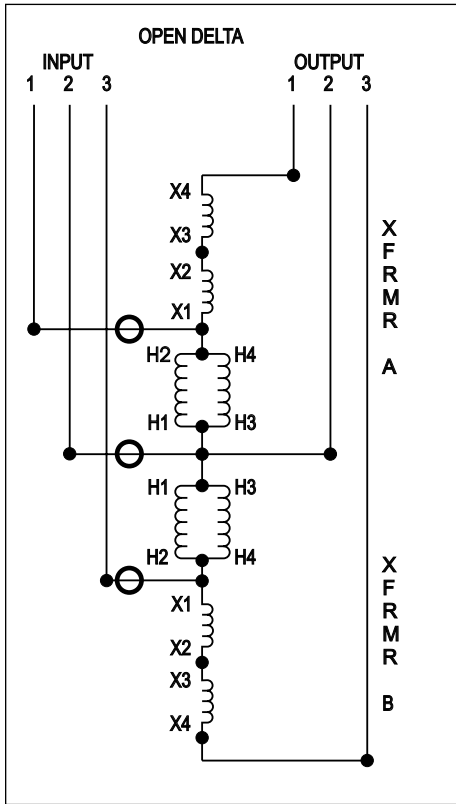


Diagram G1 - Boosting

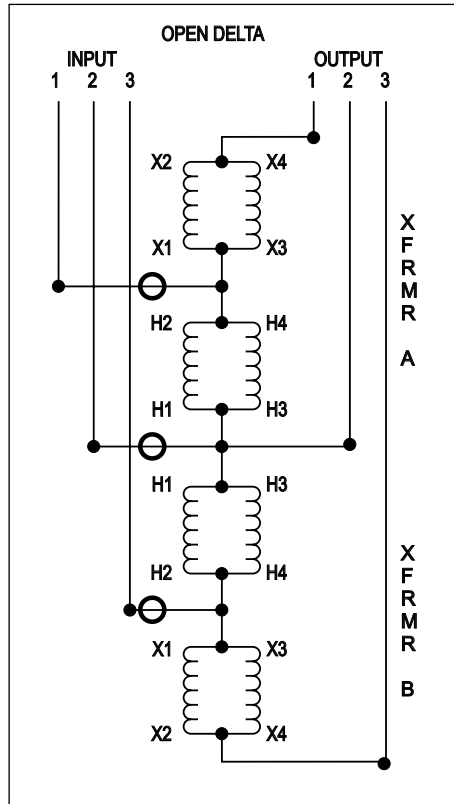


Diagram H1 - Boosting

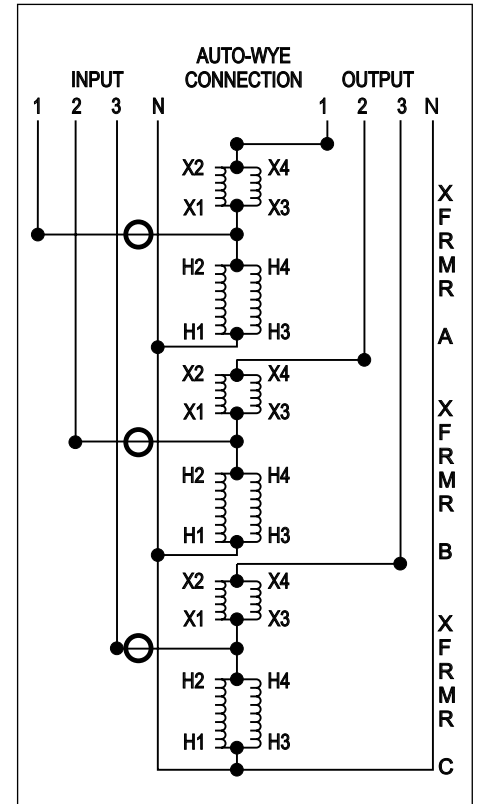


Diagram J1 - Boosting

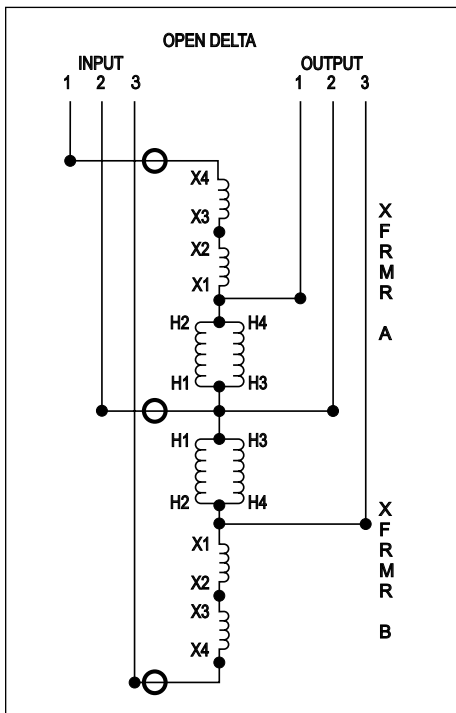


Diagram G2 - Bucking

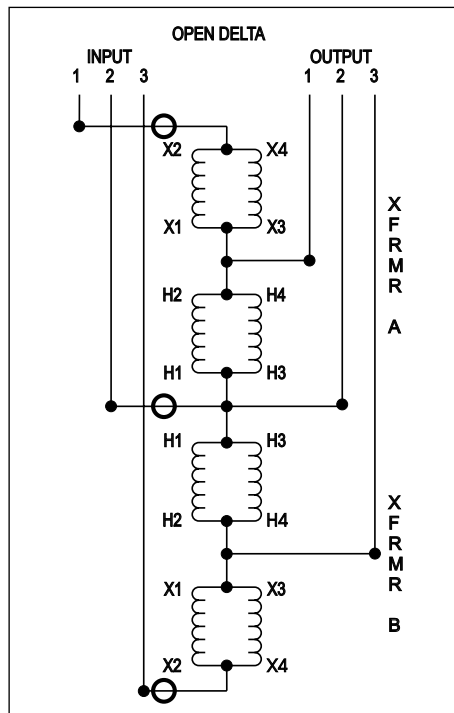


Diagram H2 - Bucking

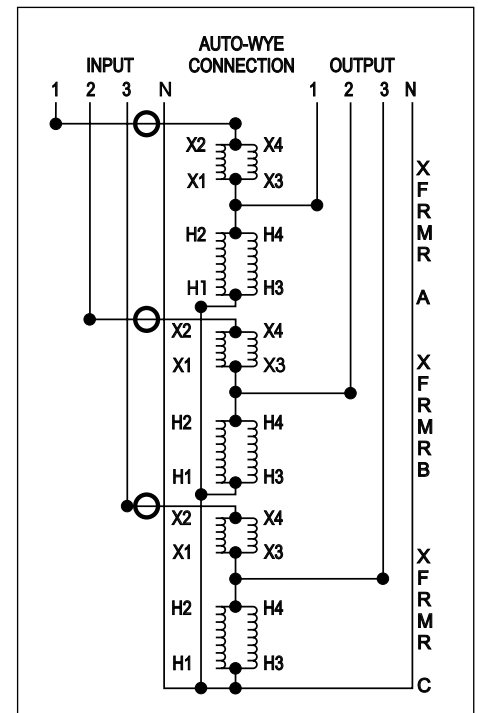


Diagram J2 - Bucking

Alternate Electrical Connections for Buck-Boost Applications

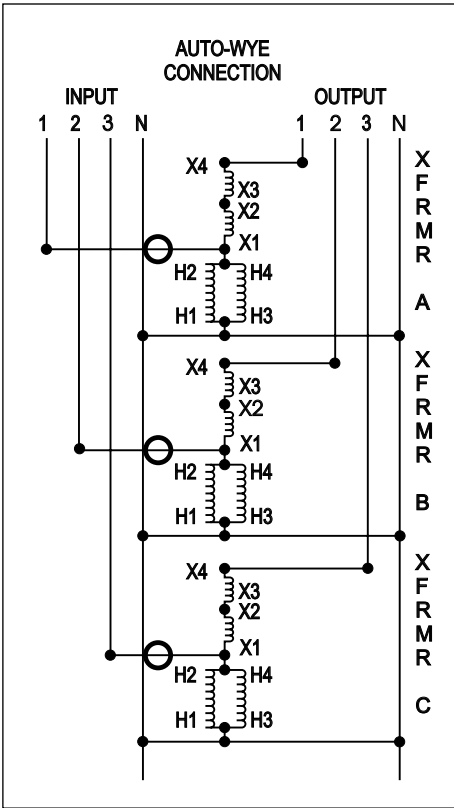


Diagram K1 – Boosting

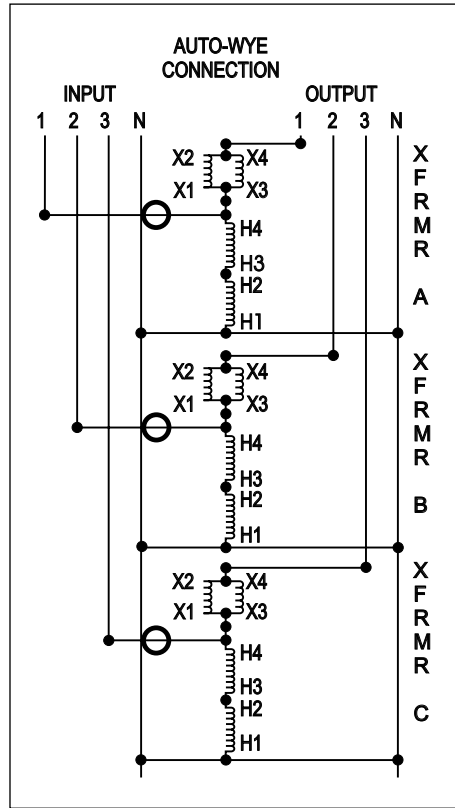


Diagram L1 – Boosting

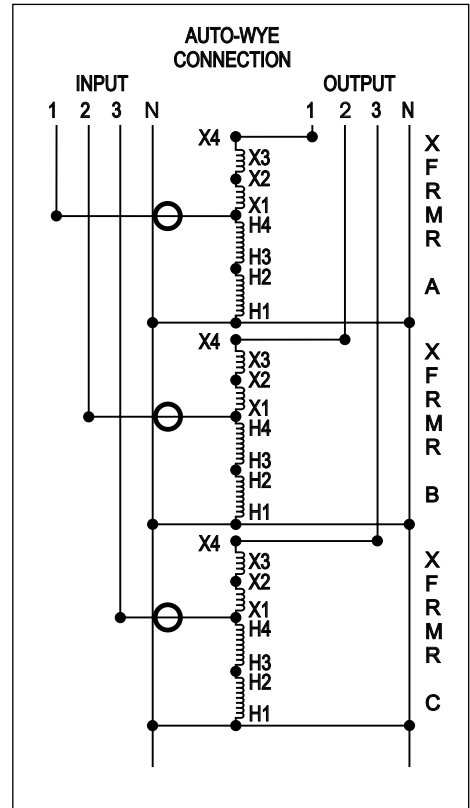


Diagram M1 – Boosting

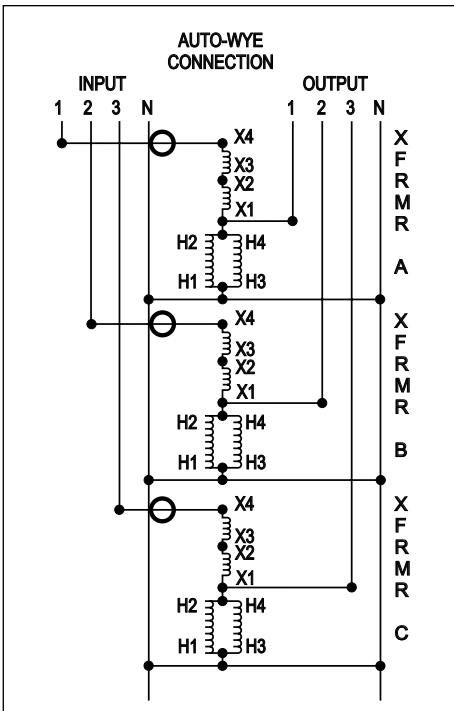


Diagram K2 – Bucking

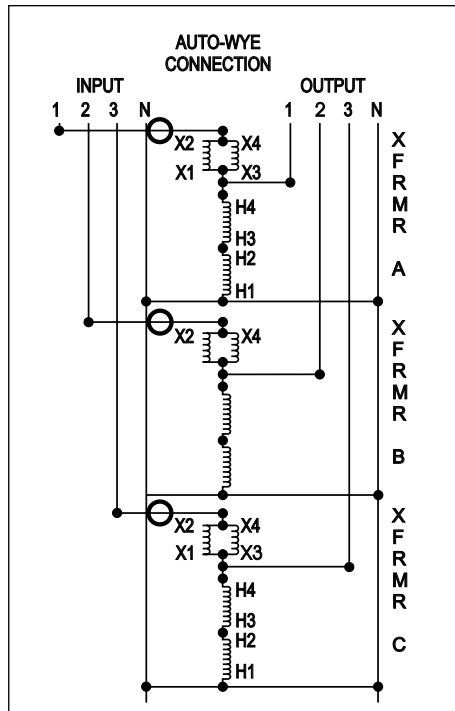


Diagram L2 – Bucking

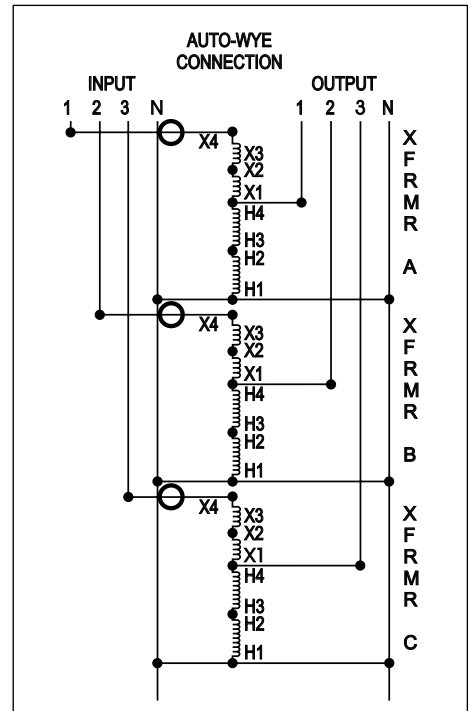


Diagram M2 – Bucking

Application Note

Application Limitations with Buck-Boost Transformers

- 1. A Buck-Boost transformer cannot be used to develop a three phase, four wire wye circuit from a three phase, three wire delta circuit.**

A delta to wye connection does not supply enough current carrying capability to provide for unbalanced currents flowing in the neutral wire of the four wire circuit. The neutral created is not stable and under load will not deliver desired line to neutral voltages. This connection would also be in violation of the National Electric Code, Article 210.9.

- 2. Buck-Boost transformers cannot be used in a closed delta connection.**

A closed delta requires more kVA capacity than a wye or an open delta connection, plus phase shifting comes into play on the output side.

- 3. Buck-Boost transformers should not be used to correct for voltage drop on a long circuit run where the load fluctuates.**

Voltage drop varies with the load and buck-boost transformers are connected for a specific voltage change. If a buck-boost transformer was used to correct voltage drop during peak loading conditions, high voltages may result under light load conditions. This could be equally detrimental to the load and possibly pose safety hazards.

- 4. Buck-Boost transformers cannot be used to create a 240/120 Volt, single phase service from a 208Y/120 Volt three phase supply.**

Two problems that would occur:

- A. Two neutrals would exist on the same circuit. Since neutrals must be grounded according to the National Electric Code, a short circuit would be created.
- B. Unbalanced line to output neutral voltages would be created; one line would read 120 Volts, the other 130+ Volts.

What is a Buck-Boost transformer and why is it used?

Isolation transformers have separate primary and secondary windings, electrically insulated and isolated from one another. With a relatively high voltage primary (typically 120, 240 or 480 Volts) and a relatively low voltage secondary (typically 12, 16, 24, 32 or 48 Volts), buck-boost transformers are designed to be field connected as autotransformers. These are transformers with one continuous winding, a portion of which is jointly shared between the input and the output. No electrical isolation is present in an autotransformer.

Buck-Boost transformers have two major uses:

1. When field connected as an autotransformer, they can be used to Buck (lower) or Boost (raise) available line voltage in the range of 5 to 27% and at a kVA rating many times that listed on the transformer nameplate.
2. When left as an isolation transformer, they can be used to supply power to low voltage circuits at the nameplate rating listed.

The importance of altering available line voltage.

Electrical equipment is designed to operate at maximum efficiency at a specific standard supply voltage. Your voltage may not be at the standard supply voltage level. Causes can be proximity to a large utility transformer, losses in the line voltage due to loads on that circuit, or a difference between the standard supply voltage available and the standard supply voltage needed to run the equipment.

Normally the problem is having low voltage available. Low voltage on a circuit, even as little as 5% lower can cause a decrease in incandescent light output, and a decrease in resistive heat output. With motors low voltage can cause a decrease in motor torque, an increase in motor amperage requirements, an increase in motor temperature and decrease in motor life expectancy.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А