

LTC6412
800MHz, 31dB Range
Analog-Controlled VGA


DESCRIPTION

Demonstration circuit 1464 features the LTC6412 analog-controlled VGA. The demo board incorporates a variety of passive components to allow for direct connection to a 2-port network analyzer or other single-ended 50Ω test system for simplified evaluation.

The 1464 demo board factory default configuration is set for $-V_G$ control mode in the power-on and amplifier-enabled state ($\overline{\text{SHDN}}=1$, $\overline{\text{EN}}=0$).

The demo board is easily configured to access the $+V_G$ control mode and $\overline{\text{EN}}/\overline{\text{SHDN}}$ features. Other simple PCB modifications can accommodate differential input/output signals and shunt tuning elements for bread-boarding into larger systems.

Design files for this circuit board are available. Call the LTC factory.

 LTC, LTM, and LT are trademarks of Linear Technology Corporation. Other product names may be trademarks of the companies that manufacture the products.

QUICK START PROCEDURE

Demonstration circuit 1464 is easy to set up to evaluate the performance of the LTC6412. Refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

1. Connect SMA cables to the +IN and +OUT ports. Applied signal should be less than +10dBm peak RF power to avoid damage in the power-off state.
2. Apply +3.3V between $+V_{CC}$ and GND turrets. Limit supply current to approximately 150mA.
3. Apply the desired control signal to either the $-V_G$ turret or the $-V_G$ SMA to access the $-V_G$ pin of the LTC6412. For this $-V_G$ control mode, an *increase* in control signal voltage produces a *decrease* in amplifier gain.

This procedure contains only one critical sequence order. The user must apply supply voltage before applying the control signal voltage and remove or turn-down the control signal voltage before turning down the supply voltage. This proper sequence will prevent excessive current through the ESD diodes from the $\pm V_G$ pins to the positive supply, V_{CC} .

Table 1 shows the function of each SMA connector on the board. Only J1 and J2 are used in the default evaluation configuration. Other connectors provide flexibility for fast control signals, differential input/output signals, and balun loss calibration.

DEMO CIRCUIT DC1464 QUICK START GUIDE FOR LTC6412

Table 1. DC1464 SMA Connector Descriptions

| CONNECTOR | FUNCTION |
|-------------------------------|--|
| J1 (+IN) | Differential input connected to input balun for single-ended operation. Drive from a 50 Ohm signal source. No external termination needed. |
| J2 (+OUT) | Differential output connected to output balun for single-ended operation. Impedance matched to 50 Ohms for direct connection to a 50 Ohm network/spectrum analyzer input. |
| J3 (-IN) | Differential input. Not connected by default. Resistor R9 can be removed to drive the input balun differentially. |
| J4 (-OUT) | Differential output. Not connected by default. Capacitor at C21 can be moved to C9 to drive the differential outputs. |
| J5 (VGAIN) | SMA terminal. Default connected in parallel with -VG turret to the -VG pin of LTC6412. Used to apply fast control signals. Move jumper R15 to location R14 and jumper R19 to location R18 to configure for +VG control. |
| J6 (TEST IN) J7 (TEST OUT) | Cascaded 1:1 balun thru connection. Used to estimate the loss of the input balun at the frequency of interest. |

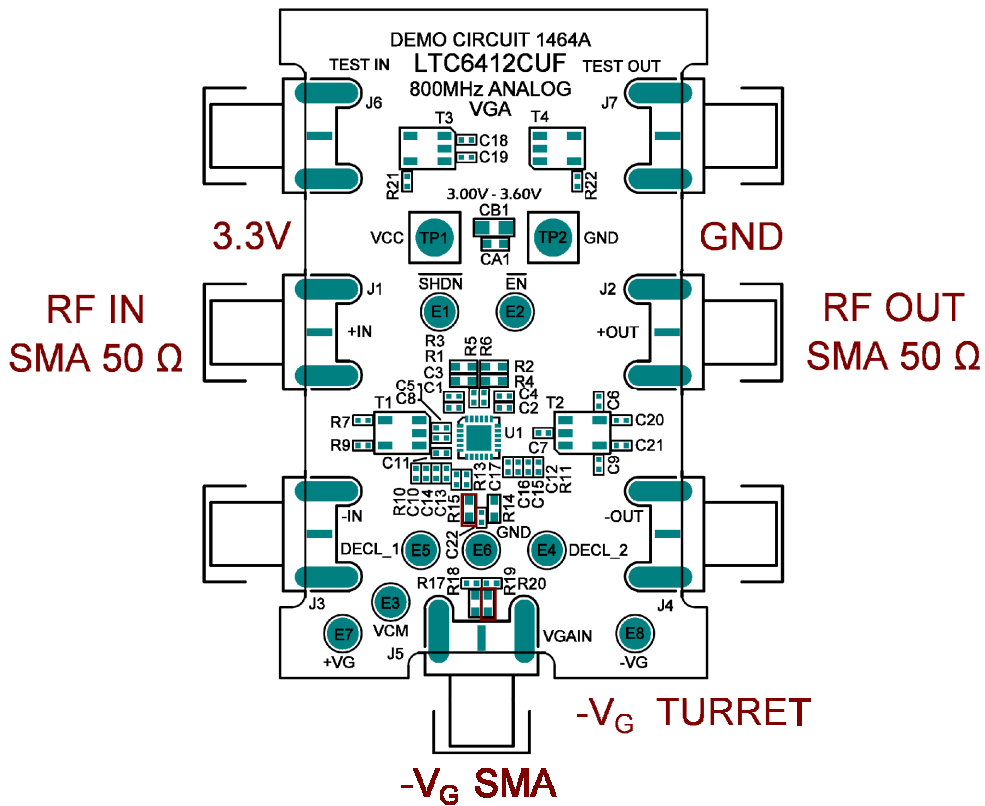


Figure 1. Picture of DC1464 Top Silkscreen with recommended default measurement setup connections shown in maroon.

DEMO CIRCUIT DC1464 QUICK START GUIDE FOR LTC6412

ADDITIONAL INFORMATION

SHUTDOWN AND ENABLE

The factory default configuration is set for the power-on and amplifier-enabled state ($\overline{\text{SHDN}}=1$, $\overline{\text{EN}}=0$). The $\overline{\text{SHDN}}$ pin is pulled high with a $1\text{k}\Omega$ resistor to V_{CC} , and the $\overline{\text{EN}}$ pin is pulled low with a $1\text{k}\Omega$ resistor to ground. One can override these board-level defaults by applying voltages directly to the $\overline{\text{SHDN}}$ and $\overline{\text{EN}}$ turrets as needed.

$-V_{\text{G}}$ AND $+V_{\text{G}}$ CONTROL

The factory default configuration is set for $-V_{\text{G}}$ control with the V_{GAIN} SMA connector hooked in parallel with the $-V_{\text{G}}$ turret. These control inputs can be reconfigured for $+V_{\text{G}}$ operation by moving jumper R15 to location R14 and moving jumper R19 to location R18. Clip leads to the $\pm V_{\text{G}}$ turrets are susceptible to noise pickup and should be lowpass filtered to avoid AM up-conversion artifacts. While using the $\pm V_{\text{G}}$ turrets, a $4.7\mu\text{F}$ capacitor from the V_{GAIN} SMA terminal to ground provides an effective lowpass filter with a cutoff frequency of 340 Hz.

DIFFERENTIAL INPUTS


The inputs connectors can be configured for differential drive. Remove the jumper in location R9 to enable differential input drive (50 Ohm).

Alternatively, the input balun T1 can be removed completely and the $\pm\text{IN}$ signals routed directly to C5 and C8 using 0603 0Ω jumpers across the input balun pads.

DIFFERENTIAL OUTPUTS

The output connectors can be configured for differential drive. Move capacitor C21 to location C9 to enable differential output drive (50 Ohm).

Alternatively, the output balun can be removed completely with the $\pm\text{OUT}$ signals routed to LTC6412 output pins using 0Ω 0603 jumpers across the output balun pads as shown below. This transformerless configuration requires two additional inductors from the balun center tap pad to conduct supply current to the LTC6412 output pins. The inductors should choke the RF signal sufficiently at the frequency of interest while passing DC current with minimal supply drop, $<100\text{mV}$ is recommended. A surface mount 0603 inductor is a good size choice to bridge the PCB pad gap. Keep the DC blocking capacitors at C6 and C9 to avoid a DC path to the output SMA connectors.

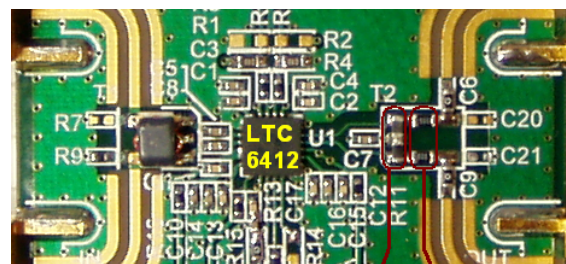

0603 Inductors
0603 Jumpers

TURRET OPTIONS

Turrets to V_{CM} , DECL_1 , and DECL_2 are usually not stuffed as they represent internal voltages generated by LTC6412. Do not connect to these nodes beyond the recommended bypass capacitors to ground.

DEMO CIRCUIT DC1464 QUICK START GUIDE FOR LTC6412

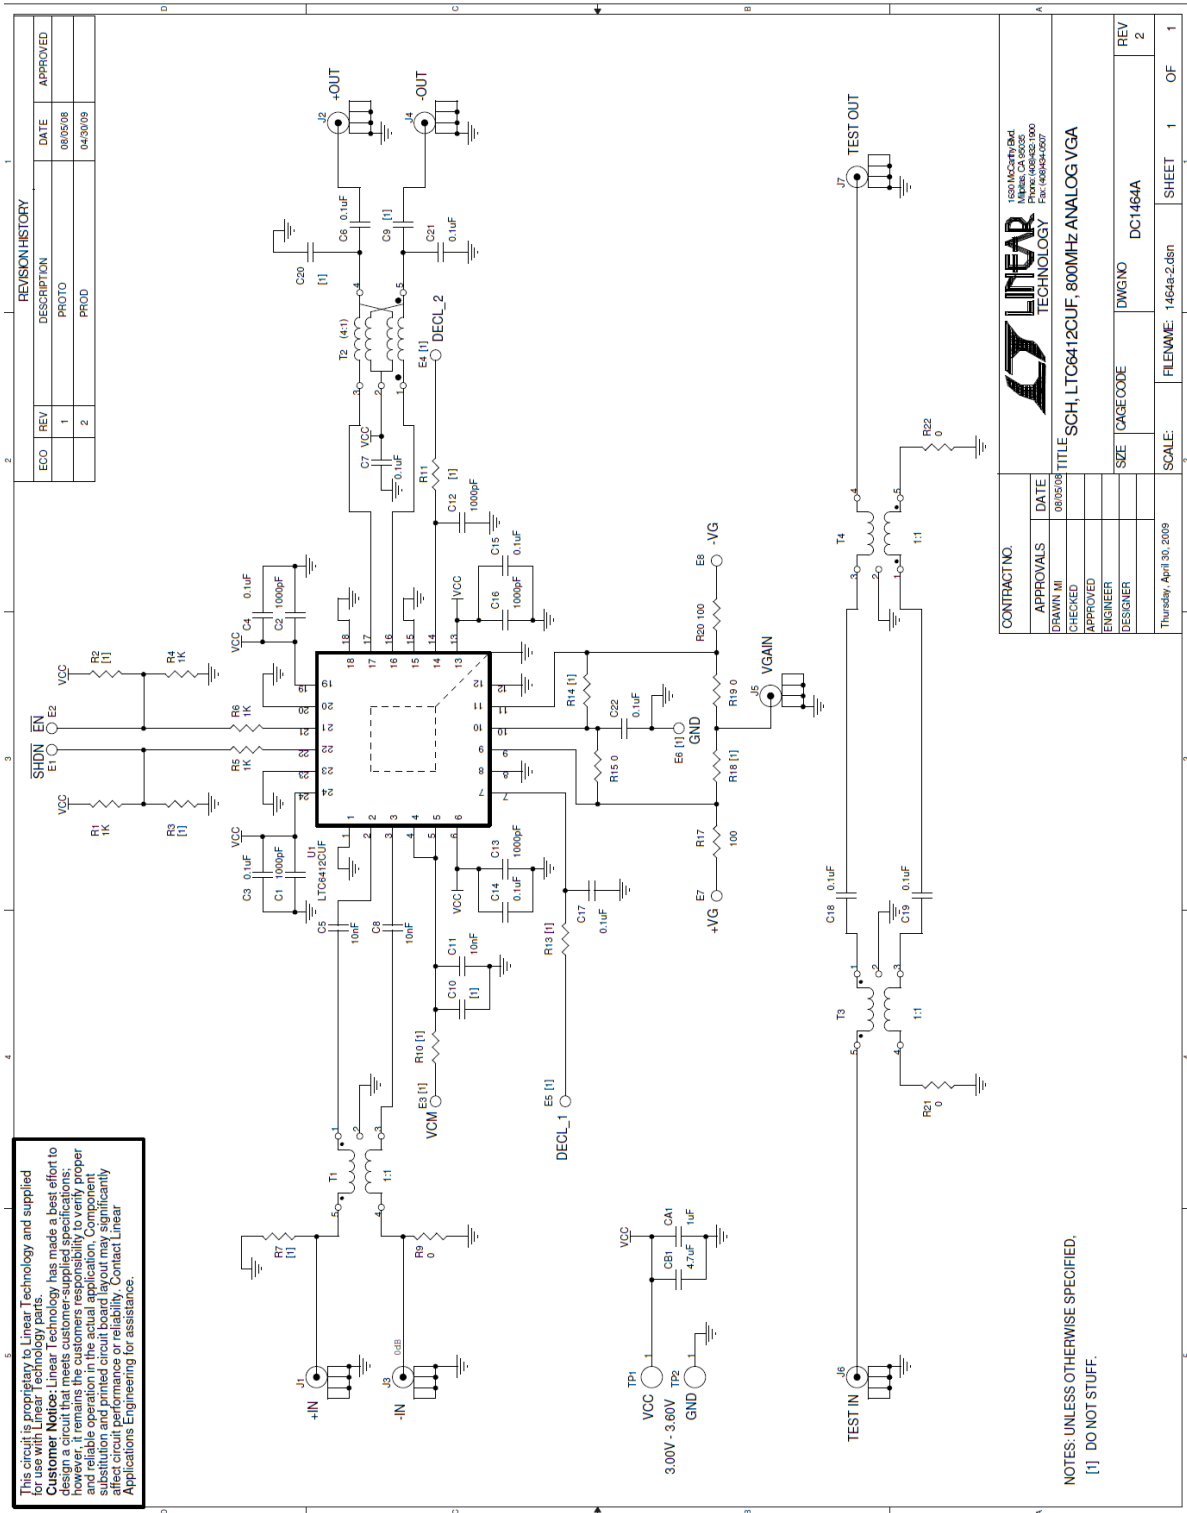


Figure 2. DC1464A Schematic

DEMO CIRCUIT DC1464 QUICK START GUIDE FOR LTC6412

DC1464A Rev 2

4/30/2009
MCP

| Item | Qty | Ref - Des | Desc | Manufacturer's Part Number |
|------|-----|---|------------------------------------|----------------------------------|
| 1 | 1 | CA1 | CAP, 0603 1uF 10% 10V X5R | AVX 0603ZD105KAT2A |
| 2 | 1 | CB1 | CAP, 0805 4.7uF 20% 6.3V X5R | TDK C2012X5R0J475M |
| 3 | 5 | C1,C2,C12,C13,C16 | CAP, 0402 1000pF 10% 50V X7R | AVX 04025C102KAT2A |
| 4 | 11 | C3,C4,C6,C7,C14,C15,C17, C18,C19,C21,C22 | CAP, 0402 0.1uF 10% 10V X5R | AVX 0402ZD104KAT2A |
| 5 | 3 | C5,C8,C11 | CAP, 0402 10nF 10% 16V X7R | AVX 0402YC103KAT2A |
| 6 | 0 | C9,C10,C20 | CAP, 0402 0.1uF 10% 10V X5R OPTION | AVX 0402ZD104KAT2A OPTION |
| 7 | 4 | E1,E2,E7,E8 | TURRET | MILL-MAX 2308-2-00-80-00-00-07-0 |
| 8 | 0 | E3,E4,E5,E6 | TURRET OPTION | MILL-MAX 2308-2-00-80-00-00-07-0 |
| 9 | 7 | J1,J2,J3,J4,J5,J6,J7 | CONN, SMA 50-OHM EDGE-LANCH | E.F.JOHNSON, 142-0701-851 |
| 10 | 2 | R4,R1 | RES, 0603 1K OHMS 1% 1/16W | VISHAY CRCW06031K00FKED |
| 11 | 0 | R3,R2 | DO NOT STUFF | NONE |
| 12 | 2 | R6,R5 | RES, 0402 1K OHMS 1% 1/16W | VISHAY CRCW04021K00FKED |
| 13 | 0 | R7 | RES, 0402 OPTION | OPTION |
| 14 | 3 | R9,R21,R22 | RES, 0402 0 OHM JUMPER | VISHAY CRCW04020000Z0ED |
| 15 | 0 | R10 | RES, 0402 100 OHMS 1% 1/16W OPTION | VISHAY CRCW0402100RFKED OPTION |
| 16 | 0 | R13,R11 | RES, 0402 1K OHMS 1% 1/16W OPTION | VISHAY CRCW04021K00FKED OPTION |
| 17 | 0 | R14,R18 | RES, 0603 0 OHM JUMPER OPTION | VISHAY CRCW06030000Z0ED OPTION |
| 18 | 2 | R15,R19 | RES, 0603 0 OHM JUMPER | VISHAY CRCW06030000Z0ED |
| 19 | 2 | R20,R17 | RES, 0402 100 OHMS 1% 1/16W | VISHAY CRCW0402100RFKED |
| 20 | 2 | TP1,TP2 | TURRET | MILL MAX 2501-2-00-80-00-00-07-0 |
| 21 | 1 | T1,T3,T4 | XFMR, 1:1 | TYCO MABA-007159-000000 (1:1) |
| 22 | 0 | T1,T3,T4-ALTERNATE | | MINI-CIRCUITS TCM4-19+ (4:1) |
| 23 | 1 | T2 | XFMR, 4:1 | MINI-CIRCUITS TCM4-19+ (4:1) |
| 24 | 0 | T2-ALTERNATE | XFMR, 4:1 | MINI-CIRCUITS TCM4-6+ (4:1) |
| 24 | 1 | U1 | IC, LTC6412CUF | LINEAR TECH LTC6412CUF |

Table 2. DC1464A Parts List

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А