

# Precision, Gain Selectable High Side Current Sense Amplifier

## FEATURES

- **Input Offset Voltage: 300 $\mu$ V (Max)**
- **Sense Inputs Up to 48V**
- **0.5% Gain Accuracy**
- **Pin Selectable Gain: 10, 12.5, 20, 25, 40, 50V/V**
- **Separate Power Supply: 2.7V to 36V**
- **Operating Current: 60 $\mu$ A**
- **Sense Input Current ( $V_{CC}$  Powered Down): 1nA**
- **Reverse Battery Protected to -48V**
- **Buffered Output**
- **Noise Filtering Input**
- **-40°C to 125°C Operating Temperature Range**
- **Available in 8-Lead DFN and MSOP Packages**

## APPLICATIONS

- Battery Monitoring
- Fuse Monitoring
- Portable and Cellular Phones
- Portable Test/Measurement Systems

LT, LT, LTC, LTM, Linear Technology, the Linear logo and Over-The-Top are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

## DESCRIPTION

The **LT<sup>®</sup>6100** is a complete micropower, precision, high side current sense amplifier. The LT6100 monitors unidirectional currents via the voltage across an external sense resistor. Fixed gains of 10, 12.5, 20, 25, 40, 50V/V are obtained by simply strapping or floating two gain select pins. Gain accuracy is better than 0.5% for all gains.


The LT6100 sense inputs have a voltage range that extends from 4.1V to 48V, and can withstand a differential voltage of the full supply. This makes it possible to monitor the voltage across a MOSFET switch or a fuse. The part can also withstand a reverse battery condition on the inputs.

Input offset is a low 300 $\mu$ V. CMRR and PSRR are in excess of 105dB, resulting in a wide dynamic range. A filter pin is provided to easily implement signal filtering with a single capacitor.


The LT6100 has a separate supply input, which operates from 2.7V to 36V and draws only 60 $\mu$ A. When  $V_{CC}$  is powered down, the sense pins are biased off. This prevents loading of the monitored circuit, irrespective of the sense voltage. The LT6100 is available in an 8-lead DFN and MSOP package.

## TYPICAL APPLICATION

### 0A to 33A High Side Current Monitor with 12kHz Frequency Roll-off

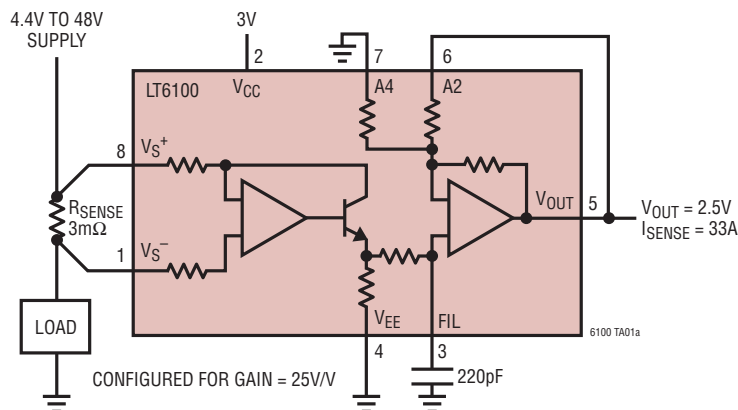

### Input Offset Voltage vs $V_S$ Sense Input Voltage

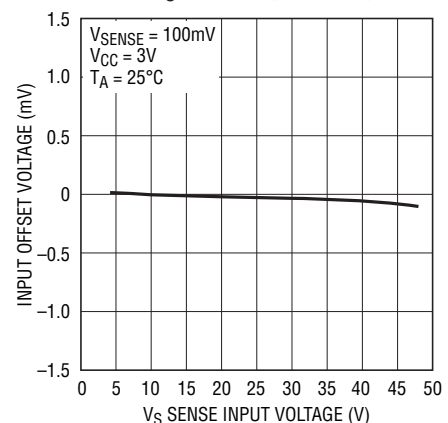

# LT6100

## ABSOLUTE MAXIMUM RATINGS (Notes 1, 2)

|                                                   |                                            |
|---------------------------------------------------|--------------------------------------------|
| Differential Sense Voltage .....                  | $\pm 48\text{V}$                           |
| Total $V_S^+$ , $V_S^-$ to $V_{EE}$ .....         | 48V                                        |
| Total $V_{CC}$ Supply Voltage from $V_{EE}$ ..... | 36V                                        |
| Output Voltage .....                              | ( $V_{EE}$ ) to ( $V_{EE} + 36\text{V}$ )  |
| Output Short-Circuit Duration (Note 3) .....      | Continuous                                 |
| Operating Temperature Range (Note 4)              |                                            |
| LT6100C .....                                     | $-40^\circ\text{C}$ to $85^\circ\text{C}$  |
| LT6100I .....                                     | $-40^\circ\text{C}$ to $85^\circ\text{C}$  |
| LT6100H .....                                     | $-40^\circ\text{C}$ to $125^\circ\text{C}$ |

|                                      |                                            |
|--------------------------------------|--------------------------------------------|
| Specified Temperature Range (Note 5) |                                            |
| LT6100C .....                        | $0^\circ\text{C}$ to $70^\circ\text{C}$    |
| LT6100I .....                        | $-40^\circ\text{C}$ to $85^\circ\text{C}$  |
| LT6100H .....                        | $-40^\circ\text{C}$ to $125^\circ\text{C}$ |
| Storage Temperature Range .....      |                                            |
| DFN .....                            | $-65^\circ\text{C}$ to $125^\circ\text{C}$ |
| MSOP .....                           | $-65^\circ\text{C}$ to $150^\circ\text{C}$ |
| Lead Temperature (Soldering, 10 sec) |                                            |
| MSOP .....                           | $300^\circ\text{C}$                        |

## PACKAGE/ORDER INFORMATION

|                                                                                                                                                                                                                                                                |                                                                                                                                                             |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>TOP VIEW</p> <p>DD PACKAGE<br/>8-LEAD (3mm <math>\times</math> 3mm) PLASTIC DFN</p> <p><math>T_{JMAX} = 125^\circ\text{C}</math>, <math>\theta_{JA} = 43^\circ\text{C/W}</math><br/>EXPOSED PAD (PIN 9) IS <math>V_{EE}</math>, MUST BE SOLDERED TO PCB</p> | <p>TOP VIEW</p> <p>MS8 PACKAGE<br/>8-LEAD PLASTIC MSOP</p> <p><math>T_{JMAX} = 150^\circ\text{C}</math>, <math>\theta_{JA} = 250^\circ\text{C/W}</math></p> |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|

## ORDER INFORMATION

| LEAD FREE FINISH | TAPE AND REEL    | PART MARKING* | PACKAGE DESCRIPTION                   | SPECIFIED TEMPERATURE RANGE                |
|------------------|------------------|---------------|---------------------------------------|--------------------------------------------|
| LT6100CDD#PBF    | LT6100CDD#TRPBF  | LBMW          | 8-Lead (3mm $\times$ 3mm) Plastic DFN | $0^\circ\text{C}$ to $70^\circ\text{C}$    |
| LT6100IDD#PBF    | LT6100IDD#TRPBF  | LBMW          | 8-Lead (3mm $\times$ 3mm) Plastic DFN | $-40^\circ\text{C}$ to $85^\circ\text{C}$  |
| LT6100HDD#PBF    | LT6100HDD#TRPBF  | LBMW          | 8-Lead (3mm $\times$ 3mm) Plastic DFN | $-40^\circ\text{C}$ to $125^\circ\text{C}$ |
| LT6100CMS8#PBF   | LT6100CMS8#TRPBF | LTBMV         | 8-Lead Plastic MS8                    | $0^\circ\text{C}$ to $70^\circ\text{C}$    |
| LT6100IMS8#PBF   | LT6100IMS8#TRPBF | LTBMV         | 8-Lead Plastic MS8                    | $-40^\circ\text{C}$ to $85^\circ\text{C}$  |
| LT6100HMS8#PBF   | LT6100HMS8#TRPBF | LTBMV         | 8-Lead Plastic MS8                    | $-40^\circ\text{C}$ to $125^\circ\text{C}$ |

Consult LTC Marketing for parts specified with wider operating temperature ranges. \*The temperature grade is identified by a label on the shipping container. Consult LTC Marketing for information on nonstandard lead based finish parts.

For more information on lead free part marking, go to: <http://www.linear.com/leadfree/>

For more information on tape and reel specifications, go to: <http://www.linear.com/tapeandreel/>

## ELECTRICAL CHARACTERISTICS

The ● denotes specifications which apply over the temperature range  $0^{\circ}\text{C} \leq T_A \leq 70^{\circ}\text{C}$  (LT6100C), otherwise specifications are  $T_A = 25^{\circ}\text{C}$ .  $V_{CC} = 5\text{V}$ ,  $V_{EE} = 0\text{V}$ ,  $V_S^+ = V_{CC} + 1.4\text{V}$  unless otherwise specified. (Note 5)

| SYMBOL                      | PARAMETER                                     | CONDITIONS                                                                                                                                             | MIN                    | TYP          | MAX                     | UNITS                                |
|-----------------------------|-----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|--------------|-------------------------|--------------------------------------|
| $V_S^-, V_S^+$              | Sense Amplifier Supply Voltage                | $V_{CC} = 2.7\text{V}$                                                                                                                                 | ● 4.1                  |              | 48                      | V                                    |
| $V_{SENSE}$                 | Input Sense Voltage Full Scale                | $V_{SENSE} = V_S^+ - V_S^-$ , $V_{CC} = 3\text{V}$ , $A_V = 10\text{V/V}$<br>$V_{SENSE} = V_S^+ - V_S^-$ , $V_{CC} = 5\text{V}$ , $A_V = 10\text{V/V}$ | ● 110<br>● 300         |              |                         | mV<br>mV                             |
| $V_{OS}$                    | Input Offset Voltage (MS Package)             | $I_{OUT} = 0$                                                                                                                                          | ● -300<br>-500         | $\pm 80$     | 300<br>500              | $\mu\text{V}$<br>$\mu\text{V}$       |
|                             | Input Offset Voltage (DD Package)             | $I_{OUT} = 0$                                                                                                                                          | ● -350<br>-550         | $\pm 80$     | 350<br>550              | $\mu\text{V}$<br>$\mu\text{V}$       |
| $V_{OS\text{ TC}}$          | Temperature Coefficient of $V_{OS}$           | (Note 6)                                                                                                                                               | ●                      | 0.5          | 3                       | $\mu\text{V}/^{\circ}\text{C}$       |
| $A_V$                       | Gain, $V_{OUT}/V_{SENSE}$                     | $V_{SENSE} = 50\text{mV}$ to $80\text{mV}$ , $A_V = 10\text{V/V}$<br>LT6100MS8<br>LT6100DD8                                                            | ● 9.95<br>9.94<br>9.90 |              | 10.05<br>10.06<br>10.10 | V/V<br>V/V<br>V/V                    |
|                             |                                               | $V_S = 48\text{V}$ , $V_{SENSE} = 50\text{mV}$ to $80\text{mV}$ , $A_V = 10\text{V/V}$                                                                 | ● 9.90                 |              | 10.10                   | V/V                                  |
|                             | Output Voltage Gain Error (Note 7)            | $V_{SENSE} = 50\text{mV}$ to $80\text{mV}$ ,<br>$A_V = 10, 12.5, 20, 25, 40, 50\text{V/V}$<br>LT6100MS8<br>LT6100DD8                                   | ● -0.5<br>-0.6<br>-1.0 |              | 0.5<br>0.6<br>1.0       | %<br>%<br>%                          |
|                             |                                               | $V_S = 48\text{V}$ , $V_{SENSE} = 50\text{mV}$ to $80\text{mV}$ ,<br>$A_V = 10, 12.5, 20, 25, 40, 50\text{V/V}$                                        | ● -1.0                 |              | 1.0                     | %                                    |
| $V_S\text{ CMRR}$           | $V_S$ Sense Input Common Mode Rejection Ratio | $V_{SENSE} = 50\text{mV}$ , $V_{CC} = 2.7\text{V}$ , $V_S = 4.1\text{V}$ to $36\text{V}$                                                               | ● 105<br>100           | 120<br>120   |                         | dB<br>dB                             |
| $V_{CC}\text{ PSRR}$        | $V_{CC}$ Supply Rejection Ratio               | $V_{SENSE} = 50\text{mV}$ , $V_S = 36\text{V}$ , $V_{CC} = 3\text{V}$ to $30\text{V}$                                                                  | ● 105<br>100           | 120<br>120   |                         | dB<br>dB                             |
| $V_{CC}$                    | Supply Voltage $V_{CC}$                       |                                                                                                                                                        | ● 2.7                  |              | 36                      | V                                    |
| BW                          | Bandwidth                                     | $A_V = 10\text{V/V}$ , $f_0 = -3\text{dB}$ , $V_{CC} = 15\text{V}$                                                                                     |                        | 100          | 150                     | kHz                                  |
|                             |                                               | $A_V = 50\text{V/V}$ , $f_0 = -3\text{dB}$ , $V_{CC} = 15\text{V}$                                                                                     |                        | 20           | 50                      | kHz                                  |
| $t_S$                       | Output Settling to 1% Final Value             | $V_{SENSE} = 10\text{mV}$ to $100\text{mV}$                                                                                                            |                        | 15           |                         | $\mu\text{s}$                        |
| $I_S^+(0), I_S^-(0)$        | Sense Input Current                           | $V_{SENSE} = 0\text{V}$                                                                                                                                | ●                      | 4.5          | 10                      | $\mu\text{A}$                        |
| $I_{CC}(0)$                 | $V_{CC}$ Supply Current                       | $V_{SENSE} = 0\text{V}$                                                                                                                                | ●                      | 60           | 130                     | $\mu\text{A}$                        |
| SR                          | Slew Rate (Note 8)                            | $V_{CC} = 15\text{V}$ , $V_{SENSE} = 26\text{mV}$ to $380\text{mV}$ , $A_V = 50\text{V/V}$                                                             | ● 0.03<br>0.02         | 0.05<br>0.05 |                         | V/ $\mu\text{s}$<br>V/ $\mu\text{s}$ |
| $I_{SC}$                    | Short-Circuit Current                         | $I_{SC}^+, I_{SC}^-$                                                                                                                                   |                        | 8            | 15                      | mA                                   |
|                             | Reverse $V_S$ Supply                          | $I_S(\text{TOTAL}) = -200\mu\text{A}$ , $V_{CC} = \text{Open}$                                                                                         | ●                      | 50           | 60                      | V                                    |
| $V_{O(\text{MIN})}$         | Minimum Output Voltage                        | $V_{SENSE} = 0\text{V}$ , No Load                                                                                                                      | ●                      | 15           | 30                      | mV                                   |
|                             |                                               | $V_{SENSE} = V_S^+ - V_S^- = -100\text{mV}$ , $A_V = 50\text{V/V}$ , No Load                                                                           |                        | 15           | 25                      | mV                                   |
| $V_{O(\text{MAX})}$         | Output High (Referred to $V_{CC}$ )           | $A_V = 50\text{V/V}$ , $V_{SENSE} = 100\text{mV}$ , $I_L = 0$                                                                                          | ●                      | 75           | 125                     | mV                                   |
|                             |                                               | $V_{SENSE} = 100\text{mV}$ , $I_L = 100\mu\text{A}$                                                                                                    | ●                      | 85           | 150                     | mV                                   |
|                             |                                               | $V_{SENSE} = 100\text{mV}$ , $I_L = 500\mu\text{A}$                                                                                                    | ●                      | 125          | 250                     | mV                                   |
|                             |                                               | $V_{SENSE} = 100\text{mV}$ , $I_L = 1\text{mA}$                                                                                                        | ●                      | 175          | 400                     | mV                                   |
| $I_S^+, I_S^- (\text{Off})$ | Sense Input Current (Power Down)              | $V_{CC} = 0\text{V}$ , $V_S = 48\text{V}$ , $V_{SENSE} = 0\text{V}$                                                                                    | ●                      | 0.001        | 1                       | $\mu\text{A}$                        |

## ELECTRICAL CHARACTERISTICS

The ● denotes specifications which apply over the temperature range  $-40^{\circ}\text{C} \leq T_A \leq 85^{\circ}\text{C}$  (LT6100I), otherwise specifications are  $T_A = 25^{\circ}\text{C}$ .  $V_{CC} = 5\text{V}$ ,  $V_{EE} = 0\text{V}$ ,  $V_S^+ = V_{CC} + 1.4\text{V}$  unless otherwise specified. (Note 5)

| SYMBOL                | PARAMETER                                     | CONDITIONS                                                                                                                                                                                                                     | MIN                        | TYP                    | MAX                      | UNITS                |
|-----------------------|-----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------------------|--------------------------|----------------------|
| $V_S^-, V_S^+$        | Sense Amplifier Supply Voltage                | $V_{CC} = 2.7\text{V}$                                                                                                                                                                                                         | ● 4.1                      |                        | 48                       | V                    |
| $V_{SENSE}$           | Input Sense Voltage Full Scale                | $V_{SENSE} = V_S^+ - V_S^-$ , $V_{CC} = 3\text{V}$ , $A_V = 10\text{V/V}$<br>$V_{SENSE} = V_S^+ - V_S^-$ , $V_{CC} = 5\text{V}$ , $A_V = 10\text{V/V}$                                                                         | ● 110<br>● 300             |                        |                          | mV<br>mV             |
| $V_{OS}$              | Input Offset Voltage (MS Package)             | $I_{OUT} = 0$                                                                                                                                                                                                                  | ● -300<br>● -550           | ±80                    | 300<br>550               | μV<br>μV             |
|                       | Input Offset Voltage (DD Package)             | $I_{OUT} = 0$                                                                                                                                                                                                                  | ● -350<br>● -600           | ±80                    | 350<br>600               | μV<br>μV             |
| $V_{OS\ TC}$          | Temperature Coefficient of $V_{OS}$           | (Note 6)                                                                                                                                                                                                                       | ●                          | 0.5                    | 3                        | μV/°C                |
| $A_V$                 | Gain, $V_{OUT}/V_{SENSE}$                     | $V_{SENSE} = 50\text{mV}$ to $80\text{mV}$ , $A_V = 10\text{V/V}$<br>LT6100MS8<br>LT6100DD8                                                                                                                                    | ● 9.95<br>● 9.94<br>● 9.90 |                        | 10.05<br>10.06<br>10.10  | V/V<br>V/V<br>V/V    |
|                       |                                               | $V_S = 48\text{V}$ , $V_{SENSE} = 50\text{mV}$ to $80\text{mV}$ , $A_V = 10\text{V/V}$                                                                                                                                         | ● 9.90                     |                        | 10.10                    | V/V                  |
|                       | Output Voltage Gain Error (Note 7)            | $V_{SENSE} = 50\text{mV}$ to $80\text{mV}$ ,<br>$A_V = 10, 12.5, 20, 25, 40, 50\text{V/V}$<br>LT6100MS8<br>LT6100DD8                                                                                                           | ● -0.5<br>● -0.6<br>● -1.0 |                        | 0.5<br>0.6<br>1.0        | %<br>%<br>%          |
|                       |                                               | $V_S = 48\text{V}$ , $V_{SENSE} = 50\text{mV}$ to $80\text{mV}$ ,<br>$A_V = 10, 12.5, 20, 25, 40, 50\text{V/V}$                                                                                                                | ● -1.0                     |                        | 1.0                      | %                    |
| $V_S\ \text{CMRR}$    | $V_S$ Sense Input Common Mode Rejection Ratio | $V_{SENSE} = 50\text{mV}$ , $V_{CC} = 2.7\text{V}$ , $V_S = 4.1\text{V}$ to $36\text{V}$                                                                                                                                       | ● 105<br>● 100             | 120<br>120             |                          | dB<br>dB             |
| $V_{CC}\ \text{PSRR}$ | $V_{CC}$ Supply Rejection Ratio               | $V_{SENSE} = 50\text{mV}$ , $V_S = 36\text{V}$ , $V_{CC} = 3\text{V}$ to $30\text{V}$                                                                                                                                          | ● 105<br>● 100             | 120<br>120             |                          | dB<br>dB             |
| $V_{CC}$              | Supply Voltage $V_{CC}$                       |                                                                                                                                                                                                                                | ● 2.7                      |                        | 36                       | V                    |
| $BW$                  | Bandwidth                                     | $A_V = 10\text{V/V}$ , $f_0 = -3\text{dB}$ , $V_{CC} = 15\text{V}$<br>$A_V = 50\text{V/V}$ , $f_0 = -3\text{dB}$ , $V_{CC} = 15\text{V}$                                                                                       |                            | 100<br>20              | 150<br>50                | kHz<br>kHz           |
| $t_S$                 | Output Settling to 1% Final Value             | $V_{SENSE} = 10\text{mV}$ to $100\text{mV}$                                                                                                                                                                                    |                            | 15                     |                          | μs                   |
| $I_S^+(0), I_S^-(0)$  | Sense Input Current                           | $V_{SENSE} = 0\text{V}$                                                                                                                                                                                                        | ●                          | 4.5                    | 10                       | μA                   |
| $I_{CC}(0)$           | Supply Current                                | $V_{SENSE} = 0\text{V}$                                                                                                                                                                                                        | ●                          | 60                     | 145                      | μA                   |
| $SR$                  | Slew Rate (Note 8)                            | $V_{CC} = 15\text{V}$ , $V_{SENSE} = 26\text{mV}$ to $380\text{mV}$ , $A_V = 50\text{V/V}$                                                                                                                                     | ● 0.03<br>● 0.02           | 0.05<br>0.05           |                          | V/μs<br>V/μs         |
| $I_{SC}$              | Short-Circuit Current                         | $I_{SC}^+, I_{SC}^-$                                                                                                                                                                                                           |                            | 8                      | 15                       | mA                   |
|                       | Reverse $V_S$ Supply                          | $I_{S(TOTAL)} = -200\mu\text{A}$ , $V_{CC} = \text{Open}$                                                                                                                                                                      | ●                          | 50                     | 60                       | V                    |
| $V_{O(MIN)}$          | Minimum Output Voltage                        | $V_{SENSE} = 0\text{V}$ , No Load<br>$V_{SENSE} = V_S^+ - V_S^- = -100\text{mV}$ , $A_V = 50\text{V/V}$ , No Load                                                                                                              | ●                          | 15<br>15               | 30<br>25                 | mV<br>mV             |
| $V_{O(MAX)}$          | Output High (Referred to $V_{CC}$ )           | $A_V = 50\text{V/V}$ , $V_{SENSE} = 100\text{mV}$ , $I_L = 0$<br>$V_{SENSE} = 100\text{mV}$ , $I_L = 100\mu\text{A}$<br>$V_{SENSE} = 100\text{mV}$ , $I_L = 500\mu\text{A}$<br>$V_{SENSE} = 100\text{mV}$ , $I_L = 1\text{mA}$ | ●<br>●<br>●<br>●           | 75<br>85<br>125<br>175 | 125<br>150<br>250<br>400 | mV<br>mV<br>mV<br>mV |
| $I_S^+, I_S^-$ (Off)  | Sense Input Current (Power Down)              | $V_{CC} = 0\text{V}$ , $V_S = 48\text{V}$ , $V_{SENSE} = 0\text{V}$                                                                                                                                                            | ●                          | 0.001                  | 1                        | μA                   |

## ELECTRICAL CHARACTERISTICS

The ● denotes specifications which apply over the temperature range  $-40^{\circ}\text{C} \leq T_A \leq 125^{\circ}\text{C}$  (LT6100H), otherwise specifications are  $T_A = 25^{\circ}\text{C}$ .  $V_{CC} = 5\text{V}$ ,  $V_{EE} = 0\text{V}$ ,  $V_S^+ = V_{CC} + 1.4\text{V}$  unless otherwise specified. (Note 5)

| SYMBOL               | PARAMETER                                     | CONDITIONS                                                                                                                                             | MIN                    | TYP          | MAX               | UNITS        |
|----------------------|-----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|--------------|-------------------|--------------|
| $V_S^-, V_S^+$       | Sense Amplifier Supply Voltage                | $V_{CC} = 2.7\text{V}$                                                                                                                                 | ● 4.1                  |              | 48                | V            |
| $V_{SENSE}$          | Input Sense Voltage Full Scale                | $V_{SENSE} = V_S^+ - V_S^-$ , $V_{CC} = 3\text{V}$ , $A_V = 10\text{V/V}$<br>$V_{SENSE} = V_S^+ - V_S^-$ , $V_{CC} = 5\text{V}$ , $A_V = 10\text{V/V}$ | ● 110<br>● 300         |              |                   | mV<br>mV     |
| $V_{OS}$             | Input Offset Voltage (MS Package)             | $I_{OUT} = 0$                                                                                                                                          | ● -300<br>-600         | ±80          | 300<br>600        | μV<br>μV     |
|                      | Input Offset Voltage (DD Package)             | $I_{OUT} = 0$                                                                                                                                          | ● -350<br>-650         | ±80          | 350<br>650        | μV<br>μV     |
| $V_{OS\ TC}$         | Temperature Coefficient of $V_{OS}$           | (Note 6)                                                                                                                                               | ●                      | 0.5          | 5                 | μV/°C        |
| $A_V$                | Gain, $V_{OUT}/V_{SENSE}$                     | $V_{SENSE} = 50\text{mV}$ to $80\text{mV}$ , $A_V = 10\text{V/V}$<br>LT6100MS8                                                                         | ● 9.95                 |              | 10.05             | V/V          |
|                      |                                               | LT6100DD8                                                                                                                                              | 9.94                   |              | 10.06             | V/V          |
|                      |                                               |                                                                                                                                                        | 9.90                   |              | 10.10             | V/V          |
|                      | Output Voltage Gain Error (Note 7)            | $V_S = 48\text{V}$ , $V_{SENSE} = 50\text{mV}$ to $80\text{mV}$ , $A_V = 10\text{V/V}$                                                                 | ● 9.90                 |              | 10.10             | V/V          |
|                      |                                               | $V_{SENSE} = 50\text{mV}$ to $80\text{mV}$ ,<br>$A_V = 10, 12.5, 20, 25, 40, 50\text{V/V}$<br>LT6100MS8                                                | ● -0.5<br>-0.6<br>-1.0 |              | 0.5<br>0.6<br>1.0 | %<br>%<br>%  |
|                      |                                               | $V_S = 48\text{V}$ , $V_{SENSE} = 50\text{mV}$ to $80\text{mV}$ ,<br>$A_V = 10, 12.5, 20, 25, 40, 50\text{V/V}$                                        | ● -1.0                 |              | 1.0               | %            |
| $V_S\ CMRR$          | $V_S$ Sense Input Common Mode Rejection Ratio | $V_{SENSE} = 50\text{mV}$ , $V_{CC} = 2.7\text{V}$ , $V_S = 4.1\text{V}$ to $36\text{V}$                                                               | ● 105<br>100           | 120<br>120   |                   | dB<br>dB     |
| $V_{CC}\ PSRR$       | $V_{CC}$ Supply Rejection Ratio               | $V_{SENSE} = 50\text{mV}$ , $V_S = 36\text{V}$ , $V_{CC} = 3\text{V}$ to $30\text{V}$                                                                  | ● 105<br>95            | 120<br>120   |                   | dB<br>dB     |
| $V_{CC}$             | Supply Voltage $V_{CC}$                       |                                                                                                                                                        | ● 2.7                  |              | 36                | V            |
| BW                   | Bandwidth                                     | $A_V = 10\text{V/V}$ , $f_0 = -3\text{dB}$ , $V_{CC} = 15\text{V}$                                                                                     |                        | 100          | 150               | kHz          |
|                      |                                               | $A_V = 50\text{V/V}$ , $f_0 = -3\text{dB}$ , $V_{CC} = 15\text{V}$                                                                                     |                        | 20           | 50                | kHz          |
| $t_S$                | Output Settling to 1% Final Value             | $V_{SENSE} = 10\text{mV}$ to $100\text{mV}$                                                                                                            |                        | 15           |                   | μs           |
| $I_S^+(0), I_S^-(0)$ | Sense Input Current                           | $V_{SENSE} = 0\text{V}$                                                                                                                                | ●                      | 4.5          | 10                | μA           |
| $I_{CC(0)}$          | Supply Current                                | $V_{SENSE} = 0\text{V}$                                                                                                                                | ●                      | 60           | 170               | μA           |
| SR                   | Slew Rate (Note 8)                            | $V_{CC} = 15\text{V}$ , $V_{SENSE} = 26\text{mV}$ to $380\text{mV}$ , $A_V = 50\text{V/V}$                                                             | ● 0.03<br>0.02         | 0.05<br>0.05 |                   | V/μs<br>V/μs |
| $I_{SC}$             | Short-Circuit Current                         | $I_{SC}^+, I_{SC}^-$                                                                                                                                   |                        | 8            | 15                | mA           |
|                      | Reverse $V_S$ Supply                          | $I_{S(TOTAL)} = -200\mu\text{A}$ , $V_{CC} = \text{Open}$                                                                                              | ●                      | 50           | 60                | V            |
| $V_{O(MIN)}$         | Minimum Output Voltage                        | $V_{SENSE} = 0\text{V}$ , No Load                                                                                                                      | ●                      | 15           | 35                | mV           |
|                      |                                               | $V_{SENSE} = V_S^+ - V_S^- = -100\text{mV}$ , $A_V = 50\text{V/V}$ , No Load                                                                           |                        | 15           | 25                | mV           |
| $V_{O(MAX)}$         | Output High (Referred to $V_{CC}$ )           | $A_V = 50\text{V/V}$ , $V_{SENSE} = 100\text{mV}$ , $I_L = 0$                                                                                          | ●                      | 75           | 140               | mV           |
|                      |                                               | $V_{SENSE} = 100\text{mV}$ , $I_L = 100\mu\text{A}$                                                                                                    | ●                      | 85           | 160               | mV           |
|                      |                                               | $V_{SENSE} = 100\text{mV}$ , $I_L = 500\mu\text{A}$                                                                                                    | ●                      | 125          | 250               | mV           |
|                      |                                               | $V_{SENSE} = 100\text{mV}$ , $I_L = 1\text{mA}$                                                                                                        | ●                      | 175          | 400               | mV           |
| $I_S^+, I_S^-$ (Off) | Sense Input Current (Power Down)              | $V_{CC} = 0\text{V}$ , $V_S = 48\text{V}$ , $V_{SENSE} = 0\text{V}$                                                                                    | ●                      | 0.001        | 1                 | μA           |

## ELECTRICAL CHARACTERISTICS

**Note 1:** Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

**Note 2:** ESD (Electrostatic Discharge) sensitive devices. Extensive use of ESD protection devices are used internal to the LT6100, however, high electrostatic discharge can damage or degrade the device. Use proper ESD handling precautions.

**Note 3:** A heat sink may be required to keep the junction temperature below absolute maximum ratings.

**Note 4:** The LT6100C/LT6100I are guaranteed functional over the operating temperature range of  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$ . The LT6100H is guaranteed functional over the operating temperature range of  $-40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$ .







**Note 5:** The LT6100C is guaranteed to meet specified performance from  $0^{\circ}\text{C}$  to  $70^{\circ}\text{C}$ . The LT6100C is designed, characterized and expected to meet specified performance from  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$  but is not tested or QA sampled at these temperatures. The LT6100I is guaranteed to meet specified performance from  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$ . The LT6100H is guaranteed to meet specified performance from  $-40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$ .

**Note 6:** This parameter is not 100% tested.

**Note 7:** Gain error for  $A_V = 12.5$ ,  $25\text{V/V}$  is guaranteed by the other gain error tests.


**Note 8:** Slew rate is measured on the output between  $3.5\text{V}$  and  $13.5\text{V}$ .

## TYPICAL PERFORMANCE CHARACTERISTICS

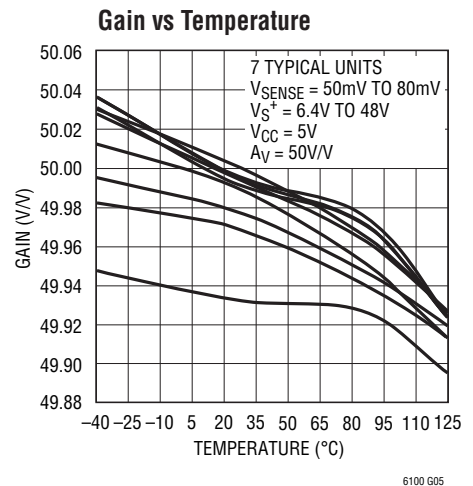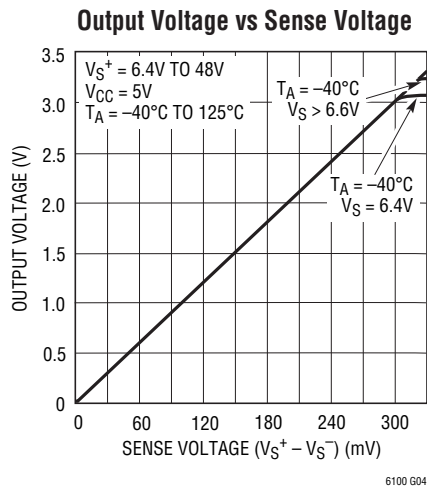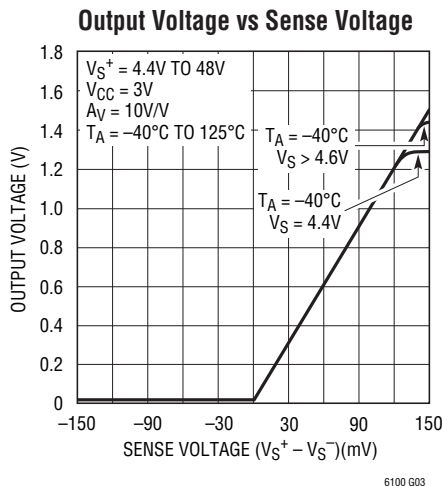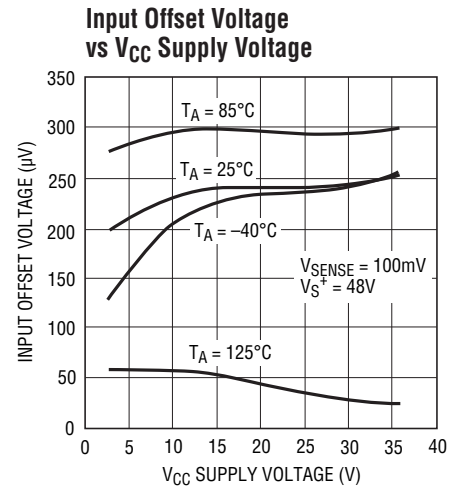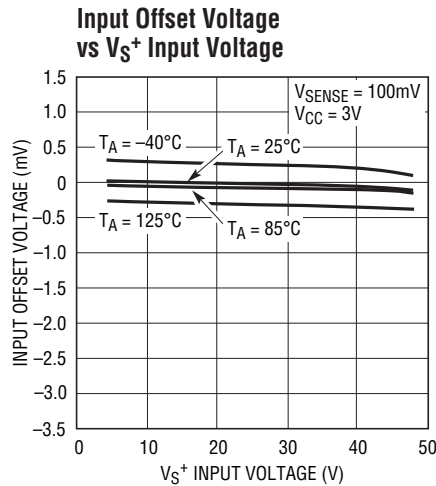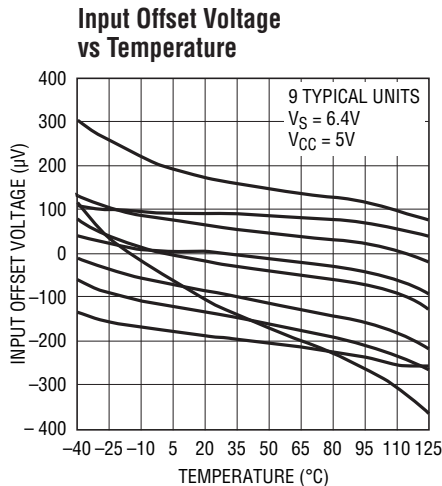


# TYPICAL PERFORMANCE CHARACTERISTICS


**Negative Sense Input Current vs Sense Voltage**

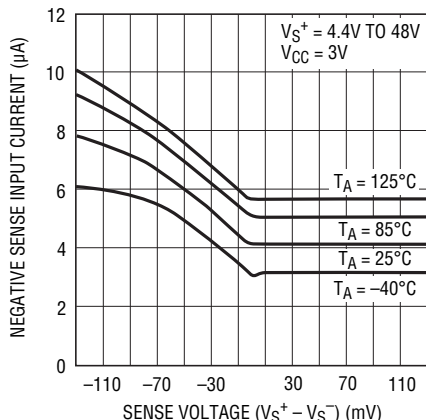


**Positive Sense Input Current vs Sense Voltage**

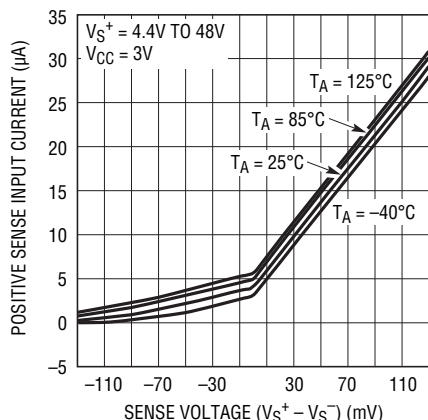


**Output Positive Swing vs Load Current**

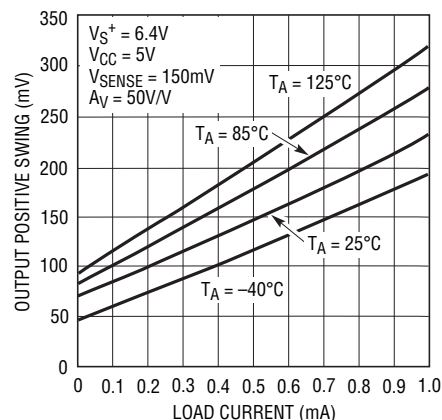


**V<sub>CC</sub> Supply Current vs V<sub>S</sub> Input Voltage**

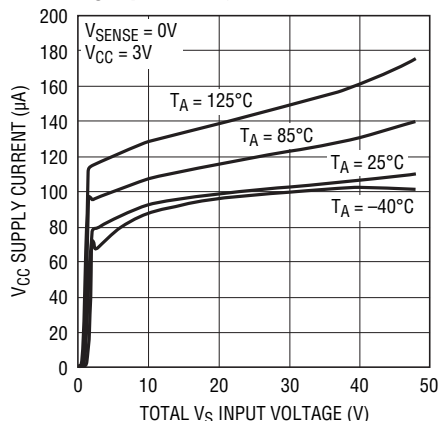


**Op Amp Output Impedance vs Frequency**

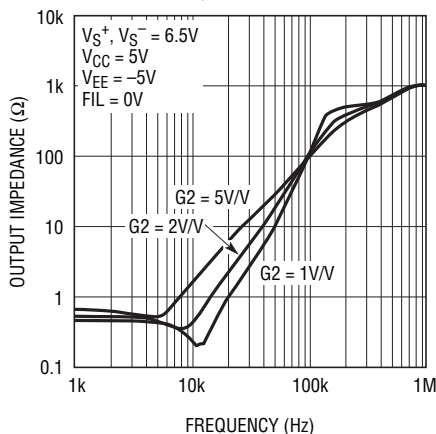


**Gain vs Frequency**

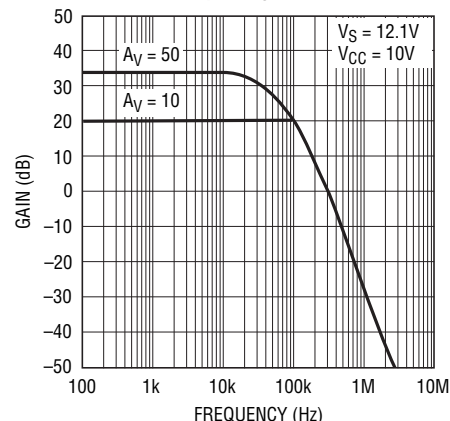


**CMRR vs Frequency**

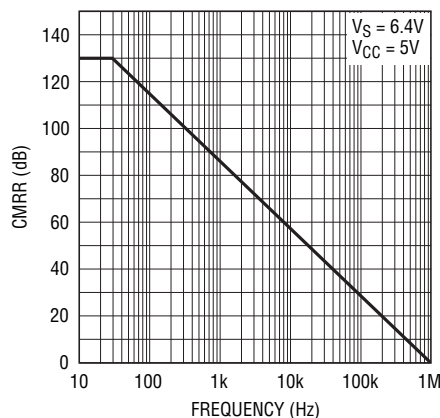

**V<sub>CC</sub> PSRR vs Frequency**

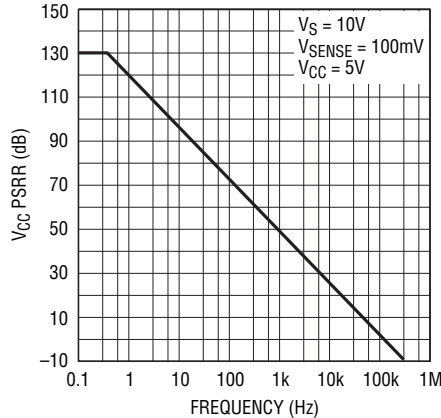


**Gain Error vs V<sub>SENSE</sub>**

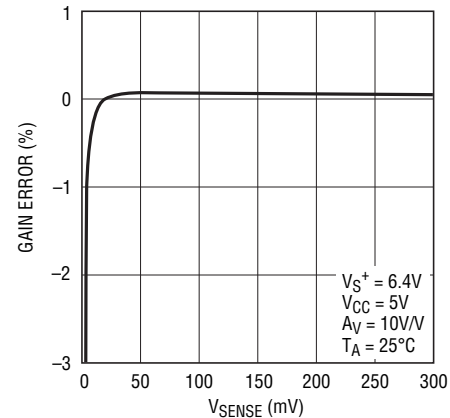




# TYPICAL PERFORMANCE CHARACTERISTICS


Sense Input Current ( $V_{CC}$  Powered Down) vs  $V_{S^+}$

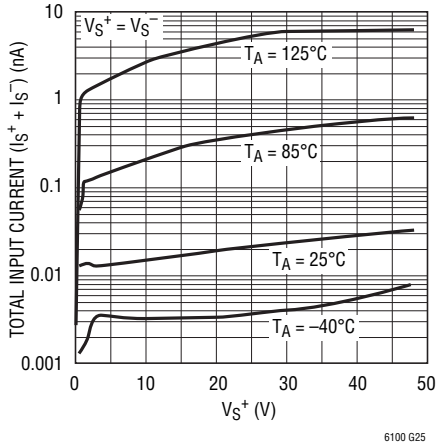


Step Response at  $V_{SENSE} = 0\text{V}$  to  $130\text{mV}$

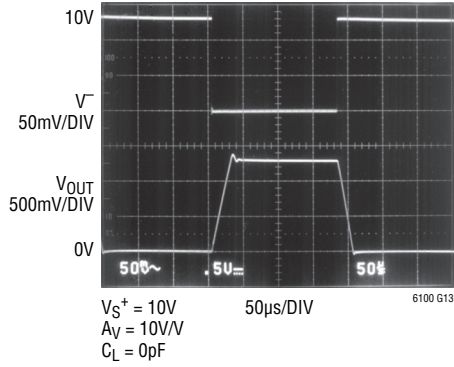


Step Response at  $V_{SENSE} = 0\text{V}$  to  $130\text{mV}$

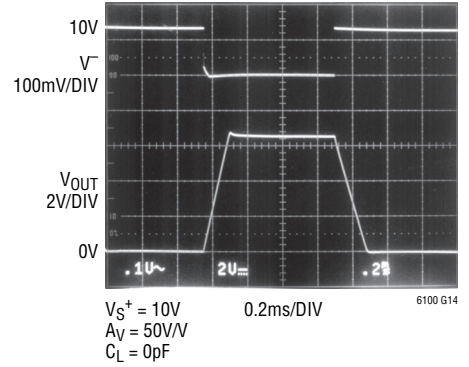


Step Response at  $V_{SENSE} = 0\text{V}$  to  $10\text{mV}$

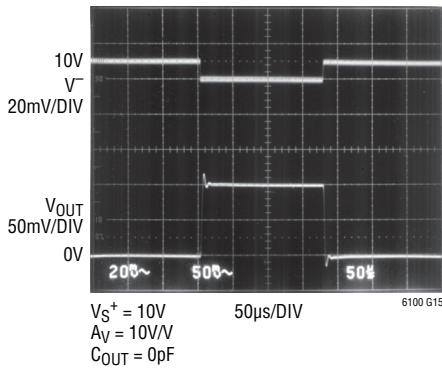


Step Response at  $V_{SENSE} = 0\text{V}$  to  $10\text{mV}$

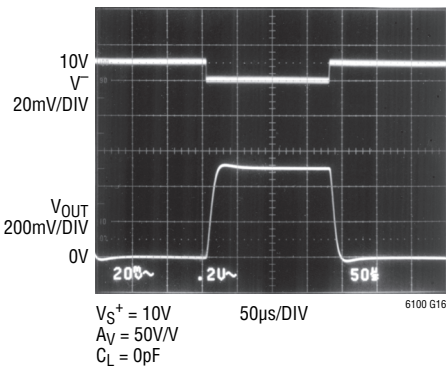


Step Response at  $V_{SENSE} = 0\text{V}$  to  $130\text{mV}$

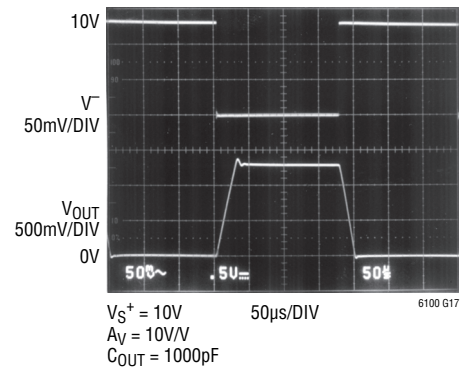

Step Response at  $V_{SENSE} = 0\text{V}$  to  $130\text{mV}$

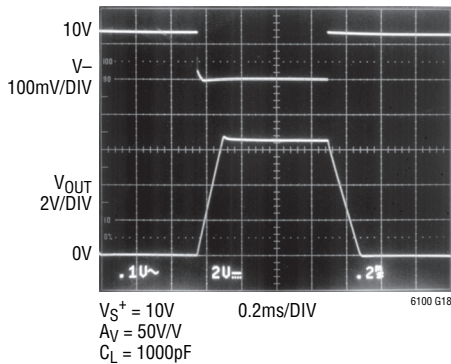


Step Response at  $V_{SENSE} = 0\text{V}$  to  $10\text{mV}$

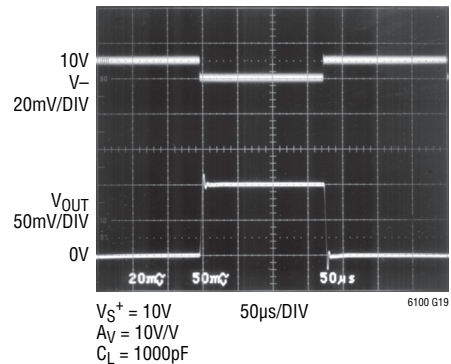




## TYPICAL PERFORMANCE CHARACTERISTICS

Step Response at  $V_{SENSE} = 0V$  to  $10mV$

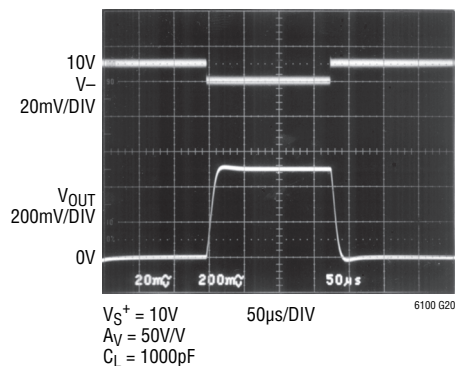

Start-Up Delay

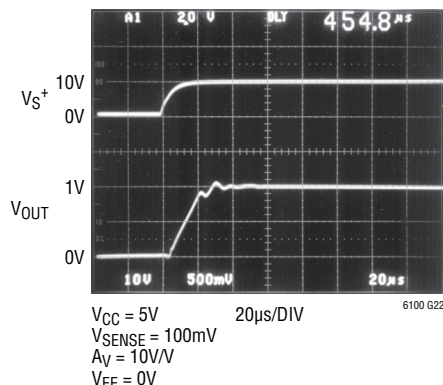

## PIN FUNCTIONS

**$V_S^-$  (Pin 1):** Negative Sense Input Terminal. Negative sense voltage input will remain functional for voltages up to 48V.  $V_S^-$  is connected to an internal gain-setting resistor  $R_{G1} = 5k$ .

**$V_{CC}$  (Pin 2):** Supply Voltage Input. This power supply pin supplies current to both current sense amplifier and op amp.

**FIL (Pin 3):** Filter Pin. Connects to an external capacitor to roll off differential noise of the system. Pole frequency  $f_{-3dB} = 1/(2\pi R_{FIL} C)$ ,  $R_{FIL} = R_E + R_O = 60k$ .

**$V_{EE}$  (Pin 4):** Negative Supply or Ground for Single Supply Operation.

**$V_{OUT}$  (Pin 5):** Voltage Output Proportional to the Magnitude of the Current Flowing Through  $R_{SENSE}$ :

$$V_{OUT} = A_V \cdot (V_{SENSE} \pm V_{OS})$$

$V_{OS}$  is the input offset voltage.  $A_V$  is the total gain of the LT6100.

**A2 (Pin 6):** Gain Select Pin. Refer to Table 1.

**A4 (Pin 7):** Gain Select Pin. When Pin 7 is shorted to  $V_{EE}$ , the total gain is 40V/V. When both Pin 6 and Pin 7 are shorted to  $V_{EE}$ , the total gain is 50V/V. When both Pin 6 and Pin 7 are opened, the total gain is 10V/V.

**$V_S^+$  (Pin 8):** Positive Sense Input Terminal. Connecting a supply to  $V_S^+$  and a load to  $V_S^-$  will allow the LT6100 to monitor the current through  $R_{SENSE}$ , refer to Figure 1.  $V_S^+$  is connected to an internal gain setting resistor  $R_{G2} = 5k$ .  $V_S^+$  remains functional for voltages up to 48V.

FUNCTIONAL DIAGRAM

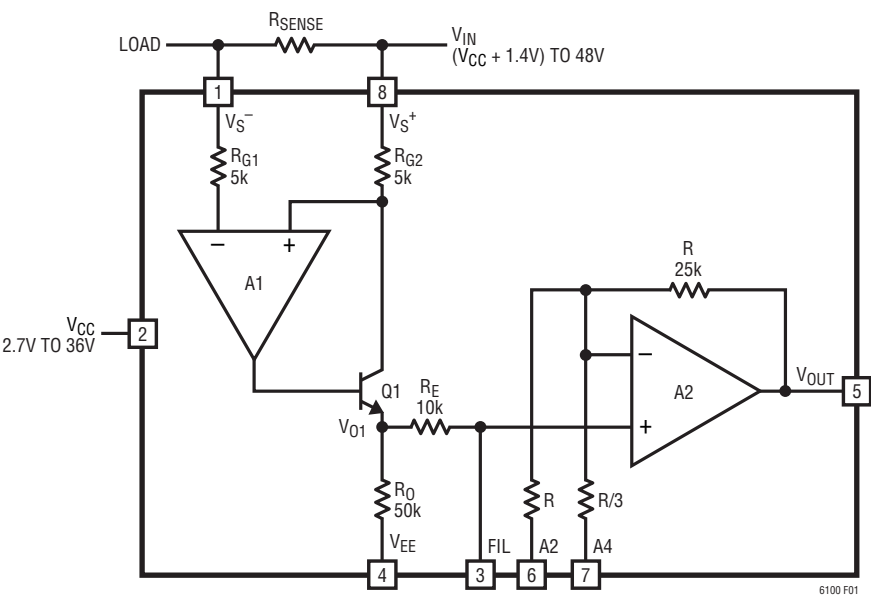


Figure 1. Functional Diagram

## APPLICATIONS INFORMATION

The LT6100 high side current sense amplifier (Figure 1) provides accurate unidirectional monitoring of current through a user-selected sense resistor. The LT6100 features a fully specified 4.1V to 48V input common mode range. A high PSRR  $V_{CC}$  supply (2.7V to 36V) powers the current sense amplifier and the internal op amp circuitry. The input sense voltage is level shifted from the positive sense power supply to the ground reference and amplified by a user-selected gain to the output. The buffered output voltage is directly proportional to the current flowing through the sense resistor.

### Theory of Operation (Refer to Figure 1)

Current from the source at  $V_S^+$  flows through  $R_{SENSE}$  to the load at  $V_S^-$ , creating a sense voltage,  $V_{SENSE}$ . Inputs  $V_S^+$  and  $V_S^-$  apply the sense voltage to  $R_{G2}$ . The opposite ends of resistors  $R_{G1}$  and  $R_{G2}$  are forced to be at equal potentials by the voltage gain of amplifier A1. The current through  $R_{G2}$  is forced to flow through transistor Q1 and is sourced to node  $V_{O1}$ . The current from  $R_{G2}$  flowing through resistor  $R_O$  gives a voltage gain of ten,  $V_{O1}/V_{SENSE} = R_O/R_{G2} = 10V/V$ . The sense amplifier output at  $V_{O1}$  is amplified again by amplifier A2. The inputs of amplifier A2 can operate to ground which ensures that small sense voltage signals are detected. Amplifier A2 can be programmed to different gains via Pin 6 and Pin 7. Thus, the total gain of the system becomes  $A_V = 10 \cdot A_2$  and  $V_{OUT} = V_{SENSE} \cdot A_V$ .

### Gain Setting

The LT6100 gain is set by strapping (or floating) the two gain pins (see Table 1). This feature allows the user to “zoom in” by increasing the gain for accurate measurement of low currents.

$A_V = 10V/V \cdot G_2$ ,  $G_2$  is the gain of op amp A2.

**Table 1. Gain Set with Pin 6 and Pin 7**

| A2 (PIN 6) | A4 (PIN 7) | G2   | A <sub>V</sub> |
|------------|------------|------|----------------|
| Open       | Open       | 1    | 10             |
| $V_{EE}$   | Out        | 1.25 | 12.5           |
| $V_{EE}$   | Open       | 2    | 20             |
| Out        | $V_{EE}$   | 2.5  | 25             |
| Open       | $V_{EE}$   | 4    | 40             |
| $V_{EE}$   | $V_{EE}$   | 5    | 50             |

### Selection of External Current Sense Resistor

External  $R_{SENSE}$  resistor selection is a delicate trade-off between power dissipation in the resistor and current measurement accuracy. The maximum sense voltage may be as large as  $\pm 300mV$  to get maximum dynamic range. For high current applications, the user may want to minimize the sense voltage to minimize the power dissipation in the sense resistor. The LT6100's low input offset voltage of  $80\mu V$  allows for high resolution of low sense voltages. This allows limiting the maximum sense voltage while still providing high resolution current monitoring.

Kelvin connection of the LT6100's  $V_S^+$  and  $V_S^-$  inputs to the sense resistor should be used to provide the highest accuracy in high current applications. Solder connections and PC board interconnect resistance (approximately  $0.5m\Omega$  per square) can be a large error in high current systems. A 5A application might choose a  $20m\Omega$  sense resistor to give a  $100mV$  full-scale input to the LT6100. Input offset voltage will limit resolution to  $4mA$ . Neglecting contact resistance at solder joints, even one square of PC board copper at each resistor end will cause an error of 5%. This error will grow proportionately higher as monitored current levels rise.

## APPLICATIONS INFORMATION

### Noise Filtering

The LT6100 provides signal filtering via pin FIL that is internally connected to the resistors  $R_E$  and  $R_O$ . This pin may be used to filter the input signal entering the LT6100's internal op amp, and should be used when fast ripple current or transients flow through the sense resistor. High frequency signals above the 300kHz bandwidth of the LT6100's internal amplifier will cause errors. A capacitor connected between FIL and  $V_{EE}$  creates a single pole low pass filter with corner frequency:

$$f_{-3dB} = 1/(2\pi R_{FIL}C)$$

where  $R_{FIL} = 60k$ . A 220pF capacitor creates a pole at 12kHz, a good choice for many applications.

### Output Signal Range

The LT6100's output signal is developed by current through  $R_{G2}$  into output resistor  $R_O$ . The current is  $V_{SENSE}/R_{G2}$ . The sense amplifier output,  $V_{O1}$ , is buffered by the internal op amp so that connecting the output pins to other systems will preserve signal accuracy. For zero  $V_{SENSE}$ , internal circuit saturation with loss of accuracy occurs at the minimum  $V_{OUT}$  swing, 15mV above  $V_{EE}$ .  $V_{OUT}$  may swing positive to within 75mV of  $V_{CC}$  or a maximum of 36V, a limit set by internal junction breakdown. Within these constraints,

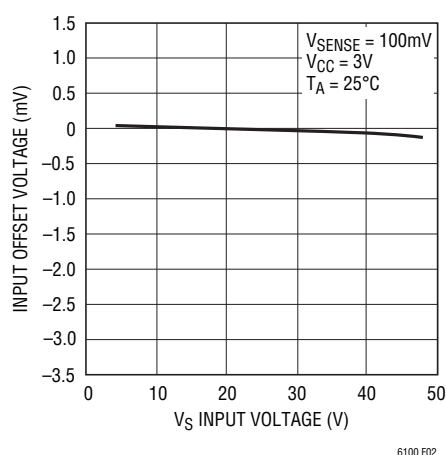


Figure 2.  $V_{OS}$  vs  $V_S$  Input Voltage

an amplified, level shifted representation of the  $R_{SENSE}$  voltage is developed at  $V_{OUT}$ . The output is well behaved driving capacitive loads to 1000pF.

### Sense Input Signal Range

The LT6100 has high CMRR over the wide input voltage range of 4.1V to 48V. The minimum operation voltage of the sense amplifier input is 1.4V above  $V_{CC}$ . The output remains accurate even when the sense inputs are driven to 48V. Figure 2 shows that  $V_{OS}$  changes very slightly over a wide input range. Furthermore, the sense inputs  $V_S^+$  and  $V_S^-$  can collapse to zero volts without incurring any damage to the device. The LT6100 can handle differential sense voltages up to the voltage of the sense inputs supplies. For example,  $V_S^+ = 48V$  and  $V_S^- = 0V$  can be a valid condition in a current monitoring application (Figure 3) when an overload protection fuse is blown and  $V_S^-$  voltage collapses to ground. Under this condition, the output of the LT6100 goes to the positive rail,  $V_{OH}$ . There is no phase inversion to cause an erroneous output signal. For the opposite case when  $V_S^+$  collapse to ground with  $V_S^-$  held up at some higher voltage potential, the output will sit at  $V_{OL}$ . If both inputs fall below the minimum CM voltage,  $V_{CC} + 1.4V$ , the output is indeterminate but the LT6100 will not be damaged.

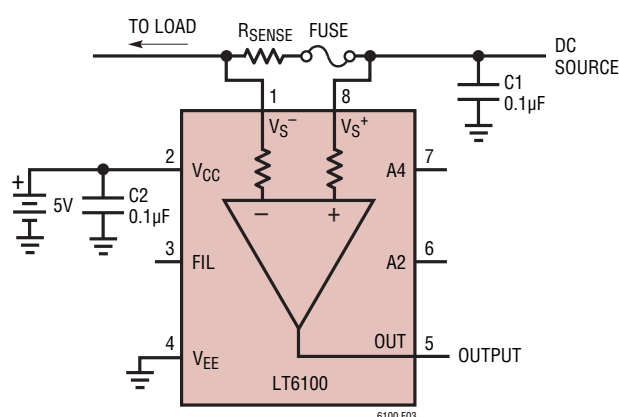


Figure 3. Current Monitoring of a Fuse Protected Circuit

## APPLICATIONS INFORMATION

### Low Sense Voltage Operation

Figure 4 shows the simplest circuit configuration in which the LT6100 may be used. While  $V_{OUT}$  (output voltage) increases with positive sense current, at  $V_{SENSE} = 0V$ , the LT6100's buffered output can only swing as low as

$V_{OL} = 15mV$ . The accuracy at small sense voltages can be improved by selecting higher gain. When gain of  $50V/V$  is selected, as shown in Figure 7,  $V_{OUT}$  leaves the clipped region for a positive  $V_{SENSE}$  greater than  $1mV$  compared to  $2.5mV$  for gain of  $10V/V$  (see Figure 6).

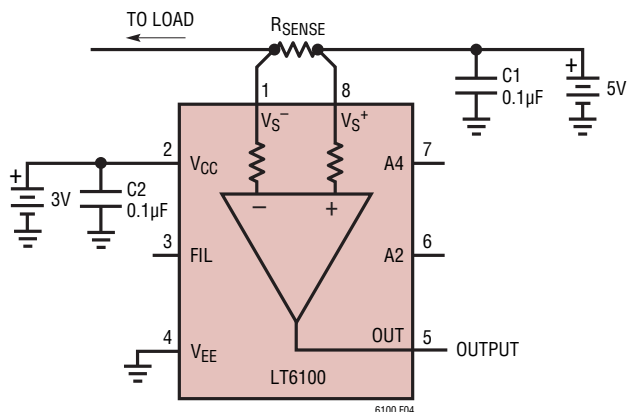


Figure 4. LT6100 Load Current Monitor

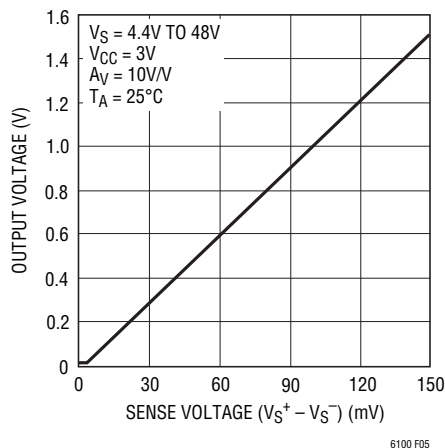


Figure 5. Output Voltage vs  $V_{SENSE}$

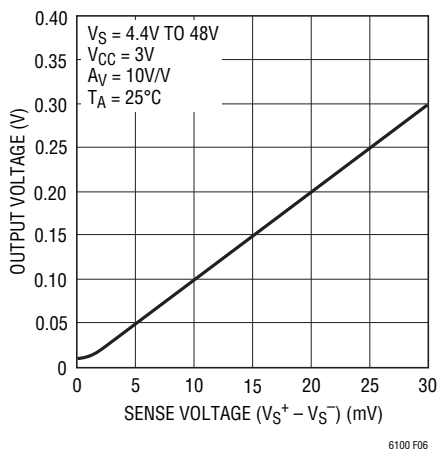


Figure 6. Expanded View of Output Voltage vs  $V_{SENSE}$ ,  $A_V = 10V/V$


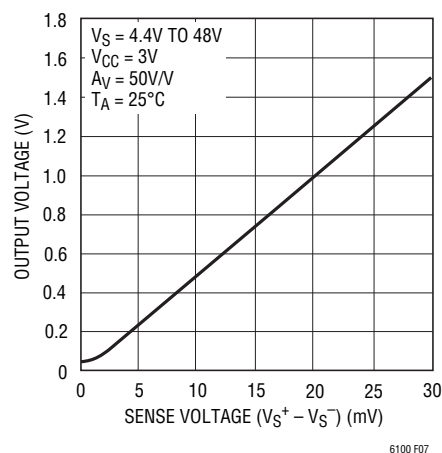


Figure 7. Expanded View of Output Voltage vs  $V_{SENSE}$ ,  $A_V = 50V/V$


Another unique benefit of the LT6100 is that you can leave it connected to a battery even when it is denied power. When the LT6100 loses power or is intentionally powered down,

its inputs remain high impedance (see Figure 8). This is due to the implementation of Linear Technology's Over-The-Top® input topology at its front end. When powered down, the LT6100 inputs draw less than 1µA of current.

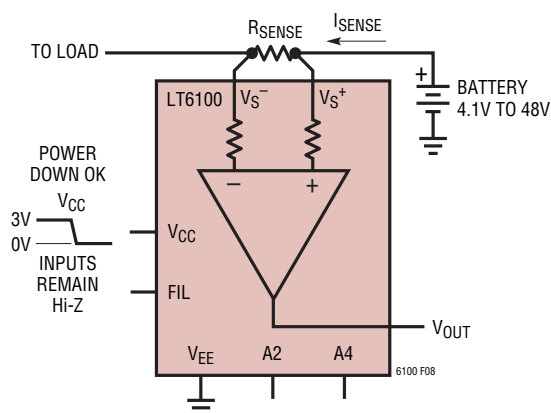

### Figure 8. Input Remains Hi-Z when LT6100 is Powered Down

### Adjust Gain Dynamically for Enhanced Range

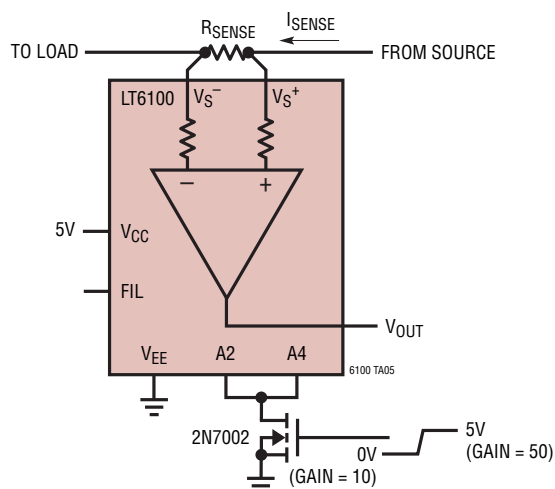


The schematic diagram illustrates the electrical interface for a Micro-Hotplate (MHP100S-005) from Boston Microsystems. The hotplate is connected to a positive supply  $V_{DR}^+$  through a  $10\Omega$ , 1% resistor, with the current  $I_{HOTPLATE}$  flowing into the top terminal. The bottom terminal of the hotplate is connected to  $V_{DR}^-$ . The top terminal is also connected to the non-inverting input ( $V_S^+$ ) of the LT6100 instrumentation amplifier. The LT6100 is configured with its inverting input ( $V_S^-$ ) to  $V_{DR}^+$  via a resistor, its output ( $V_{OUT}$ ) to  $V_{CC}$  (5V), and its reference input ( $V_{EE}$ ) to ground. The LT1991 instrumentation amplifier is used for voltage monitoring, with its non-inverting input ( $V_P^+$ ) connected to the bottom terminal of the hotplate and its inverting input ( $V_P^-$ ) connected to the top terminal. The LT1991 is powered by 5V supplies and has its output ( $V_{OUT}$ ) connected to ground. The output voltage is given by the formula  $V_{OUT} = \frac{V_{DR}^+ - V_{DR}^-}{10}$ . The LT6100 is labeled with pins  $V_{CC}$ ,  $V_{EE}$ ,  $A2$ , and  $A4$ . The LT1991 is labeled with pins  $M9$ ,  $M3$ ,  $M1$ ,  $P1$ ,  $P3$ , and  $P9$ . The part number 6100 TA06 is noted at the bottom right.



# PACKAGE DESCRIPTION

Please refer to <http://www.linear.com/designtools/packaging/> for the most recent package drawings.

## DD Package 8-Lead Plastic DFN (3mm × 3mm) (Reference LTC DWG # 05-08-1698 Rev C)

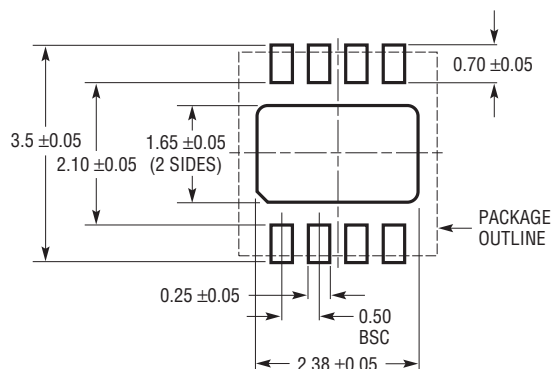

RECOMMENDED SOLDER PAD PITCH AND DIMENSIONS  
APPLY SOLDER MASK TO AREAS THAT ARE NOT SOLDERED

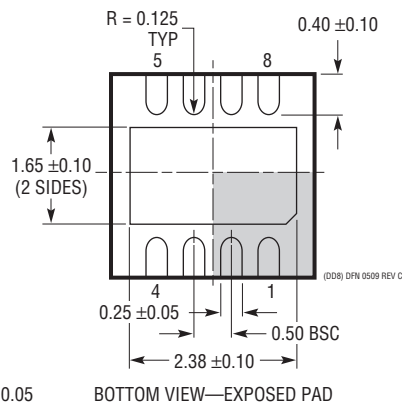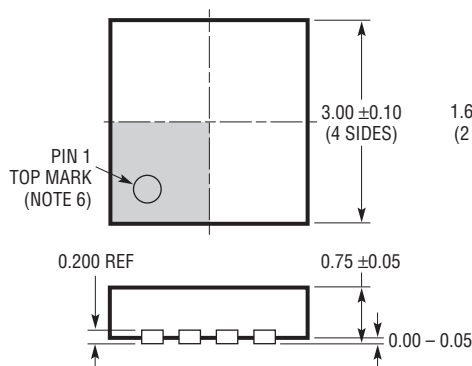

### NOTE:

1. DRAWING TO BE MADE A JEDEC PACKAGE OUTLINE M0-229 VARIATION OF (WEED-1)
2. DRAWING NOT TO SCALE
3. ALL DIMENSIONS ARE IN MILLIMETERS
4. DIMENSIONS OF EXPOSED PAD ON BOTTOM OF PACKAGE DO NOT INCLUDE MOLD FLASH. MOLD FLASH, IF PRESENT, SHALL NOT EXCEED 0.15mm ON ANY SIDE
5. EXPOSED PAD SHALL BE SOLDER PLATED
6. SHADED AREA IS ONLY A REFERENCE FOR PIN 1 LOCATION ON TOP AND BOTTOM OF PACKAGE






**REVISION HISTORY** (Revision history begins at Rev C)


| REV | DATE  | DESCRIPTION                                       | PAGE NUMBER |
|-----|-------|---------------------------------------------------|-------------|
| C   | 11/12 | Corrected value in Output Signal Range section.   | 11          |
| D   | 07/14 | Corrected part numbers in Order Information       | 2           |
|     |       | Corrected Specified Temperature Range for LT6100C | 2           |
|     |       | Updated format of Order Information               | 2           |
|     |       | Added web links                                   | All         |

TYPICAL APPLICATIONS


800mA/1A White LED Current Regulator

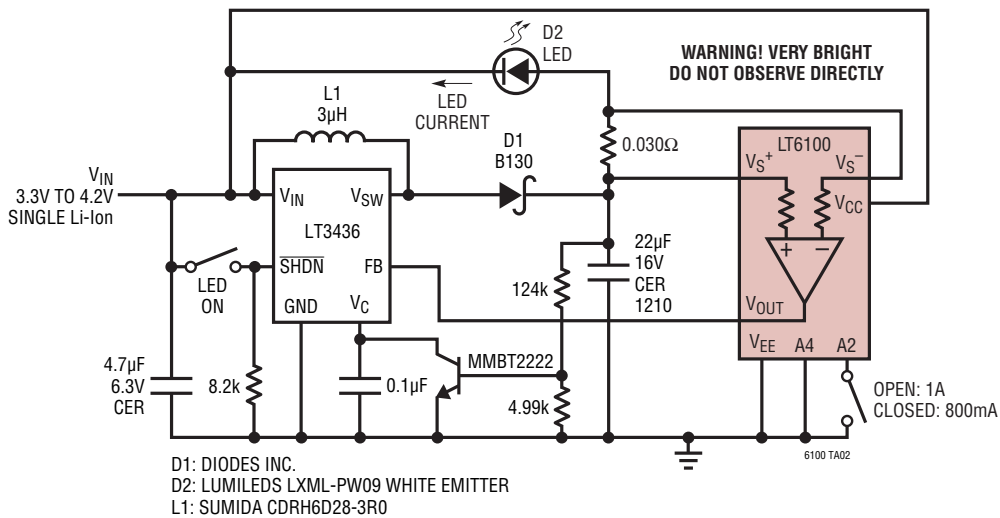

Filtered Gain of 20 Current Sense

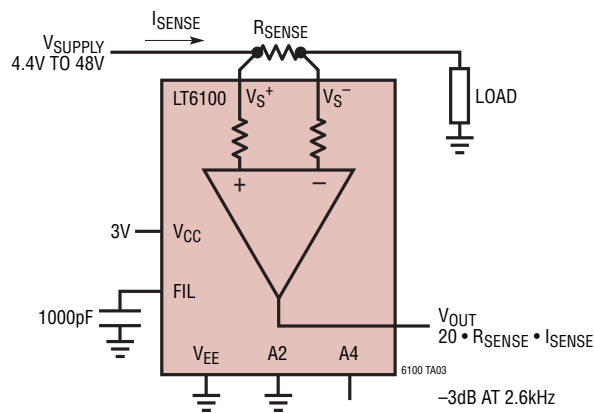

Gain of 50 Current Sense

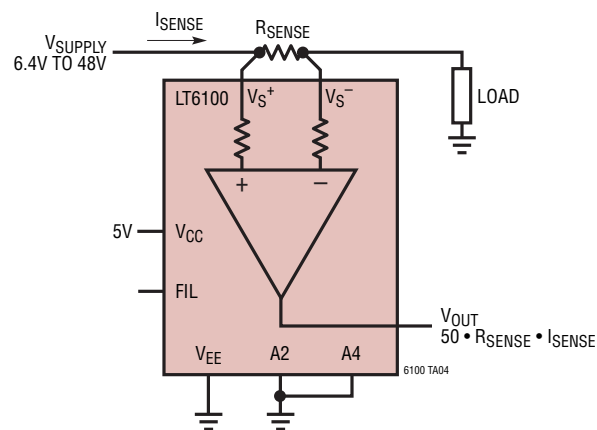

RELATED PARTS

| PART NUMBER                       | DESCRIPTION                                                      | COMMENTS                                                     |
|-----------------------------------|------------------------------------------------------------------|--------------------------------------------------------------|
| <a href="#">LTC®1043</a>          | Dual Precision Instrumentation Switched Capacitor Building Block | 120dB CMRR, 3V to 18V Operation                              |
| <a href="#">LT1490/LT1491</a>     | Dual and Quad Micropower Rail-to-Rail Input and Output Op Amps   | 50μA Amplifier, 2.7V to 40V Operation, Over-The-Top Inputs   |
| <a href="#">LT1620/LT1621</a>     | Rail-to-Rail Current Sense Amplifiers                            | Accurate Output Current Programming, Battery Charging to 32V |
| <a href="#">LT1787</a>            | Precision Bidirectional, High Side Current Sense Amplifier       | 75μV VOS, 60V, 60μA Operation                                |
| <a href="#">LTC6101/LTC6101HV</a> | High Voltage, High Side, Precision Current Sense Amplifiers      | 4V to 60V/5V to 100V, Gain Configurable, SOT-23              |

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А