MAX4194–MAX4197

Micropower, Single-Supply, Rail-to-Rail, Precision Instrumentation Amplifiers

General Description

The MAX4194 is a variable-gain precision instrumentation amplifier that combines Rail-to-Rail® single-supply operation, outstanding precision specifications, and a high gain bandwidth. This amplifier is also offered in three fixed-gain versions: the MAX4195 (G = +1V/V), the MAX4196 (G = +10V/V), and the MAX4197 (G = +100V/V). The fixed-gain instrumentation amplifiers feature a shutdown function that reduces the quiescent current to 8µA. A traditional three operational amplifier configuration is used to achieve maximum DC precision.

The MAX4194–MAX4197 have rail-to-rail outputs and inputs that can swing to 200mV below the negative rail and to within 1.1V of the positive rail. All parts draw only 93µA and operate from a single +2.7V to +7.5V supply or from dual ±1.35V to ±3.75V supplies. These amplifiers are offered in 8-pin SO packages and are specified for the extended temperature range (-40°C to +85°C).

See the MAX4198/MAX4199 data sheet for single-supply, precision differential amplifiers.

Applications

Medical Equipment

Thermocouple Amplifier

4–20mA Loop Transmitters

Data-Acquisition Systems

Battery-Powered/Portable Equipment

Transducer Interface

Bridge Amplifier

Benefits and Features

- Low Power Consumption Is Ideal for Remote-Sensing and Battery-Powered Applications
  - +2.7V Single-Supply Operation
  - Low Power Consumption
    - 93µA Supply Current
    - 8µA Shutdown Current (MAX4195/MAX4196/MAX4197)
- Precision Specifications Maximize Sensor Peformance
  - High Common-Mode Rejection: 115dB (G = +10V/V)
  - Input Common-Mode Range Extends 200mV Below GND
  - Low 50µV Input Offset Voltage (G ≥ +100V/V)
  - Low ±0.01% Gain Error (G = +1V/V)
  - 250kHz -3dB Bandwidth (G = +1V/V, MAX4194)
  - Rail-to-Rail Outputs

Ordering Information

PART	TEMP RANGE	PIN-PACKAGE
MAX4194ESA	-40°C to +85°C	8 SO
MAX4195ESA	-40°C to +85°C	8 SO
MAX4196ESA	-40°C to +85°C	8 SO
MAX4197ESA	-40°C to +85°C	8 SO

Selector Guide

PART	SHUTDOWN	GAIN (V/V)	CMRR (dB)
MAX4194	No	Variable	95 (G = +1V/V)
MAX4195	Yes	+1	95
MAX4196	Yes	+10	115
MAX4197	Yes	+100	115

Pin Configurations

TOP VIEW



SO



SO

Rail-to-Rail is a registered trademark of Nippon Motorola, Ltd.

19-1468; Rev 2; 5/15

maxim integrated™

Supply Voltage (V_{CC} to V_{EE}).....+8V
All Other Pins ..... (V_{CC} + 0.3V) to (V_{EE} - 0.3V)
Current into Any Pin.....±30mA
Output Short-Circuit Duration (to V_{CC} or V_{EE})..... Continuous
Continuous Power Dissipation (T_A = +70°C)
8-Pin SO (derate 5.9mW/°C above +70°C)..... 471mW

Operating Temperature Range .....-40°C to +85°C
Junction Temperature.....+150°C
Storage Temperature Range .....-65°C to +150°C
Lead Temperature (soldering, 10s) ..... +300°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Electrical Characteristics

(V_{CC} = +5V, V_{EE} = 0V, R_L = 25kΩ tied to $V_{CC}/2$, V_{REF} = $V_{CC}/2$, T_A = T_{MIN} to T_{MAX}, unless otherwise noted. Typical values are at T_A = +25°C.)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Supply Voltage Range	V_{CC}	Inferred by PSR test	Single supply	2.7		7.5	V
			Dual supplies	±1.35		±3.75	
Quiescent Current	I_{CC}	V_{IN+} = V_{IN-} = $V_{CC}/2$, V_{DIFF} = 0V			93	110	µA
Shutdown Current	$I_{\overline{SHDN}}$	$\overline{SHDN}$ = V_{IL}, MAX4195/MAX4196/MAX4197 only			8	12	µA
Input Offset Voltage	V_{OS}	G = +1V/V, V_{CM} = $V_{CC}/2$, T_A = +25°C			±100	±450	µV
		G = +10V/V, V_{CM} = $V_{CC}/2$, T_A = +25°C			±75	±225	
		G = +100V/V, V_{CM} = $V_{CC}/2$, T_A = +25°C			±50	±225	
		G = +1000V/V, V_{CM} = $V_{CC}/2$, T_A = +25°C			±50		
		G = +1V/V, V_{CM} = $V_{CC}/2$, T_A = T_{MIN} to T_{MAX}			±100	±690	
		G = +1V/V, V_{CM} = $V_{CC}/2$, T_A = T_{MIN} to T_{MAX}			±75	±345	
		G = +100V/V, V_{CM} = $V_{CC}/2$, T_A = T_{MIN} to T_{MAX}			±50	±345	
		G = +1000V/V, V_{CM} = $V_{CC}/2$, T_A = T_{MIN} to T_{MAX}			±50		
Input Offset Voltage Drift (Note 1)	TC_{VOS}	G = +1V/V			±1.0	±4.0	µV/°C
		G ≥ +10V/V			±0.5	±2.0	
Input Resistance	R_{IN}	V_{CM} = $V_{CC}/2$	Differential		1000		MΩ
			Common mode		1000		
Input Capacitance	C_{IN}	V_{CM} = $V_{CC}/2$	Differential		1		pF
			Common mode		4		
Input Voltage Range	V_{IN}	Inferred from CMR test		V_{EE} - 0.2		V_{CC} - 1.1	V
DC Common-Mode Rejection	CMR_{DC}	V_{CM} = V_{EE} - 0.2V to V_{CC} - 1.1V, T_A = +25°C, ΔR_S = 1kΩ (Note 1)	G = +1V	66	78		dB
			G = +10V	80	94		
			G = +100V	86	99		
		V_{CM} = V_{EE} - 0.2V to V_{CC} - 1.1V, T_A = T_{MIN} to T_{MAX}, ΔR_S = 1kΩ, (Note 1)	G = +1V	60	78		
			G = +10V	74	94		
			G = +100V	77	99		

Electrical Characteristics (continued)

(V_{CC} = +5V, V_{EE} = 0V, R_L = 25kΩ tied to $V_{CC}/2$, V_{REF} = $V_{CC}/2$, T_A = T_{MIN} to T_{MAX}, unless otherwise noted. Typical values are at T_A = +25°C.)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
DC Common-Mode Rejection	CMR_{DC}	V_{CM} = V_{EE} + 0.2V to V_{CC} - 1.1V, T_A = +25°C, ΔR_S = 1kΩ	G = +1V	78	95		dB
			G = +10V	93	115		
			G = +100V/V	95	115		
			G = +1000V/V		115		
		V_{CM} = V_{EE} + 0.2V to V_{CC} - 1.1V, T_A = T_{MIN} to T_{MAX}, ΔR_S = 1kΩ	G = +1V	73	95		
			G = +10V	88	115		
			G = +100V/V	90	115		
			G = +1000V/V		115		
AC Common-Mode Rejection	CMR_{AC}	V_{CM} = V_{EE} + 0.2V to V_{CC} - 1.1V, f = 120Hz	G = +1V		85		dB
			G = +10V		101		
			G = +100V		106		
Power-Supply Rejection	PSR	+2.7V ≤ V_{CC} ≤ +7.5V; V_{CM} = +1.5V; V_{OUT} = +1.5V; V_{REF} = +1.5V; R_L = 25kΩ to +1.5V; G = +1V/V, +10V/V, +100V/V		90	120		dB
Input Bias Current	I_B	V_{CM} = $V_{CC}/2$			6	20	nA
Input Bias Current Drift	TC_{IB}	V_{CM} = $V_{CC}/2$			15		pA/°C
Input Offset Current	I_{OS}	V_{CM} = $V_{CC}/2$			±1.0	±3.0	nA
Input Offset Current Drift	TC_{IOS}	V_{CM} = $V_{CC}/2$			15		pA/°C
Input Noise Voltage	e_n	G = +1V/V	f = 10Hz		85		nV/√Hz
			f = 100Hz		75		
			f = 10kHz		72		
			f = 0.1Hz to 10Hz		1.4		μV_{RMS}
		G = +10V/V	f = 10Hz		35		nV/√Hz
			f = 100Hz		32		
			f = 10kHz		31		
			f = 0.1Hz to 10Hz		0.7		μV_{RMS}
		G = +100V/V	f = 10Hz		32		nV/√Hz
			f = 100Hz		31		
			f = 10kHz		8.7		
			f = 0.1Hz to 10Hz		0.6		μV_{RMS}
Input Noise Current	i_n	f = 10Hz			2.4		pA/√Hz
		f = 100Hz			0.76		
		f = 10kHz			0.1		
		f = 0.1Hz to 10Hz			16		pA_{RMS}
Output Voltage Swing	V_{OH}, V_{OL}	R_L = 25kΩ to $V_{CC}/2$	V_{CC} - V_{OH}		30	100	mV
			V_{OL}		30	100	
		R_L = 5kΩ to $V_{CC}/2$	V_{CC} - V_{OH}		100	200	
			V_{OL}		100	200	

Electrical Characteristics (continued)

(V_{CC} = +5V, V_{EE} = 0V, R_L = 25kΩ tied to $V_{CC}/2$, V_{REF} = $V_{CC}/2$, T_A = T_{MIN} to T_{MAX}, unless otherwise noted. Typical values are at T_A = +25°C.)

PARAMETER	SYMBOL	CONDITIONS			MIN	TYP	MAX	UNITS
Short-Circuit Current (Note 2)	I_{SC}					±4.5		mA
Gain Equation		MAX4194 only				1 + (50kΩ/R_G)		
Gain Error		T_A = +25°C, V_{CM} = $V_{CC}/2$, R_L = 25kΩ, V_{EE} + 0.1V ≤ V_{OUT} ≤ V_{CC} - 0.1V	G = +1V			±0.01	±0.1	%
			G = +10V			±0.03	±0.3	
			G = +100V/V			±0.05	±0.5	
			G = +1000V/V, MAX4194			±0.5		
		T_A = +25°C, V_{CM} = $V_{CC}/2$, R_L = 5kΩ, V_{EE} + 0.2V ≤ V_{OUT} ≤ V_{CC} - 0.2V	G = +1V			±0.01	±0.1	
			G = +10V			±0.03	±0.3	
			G = +100V/V			±0.05	±0.5	
			G = +1000V/V, MAX4194			±0.5		
Gain Temperature Coefficient (Note 1)		MAX4194/MAX4195, G = +1V/V				±1	±8	ppm/°C
		MAX4196/MAX4197				±1	±15	
50kΩ Resistance Temperature Coefficient (Note 3)	$TC_{50k\Omega}$	MAX4194				±16		ppm/°C
Nonlinearity		V_{EE} + 0.1V ≤ V_{OUT} ≤ V_{CC} - 0.1V, V_{CM} = $V_{CC}/2$, G = +1V/V, +10V/V, +100V/V, +1000V/V				±0.001		%
Capacitive-Load Stability	C_L					300		pF
-3dB Bandwidth	BW_{-3dB}	V_{OUT} ≤ 0.1V_{P-P}, V_{CM} = $V_{CC}/2$	G = +1V/V	MAX4194		250		kHz
				MAX4195		220		
			G = +10V/V	MAX4194		17		
				MAX4196		34		
			G = +100V/V	MAX4194		1.5		
				MAX4197		3.1		
			G = +1000V/V	MAX4194		0.147		
Slew Rate	SR	V_{OUT} = 2V_{P-P}, G = +1V/V				0.06		V/µs
Settling Time	t_S	0.1%, V_{OUT} = 2V_{P-P}	G = +1V/V			0.05		ms
			G = +10V/V			0.04		
			G = +100V/V			5		
			G = +1000V/V			7		
Total Harmonic Distortion	THD	V_{OUT} = 2V_{P-P}, G = +1V/V, f = 1kHz				0.001		%
Input Logic Voltage High	V_{IH}				V_{CC} - 1.5			V
Input Logic Voltage Low	V_{IL}						V_{CC} - 2.5	V
$\overline{SHDN}$ Input Current		V_{EE} < $V_{\overline{SHDN}}$ < V_{CC}	MAX4195/MAX4196/MAX4197 only				±0.1	µA

Electrical Characteristics (continued)

(V_{CC} = +5V, V_{EE} = 0V, R_L = 25kΩ tied to $V_{CC}/2$, V_{REF} = $V_{CC}/2$, T_A = T_{MIN} to T_{MAX}, unless otherwise noted. Typical values are at T_A = +25°C.)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Time to Shutdown	$t_{\overline{SHDN}}$	G = +1V/V, 0.1%, V_{OUT} = +3V	MAX4195/MAX4196/ MAX4197 only		0.5		ms
Enable Time From Shutdown	t_{ENABLE}	G = +1V/V, 0.1%, V_{OUT} = +3.5V	MAX4195/MAX4196/ MAX4197 only		0.5		ms
Power-Up Delay		G = +1V/V, 0.1%, V_{OUT} = +3.5V			1		ms
On/Off Settling Time	$t_{ON/OFF}$	V_{SHDN} = V_{CC} - 2.5V to V_{CC} - 1.5V, G = +100V/V, 0.1%, V_{OUT} = +3.5V			0.5		ms

Note 1: Guaranteed by design.
Note 2: Maximum output current (sinking/sourcing) in which the gain changes by less than 0.1%.
Note 3: This specification represents the typical temperature coefficient of an on-chip thin film resistor. In practice, the temperature coefficient of the gain for the MAX4194 will be dominated by the temperature coefficient of the external gain-setting resistor.

Typical Operating Characteristics

(V_{CC} = +5V, V_{EE} = 0, R_L = 25kΩ tied to $V_{CC}/2$, T_A = +25°C, unless otherwise noted.)

MAX4194
SMALL-SIGNAL GAIN vs. FREQUENCY

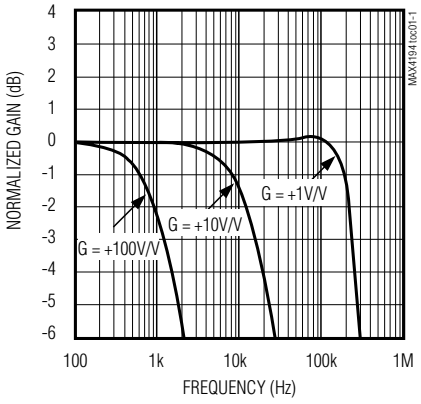

MAX4195/MAX4196/MAX4197
SMALL-SIGNAL GAIN vs. FREQUENCY

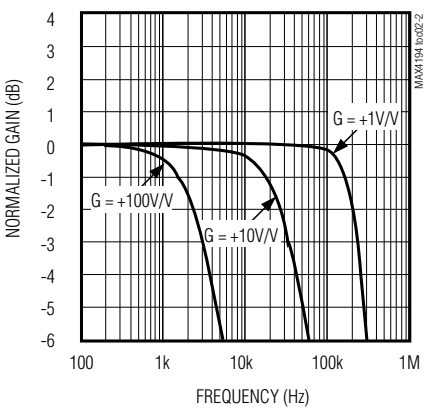

0.1% SETTLING TIME vs. GAIN
(V_{OUT} = 2Vp-p)

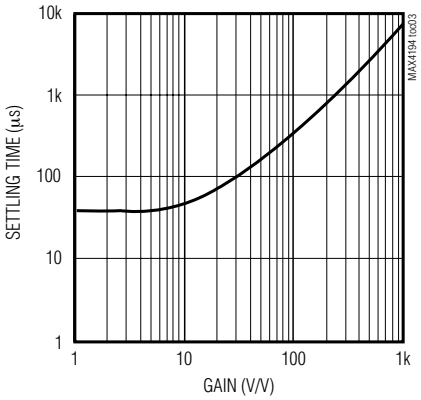

Typical Operating Characteristics (continued)

(V_{CC} = +5V, V_{EE} = 0, R_L = 25kΩ tied to $V_{CC}/2$, T_A = +25°C, unless otherwise noted.)

MAX4194
LARGE-SIGNAL PULSE RESPONSE
(GAIN = +1V/V)

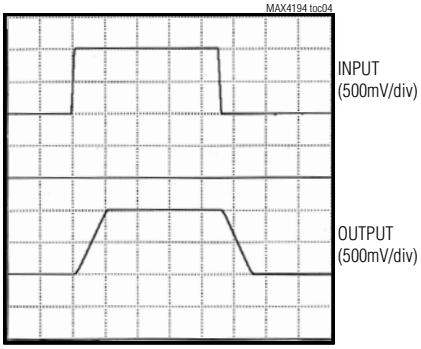

MAX4194
LARGE-SIGNAL PULSE RESPONSE
(GAIN = +100V/V)

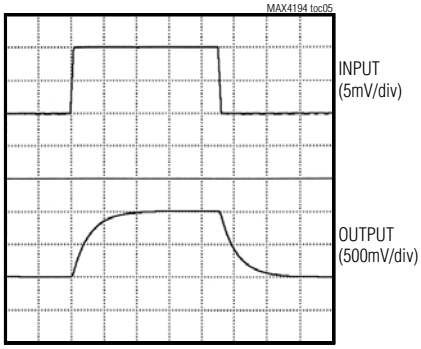

MAX4197
LARGE-SIGNAL PULSE RESPONSE
(GAIN = +100V/V)

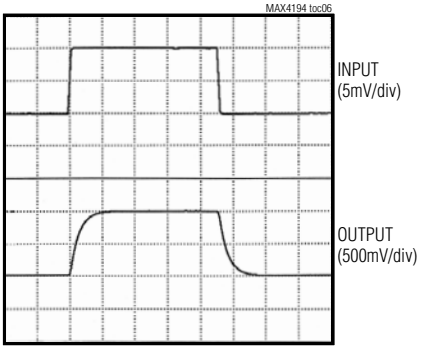

MAX4194
SMALL-SIGNAL PULSE RESPONSE
(GAIN = +1V/V)

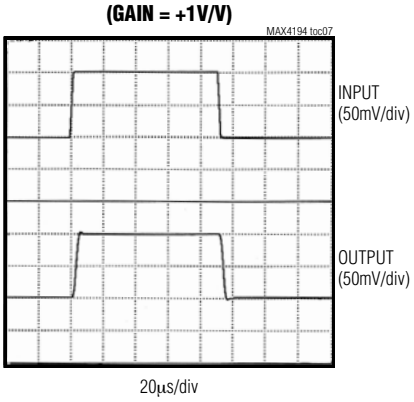

MAX4194
SMALL-SIGNAL PULSE RESPONSE
(GAIN = +100V/V)

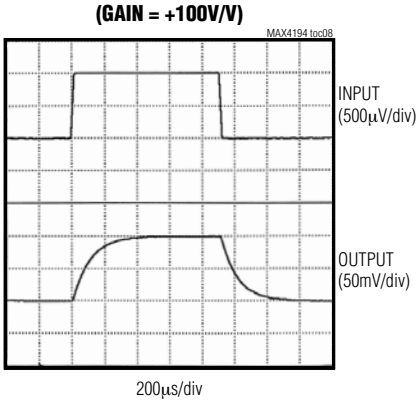

MAX4197
SMALL-SIGNAL PULSE RESPONSE
(GAIN = +100V/V)

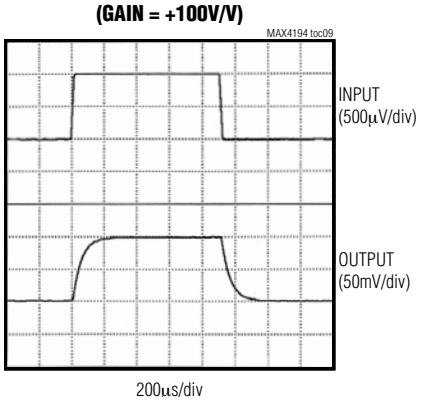

POWER-SUPPLY REJECTION
vs. FREQUENCY

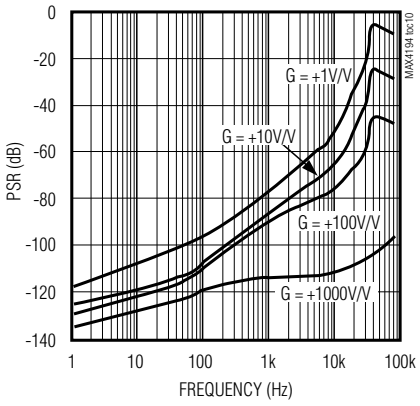

COMMON-MODE REJECTION
vs. FREQUENCY

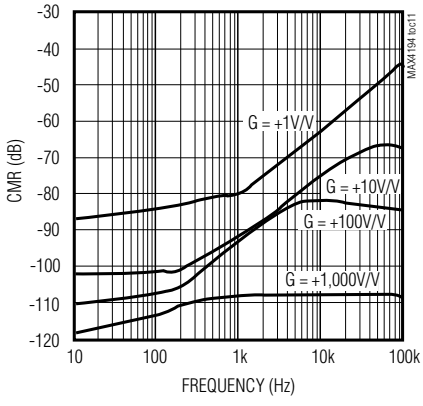

Typical Operating Characteristics (continued)

(V_{CC} = +5V, V_{EE} = 0, R_L = 25kΩ tied to $V_{CC}/2$, T_A = +25°C, unless otherwise noted.)

VOLTAGE-NOISE DENSITY vs. FREQUENCY

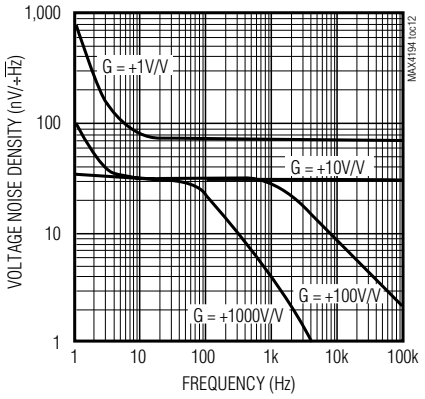

MAX4195/MAX4196 TOTAL HARMONIC DISTORTION PLUS NOISE vs. FREQUENCY

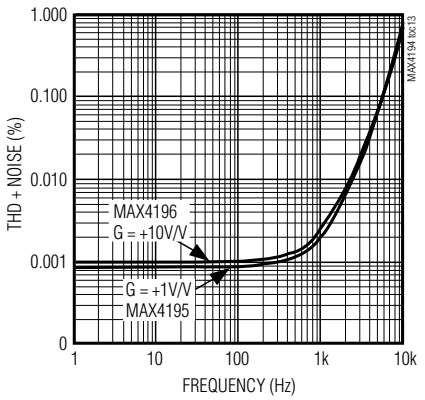

SUPPLY CURRENT vs. SUPPLY VOLTAGE

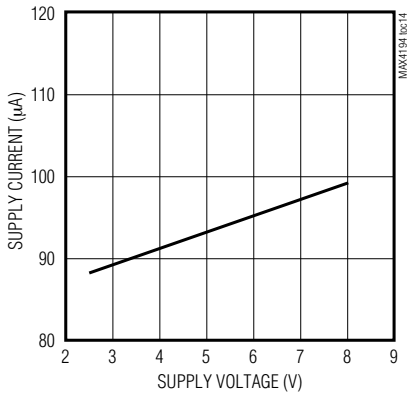

SUPPLY CURRENT vs. TEMPERATURE

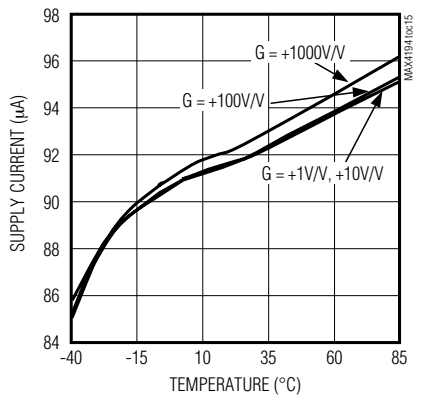

MAX4195/MAX4196/MAX4197 SHUTDOWN CURRENT vs. TEMPERATURE

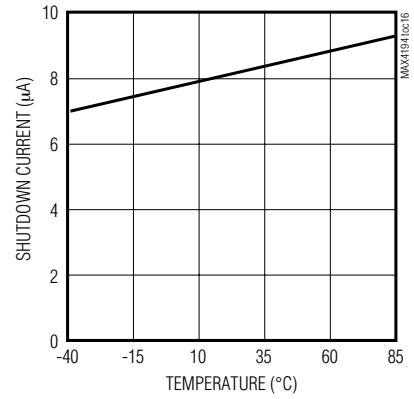

INPUT BIAS CURRENT vs. TEMPERATURE

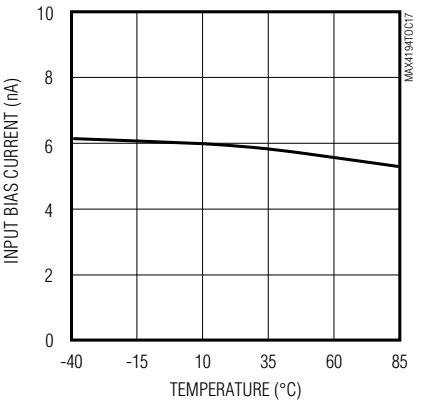

Typical Operating Characteristics (continued)

(V_{CC} = +5V, V_{EE} = 0, R_L = 25kΩ tied to $V_{CC}/2$, T_A = +25°C, unless otherwise noted.)

INPUT OFFSET CURRENT vs. TEMPERATURE

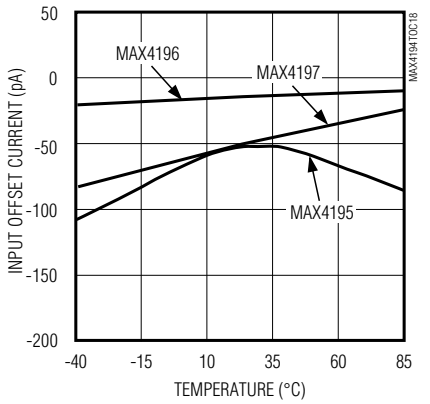

INPUT OFFSET VOLTAGE vs. TEMPERATURE

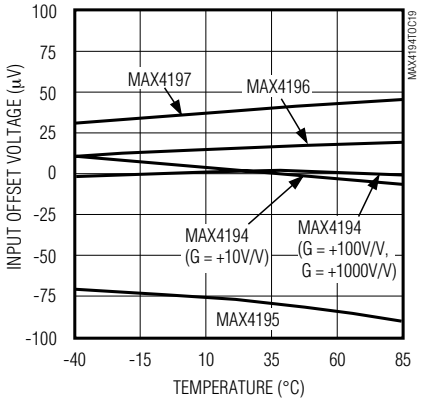

Pin Description

PIN		NAME	FUNCTION
MAX4194	MAX4195 MAX4196 MAX4197		
1, 8	—	RG-, RG+	Connection for Gain-Setting Resistor
5	1	REF	Reference Voltage. Offsets output voltage.
2	2	IN-	Inverting Input
3	3	IN+	Noninverting Input
4	4	V_{EE}	Negative Supply Voltage
—	5	FB	Feedback. Connects to OUT.
6	6	OUT	Amplifier Output
7	7	V_{CC}	Positive Supply Voltage
—	8	$\overline{SHDN}$	Shutdown Control

Detailed Description

Input Stage

The MAX4194–MAX4197 family of low-power instrumentation amplifiers implements a three-amplifier topology (Figure 1). The input stage is composed of two operational amplifiers that together provide a fixed-gain differential and a unity common-mode gain. The output stage is a conventional differential amplifier that provides an overall common-mode rejection of 115dB (G = +10V/V). The MAX4194's gain can be externally set between +1V/V and +10,000V/V (Table 1). The MAX4195/MAX4196/MAX4197 have on-chip gain-setting resistors (Figure 2), and their gains are fixed at +1V/V, +10V/V, and +100V/V, respectively.

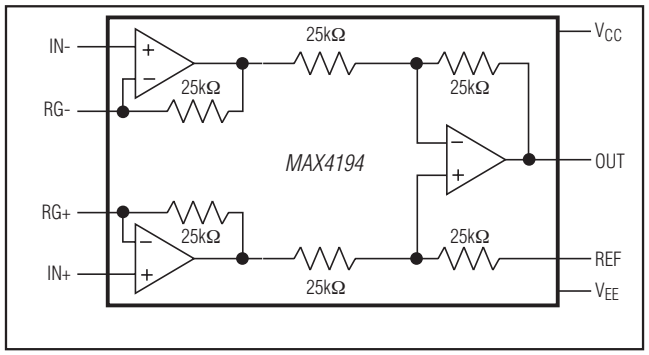

Figure 1. MAX4194 Simplified Block Diagram

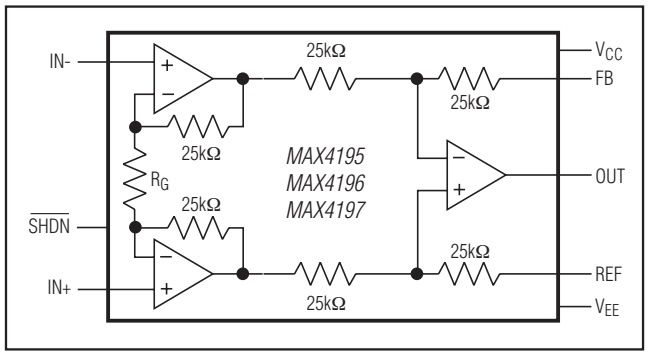

Figure 2. MAX4195/MAX4196/MAX4197 Simplified Block Diagram

Input Voltage Range and Detailed Operation

The common-mode input range for all of these amplifiers is V_{EE} - 0.2V to V_{CC} - 1.1V. Ideally, the instrumentation amplifier (Figure 3) responds only to a differential voltage applied to its inputs, IN+ and IN-. If both inputs are at the same voltage, the output is V_{REF}. A differential voltage at IN+ (V_{IN+}) and IN- (V_{IN-}) develops an identical voltage across the gain-setting resistor, causing a current (I_G) to flow. This current also flows through the feedback resistors of the two input amplifiers A1 and A2, generating a differential voltage of:

$$V_{OUT2} - V_{OUT1} = I_G \cdot (R_1 + R_G + R_1)$$

where V_{OUT1} and V_{OUT2} are the output voltages of A1 and A2, R_G is the gain-setting resistor (internal or external to the part), and R1 is the feedback resistor of the input amplifiers.

I_G is determined by the following equation:

$$I_G = (V_{IN+} - V_{IN-}) / R_G$$

The output voltage (V_{OUT}) for the instrumentation amplifier is expressed in the following equation:

$$V_{OUT} = (V_{IN+} - V_{IN-}) \cdot [(2 \cdot R1) / R_G] + 1$$

The common-mode input range is a function of the amplifier's output voltage and the supply voltage. With a power supply of V_{CC}, the largest output signal swing can be obtained with REF tied to $V_{CC}/2$. This results in an output voltage swing of $\pm V_{CC}/2$. An output voltage swing less than full-scale increases the common-mode input range.

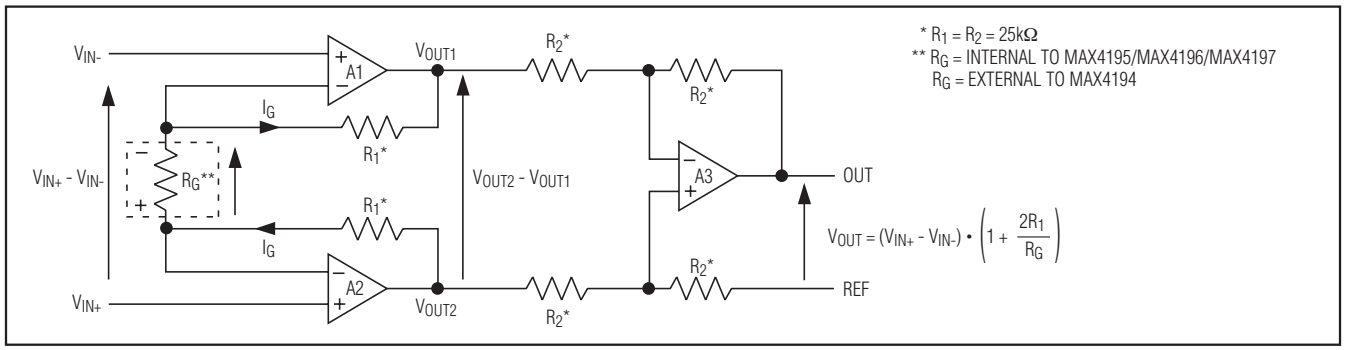

Figure 3. Instrumentation Amplifier Configuration

Table 1. MAX4194 External Gain Resistor Selection

GAIN (V/V)	CLOSEST R_G (1%) (Ω)	CLOSEST R_G (5%) (Ω)
+1	∞ *	∞ *
+2	49.9k	51k
+5	12.4k	12k
+10	5.62k	5.6k
+20	2.61k	2.7k
+50	1.02k	1.0k
+100	511	510
+200	249	240
+500	100	100
+1,000	49.9	51
+2,000	24.9	24
+5,000	10	10
+10,000	4.99	5.1

**Leave pins 1 and 8 open for G = +1V/V.*

V_{CM} vs. V_{OUT} Characterization

Figure 4 illustrates the MAX4194 typical common-mode input voltage range over output voltage swing at unity-gain (pins 1 and 8 left floating), with a single-supply voltage of V_{CC} = +5V and a bias reference voltage of V_{REF} = V_{CC}/2 = +2.5V. Points A and D show the full input voltage range of the input amplifiers (V_{EE} - 0.2V to V_{CC} - 1.1V) since, with +2.5V output, there is zero input differential swing. The other points (B, C, E, and F) are determined by the input voltage range of the input amps minus the differential input amplitude necessary to produce the associated V_{OUT}. For the higher gain configurations, the V_{CM} range will increase at the end-points (B, C, E, and F) since a smaller differential voltage is necessary for the given output voltage.

Rail-to-Rail Output Stage

The MAX4194–MAX4197's output stage incorporates a common-source structure that maximizes the dynamic range of the instrumentation amplifier.

The output can drive up to a 25kΩ (tied to V_{CC}/2) resistive load and still typically swing within 30mV of the rails. With an output load of 5kΩ tied to V_{CC}/2, the output voltage swings within 100mV of the rails.

Shutdown Mode

The MAX4195–MAX4197 feature a low-power shutdown mode. When the shutdown pin ($\overline{SHDN}$) is pulled low, the internal amplifiers are switched off and the supply current drops to 8µA typically (Figures 5a, 5b, and 5c). This disables the instrumentation amplifier and puts its output in a high-impedance state. Pulling $\overline{SHDN}$ high enables the instrumentation amplifier.

Applications Information

Setting the Gain (MAX4194)

The MAX4194's gain is set by connecting a single, external gain resistor between the two RG pins (pin 1 and pin 8), and can be described as:

$$G = 1 + 50k\Omega / R_G$$

where G is the instrumentation amplifier's gain and R_G is the gain-setting resistor.

The 50kΩ resistor of the gain equation is the sum of the two resistors internally connected to the feedback loops of the IN+ and IN- amplifiers. These embedded feedback resistors are laser trimmed, and their accuracy and temperature coefficients are included in the gain and drift specification for the MAX4194.

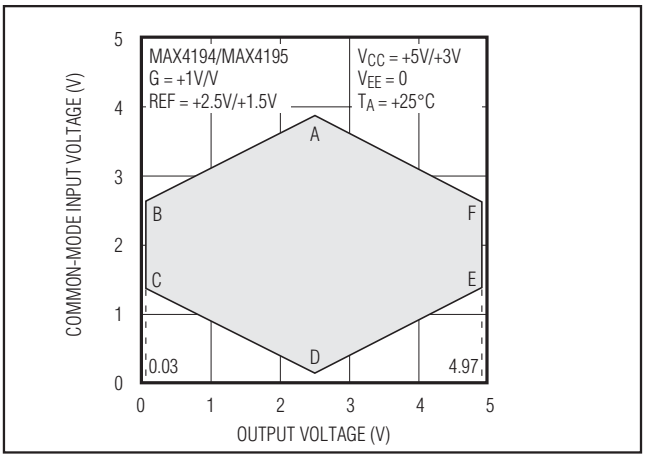

Figure 4. Common-Mode Input Voltage vs. Output Voltage

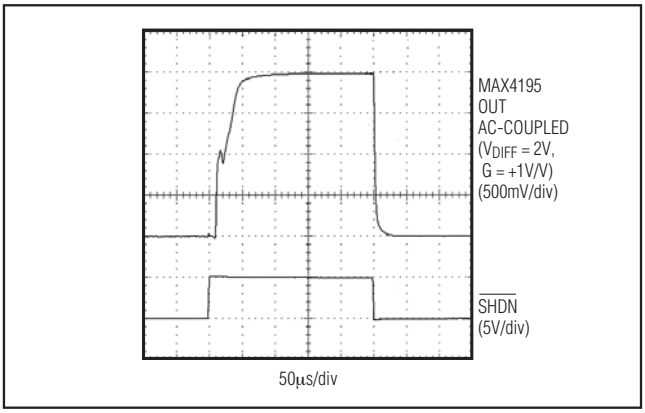

Figure 5a. MAX4195 Shutdown Mode

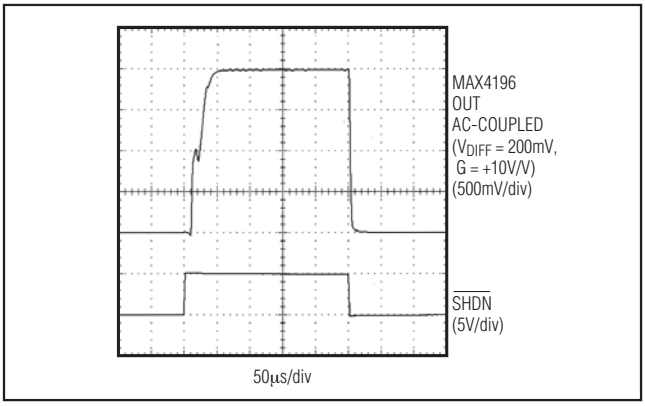

Figure 5b. MAX4196 Shutdown Mode

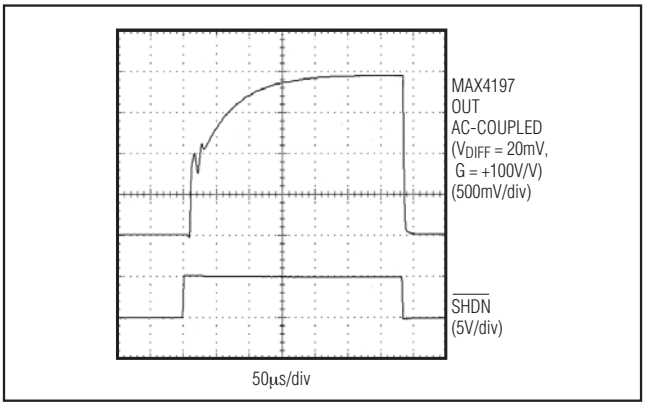

Figure 5c. MAX4197 Shutdown Mode

The accuracy and temperature drift of the R_G resistors also influence the IC's precision and gain drift, and can be derived from the equation above. With low R_G values, which are required for high-gain operation, parasitic resistances may significantly increase the gain error.

Capacitive-Load Stability

The MAX4194–MAX4197 are stable for capacitive loads up to 300pF (Figure 6a). Applications that require greater capacitive-load driving capability can use an isolation resistor (Figure 6b) between the output and the capacitive load to reduce ringing on the output signal. However, this alternative reduces gain accuracy because R_{ISO} (Figure 6c) forms a potential divider with the load resistor.

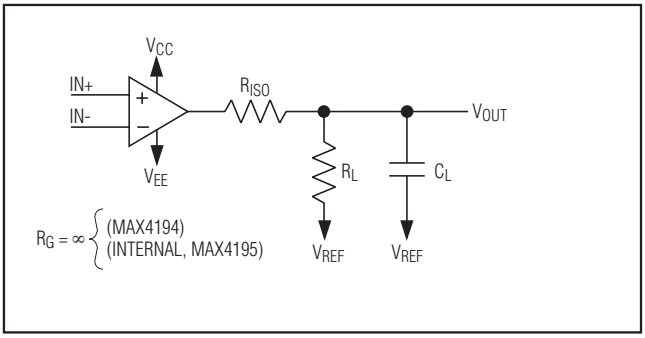

Figure 6a. Using a Resistor to Isolate a Capacitive Load from the Instrumentation Amplifier (G = +1V/V)

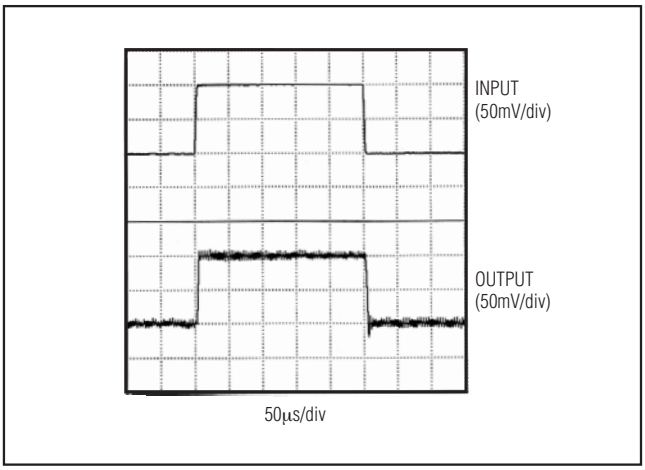

Figure 6b. Small-Signal Pulse Response with Excessive Capacitive Load (R_L = 25kΩ, C_L = 1000pF)

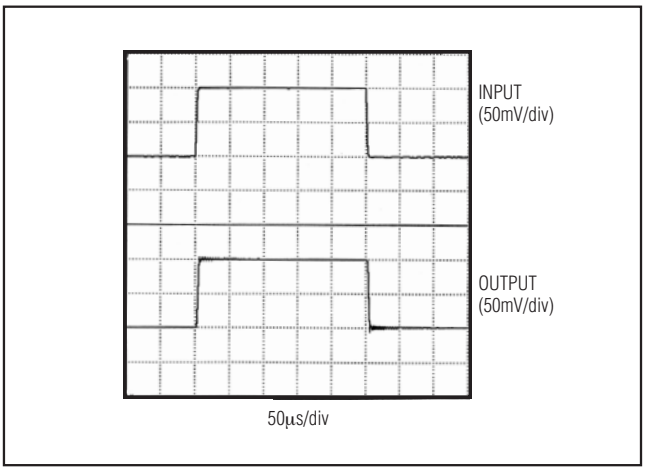

Figure 6c. Small-Signal Pulse Response with Excessive Capacitive Load and Isolating Resistor (R_{ISO} = 75Ω, R_L = 25kΩ, C_L = 1000pF)

Power-Supply Bypassing and Layout

Good layout technique optimizes performance by decreasing the amount of stray capacitance at the instrumentation amplifier's gain-setting pins. Excess capacitance will produce peaking in the amplifier's frequency response. To decrease stray capacitance, minimize trace lengths by placing external components as close to the instrumentation amplifier as possible. For best performance, bypass each power supply to ground with a separate 0.1µF capacitor.

Transducer Applications

The MAX4194–MAX4197 instrumentation amplifiers can be used in various signal-conditioning circuits for thermocouples, PT100s, strain gauges (displacement sensors), piezoresistive transducers (PRTs), flow sensors, and bioelectrical applications. Figure 7 shows a simplified example of how to attach four strain gauges (two identical two-element strain gauges) to the inputs of the MAX4194. The bridge contains four resistors, two of which increase and two of which decrease by the same ratio.

With a fully balanced bridge, points A (IN+) and B (IN-) see half the excitation voltage (V_{BRIDGE}). The low impedance (120Ω to 350Ω) of the strain gauges, however, could cause significant voltage drop contributions by the wires leading to the bridge, which would cause excitation variations. Output voltage V_{OUT} can be calculated as follows:

$$V_{OUT} = V_{AB} \cdot G$$

where $G = (1 + 50k\Omega / R_G)$ is the gain of the instrumentation amplifier.

Since V_{AB} is directly proportional to the excitation, gain errors may occur.

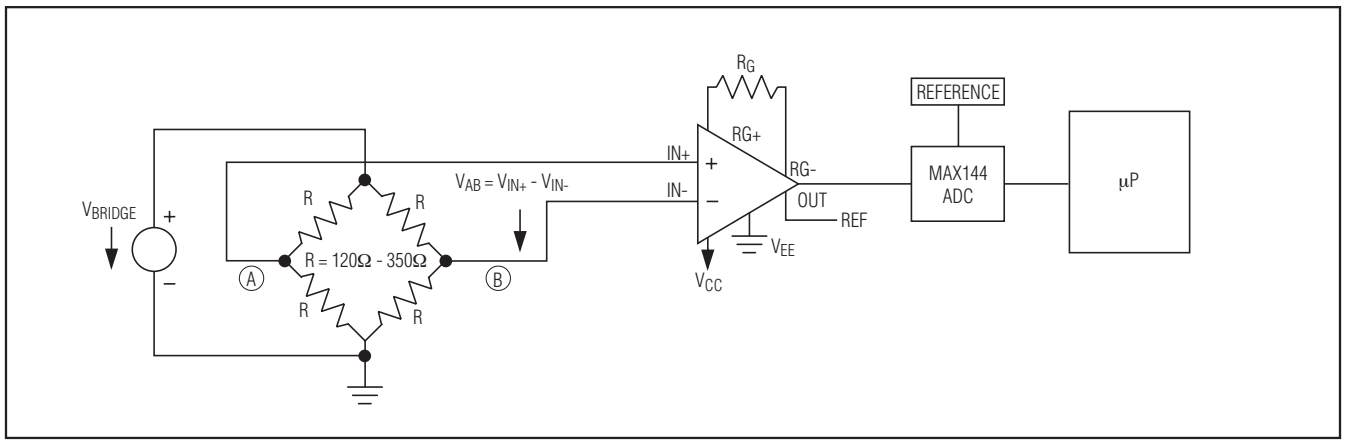

Figure 7. Strain Gauge Connection to the MAX4194

Chip Information

TRANSISTOR COUNT: 432

Package Information

For the latest package outline information and land patterns (footprints), go to **www.maximintegrated.com/packages**. Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

PACKAGE TYPE	PACKAGE CODE	OUTLINE NO.	LAND PATTERN NO.
8 SO	S8-5	21-0041	90-0096

Revision History

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
2	5/15	Updated *Benefits and Features* section	1

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim Integrated's website at www.maximintegrated.com.

Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the Electrical Characteristics table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.

Maxim Integrated and the Maxim Integrated logo are trademarks of Maxim Integrated Products, Inc. © 2015 Maxim Integrated Products, Inc.

OCEAN CHIPS
Океан Электроники
Поставка электронных компонентов

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «**JONHON**», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «**FORSTAR**».

AVIC JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).

FORSTAR®

Телефон: 8 (812) 309-75-97 (многоканальный)
Факс: 8 (812) 320-03-32
Электронная почта: ocean@oceanchips.ru
Web: http://oceanchips.ru/
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А