

# **Device circuit breakers**

Selective power distribution: branch out, individual adaptation, modular extension




# Interference-free mains supply and signal transmission

A constant energy supply and secure data links are especially important for the operational reliability of electrical systems, installations, and devices.

Phoenix Contact meets all of these requirements with the TRABTECH product line. Coordinated solutions consisting of surge protection, monitoring, device circuit breakers and EMC products offer consistently high power and signal quality for maximum availability.



Device circuit breakers as a modularly expandable system or electronic multi-channel variant with comprehensive functions.

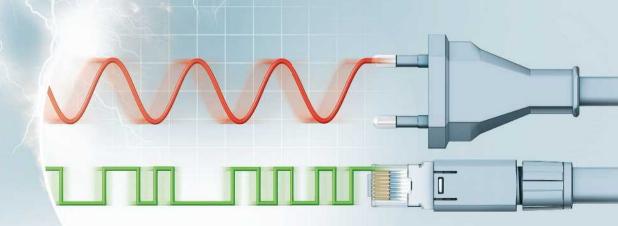

# Selective fuse protection for circuits




## Reliable protection in the event of harmful overload and short-circuit currents

System failures can be caused by various factors. A permanent overload, for example, can damage the load and lead to the downtime of the system or a system part.

Provide selective fuse protection for the control circuits in your systems in order to increase system availability.

In practice, around 90% of all systems are operated with 24 V DC control voltages.

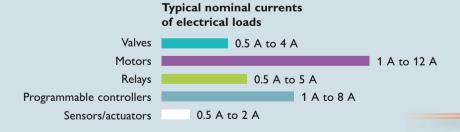

The different nominal currents of the various loads illustrate the usefulness of selective protection for the individual circuits. And you will find the perfect device circuit breaker for almost any nominal current.

#### Table of contents

High-quality device circuit breakers provide safety for your systems

Page 4/5

CBM multi-channel electronic device circuit breakers

Page 6/7

Electronic device circuit breakers

Page 8/9

Thermomagnetic device circuit breakers

Page 10/11

Thermal device circuit breakers

Page 12/13

Device circuit breaker board

Page 14/15

Product overview

Page 16-21

Device circuit breakers and QUINT POWER

Page 22/23

**QUINT POWER** 

Page 24/25

TRIO POWER and CBM

Page 26/27

# High-quality device circuit breakers provide security for your systems

Device circuit breakers are a key factor in high system availability. In the event of overload and short circuit, they selectively shut down the faulty circuit. All other system parts remain in operation.

- · Thermal circuit breakers
- Thermomagnetic circuit breakers
- Electronic circuit breakers
- Multi-channel, electronic circuit breakers




Select the right circuit breaker plus a base element with push-in or

screw connection technology.

|                                    | Tripping time in the case of overload | Tripping time in the event of a short circuit | Your application is optimally protected in the event of   |
|------------------------------------|---------------------------------------|---|---|
| Thermal<br>circuit breakers        | Suitable                              | Unsuitable                                    | • Overload  |
| Thermomagnetic<br>circuit breakers | Suitable                              | Ideal   | <ul> <li>Overload</li> <li>Short circuit</li> <li>Long cable paths<br/>(SFB tripping<br/>characteristic)</li> </ul> |
| Electronic<br>circuit breakers     | Ideal                                 | Ideal   | <ul><li>Overload</li><li>Short circuit</li><li>Long cable paths<br/>(active current limitation)</li></ul>           |







#### **Modular extension**

It couldn't be easier. Enhance your system with additional device circuit breakers in no time at all. It is even possible to pre-wire your system on-site with a customized plug selection. The uniform, plug-in housing concept as well as the bridgeability of the base elements simplify installation.

## **Branch** out

Thermomagnetic device circuit breakers with the SFB tripping characteristic\* provide maximum overcurrent protection - even in large systems with long cable paths. The characteristic curve:

- Prevents the device from being shut down unnecessarily early in the event of brief current increases during operation, such as starting currents
- Prevents excessively long overload currents that may be linked to hazardous heat buildup in the equipment

# Individual adaptation

With the unique bridge system from the CLIPLINE complete range of accessories, the device circuit breakers can also be combined easily and individually. Potentials of the same type can be connected quickly and safely.

You can extend the power distribution, modify the signal string or bridge the auxiliary voltage for the electronic device circuit breakers without this resulting in significant wiring costs.







# **Multi-channel protection**

The multi-channel electronic device circuit breaker provides protection for four or eight loads, depending on the version. The individual channels can be configured individually and have an electronic locking mechanism to prevent accidental changes. The status of each channel is displayed directly on the device and can also be queried as group remote signaling using the connections provided for this purpose.

# Distribute effortlessly

Device circuit breaker boards combine the advantages of CB device circuit breakers with easy and space-saving potential distribution. The switching states of the circuit breakers are monitored and provided as group remote signaling in two groups via connection terminal blocks. Protect up to four loads simultaneously per channel. There is also the connection option for external relay contacts, such as for safety-oriented shutoff.

# **Selective protection**

To trigger device circuit breakers magnetically and therefore quickly, power supplies have to provide a multiple of the nominal current for a short time. This current reserve is available with QUINT POWER with SFB Technology\* and up to six times the nominal current for 12 ms.


# CBM multi-channel electronic device circuit breakers

The multi-channel, electronic device circuit breakers are optimally suited for use in machine building, process engineering and control and systems manufacturing.

The voltage remains at a constant level due to the dynamic limiting of the current. Other loads will not be influenced. The individual adjustability of the 4 and 8-channel devices provides a convenient and space-saving solution for any application.

#### Your advantages:

- The nominal current assistant facilitates the setting of nominal currents and provides optimal system protection
- Undervoltages and surge voltages will be identified, loads will be switched off reliably
- The electronic locking mechanism prevents accidental changes to the current values
- Fine nominal current graduations from 0.5 to 10 A in just one device
- Dynamic current limiting for a better utilization of the upstream power supply unit

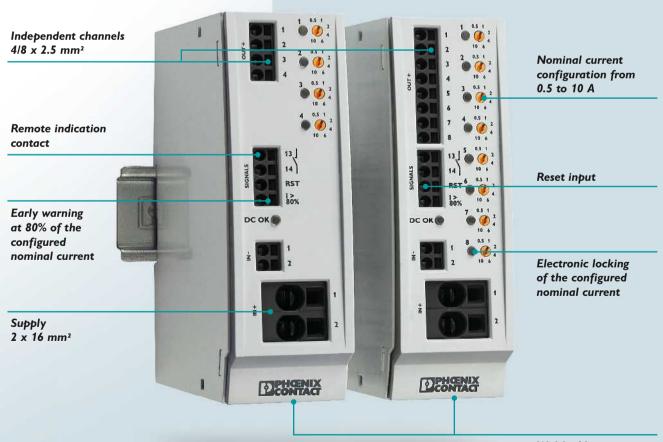


# **Tripping characteristics**

The multi-channel electronic device circuit breakers differentiate between three states: normal operating state, overload and short circuit. In the range between 1.1 and 1.3 times the nominal current, an overload is detected and switched off after thirty seconds for

safety reasons. If the flowing current is over 1.3 times the nominal current, it is detected as a short circuit and actively limited depending on the configured current. Switching off in case of short circuit occurs after 20 milliseconds.


This allows the supply voltage to remain consistent, while other loads can continue to run without interruption.

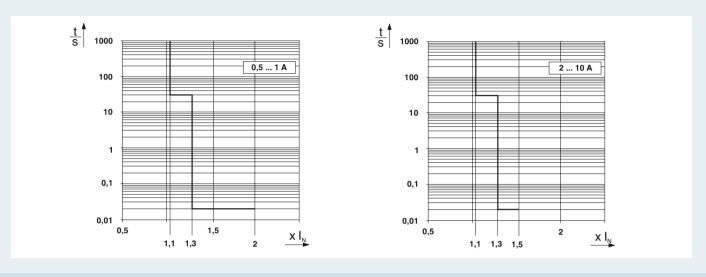

# Illustration of application

By using multi-channel electronic device circuit breakers, the project engineering for a switchgear is significantly more simple and more easily understandable. The configurable nominal currents can be used to adjust the required protection for the load used. This makes the devices very well-suited for protecting relays, programmable controllers, motors, sensors/actuators and valves.

Also, the signaling always keeps the user up-to-date about the operating state of the system. The reset input can be used to remotely switch back on paths that have been switched off.

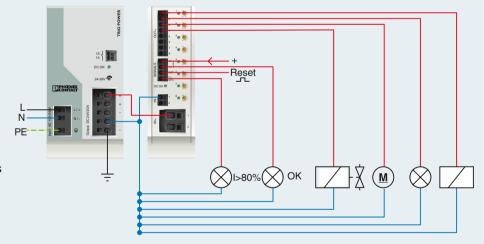


# Electronic device circuit breakers

Electronic device circuit breakers are often used in automation and communication technology.

The active current limitation prevents the interruption of the output voltage at the switched-mode power supply unit in the event of an error. All other circuits remain unaffected.


## Your advantages:

- Compact design with precise nominal current levels
- Sophisticated remote signaling concept enables monitoring from any location
- The reset or control input can be switched by means of remote control
- Active current limitation, even when switching capacitive loads
- Supply/remote signaling can be bridged with CLIPLINE complete accessories
- Variable connection technology: either push-in or screw connection

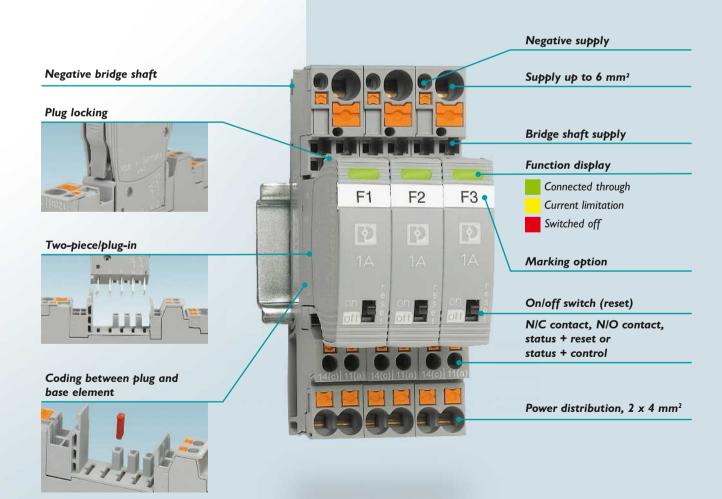


# **Tripping characteristics**

In the event of a short circuit, electronic device circuit breakers trip within a few milliseconds. Here the current is limited to 1.25 times the nominal current. Even with a high cable resistance, the circuit breakers disconnect the circuit within the shortest possible time.

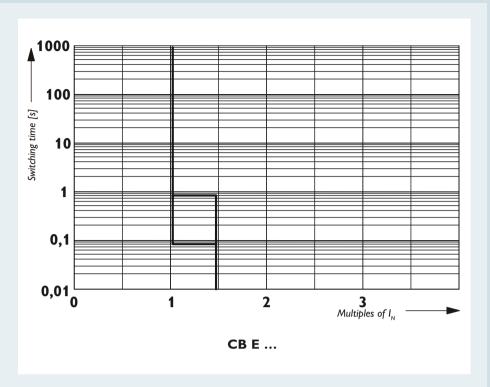

# Illustration of application

Electronic device circuit breakers are ideal for protecting relays, programmable controllers, motors, sensors/actuators, and valves, for example.

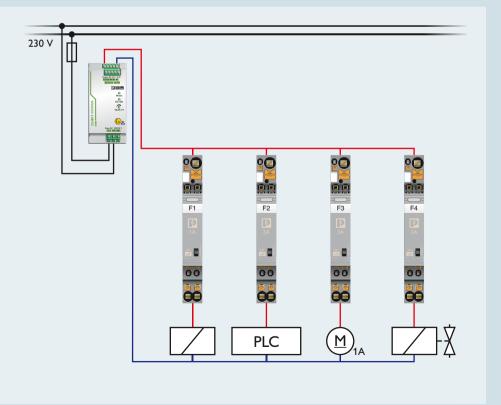


# Thermomagnetic device circuit breakers

The thermomagnetic device circuit breakers are used in information and communication technology as well as process engineering. Due to the various tripping characteristics, the circuit breakers can be used in a range of applications. The reactivation and immediate remote signaling of the operating state ensure availability.

## Your advantages:

- · Compact design with precise nominal current levels
- Sophisticated remote signaling concept enables monitoring from any location
- Maximum overcurrent protection over long cable paths thanks to SFB tripping characteristic
- Supply/remote signaling can be bridged with CLIPLINE complete accessories
- Protect 230/240 V AC control voltage with the aid of the M1 characteristic curve (based on characteristic C)
- Variable connection technology: either push-in or screw connection

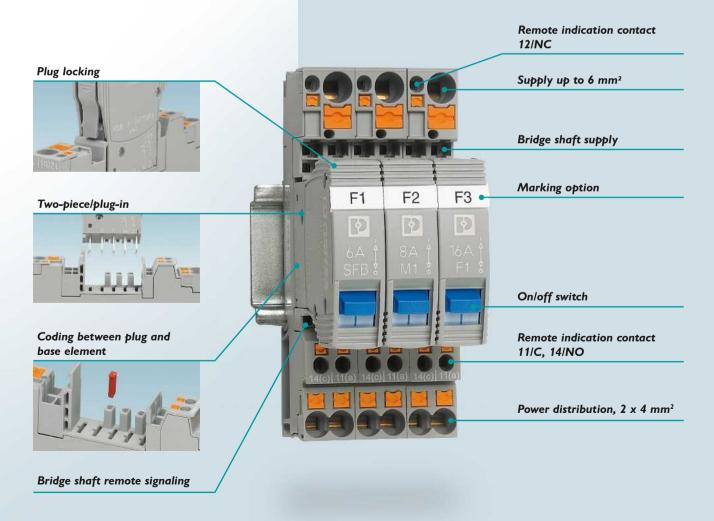


# **Tripping characteristics**

With thermomagnetic device circuit breakers, the tripping time depends on the type of overload. In the event of an overload, the load is disconnected from the power supply by means of time-delayed thermal


tripping. If there is a high overload current or even a short circuit, the magnetic tripping interrupts the circuit in a matter of milliseconds. Protective devices should be selected with the most suitable characteristic curve in

relation to the area of application, the load, and the protection requirements.

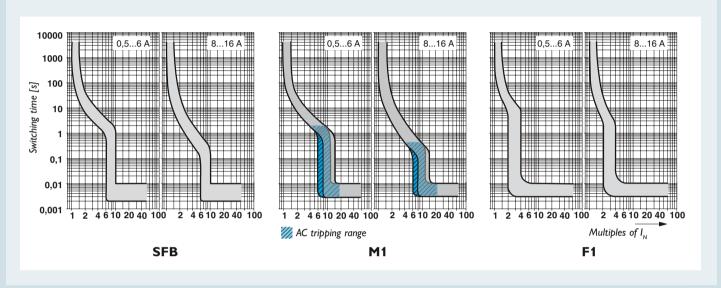

# Illustration of application

Thermomagnetic device circuit breakers are ideal for protecting programmable controllers, valves, motors and frequency inverters, for example.

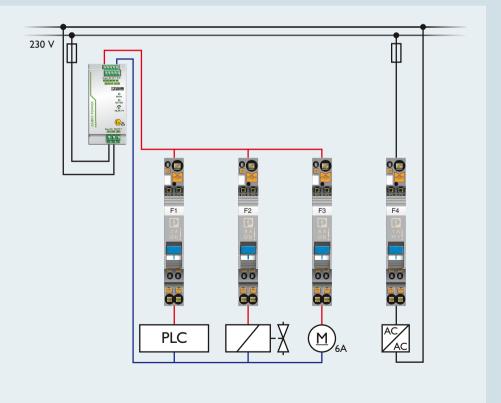


# Thermal device circuit breakers

Thermal device circuit breakers provide optimum protection for inductive loads against overload in power distribution systems in control cabinet engineering and systems manufacturing. The integrated switching function enables the device to be switched on again immediately and therefore ensures the availability of the system.

#### Your advantages:


- Compact design with precise nominal current levels
- Fits in all fuse holders designed for flat-type fuse inserts in accordance with ISO 8820-3 (DIN 72581-3)
- Can be used to protect integrated circuits in all battery and onboard systems in the DC voltage range
- · Supply can be bridged with CLIPLINE complete accessories
- Protect 230/240 V AC control voltage with the aid of the TCP... A products

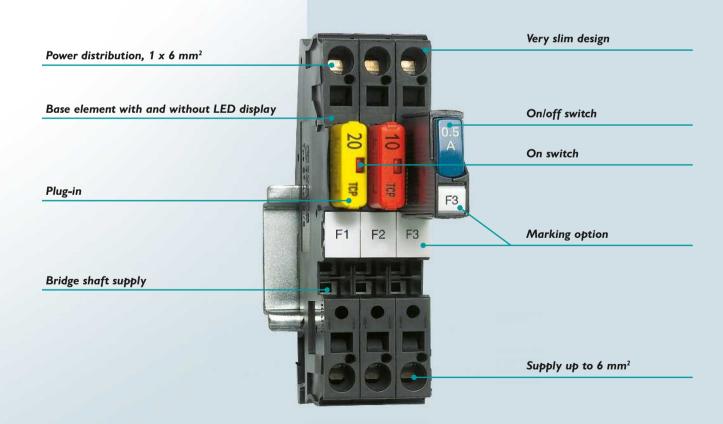


# **Tripping characteristics**

The tripping time of the thermal device circuit breakers varies with the pending overload current. As can be seen in the characteristic curves, the circuit breaker trips more quickly as the overload increases. The protective


function provided by a bimetal reacts at a defined tripping temperature. With a relatively low overload current, it therefore takes longer for the connected load to be disconnected from the power supply.





# Illustration of application

Thermal device circuit breakers are ideal for protecting motors, lighting, solenoid valves, transformers and onboard networks, for example.

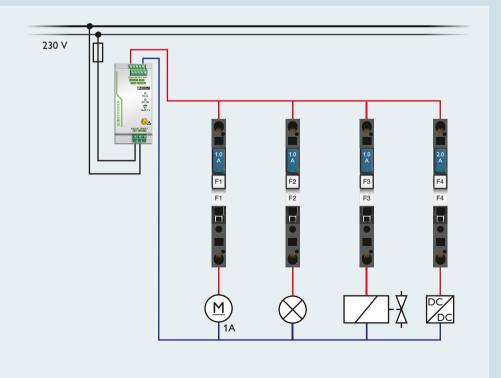


# Device circuit breaker board

The multi-channel device circuit breaker boards are used in standard machine production or in control and process engineering, for example.

Due to the central potential distribution, installation time is reduced to a minimum. The boards are very versatile as they can be fitted individually with thermomagnetic and electronic circuit breakers.

#### Your advantages:

- Reduced installation time thanks to multi-channel device circuit breaker board (4/8/12 channels)
- Compact design saves up to 35% space
- Fuse protection of up to 12 A per channel provides optimum protection for the connected loads
- Thanks to the effortless potential distribution, four loads can be protected per channel
- Integrated group remote signaling ensures that you are always kept informed
- High current carrying capacity of the board supports supply of up to 60 A
- Looped-in relay contacts are also protected using the device circuit breaker

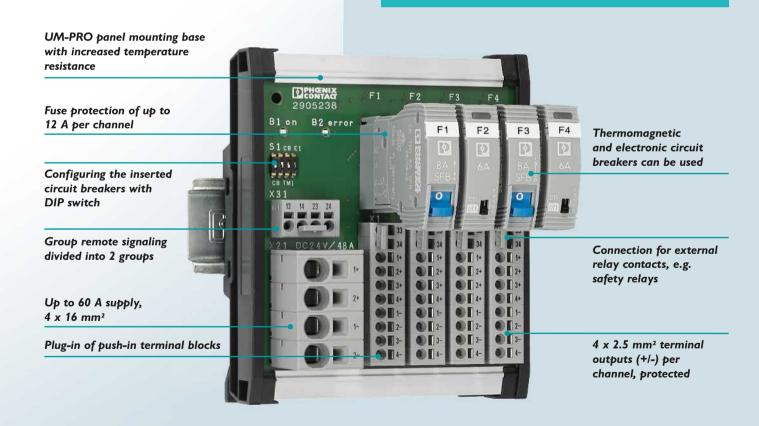

# High operational reliability thanks to redundant power supply

Ensure high availability and productivity levels for your control and process engineering system.

This can be achieved with a redundant switchgear structure. In this case, two 24 V DC power supplies are decoupled via a redundancy module thereby offering superior system availability.

The doubled supply of the device circuit breaker board also offers the option of configuring redundant wiring.




# Illustration of application

The device circuit breaker boards offer connection options for up to five loads per mode of protection.

Therefore, the boards combine the advantages of the device circuit breaker series CB TM1... and CB E1... with easy and space-saving potential distribution.

Group remote signaling is evaluated, for example, using a programmable controller.

Also, for each channel, the device circuit breaker board provides the option of connecting external relay contacts, such as for safety switching devices.

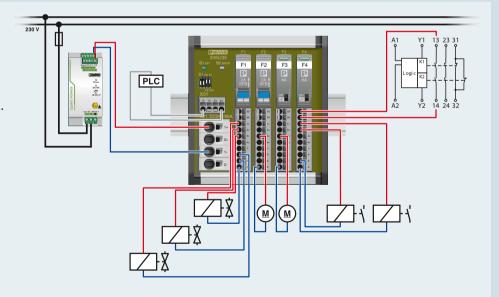

# Product overview

# **Electronic device circuit breakers**

Product cod Channe Group remote signalin Max. supply curre

| CBM multi-channel device circuit breaker      |   |  |  |  |  |
|---|---|--|--|--|--|
| 4   | 8   |  |  |  |  |
| Channels 1-4                                  | Channels 1-8                                  |  |  |  |  |
| 40 A  | 80 A  |  |  |  |  |
| CBM E4 24DC/0.5-10A NO-R<br>Order No. 2905743 | CBM E8 24DC/0.5-10A NO-R<br>Order No. 2905744 |  |  |  |  |

# **Electronic device circuit breakers**

| Product code        | CB device circuit breakers |              |  |
|---------------------|----------------------------|--------------|--|
| Fuse type           |                            | E electronic |  |
| Number of positions |                            | 1            |  |
| Nominal voltage     | Nominal voltage 24 DC      |              |  |
|                     |                            |              |  |



| al voltage      |      | 24 DC                                     |   |   |  |
|-----------------|------|---|---|---|--|
|                 | Туре | NO<br>N/O contact                         | NC<br>N/C contact                                 | S-R status output and reset input                   |  |
|                 | 1 A  | CB E1 24DC/1A NO P<br>Order No. 2800901   | CB E1 24DC/1A NC P<br>Order No. 2800915           | CB E1 24DC/1A S-R P<br>Order No. 2800908            |  |
|                 | 2 A  | CB E1 24DC/2A NO P<br>Order No. 2800902   | CB E1 24DC/2A NC P<br>Order No. 2800916           | CB E1 24DC/2A S-R P<br>Order No. 2800909            |  |
| rent            | 3 A  | CB E1 24DC/3A NO P<br>Order No. 2800903   | CB E1 24DC/3A NC P<br>Order No. 2800917           | CB E1 24DC/3A S-R P<br>Order No. 2800910            |  |
| Nominal current | 4 A  | CB E1 24DC/4A NO P<br>Order No. 2800904   | CB E1 24DC/4A NC P<br>Order No. 2800918           | CB E1 24DC/4A S-R P<br>Order No. 2800911            |  |
| No              | 6 A  | CB E1 24DC/6A NO P<br>Order No. 2800905   | CB E1 24DC/6A NC P<br>Order No. 2800919           | CB E1 24DC/6A S-R P<br>Order No. 2800912            |  |
|                 | 8 A  | CB E1 24DC/8A NO P<br>Order No. 2800906   | -   | CB E1 24DC/8A S-R P<br>Order No. 2800913            |  |
|                 | 10 A | CB E1 24DC/10A NO P<br>Order No. 2800907  | -   | CB E1 24DC/10A S-R P<br>Order No. 2800914           |  |
|                 | Туре | S-C<br>Status output<br>and control input | SI-R<br>Inverted status output<br>and reset input | SI-C<br>Inverted status output<br>and control input |  |
|                 | 1 A  | CB E1 24DC/1A S-C P<br>Order No. 2800922  | CB E1 24DC/1A SI-R P<br>Order No. 2905799         | CB E1 24DC/1A SI-C P<br>Order No. 2905806           |  |
|                 | 2 A  | CB E1 24DC/2A S-C P<br>Order No. 2800923  | CB E1 24DC/2A SI-R P<br>Order No. 2905800         | CB E1 24DC/2A SI-C P<br>Order No. 2905807           |  |
| rent            | 3 A  | CB E1 24DC/3A S-C P<br>Order No. 2800924  | CB E1 24DC/3A SI-R P<br>Order No. 2905801         | CB E1 24DC/3A SI-C P<br>Order No. 2905808           |  |
| Nominal current | 4 A  | CB E1 24DC/4A S-C P<br>Order No. 2800925  | CB E1 24DC/4A SI-R P<br>Order No. 2905802         | CB E1 24DC/4A SI-C P<br>Order No. 2905809           |  |
| No              | 6 A  | CB E1 24DC/6A S-C P<br>Order No. 2800926  | CB E1 24DC/6A SI-R P<br>Order No. 2905803         | CB E1 24DC/6A SI-C P<br>Order No. 2905810           |  |
|                 | 8 A  | CB E1 24DC/8A S-C P<br>Order No. 2800927  | CB E1 24DC/8A SI-R P<br>Order No. 2905804         | CB E1 24DC/8A SI-C P<br>Order No. 2905811           |  |
|                 | 10 A | CB E1 24DC/10A S-C P<br>Order No. 2800928 | CB E1 24DC/10A SI-R P<br>Order No. 2905805        | CB E1 24DC/10A SI-C P<br>Order No. 2905812          |  |

NO: normally open NC: normally closed

S-R: status out – reset in S-C: status out - control in

SI-R: status out inverted - reset in SI-C: status out inverted - control in reset in: restart with impulse

control in: switching on and off with applying 24 V DC

status out: in the case of active load output, a high signal (24 V DC) is issued status out inverted: in the case of active load output, a low signal (0 V DC) is issued

# Thermomagnetic device circuit breakers, 1 and 2-pos.

| Product              | code   | CB device circuit breakers |                  |        |  |
|----------------------|--------|----------------------------|------------------|--------|--|
| Fuse type            |        | TM thermomagnetic          |                  |        |  |
| Fur                  | nction | ction 1 changeover contact |                  |        |  |
| Number of positions  |        |                            | 1                |        |  |
| Characteristic curve |        | SFB                        | M1               |        |  |
|                      | 0.5 A  | CB TM1 0.5A SFB P          | CB TM1 0.5A M1 P | CB TM1 |  |



|                 | 0.5 A  | CB TM1 0.5A SFB P<br>Order No. 2800835 | CB TM1 0.5A M1 P<br>Order No. 2800846 | CB TM1 0.5A F1 P<br>Order No. 2800857 |  |
|-----------------|--------|--|---------------------------------------|---------------------------------------|--|
|                 | 1 A    | CB TM1 1A SFB P<br>Order No. 2800836   | CB TM1 1A M1 P<br>Order No. 2800847   | CB TM1 1A F1 P<br>Order No. 2800858   |  |
|                 | 2 A    | CB TM1 2A SFB P<br>Order No. 2800837   | CB TM1 2A M1 P<br>Order No. 2800848   | CB TM1 2A F1 P<br>Order No. 2800859   |  |
|                 | 3 A    | CB TM1 3A SFB P<br>Order No. 2800838   | CB TM1 3A M1 P<br>Order No. 2800849   | CB TM1 3A F1 P<br>Order No. 2800860   |  |
| rent            | 4 A    | CB TM1 4A SFB P<br>Order No. 2800839   | CB TM1 4A M1 P<br>Order No. 2800850   | CB TM1 4A F1 P<br>Order No. 2800861   |  |
| Nominal current | 5 A    | CB TM1 5A SFB P<br>Order No. 2800840   | CB TM1 5A M1 P<br>Order No. 2800851   | CB TM1 5A F1 P<br>Order No. 2800862   |  |
| Non             | 6 A    | CB TM1 6A SFB P<br>Order No. 2800841   | CB TM1 6A M1 P<br>Order No. 2800852   | CB TM1 6A F1 P<br>Order No. 2800863   |  |
|                 | 8 A    | CB TM1 8A SFB P<br>Order No. 2800842   | CB TM1 8A M1 P<br>Order No. 2800853   | CB TM1 8A F1 P<br>Order No. 2800864   |  |
|                 | 10 A   | CB TM1 10A SFB P<br>Order No. 2800843  | CB TM1 10A M1 P<br>Order No. 2800854  | CB TM1 10A F1 P<br>Order No. 2800865  |  |
|                 | 12 A   | CB TM1 12A SFB P<br>Order No. 2800844  | CB TM1 12A M1 P<br>Order No. 2800855  | CB TM1 12A F1 P<br>Order No. 2800866  |  |
|                 | 16 A   | CB TM1 16A SFB P<br>Order No. 2800845  | CB TM1 16A M1 P<br>Order No. 2800856  | CB TM1 16A F1 P<br>Order No. 2800867  |  |
| Fur             | nction | 2 changeover contacts                  |                                       |                                       |  |
|                 |        |  |                                       |                                       |  |

F1

Number of positions Characterist



| stic            | curve | SFB                                    | M1                                    | F1                                    |
|-----------------|-------|--|---------------------------------------|---------------------------------------|
|                 | 0.5 A | CB TM2 0.5A SFB P<br>Order No. 2800868 | CB TM2 0.5A M1 P<br>Order No. 2800879 | CB TM2 0.5A F1 P<br>Order No. 2800890 |
|                 | 1 A   | CB TM2 1A SFB P<br>Order No. 2800869   | CB TM2 1A M1 P<br>Order No. 2800880   | CB TM2 1A F1 P<br>Order No. 2800891   |
|                 | 2 A   | CB TM2 2A SFB P<br>Order No. 2800870   | CB TM2 2A M1 P<br>Order No. 2800881   | CB TM2 2A F1 P<br>Order No. 2800892   |
|                 | 3 A   | CB TM2 3A SFB P<br>Order No. 2800871   | CB TM2 3A M1 P<br>Order No. 2800882   | CB TM2 3A F1 P<br>Order No. 2800893   |
| rent            | 4 A   | CB TM2 4A SFB P<br>Order No. 2800872   | CB TM2 4A M1 P<br>Order No. 2800883   | CB TM2 4A F1 P<br>Order No. 2800894   |
| Nominal current | 5 A   | CB TM2 5A SFB P<br>Order No. 2800873   | CB TM2 5A M1 P<br>Order No. 2800884   | CB TM2 5A F1 P<br>Order No. 2800895   |
| Non             | 6 A   | CB TM2 6A SFB P<br>Order No. 2800874   | CB TM2 6A M1 P<br>Order No. 2800885   | CB TM2 6A F1 P<br>Order No. 2800896   |
|                 | 8 A   | CB TM2 8A SFB P<br>Order No. 2800875   | CB TM2 8A M1 P<br>Order No. 2800886   | CB TM2 8A F1 P<br>Order No. 2800897   |
|                 | 10 A  | CB TM2 10A SFB P<br>Order No. 2800876  | CB TM2 10A M1 P<br>Order No. 2800887  | CB TM2 10A F1 P<br>Order No. 2800898  |
|                 | 12 A  | CB TM2 12A SFB P<br>Order No. 2800877  | CB TM2 12A M1 P<br>Order No. 2800888  | CB TM2 12A F1 P<br>Order No. 2800899  |
|                 | 16 A  | CB TM2 16A SFB P<br>Order No. 2800878  | CB TM2 16A M1 P<br>Order No. 2800889  | CB TM2 16A F1 P<br>Order No. 2800900  |

# Thermal circuit breakers



| Product code         |        | Thermal circuit breakers |                    |  |
|----------------------|--------|--------------------------|--------------------|--|
| Number of positions  |        |                          | 1                  |  |
| Characteristic curve |        |                          | T1                 |  |
| Function             |        | Can be sw                | vitched on and off |  |
|                      | 0.1 A  | TCP 0,1A                 | Order No. 0712107  |  |
|                      | 0.25 A | TCP 0,25A                | Order No. 0712123  |  |
|                      | 0.5 A  | TCP 0,5A                 | Order No. 0712152  |  |
| rent                 | 1 A    | TCP 1A                   | Order No. 0712194  |  |
| Nominal current      | 2 A    | TCP 2A                   | Order No. 0712217  |  |
| ninal                | 3 A    | TCP 3A                   | Order No. 0712233  |  |
| S                    | 4 A    | TCP 4A                   | Order No. 0712259  |  |
|                      | 6 A    | TCP 6A                   | Order No. 0712275  |  |
|                      | 8 A    | TCP 8A                   | Order No. 0712291  |  |



10 A

| Product code         |       | Thermal circuit breakers |                   |
|----------------------|-------|--------------------------|-------------------|
| Number of positions  |       |                          | 1                 |
| Characteristic curve |       | T1                       |                   |
| Function             |       | Reclosable               |                   |
|                      | 5 A   | TCP 5/DC32V              | Order No. 0700005 |
|                      | 7.5 A | TCP 7,5/DC32V            | Order No. 0700007 |
| current              | 10 A  | TCP 10/DC32V             | Order No. 0700010 |
|                      | 15 A  | TCP 15/DC32V             | Order No. 0700015 |
| Nominal              | 20 A  | TCP 20/DC32V             | Order No. 0700020 |
| Non                  | 25 A  | TCP 25/DC32V             | Order No. 0700025 |
|                      | 30 A  | TCP 30/DC32V             | Order No. 0700030 |
|                      | 40 A  | TCP 40/DC32V             | Order No. 0700040 |

TCP 10A





|          | 40 A    | TCP 40/DC32V                    | ′ (                                    | Order No. 0700040                      |  |  |  |
|----------|---------|---------------------------------|--|--|--|--|--|
|          |         |                                 |  |  |  |  |  |
| Produ    | ct code |                                 | Flat-type fuse terminal block          |  |  |  |  |
| Function |         | Without LED display             | With LED display,<br>12 V              | With LED display,<br>24 V              |  |  |  |
|          |         | ST 4-FSI/C<br>Order No. 3036372 | ST 4-FSI/C-LED 12<br>Order No. 3036495 | ST 4-FSI/C-LED 24<br>Order No. 3036505 |  |  |  |
|          |         | UK 6-FSI/C<br>Order No. 3118203 | UK 6-FSI/C-LED12<br>Order No. 3001925  | UK 6-FSI/C-LED24<br>Order No. 3001938  |  |  |  |

Order No. 0712314

# **Device circuit breaker board**

| Product code           | CI   | BB device circuit breaker boa             | ırd                                       |  |
|------------------------|--|---|---|--|
| Mounting               | Thermomagnetic and electronic device circuit breaker CB TM1 and CB E1 NO |   |   |  |
| Channels               | 4  | 8   | 12  |  |
| Group remote signaling | 2×2  | 2×4                                       | 2×6                                       |  |
| Max. supply current    | 48 A   | 60 A                                      | 60 A                                      |  |
|                        | CBB 04 2x2RC-PT<br>Order No. 2905238                                     | CBB 08 2x4RC-PT<br>Order No. 2905240      | CBB 12 2x6RC-PT<br>Order No. 2905241      |  |
| Mounting               | Ther   | momagnetic device circuit br<br>CB TM1    | eaker                                     |  |
| Channels               | 4  | 8   | 12  |  |
| Group remote signaling | 2×2  | 2×4                                       | 2×6                                       |  |
| Max. supply current    | 48 A   | 60 A                                      | 60 A                                      |  |
|                        | CBB TM 04 2×2RC P-PT<br>Order No. 2801481                                | CBB TM 08 2×4RC P-PT<br>Order No. 2801482 | CBB TM 12 2×6RC P-PT<br>Order No. 2801483 |  |

Select the right CB TM1... or CB E1... device circuit breakers according to the application.

# Accessories



Product code

| е | Base element                            |                                       |                              |  |  |
|---|---|---------------------------------------|------------------------------|--|--|
|   | Screw connection technology             | Push-in connection technology         | Solder base element for PCBs |  |  |
|   | CB 1/10-1/10 UT-BE<br>Order No. 2801305 | CB 1/6-2/4 PT-BE<br>Order No. 2800929 | CB S-BE<br>Order No. 2905067 |  |  |

Note: supply can be loaded with up to 41 A if two bridges are connected.



| Bridge plug for base element      |                                   |  |  |  |
|-----------------------------------|-----------------------------------|--|--|--|
| CB PT Bridge<br>Order No. 2801014 | CB RC Bridge<br>Order No. 2801616 |  |  |  |
| Bridge between 1 and 2            | Bridge between 11 and 14          |  |  |  |



| oduct code   |    | Base element and jumpers |                   |  |
|--------------|----|--------------------------|-------------------|--|
|              | 2  | FBL 2-6                  | Order No. 3030336 |  |
| of positions | 3  | FBL 3-6                  | Order No. 3030242 |  |
| oosit        | 4  | FBL 4-6                  | Order No. 3030255 |  |
|              | 5  | FBL 5-6                  | Order No. 3030349 |  |
| Number       | 10 | FBL 10-6                 | Order No. 3030271 |  |
| Zun          | 20 | FBL 20-6                 | Order No. 3030365 |  |
|              | 50 | FBL 50-6                 | Order No. 3032224 |  |



Front cutting tool for jumpers CUTFOX-FBL

Order No. 1212124

For more bridges and marking material, see main catalog or website.

# Device circuit breakers and QUINT POWER

The configuration matrix can help with the secondary-side planning of your power supply unit. It describes the maximum cable lengths depending on:


- The device circuit breaker
- The conductor cross section
- The performance class of the power supply unit

Additional support is available from our online configurator and the online project engineering matrix.

# **QUINT POWER** and device circuit breaker with SFB characteristic curve

The combination of QUINT POWER power supplies and thermomagnetic device circuit breakers with SFB characteristic curve provides you with the following advantages:

- Short circuit triggering after at least 10 milliseconds for safe operation of your controller
- Substantial reduction of tolerances; this causes the required release current to be reduced
- Safe shutoff of faulty paths through electrical isolation

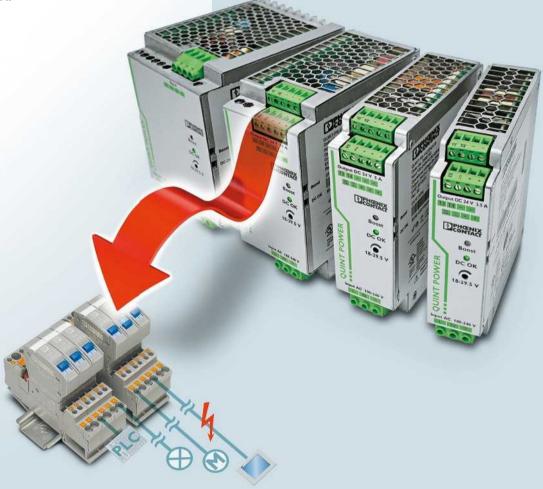


### Cable calculations

Some information is needed in order to calculate the conductor lengths. This basic data includes the output voltage of the power supply (U), the rated current of the device circuit breaker (I<sub>CB</sub>) and the conductor cross section of the cable to be used. The characteristic curves of the respective device circuit breaker types are used as a basis for this.

1. Calculation of the maximum resistance:

$$R_{\text{max}} = \frac{U}{I_{\text{CB}} \times I_{\text{Factor}}}$$
$$= \frac{24 \text{ V}}{1.4 \times 15} = 1.6 \Omega$$



2. Calculation of the maximum cable resistance:

3. Now all the necessary information is available in order to calculate the maximum cable lengths using the following formula:

$$l = \frac{R \times A}{\rho} \qquad l = \frac{0.5 \times 1.5}{0.01786} \qquad l = 42 \text{ m}$$
(forward and return line):

 $\rho$  = specific resistance (copper 0.01786)

A = cross section/conductor

Distance (l) = 21 m

# Cable lengths

The values specified relate to the distance (I) from the power supply unit to the load. Boundary parameters for the calculation:

- CB TM1 x A SFB P device circuit breaker
- Electromagnetic tripping at the latest at:
- 10 times the rated current
- Ambient temperature: +20°C
- Power supply QUINT POWER with SFB technology

The internal resistance of the device circuit breakers is taken into account.

In addition to the short-circuit current. the relevant power supply unit also supplies half the nominal current for paths connected in parallel.



| [Conductor cross section] mm² | 0.75          | 1  | 1.5 | 2.5 | 4 |  |
|-------------------------------|---------------|----|-----|-----|---|--|
|                               | Distance in m |    |     |     |   |  |
| 24 V / 5 A                    |               |    |     |     |   |  |
| CB TM1 1A SFB P               | 27            | 36 | 54  | 91  |   |  |
| CB TM1 2A SFB P               | 10            | 13 | 20  | 34  |   |  |
| 24 V/10 A                     |               |    |     |     |   |  |
| CB TM1 1A SFB P               | 27            | 36 | 54  | 91  |   |  |
| CB TM1 2A SFB P               | 18            | 25 | 37  | 63  |   |  |
| CB TM1 3A SFB P               | 11            | 15 | 22  | 38  |   |  |

Extract from the configuration matrix. The complete matrix can be found at: phoenixcontact.com > Products > Protective devices > Device circuit breakers

# QUINT POWER – Power supply units for superior system availability

Benefit from the functional advantages of the QUINT POWER power supplies. The unique SFB technology and preventive function monitoring increase the availability of your application.



# All features at a glance

## Quick tripping of device circuit breakers

Dynamic power reserve SFB technology with up to 6 times the nominal current for 12 milliseconds

#### Reliable starting of heavy loads

Static POWER BOOST power reserve with up to 1.5 times the nominal current on a permanent basis

#### Preventive function monitoring

Warns of critical operating states before faults occur by permanently monitoring the output voltage and current, remote monitoring using active switching output and floating relay contact

#### Worldwide use

Thanks to the wide range input and international approval package

# High operational reliability

due to high MTBF > 500,000 h, long power failure buffering times > 20 ms, high electric strength of single-phase devices of up to 300 V AC

### Parallel connection possible

for increased performance and redundancy

#### Three-phase devices

Error-free operation, even in the event of a permanent phase failure, high surge resistance of up to 6 kV thanks to integrated gas-filled surge arrester

#### Compensation of voltage drops

Output voltage can be set on front side. The voltage range of 5 to 56 V DC can be covered with three power supply units with output voltages of 12, 24, and 48 V DC.

#### Easy-to-maintain connection technology

with coded COMBICON connectors (up to and including 10 A)

#### Robust design

Metal housing and wide temperature range of -25°C to +70°C

# Minimize installation costs

Third negative terminal as the grounding terminal block

|  | Input voltage range                    | Output current / POWER BOOST / SFB | Magnetic fuse tripping up to                  | Setting range of the output voltage | Dimensions<br>W x H x D |  |  |
|--|--|------------------------------------|---|-------------------------------------|-------------------------|--|--|
| QUINT POWER 1~                               |  |                                    |   |                                     |                         |  |  |
| QUINT-PS/1AC/24DC/3.5<br>Order No. 2866747   | 85 V AC 264 V AC<br>90 V DC 350 V DC   | 3.5 A / 4 A / 15 A                 | B2  | 18 V DC 29.5 V DC                   | 32 × 130 × 125          |  |  |
| QUINT-PS/1AC/24DC/5<br>Order No. 2866750     | 85 V AC 264 V AC<br>90 V DC 350 V DC   | 5 A / 7.5 A / 30 A                 | B2, B4, C2                                    | 18 V DC 29.5 V DC                   | 40 x 130 x 125          |  |  |
| QUINT-PS/1AC/24DC/10<br>Order No. 2866763    | 85 V AC 264 V AC<br>90 V DC 350 V DC   | 10 A / 15 A / 60 A                 | B2, B4, B6, C2, C4                            | 18 V DC 29.5 V DC                   | 60 x 130 x 125          |  |  |
| QUINT-PS/1AC/24DC/20<br>Order No. 2866776    | 85 V AC 264 V AC<br>90 V DC 350 V DC   | 20 A / 26 A / 120 A                | B2, B4, B6, B10, B16,<br>C2, C4, C6           | 18 V DC 29.5 V DC                   | 90 x 130 x 125          |  |  |
| QUINT-PS/1AC/24DC/40<br>Order No. 2866789    | 85 V AC 264 V AC<br>90 V DC 350 V DC   | 40 A / 45 A / 215 A                | B2, B4, B6, B10, B16,<br>B25, C2, C4, C6, C13 | 18 V DC 29.5 V DC                   | 180 x 130 x 125         |  |  |
| QUINT-PS/1AC/12DC/15<br>Order No. 2866718    | 85 V AC 264 V AC<br>90 V DC 350 V DC   | 15 A / 16 A / 60 A                 | B2, B4, B6, C2, C4                            | 5 V DC 18 V DC                      | 60 x 130 x 125          |  |  |
| QUINT-PS/1AC/12DC/20<br>Order No. 2866721    | 85 V AC 264 V AC<br>90 V DC 350 V DC   | 20 A / 26 A / 120 A                | B2, B4, B6, B10, C2,<br>C4, C6                | 5 V DC 18 V DC                      | 90 x 130 x 125          |  |  |
| QUINT-PS/1AC/48DC/5<br>Order No. 2866679     | 85 V AC 264 V AC<br>90 V DC 350 V DC   | 5 A / 7.5 A / 30 A                 | B2, B4, C2                                    | 30 V DC56 V DC                      | 60 x 130 x 125          |  |  |
| QUINT-PS/1AC/48DC/10<br>Order No. 2866682    | 85 V AC 264 V AC<br>90 V DC 350 V DC   | 10 A / 13 A / 60 A                 | B2, B4, B6, C2, C4                            | 30 V DC56 V DC                      | 90 x 130 x 125          |  |  |
| QUINT-PS/1AC/48DC/20<br>Order No. 2866695    | 85 V AC 264 V AC<br>90 V DC 350 V DC   | 20 A / 22.5 A / 100 A              | B2, B4, B6, B10, C2,<br>C4, C6                | 30 V DC56 V DC                      | 180 x 130 x 125         |  |  |
| QUINT POWER 3~                               | QUINT POWER 3~                         |                                    |   |                                     |                         |  |  |
| QUINT-PS/3AC/24DC/5<br>Order No. 2866734     | 320 V AC 575 V AC<br>450 V DC 800 V DC | 5 A / 7.5 A / 30 A                 | B2, B4, C2                                    | 18 V DC 29.5 V DC                   | 40 x 130 x 125          |  |  |
| QUINT-PS/3AC/24DC/10<br>Order No. 2866705    | 320 V AC 575 V AC<br>450 V DC 800 V DC | 10 A / 15 A / 60 A                 | B2, B4, B6, C2, C4                            | 18 V DC 29.5 V DC                   | 60 x 130 x 125          |  |  |
| QUINT-PS/3AC/24DC/20<br>Order No. 2866792    | 320 V AC 575 V AC<br>450 V DC 800 V DC | 20 A / 26 A / 120 A                | B2, B4, B6, B10, B16,<br>C2, C4, C6           | 18 V DC 29.5 V DC                   | 69 x 130 x 125          |  |  |
| QUINT-PS/3AC/24DC/40<br>Order No. 2866802    | 320 V AC 575 V AC<br>450 V DC 800 V DC | 40 A / 45 A / 215 A                | B2, B4, B6, B10, B16,<br>B25, C2, C4, C6, C13 | 18 V DC 29.5 V DC                   | 96 x 130 x 176          |  |  |
| QUINT-PS/3AC/48DC/20<br>Order No. 2320827    | 320 V AC 575 V AC<br>450 V DC 800 V DC | 20 A / 22.5 A / 100 A              | B2, B4, B6, B10, C2,<br>C4, C6                | 30 V DC 56 V DC                     | 96 x 130 x 176          |  |  |
| QUINT POWER CO, with                         | protective coating f                   | or 100% humidity                   |   |                                     |                         |  |  |
| QUINT-PS/1AC/24DC/5/CO<br>Order No. 2320908  | 85 V AC 264 V AC<br>90 V DC 350 V DC   | 5 A / 7.5 A / 30 A                 | B2, B4, C2                                    | 18 V DC 29.5 V DC                   | 40 x 130 x 125          |  |  |
| QUINT-PS/1AC/24DC/10/CO<br>Order No. 2320911 | 85 V AC 264 V AC<br>90 V DC 350 V DC   | 10 A / 15 A / 60 A                 | B2, B4, B6, C2, C4                            | 18 V DC 29.5 V DC                   | 60 x 130 x 125          |  |  |
| QUINT-PS/1AC/24DC/20/CO<br>Order No. 2320898 | 85 V AC 264 V AC<br>90 V DC 350 V DC   | 20 A / 26 A / 120 A                | B2, B4, B6, B10, B16,<br>C2, C4, C6           | 18 V DC 29.5 V DC                   | 90 x 130 x 125          |  |  |
| QUINT-PS/3AC/24DC/20/CO<br>Order No. 2320924 | 320 V AC 575 V AC<br>450 V DC 800 V DC | 20 A / 26 A / 120 A                | B2, B4, B6, B10, B16,<br>C2, C4, C6           | 18 V DC 29.5 V DC                   | 69 x 130 x 125          |  |  |
| DC/DC converters                             |  |                                    |   |                                     |                         |  |  |
| QUINT-PS/24DC/24DC/5<br>Order No. 2320034    | 18 V DC 32 V DC                        | 5 A / 6.25 A / 30 A                | B2, B4, C2                                    | 18 V DC 29.5 V DC                   | 32 × 130 × 125          |  |  |
| QUINT-PS/24DC/24DC/10<br>Order No. 2320092   | 18 V DC 32 V DC                        | 10 A / 12.5 A / 60 A               | B2, B4, B6, C2, C4                            | 18 V DC 29.5 V DC                   | 48 x 130 x 125          |  |  |
| QUINT-PS/24DC/24DC/20<br>Order No. 2320102   | 18 V DC 32 V DC                        | 20 A / 25 A / 120 A                | B2, B4, B6, B10, B16,<br>C2, C4, C6           | 18 V DC 29.5 V DC                   | 82 x 130 x 125          |  |  |
| QUINT-PS/24DC/12DC/8<br>Order No. 2320115    | 18 V DC 32 V DC                        | 8 A / 10 A / 48 A                  | B2, B4, C2                                    | 5 V DC 18 V DC                      | 32 x 130 x 125          |  |  |
| QUINT-PS/24DC/48DC/5<br>Order No. 2320128    | 18 V DC 32 V DC                        | 5 A / 6.25 A / 30 A                | B2, B4, C2                                    | 30 V DC 56 V DC                     | 48 x 130 x 125          |  |  |
| QUINT-PS/12DC/12DC/8<br>Order No. 2905007    | 9 V DC 18 V DC                         | 8 A / 10 A / 48 A                  | B2, B4, C2                                    | 5 V DC 18 V DC                      | 32 x 130 x 125          |  |  |
| QUINT-PS/48DC/48DC/5<br>Order No. 2905008    | 30 V DC 60 V DC                        | 5 A / 6.25 A / 30 A                | B2, B4, C2                                    | 30 V DC 56 V DC                     | 48 x 130 x 125          |  |  |

# TRIO POWER and CBM -The perfect team for very high system availability

The combination of the CBM multi-channel electronic device circuit breakers and the TRIO POWER power supplies with pushin connection technology can help you increase the availability of your systems and machines.

Both products are perfectly matched to the requirements in machine building, forming an extremely slim 24 V power supply for superior system availability.

#### The common advantages:

- Saves space in the control cabinet thanks to narrow design of both products
- High system availability thanks to the optimum combination of power supply and device protection
- Quick and tool-free installation thanks to push-in technology
- A wide variety of application areas thanks to wide temperature range and high shock and vibration resistance



# The features of TRIO POWER at a glance

- Reliable starting of difficult loads The dynamic BOOST supplies 1.5 times the nominal current for 5 seconds
- Active function monitoring Remote monitoring of the output voltage using floating relay contact
- High operational reliability due to robust design in terms of shock, vibration and electric strength. High MTBF (Mean Time Between Failure) and temperature range between -25 °C and +70 °C as well as device startup at -40 °C (type-tested)
- Three-phase devices Error-free function, even if one phase fails permanently
- Input voltage range for DC voltage of 110 to 250 V DC or 600 V DC
- Minimize installation costs
- Third negative terminal block used as a grounding terminal block
- · Compensation of voltage drops by means of output voltage that can be adjusted on the front



|  | Input voltage range                   | Output current/<br>dynamic boost | Setting range of the output voltage | Dimensions<br>W x H x D |  |  |
|--|---------------------------------------|----------------------------------|-------------------------------------|-------------------------|--|--|
| TRIO POWER 1~                                    |                                       |                                  |                                     |                         |  |  |
| TRIO-PS-2G/1AC/24DC/3/C2LPS<br>Order No. 2903147 | 85 V AC 264 V AC<br>110 V DC 250 V DC | 3 A / 4.5 A                      | 24 V DC 28 V DC                     | 30 x 130 x 115          |  |  |
| TRIO-PS-2G/1AC/24DC/5<br>Order No. 2903148       | 85 V AC 264 V AC<br>110 V DC 250 V DC | 5 A / 7.5 A                      | 24 V DC 28 V DC                     | 35 x 130 x 115          |  |  |
| TRIO-PS-2G/1AC/24DC/10<br>Order No. 2903149      | 85 V AC 264 V AC<br>110 V DC 250 V DC | 10 A / 15 A                      | 24 V DC 28 V DC                     | 42 × 130 × 160          |  |  |
| TRIO-PS-2G/1AC/24DC/20<br>Order No. 2903151      | 85 V AC 264 V AC<br>110 V DC 250 V DC | 20 A / 30 A                      | 24 V DC 28 V DC                     | 68 x 130 x 160          |  |  |
| TRIO POWER 3~                                    |                                       |                                  |                                     |                         |  |  |
| TRIO-PS-2G/3AC/24DC/5<br>Order No. 2903153       | 3× 320 V AC 575 V AC 600 V DC         | 5 A / 7.5 A                      | 24 V DC 28 V DC                     | 35 x 130 x 115          |  |  |
| TRIO-PS-2G/3AC/24DC/10<br>Order No. 2903154      | 2x/3x 320 V AC 575 V AC 600 V DC      | 10 A / 15 A                      | 24 V DC 28 V DC                     | 45 x 130 x 160          |  |  |
| TRIO-PS-2G/3AC/24DC/20<br>Order No. 2903155      | 2x/3x 320 V AC 575 V AC<br>600 V DC   | 20 A / 30 A                      | 24 V DC 28 V DC                     | 65 x 130 x 160          |  |  |



# Product range

- · Cables and wires
- Connectors
- Controllers
- Electronics housing
- Electronic switchgear and motor control
- Fieldbus components and systems
- Functional safety
- HMIs and industrial PCs
- I/O systems

- Industrial communication technology
- Industrial Ethernet
- · Installation and mounting material
- Lighting and signaling
- Marking and labeling
- Measurement and control technology
- Modular terminal blocks
- Monitoring
- PCB terminal blocks and PCB connectors

- Power supply units and UPS
- Protective devices
- Relay modules
- Sensor/actuator cabling
- Software
- Surge protection and interference filters
- System cabling for controllers
- Tools
- Wireless data communication

PHOENIX CONTACT GmbH & Co. KG

Flachsmarktstraße 8 32825 Blomberg, Germany Phone: + 49 5235 3-00

Fax: + 49 5235 3-41200 E-mail: info@phoenixcontact.com

phoenixcontact.com





Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

## Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



**«JONHON»** (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«**FORSTAR**» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: http://oceanchips.ru/

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А