

## FEATURES

- **Guaranteed Offset Voltage:** 150 $\mu$ V Max  
–55°C to 125°C: 500 $\mu$ V Max
- **Guaranteed Drift:** 4 $\mu$ V/°C Max
- **Guaranteed Bias Current**  
70°C: 150pA Max  
125°C: 2.5nA Max
- **Guaranteed Slew Rate:** 12V/ $\mu$ s Min
- Available in 8-Pin PDIP and SO Packages

## APPLICATIONS

- Precision, High Speed Instrumentation
- Logarithmic Amplifiers
- D/A Output Amplifiers
- Photodiode Amplifiers
- Voltage-to-Frequency Converters
- Frequency-to-Voltage Converters
- Fast, Precision Sample-and-Hold

## DESCRIPTION

The **LT<sup>®</sup>1055/LT1056** JFET input operational amplifiers combine precision specifications with high speed performance.

For the first time, 16V/ $\mu$ s slew rate and 6.5MHz gain bandwidth product are simultaneously achieved with offset voltage of typically 50 $\mu$ V, 1.2 $\mu$ V/°C drift, bias currents of 40pA at 70°C and 500pA at 125°C.

The 150 $\mu$ V maximum offset voltage specification is the best available on any JFET input operational amplifier.


The LT1055 and LT1056 are differentiated by their operating currents. The lower power dissipation LT1055 achieves lower bias and offset currents and offset voltage. The additional power dissipation of the LT1056 permits higher slew rate, bandwidth and faster settling time with a slight sacrifice in DC performance.

The voltage-to-frequency converter shown below is one of the many applications which utilize both the precision and high speed of the LT1055/LT1056.


For a JFET input op amp with 23V/ $\mu$ s guaranteed slew rate, refer to the LT1022 data sheet.

LT, LT, LTC, LTM, Linear Technology and the Linear logo are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

## TYPICAL APPLICATION

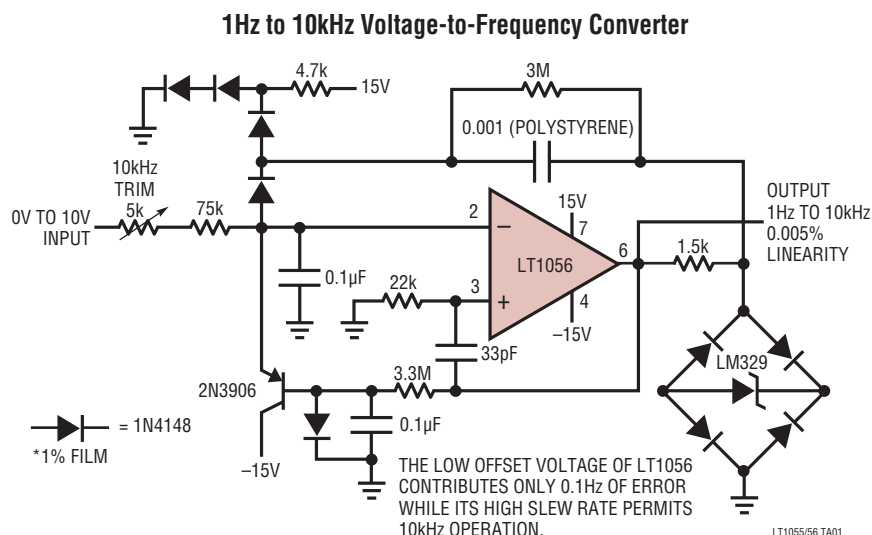

**Distribution of Input Offset Voltage  
(H Package)**

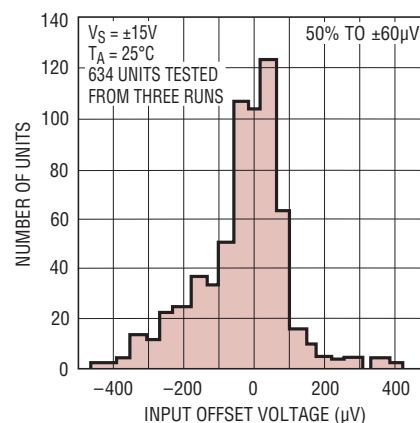

LT1055/56 TA02

10556fd

# LT1055/LT1056

## ABSOLUTE MAXIMUM RATINGS (Note 1)

|                                     |                |                                           |                |
|-------------------------------------|----------------|-------------------------------------------|----------------|
| Supply Voltage .....                | ±20V           | LT1055AC/LT1055C/LT1056AC/                |                |
| Differential Input Voltage .....    | ±40V           | LT1056C .....                             | 0°C to 70°C    |
| Input Voltage .....                 | ±20V           | Storage Temperature Range                 |                |
| Output Short-Circuit Duration ..... | Indefinite     | All Devices .....                         | –65°C to 150°C |
| Operating Temperature Range         |                | Lead Temperature (Soldering, 10 sec)..... | 300°C          |
| LT1055AM/LT1055M/LT1056AM/          |                |                                           |                |
| LT1056M ( <b>OBSOLETE</b> ) .....   | –55°C to 125°C |                                           |                |

## PIN CONFIGURATION

TOP VIEW

N8 PACKAGE  
8-LEAD PDIP  
 $T_{JMAX} = 150^{\circ}C, \theta_{JA} = 130^{\circ}C/W$

TOP VIEW

S8 PACKAGE  
8-LEAD PLASTIC SO  
 $T_{JMAX} = 150^{\circ}C, \theta_{JA} = 130^{\circ}C/W$

TOP VIEW

H PACKAGE  
8-LEAD TO-5 METAL CAN  
 $T_{JMAX} = 150^{\circ}C, \theta_{JA} = 150^{\circ}C/W, \theta_{JC} = 45^{\circ}C/W$

**OBSOLETE PACKAGE**  
Consider the N8 for Alternate Source

## ORDER INFORMATION

| LEAD FREE FINISH | TAPE AND REEL   | PART MARKING | PACKAGE DESCRIPTION   | TEMPERATURE RANGE |
|------------------|-----------------|--------------|-----------------------|-------------------|
| LT1055CN8#PBF    | LT1055CN8#TRPBF | LT1055CN8    | 8-Lead PDIP           | 0°C to 70°C       |
| LT1056CN8#PBF    | LT1056CN8#TRPBF | LT1056CN8    | 8-Lead PDIP           | 0°C to 70°C       |
| LT1055S8#PBF     | LT1055S8#TRPBF  | 1055         | 8-Lead Plastic SO     | 0°C to 70°C       |
| LT1056S8#PBF     | LT1056S8#TRPBF  | 1056         | 8-Lead Plastic SO     | 0°C to 70°C       |
| OBSOLETE PACKAGE |                 |              |                       |                   |
| LT1055ACH#PBF    | LT1055ACH#TRPBF | LT1055ACH    | 8-Lead TO-5 Metal Can | 0°C to 70°C       |
| LT1055CH#PBF     | LT1055CH#TRPBF  | LT1055CH     | 8-Lead TO-5 Metal Can | 0°C to 70°C       |
| LT1055AMH#PBF    | LT1055AMH#TRPBF | LT1055AMH    | 8-Lead TO-5 Metal Can | -55°C to 125°C    |
| LT1055MH#PBF     | LT1055MH#TRPBF  | LT1055MH     | 8-Lead TO-5 Metal Can | -55°C to 125°C    |
| LT1056ACH#PBF    | LT1056ACH#TRPBF | LT1056ACH    | 8-Lead TO-5 Metal Can | 0°C to 70°C       |
| LT1056CH#PBF     | LT1056CH#TRPBF  | LT1056CH     | 8-Lead TO-5 Metal Can | 0°C to 70°C       |
| LT1056AMH#PBF    | LT1056AMH#TRPBF | LT1056AMH    | 8-Lead TO-5 Metal Can | -55°C to 125°C    |
| LT1056MH#PBF     | LT1056MH#TRPBF  | LT1056MH     | 8-Lead TO-5 Metal Can | -55°C to 125°C    |

Consult LTC Marketing for parts specified with wider operating temperature ranges.

Consult LTC Marketing for information on nonstandard lead based finish parts.

For more information on lead free part markings, go to: <http://www.linear.com/leadfree/>

For more information on tape and reel specifications, go to: <http://www.linear.com/tapeandreel/>

ELECTRICAL CHARACTERISTICS  $T_A = 25^\circ\text{C}$ ,  $V_S = \pm 15\text{V}$ ,  $V_{CM} = 0\text{V}$  unless otherwise noted.

| SYMBOL    | PARAMETER                      | CONDITIONS                                                                                | LT1055AM/LT1056AM<br>LT1055AC/LT1056AC |                |                 | LT1055M/LT1056M<br>LT1055CH/LT1056CH<br>LT1055CN8/LT1056CN8 |                        |                          | UNITS                                                            |
|-----------|--------------------------------|-------------------------------------------------------------------------------------------|----------------------------------------|----------------|-----------------|-------------------------------------------------------------|------------------------|--------------------------|------------------------------------------------------------------|
|           |                                |                                                                                           | MIN                                    | TYP            | MAX             | MIN                                                         | TYP                    | MAX                      |                                                                  |
| $V_{OS}$  | Input Offset Voltage (Note 2)  | LT1055 H Package<br>LT1056 H Package<br>LT1055 N8 Package<br>LT1056 N8 Package            |                                        | 50<br>50       | 150<br>180      |                                                             | 70<br>70<br>120<br>140 | 400<br>450<br>700<br>800 | $\mu\text{V}$<br>$\mu\text{V}$<br>$\mu\text{V}$<br>$\mu\text{V}$ |
| $I_{OS}$  | Input Offset Current           | Fully Warmed Up                                                                           |                                        | 2              | 10              |                                                             | 2                      | 20                       | pA                                                               |
| $I_B$     | Input Bias Current             | Fully Warmed Up<br>$V_{CM} = 10\text{V}$                                                  |                                        | $\pm 10$<br>30 | $\pm 50$<br>130 |                                                             | $\pm 10$<br>30         | $\pm 50$<br>150          | pA<br>pA                                                         |
|           | Input Resistance: Differential | Common Mode $V_{CM} = -11\text{V}$ to $8\text{V}$<br>$V_{CM} = 8\text{V}$ to $11\text{V}$ |                                        | $10^{12}$      |                 |                                                             | $10^{12}$              |                          | $\Omega$                                                         |
|           |                                |                                                                                           |                                        | $10^{12}$      |                 |                                                             | $10^{12}$              |                          | $\Omega$                                                         |
|           | Input Capacitance              |                                                                                           |                                        | $10^{11}$<br>4 |                 |                                                             | $10^{11}$<br>4         |                          | $\Omega$<br>pF                                                   |
| $e_n$     | Input Noise Voltage            | 0.1Hz to 10Hz LT1055<br>LT1056                                                            |                                        | 1.8<br>2.5     |                 |                                                             | 2.0<br>2.8             |                          | $\mu\text{V}_{P-P}$<br>$\mu\text{V}_{P-P}$                       |
|           | Input Noise Voltage Density    | $f_0 = 10\text{Hz}$ (Note 3)<br>$f_0 = 1\text{kHz}$ (Note 4)                              |                                        | 28<br>14       | 50<br>20        |                                                             | 30<br>15               | 60<br>22                 | $\text{nV}/\sqrt{\text{Hz}}$<br>$\text{nV}/\sqrt{\text{Hz}}$     |
| $I_n$     | Input Noise Current Density    | $f_0 = 10\text{Hz}$ , 1kHz (Note 5)                                                       |                                        | 1.8            | 4               |                                                             | 1.8                    | 4                        | $\text{fA}/\sqrt{\text{Hz}}$                                     |
| $A_{VOL}$ | Large-Signal Voltage Gain      | $V_0 = \pm 10\text{V}$ $R_L = 2\text{k}$<br>$R_L = 1\text{k}$                             | 150<br>130                             | 400<br>300     |                 | 120<br>100                                                  | 400<br>300             |                          | V/mV<br>V/mV                                                     |
|           | Input Voltage Range            |                                                                                           | $\pm 11$                               | $\pm 12$       |                 | $\pm 11$                                                    | $\pm 12$               |                          | V                                                                |
| CMRR      | Common Mode Rejection Ratio    | $V_{CM} = \pm 11\text{V}$                                                                 | 86                                     | 100            |                 | 83                                                          | 98                     |                          | dB                                                               |
| PSRR      | Power Supply Rejection Ratio   | $V_S = \pm 10\text{V}$ to $\pm 18\text{V}$                                                | 90                                     | 106            |                 | 88                                                          | 104                    |                          | dB                                                               |
| $V_{OUT}$ | Output Voltage Swing           | $R_L = 2\text{k}$                                                                         | $\pm 12$                               | $\pm 13.2$     |                 | $\pm 12$                                                    | $\pm 13.2$             |                          | V                                                                |

10556fd

# LT1055/LT1056

## ELECTRICAL CHARACTERISTICS $T_A = 25^\circ\text{C}$ . $V_S = \pm 15\text{V}$ , $V_{CM} = 0\text{V}$ unless otherwise noted.†

| SYMBOL | PARAMETER                       | CONDITIONS                   | LT1055AM/LT1056AM<br>LT1055AC/LT1056AC |            |            | LT1055M/LT1056M<br>LT1055CH/LT1056CH<br>LT1055CN8/LT1056CN8 |            |            | UNITS                                |
|--------|---------------------------------|------------------------------|----------------------------------------|------------|------------|-------------------------------------------------------------|------------|------------|--------------------------------------|
|        |                                 |                              | MIN                                    | TYP        | MAX        | MIN                                                         | TYP        | MAX        |                                      |
| SR     | Slew Rate                       | LT1055<br>LT1056             | 10<br>12                               | 13<br>16   |            | 7.5<br>9.0                                                  | 12<br>14   |            | V/ $\mu\text{s}$<br>V/ $\mu\text{s}$ |
| GBW    | Gain Bandwidth Product          | f = 1MHz<br>LT1055<br>LT1056 |                                        | 5.0<br>6.5 |            |                                                             | 4.5<br>5.5 |            | MHz<br>MHz                           |
| $I_S$  | Supply Current                  | LT1055<br>LT1056             |                                        | 2.8<br>5.0 | 4.0<br>6.5 |                                                             | 2.8<br>5.0 | 4.0<br>7.0 | mA<br>mA                             |
|        | Offset Voltage Adjustment Range | $R_{POT} = 100\text{k}$      |                                        | $\pm 5$    |            |                                                             | $\pm 5$    |            | mV                                   |

The ● denotes the specifications which apply over the temperature range  $0^\circ\text{C} \leq T_A \leq 70^\circ\text{C}$ .  $V_S = \pm 15\text{V}$ ,  $V_{CM} = 0\text{V}$  unless otherwise noted.

| SYMBOL    | PARAMETER                                               | CONDITIONS                                 |   | LT1055AC<br>LT1056AC |            |           | LT1055CH/LT1056CH<br>LT1055CN8/LT1056CN8 |            |           | UNITS                        |
|-----------|---------------------------------------------------------|--------------------------------------------|---|----------------------|------------|-----------|------------------------------------------|------------|-----------|------------------------------|
|           |                                                         |                                            |   | MIN                  | TYP        | MAX       | MIN                                      | TYP        | MAX       |                              |
| $V_{OS}$  | Input Offset Voltage (Note 2)                           | LT1055 H Package                           | ● |                      | 100        | 330       |                                          | 140        | 750       | $\mu\text{V}$                |
|           |                                                         | LT1056 H Package                           | ● |                      | 100        | 360       |                                          | 140        | 800       | $\mu\text{V}$                |
|           |                                                         | LT1055 N8 Package                          | ● |                      |            |           |                                          | 250        | 1250      | $\mu\text{V}$                |
|           |                                                         | LT1056 N8 Package                          | ● |                      |            |           |                                          | 280        | 1350      | $\mu\text{V}$                |
|           | Average Temperature Coefficient of Input Offset Voltage | H Package (Note 6)                         | ● |                      | 1.2        | 4.0       |                                          | 1.6        | 8.0       | $\mu\text{V}/^\circ\text{C}$ |
|           |                                                         | N8 Package (Note 6)                        | ● |                      |            |           |                                          | 3.0        | 12.0      | $\mu\text{V}/^\circ\text{C}$ |
| $I_{OS}$  | Input Offset Current                                    | Warmed Up LT1055                           | ● |                      | 10         | 50        |                                          | 16         | 80        | pA                           |
|           |                                                         | $T_A = 70^\circ\text{C}$ LT1056            | ● |                      | 14         | 70        |                                          | 18         | 100       | pA                           |
| $I_B$     | Input Bias Current                                      | Warmed Up LT1055                           | ● |                      | $\pm 30$   | $\pm 150$ |                                          | $\pm 40$   | $\pm 200$ | pA                           |
|           |                                                         | $T_A = 70^\circ\text{C}$ LT1056            | ● |                      | $\pm 40$   | $\pm 80$  |                                          | $\pm 50$   | $\pm 240$ | pA                           |
| $A_{VOL}$ | Large-Signal Voltage Gain                               | $V_O = \pm 10\text{V}$ , $R_L = 2\text{k}$ | ● | 80                   | 250        |           | 60                                       | 250        |           | V/mV                         |
| CMRR      | Common Mode Rejection Ratio                             | $V_{CM} = \pm 10.5\text{V}$                | ● | 85                   | 100        |           | 82                                       | 98         |           | dB                           |
| PSRR      | Power Supply Rejection Ratio                            | $V_S = \pm 10\text{V}$ to $\pm 18\text{V}$ | ● | 89                   | 105        |           | 87                                       | 103        |           | dB                           |
| $V_{OUT}$ | Output Voltage Swing                                    | $R_L = 2\text{k}$                          | ● | $\pm 12$             | $\pm 13.1$ |           | $\pm 12$                                 | $\pm 13.1$ |           | V                            |

The ● denotes the specifications which apply over the temperature range  $-55^\circ\text{C} \leq T_A \leq 125^\circ\text{C}$ .  $V_S = \pm 15\text{V}$ ,  $V_{CM} = 0\text{V}$ , unless otherwise noted.

| SYMBOL    | PARAMETER                                               | CONDITIONS                                 |   | LT1055AM<br>LT1056AM |            |           | LT1055M<br>LT1056M |            |           | UNITS                        |
|-----------|---------------------------------------------------------|--------------------------------------------|---|----------------------|------------|-----------|--------------------|------------|-----------|------------------------------|
|           |                                                         |                                            |   | MIN                  | TYP        | MAX       | MIN                | TYP        | MAX       |                              |
| $V_{OS}$  | Input Offset Voltage (Note 2)                           | LT1055                                     | ● |                      | 180        | 500       |                    | 250        | 1200      | $\mu\text{V}$                |
|           |                                                         | LT1056                                     | ● |                      | 180        | 550       |                    | 250        | 1250      | $\mu\text{V}$                |
|           | Average Temperature Coefficient of Input Offset Voltage | (Note 6)                                   | ● |                      | 1.3        | 4.0       |                    | 1.8        | 8.0       | $\mu\text{V}/^\circ\text{C}$ |
| $I_{OS}$  | Input Offset Current                                    | Warmed Up LT1055                           | ● |                      | 0.20       | 1.2       |                    | 0.25       | 1.8       | nA                           |
|           |                                                         | $T_A = 125^\circ\text{C}$ LT1056           | ● |                      | 0.25       | 1.5       |                    | 0.30       | 2.4       | nA                           |
| $I_B$     | Input Bias Current                                      | Warmed Up LT1055                           | ● |                      | $\pm 0.4$  | $\pm 2.5$ |                    | $\pm 0.5$  | $\pm 4.0$ | nA                           |
|           |                                                         | $T_A = 125^\circ\text{C}$ LT1056           | ● |                      | $\pm 0.5$  | $\pm 3.0$ |                    | $\pm 0.6$  | $\pm 5.0$ | nA                           |
| $A_{VOL}$ | Large-Signal Voltage Gain                               | $V_O = \pm 10\text{V}$ , $R_L = 2\text{k}$ | ● | 40                   | 120        |           | 35                 | 120        |           | V/mV                         |
| CMRR      | Common Mode Rejection Ratio                             | $V_{CM} = \pm 10.5\text{V}$                | ● | 85                   | 100        |           | 82                 | 98         |           | dB                           |
| PSRR      | Power Supply Rejection Ratio                            | $V_S = \pm 10\text{V}$ to $\pm 17\text{V}$ | ● | 88                   | 104        |           | 86                 | 102        |           | dB                           |
| $V_{OUT}$ | Output Voltage Swing                                    | $R_L = 2\text{k}$                          | ● | $\pm 12$             | $\pm 12.9$ |           | $\pm 12$           | $\pm 12.9$ |           | V                            |

10556fd

**ELECTRICAL CHARACTERISTICS**  $T_A = 25^\circ\text{C}$ .  $V_S = \pm 15\text{V}$ ,  $V_{CM} = 0\text{V}$  unless otherwise noted.

| SYMBOL    | PARAMETER                       | CONDITIONS                                                                    | LT1055CS8/LT1056CS8 |                |                  | UNITS                                                        |
|-----------|---------------------------------|-------------------------------------------------------------------------------|---------------------|----------------|------------------|--------------------------------------------------------------|
|           |                                 |                                                                               | MIN                 | TYP            | MAX              |                                                              |
| $V_{OS}$  | Input Offset Voltage (Note 2)   |                                                                               |                     | 500            | 1500             | $\mu\text{V}$                                                |
| $I_{OS}$  | Input Offset Current            | Fully Warmd Up                                                                |                     | 5              | 30               | $\text{pA}$                                                  |
| $I_B$     | Input Bias Current              | Fully Warmd Up<br>$V_{CM} = 10\text{V}$                                       |                     | $\pm 30$<br>30 | $\pm 100$<br>150 | $\text{pA}$<br>$\text{pA}$                                   |
|           | Input Resistance Differential   | $V_{CM} = -11\text{V}$ to $8\text{V}$<br>$V_{CM} = 8\text{V}$ to $11\text{V}$ |                     | 0.4            |                  | $\text{T}\Omega$                                             |
|           | Common Mode                     |                                                                               |                     | 0.4            |                  | $\text{T}\Omega$                                             |
|           |                                 |                                                                               |                     | 0.05           |                  | $\text{T}\Omega$                                             |
|           | Input Capacitance               |                                                                               |                     | 4              |                  | $\text{pF}$                                                  |
| $e_n$     | Input Noise Voltage             | 0.1Hz to 10Hz LT1055<br>LT1056                                                |                     | 2.5<br>3.5     |                  | $\mu\text{V}_{P-P}$<br>$\mu\text{V}_{P-P}$                   |
|           | Input Noise Voltage Density     | $f_0 = 10\text{Hz}$ (Note 4)<br>$f_0 = 1\text{kHz}$ (Note 4)                  |                     | 35<br>15       | 70<br>22         | $\text{nV}/\sqrt{\text{Hz}}$<br>$\text{nV}/\sqrt{\text{Hz}}$ |
| $i_n$     | Input Noise Current Density     | $f_0 = 10\text{Hz}$ , $1\text{kHz}$ (Note 5)                                  |                     | 2.5            | 10               | $\text{fA}/\sqrt{\text{Hz}}$                                 |
| $A_{VOL}$ | Large-Signal Voltage Gain       | $V_0 = \pm 10\text{V}$ $R_L = 2\text{k}$<br>$R_L = 1\text{k}$                 | 120<br>100          | 400<br>300     |                  | $\text{V}/\text{mV}$<br>$\text{V}/\text{mV}$                 |
|           | Input Voltage Range             |                                                                               | $\pm 11$            | $\pm 12$       |                  | $\text{V}$                                                   |
| CMRR      | Common Mode Rejection Ratio     | $V_{CM} = \pm 11\text{V}$                                                     | 83                  | 98             |                  | $\text{dB}$                                                  |
| PSRR      | Power Supply Rejection Ratio    | $V_S = \pm 10\text{V}$ to $\pm 18\text{V}$                                    | 88                  | 104            |                  | $\text{dB}$                                                  |
| $V_{OUT}$ | Output Voltage Swing            | $R_L = 2\text{K}$                                                             | $\pm 12$            | $\pm 13.2$     |                  | $\text{V}$                                                   |
| SR        | Slew Rate                       | LT1055<br>LT1056                                                              | 7.5                 | 12             |                  | $\text{V}/\mu\text{s}$                                       |
|           |                                 |                                                                               | 9.0                 | 14             |                  | $\text{V}/\mu\text{s}$                                       |
| GBW       | Gain Bandwidth Product          | $f = 1\text{MHz}$ LT1055<br>LT1056                                            |                     | 4.5            |                  | $\text{MHz}$                                                 |
|           |                                 |                                                                               |                     | 5.5            |                  | $\text{MHz}$                                                 |
| $I_S$     | Supply Current                  | LT1055<br>LT1056                                                              |                     | 2.8            | 4.0              | $\text{mA}$                                                  |
|           |                                 |                                                                               |                     | 5.0            | 7.0              | $\text{mA}$                                                  |
|           | Offset Voltage Adjustment Range | $R_{POT} = 100\text{k}$                                                       |                     | $\pm 5$        |                  | $\text{mV}$                                                  |

The ● denotes the specifications which apply over the temperature range  $0^\circ\text{C} \leq T_A \leq 70^\circ\text{C}$ .  $V_S = \pm 15\text{V}$ ,  $V_{CM} = 0\text{V}$  unless otherwise noted.

| SYMBOL    | PARAMETER                                               | CONDITIONS                                 |   | LT1055CS8/LT1056CS8 |            |           | UNITS                        |
|-----------|---------------------------------------------------------|--------------------------------------------|---|---------------------|------------|-----------|------------------------------|
|           |                                                         |                                            |   | MIN                 | TYP        | MAX       |                              |
| $V_{OS}$  | Input Offset Voltage (Note 2)                           |                                            | ● |                     | 800        | 2200      | $\mu\text{V}$                |
|           | Average Temperature Coefficient of Input Offset Voltage |                                            | ● |                     | 4          | 15        | $\mu\text{V}/^\circ\text{C}$ |
| $I_{OS}$  | Input Offset Current                                    | Warmd Up, $T_A = 70^\circ\text{C}$         | ● |                     | 18         | 150       | $\text{pA}$                  |
| $I_B$     | Input Bias Current                                      | Warmd Up, $T_A = 70^\circ\text{C}$         | ● |                     | $\pm 60$   | $\pm 400$ | $\text{pA}$                  |
| $A_{VOL}$ | Large-Signal Voltage Gain                               | $V_0 = \pm 10\text{V}$ , $R_L = 2\text{k}$ | ● | 60                  | 250        |           | $\text{V}/\text{mV}$         |
| CMRR      | Common Mode Rejection Ratio                             | $V_{CM} = \pm 10.5\text{V}$                | ● | 82                  | 98         |           | $\text{dB}$                  |
| PSRR      | Power Supply Rejection Ratio                            | $V_S = \pm 10\text{V}$ to $\pm 18\text{V}$ | ● | 87                  | 103        |           | $\text{dB}$                  |
| $V_{OUT}$ | Output Voltage Swing                                    | $R_L = 2\text{K}$                          | ● | $\pm 12$            | $\pm 13.1$ |           | $\text{V}$                   |

## ELECTRICAL CHARACTERISTICS

For MIL-STD components, please refer to LTC883 data sheet for test listing and parameters.

**Note 1:** Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

**Note 2:** Offset voltage is measured under two different conditions: (a) approximately 0.5 seconds after application of power; (b) at  $T_A = 25^\circ\text{C}$  only, with the chip heated to approximately  $38^\circ\text{C}$  for the LT1055 and to  $45^\circ\text{C}$  for the LT1056, to account for chip temperature rise when the device is fully warmed up.





**Note 3:** 10Hz noise voltage density is sample tested on every lot of A grades. Devices 100% tested at 10Hz are available on request.

**Note 4:** This parameter is tested on a sample basis only.



**Note 5:** Current noise is calculated from the formula:  $i_n = (2qI_B)^{1/2}$ , where  $q = 1.6 \cdot 10^{-19}$  coulomb. The noise of source resistors up to  $1\text{G}\Omega$  swamps the contribution of current noise.

**Note 6:** Offset voltage drift with temperature is practically unchanged when the offset voltage is trimmed to zero with a 100k potentiometer between the balance terminals and the wiper tied to  $V^+$ . Devices tested to tighter drift specifications are available on request.

## TYPICAL PERFORMANCE CHARACTERISTICS

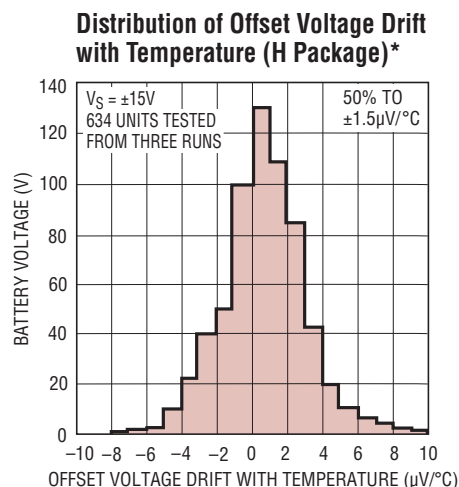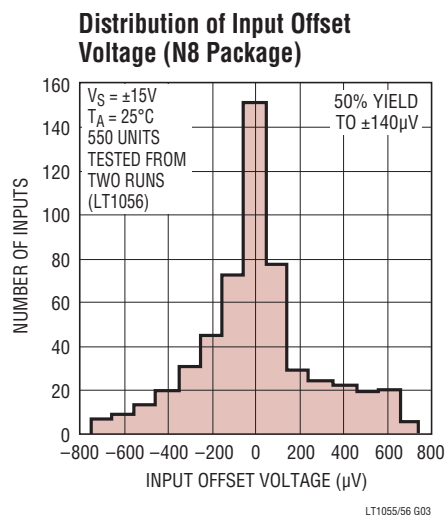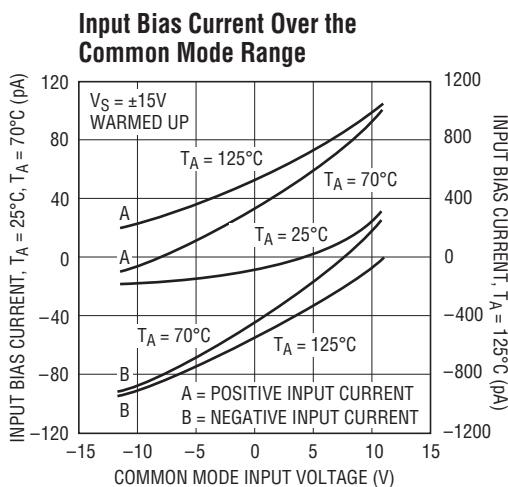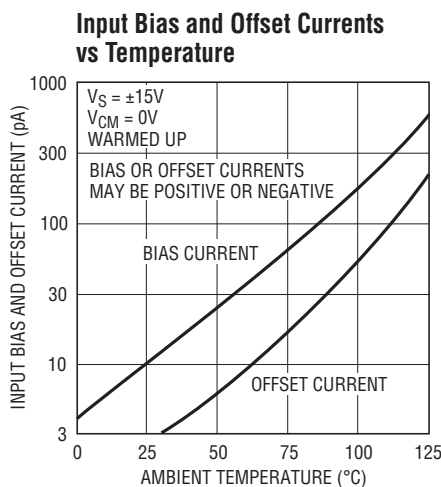


\*DISTRIBUTION IN THE PLASTIC (N8) PACKAGE IS SIGNIFICANTLY WIDER.

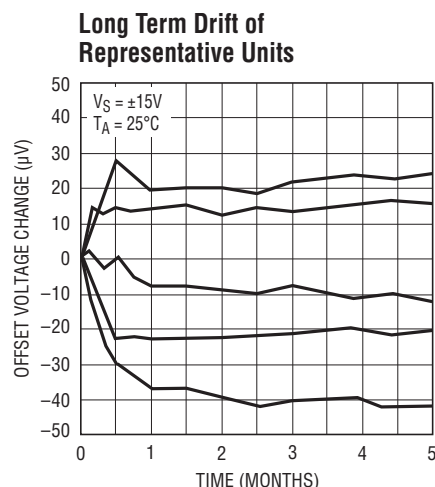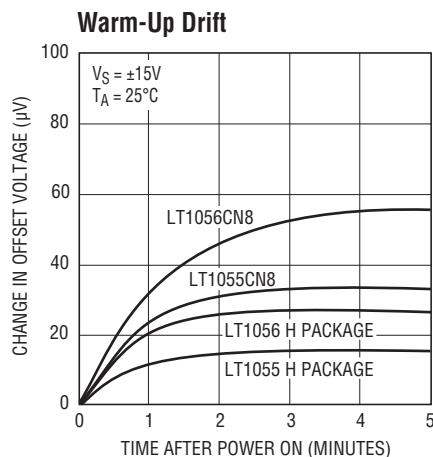


# TYPICAL PERFORMANCE CHARACTERISTICS


0.1Hz to 10Hz Noise

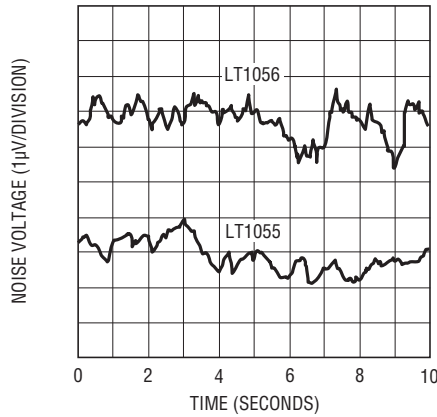


Noise vs Chip Temperature

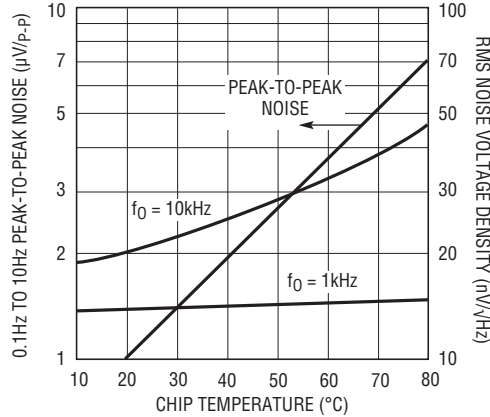


Voltage Noise vs Frequency

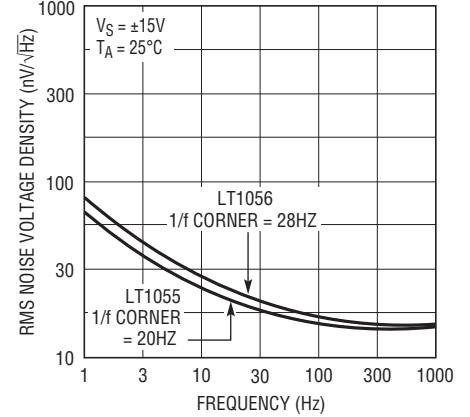


LT1056 Large-Signal Response

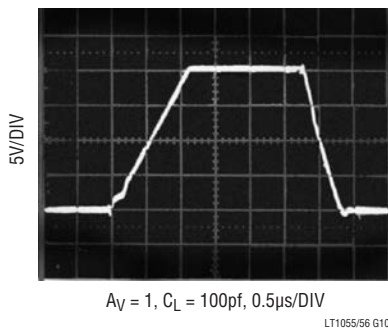


Small-Signal Response

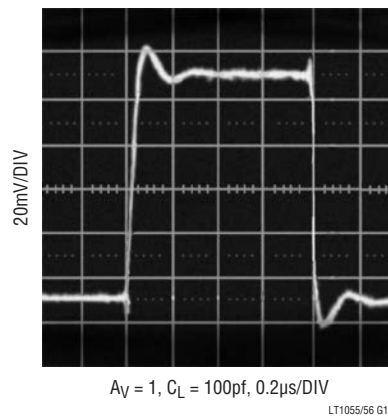


LT1055 Large-Signal Response

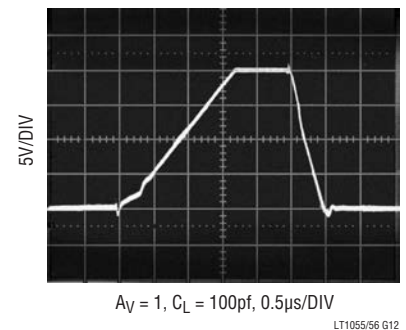


Undistorted Output Swing vs Frequency

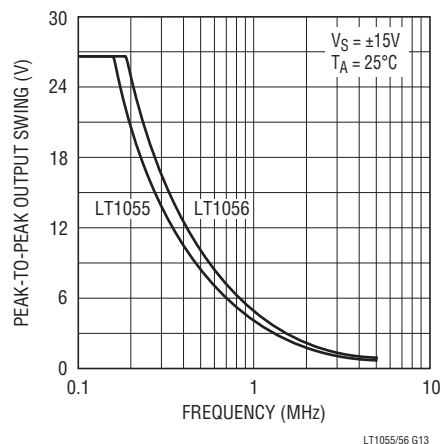

Slew Rate, Gain Bandwidth vs Temperature

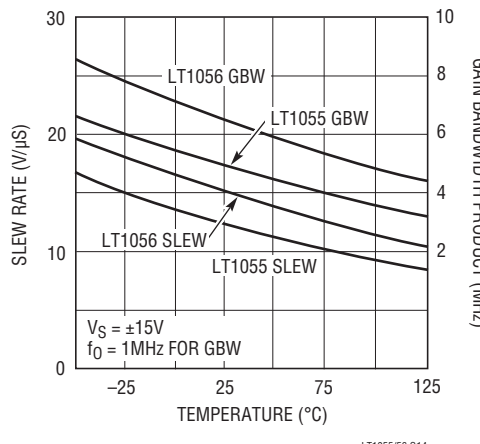


Output Impedance vs Frequency

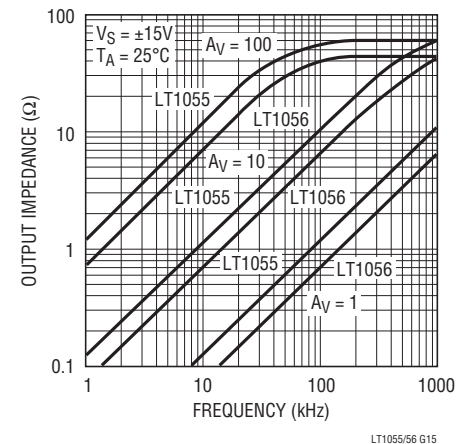


## TYPICAL PERFORMANCE CHARACTERISTICS

Gain vs Frequency

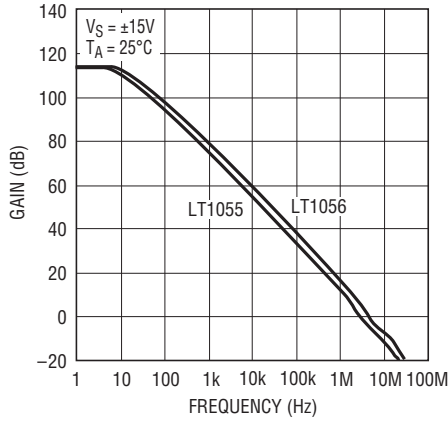


LT1055/56 G16

Gain, Phase Shift vs Frequency

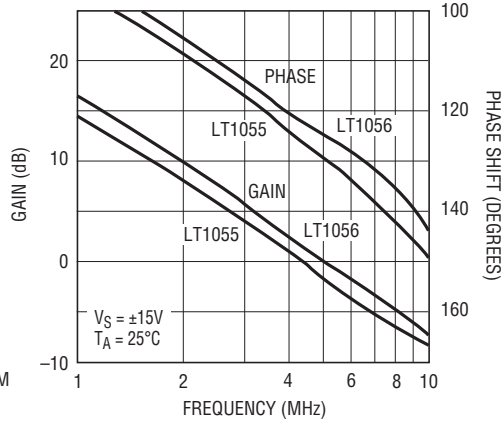


LT1055/56 G17

Voltage Gain vs Temperature

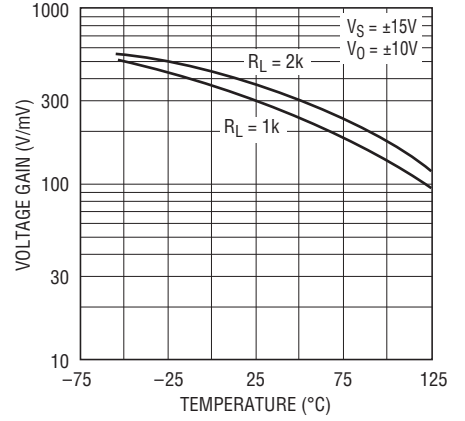


LT1055/56 G18

LT1055 Settling Time

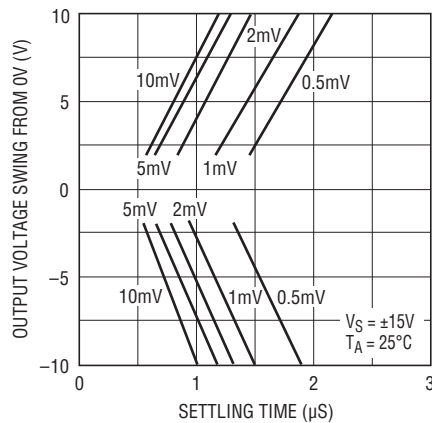


LT1055/56 G19

LT1056 Settling Time

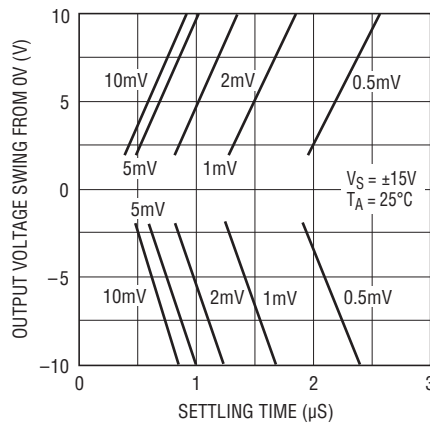


LT1055/56 G20

Common Mode Range vs Temperature

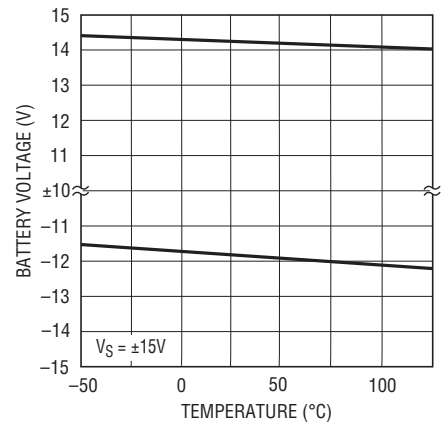


LT1055/56 G21

Common Mode and Power Supply Rejections vs Temperature

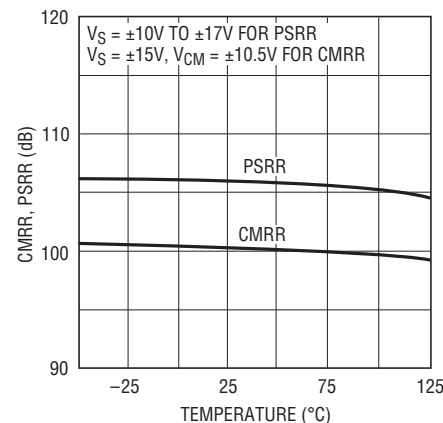


LT1055/56 G22

Common Mode Rejection Ratio vs Frequency

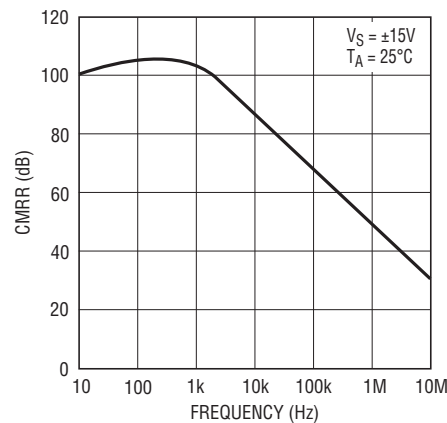




LT1055/56 G23

Power Supply Rejection Ratio vs Frequency

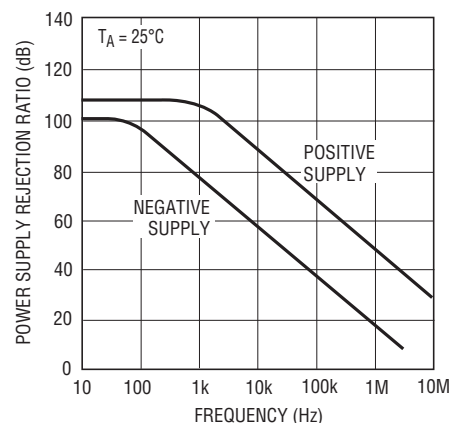


LT1055/56 G24

## TYPICAL PERFORMANCE CHARACTERISTICS

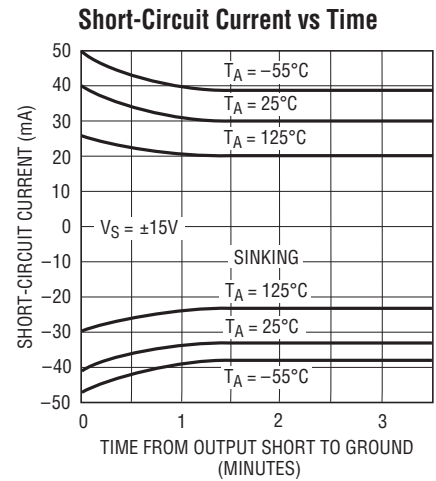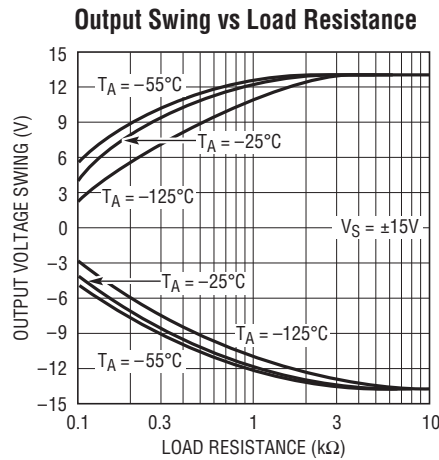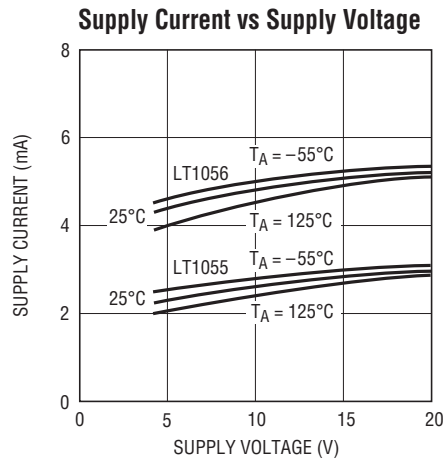

## APPLICATIONS INFORMATION

The LT1055/LT1056 may be inserted directly into LF155A/LT355A, LF156A/LT356A, OP-15 and OP-16 sockets. Offset nulling will be compatible with these devices with the wiper of the potentiometer tied to the positive supply.



No appreciable change in offset voltage drift with temperature will occur when the device is nulled with a potentiometer,  $R_P$ , ranging from 10k to 200k.


The LT1055/LT1056 can also be used in LF351, LF411, AD547, AD611, OPA-111, and TL081 sockets, provided that the nulling circuitry is removed. Because of the LT1055/LT1056's low offset voltage, nulling will not be necessary in most applications.

### Achieving Picoampere/Microvolt Performance

In order to realize the picoampere-microvolt level accuracy of the LT1055/LT1056 proper care must be exercised. For

example, leakage currents in circuitry external to the op amp can significantly degrade performance. High quality insulation should be used (e.g. Teflon, Kel-F); cleaning of all insulating surfaces to remove fluxes and other residues will probably be required. Surface coating may be necessary to provide a moisture barrier in high humidity environments.

Board leakage can be minimized by encircling the input circuitry with a guard ring operated at a potential close to that of the inputs: in inverting configurations the guard ring should be tied to ground, in noninverting connections to the inverting input at pin 2. Guarding both sides of the

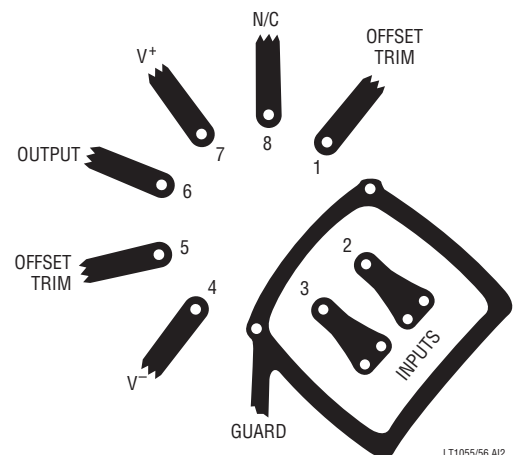

## APPLICATIONS INFORMATION

printed circuit board is required. Bulk leakage reduction depends on the guard ring width.

The LT1055/LT1056 has the lowest offset voltage of any JFET input op amp available today. However, the offset voltage and its drift with time and temperature are still not as good as on the best bipolar amplifiers because the transconductance of FETs is considerably lower than that of bipolar transistors. Conversely, this lower transconductance is the main cause of the significantly faster speed performance of FET input op amps.

Offset voltage also changes somewhat with temperature cycling. The AM grades show a typical  $20\mu\text{V}$  hysteresis ( $30\mu\text{V}$  on the M grades) when cycled over the  $-55^\circ\text{C}$  to  $125^\circ\text{C}$  temperature range. Temperature cycling from  $0^\circ\text{C}$  to  $70^\circ\text{C}$  has a negligible (less than  $10\mu\text{V}$ ) hysteresis effect.

The offset voltage and drift performance are also affected by packaging. In the plastic N8 package the molding compound is in direct contact with the chip, exerting pressure on the surface. While NPN input transistors are largely unaffected by this pressure, JFET device matching and drift are degraded. Consequently, for best DC performance, as shown in the typical performance distribution plots, the TO-5 H package is recommended.

### Noise Performance

The current noise of the LT1055/LT1056 is practically immeasurable at  $1.8\text{fA}/\sqrt{\text{Hz}}$ . At  $25^\circ\text{C}$  it is negligible up to  $1\text{G}$  of source resistance,  $R_S$  (compound to the noise of  $R_S$ ). Even at  $125^\circ\text{C}$  it is negligible to  $100\text{M}$  of  $R_S$ .

The voltage noise spectrum is characterized by a low  $1/f$  corner in the  $20\text{Hz}$  to  $30\text{Hz}$  range, significantly lower than on other competitive JFET input op amps. Of particular interest is the fact that with any JFET IC amplifier, the frequency location of the  $1/f$  corner is proportional to the square root of the internal gate leakage currents and, therefore, noise doubles every  $20^\circ\text{C}$ . Furthermore, as illustrated in the noise versus chip temperature curves, the  $0.1\text{Hz}$  to  $10\text{Hz}$  peak-to-peak noise is a strong function of temperature, while wideband noise ( $f_0 = 1\text{kHz}$ ) is practically unaffected by temperature.

Consequently, for optimum low frequency noise, chip temperature should be minimized. For example, operat-


ing an LT1056 at  $\pm 5\text{V}$  supplies or with a  $20^\circ\text{C}/\text{W}$  case-to-ambient heat sink reduces  $0.1\text{Hz}$  to  $10\text{Hz}$  noise from typically  $2.5\mu\text{V}_{\text{P-P}}$  ( $\pm 15\text{V}$ , free-air) to  $1.5\mu\text{V}_{\text{P-P}}$ . Similarly, the noise of an LT1055 will be  $1.8\mu\text{V}_{\text{P-P}}$  typically because of its lower power dissipation and chip temperature.

### High Speed Operation

Settling time is measured in the test circuit shown. This test configuration has two features which eliminate problems common to settling time measurements: (1) probe capacitance is isolated from the "false summing" node, and (2) it does not require a "flat top" input pulse since the input pulse is merely used to steer current through the diode bridges. For more details, please see Application Note 10.

As with most high speed amplifiers, care should be taken with supply decoupling, lead dress and component placement.

When the feedback around the op amp is resistive ( $R_F$ ), a pole will be created with  $R_F$ , the source resistance and capacitance ( $R_S$ ,  $C_S$ ), and the amplifier input capacitance ( $C_{\text{IN}} \approx 4\text{pF}$ ). In low closed-loop gain configurations and with  $R_S$  and  $R_F$  in the kilohm range, this pole can create excess phase shift and even oscillation. A small capacitor ( $C_F$ ) in parallel with  $R_F$  eliminates this problem. With  $R_S (C_S + C_{\text{IN}}) = R_F C_F$ , the effect of the feedback pole is completely removed.

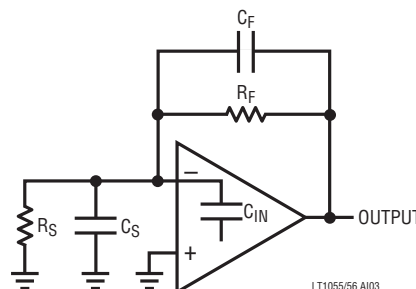


### Phase Reversal Protection


Most industry standard JFET input op amps (e.g., LF155/LF156, LF351, LF411, OP15/16) exhibit phase reversal at the output when the negative common mode limit at the input is exceeded (i.e., from  $-12\text{V}$  to  $-15\text{V}$  with  $\pm 15\text{V}$  supplies). This can cause lock-up in servo systems. As shown below, the LT1055/LT1056 does not have this problem due to unique phase reversal protection circuitry (Q1 on simplified schematic).

## APPLICATIONS INFORMATION


### Settling Time Test Circuit

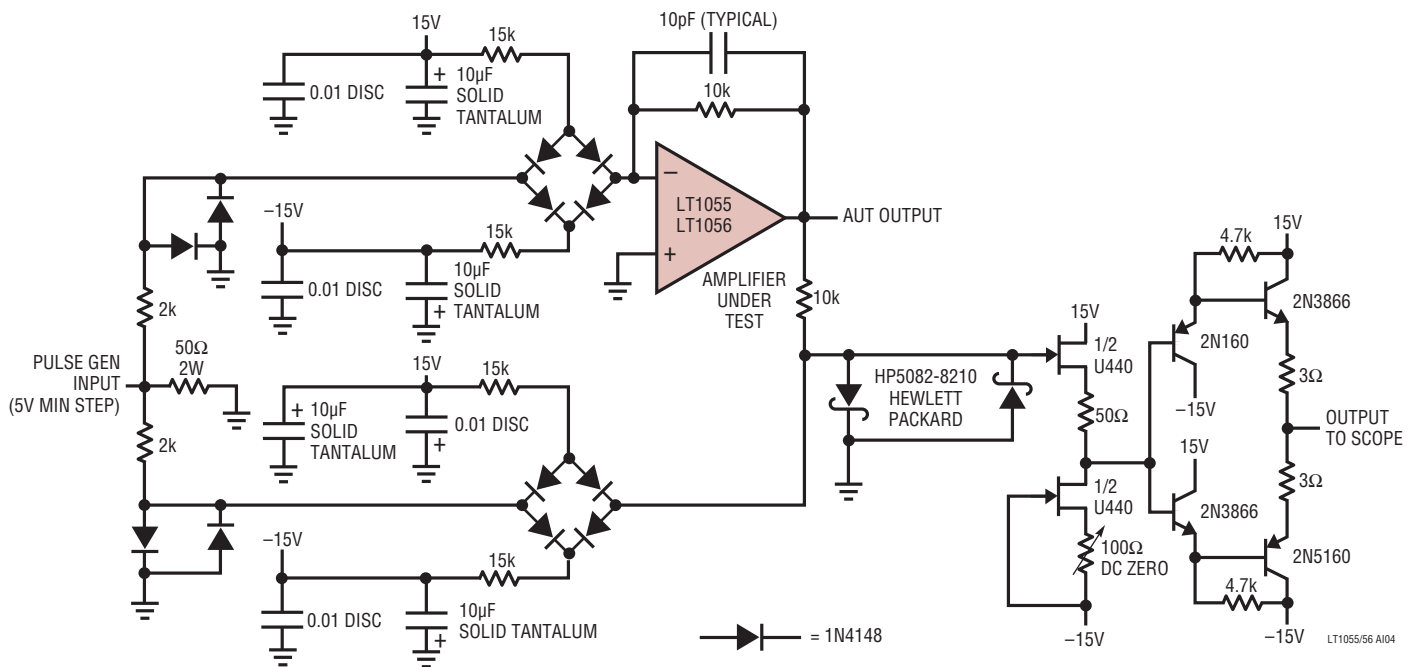


### Voltage Follower with Input Exceeding the Negative Common Mode Range

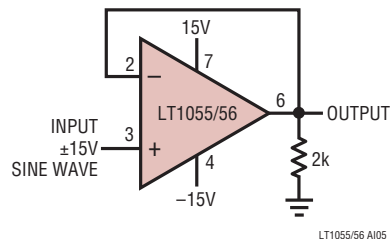

### Input

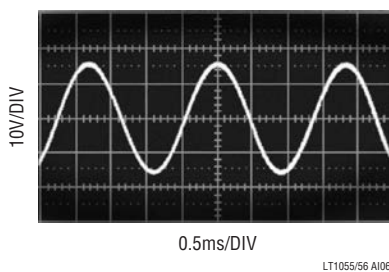


**Output**  
(LF155/LF56, LF441, OP-15/OP-16)

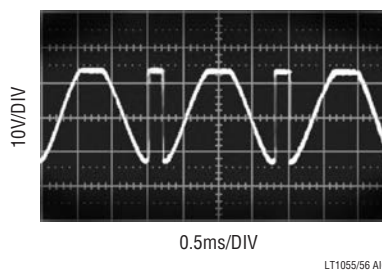


## Output

### LT1055/LT1056

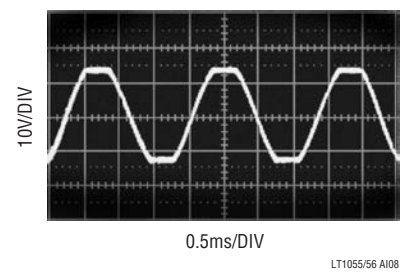


## TYPICAL APPLICATIONS<sup>†</sup>

### Exponential Voltage-to-Frequency Converter for Music Synthesizers

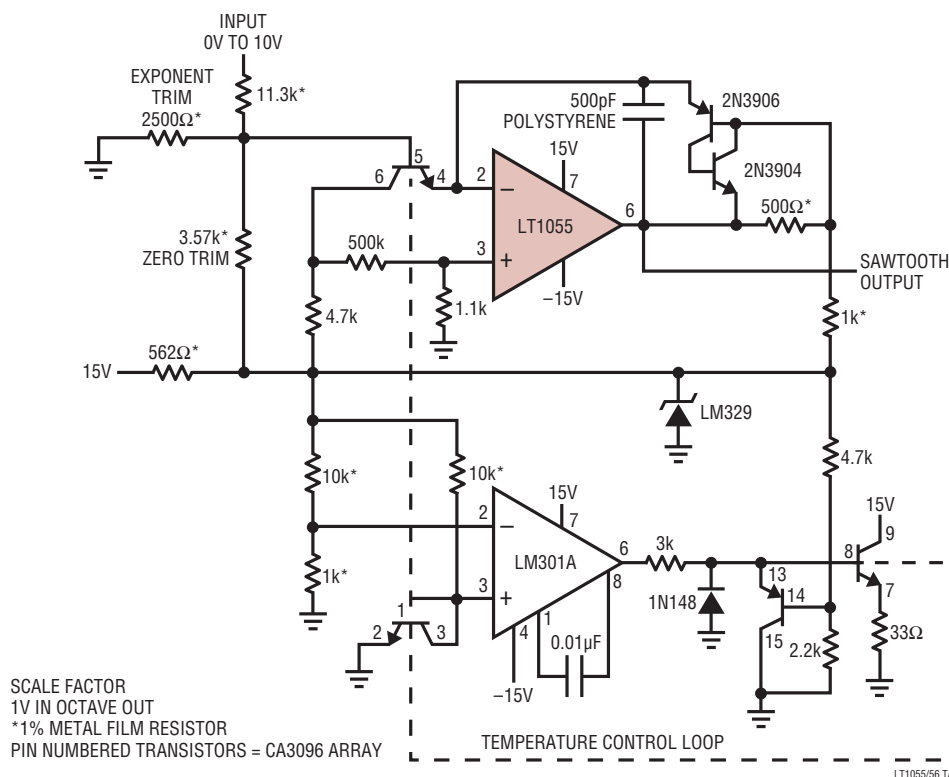

<sup>†</sup>For ten additional applications utilizing the LT1055 and LT1056, please see the LTC1043 data sheet and Application Note 3.

### 12-Bit Charge Balance A/D Converter

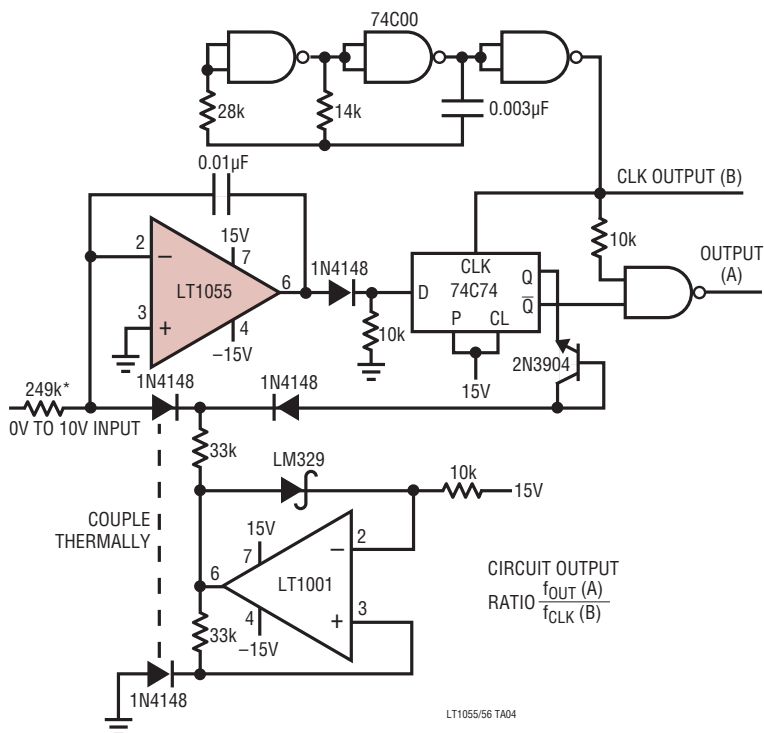


The diagram shows a two-stage circuit. The first stage is an inverter using an LT1056 comparator. Its non-inverting input (pin 3) is connected to ground. Its inverting input (pin 2) is connected to an input signal through a 4.7k resistor, to a 15V supply through a 50k resistor, and to ground through a 100k resistor. A 2.5V LT1009 diode is connected from the input signal to ground. The output of the LT1056 (pin 6) is connected to a 15V supply through an HP5082-2810 diode and to the non-inverting input (pin 8) of a second LT1011 comparator through another HP5082-2810 diode. The LT1011 comparator has its inverting input (pin 3) connected to ground, its non-inverting input (pin 8) connected to the output of the first stage, and its output (pin 7) connected to a 15V supply through a 3k resistor. The final output is taken from the output of the LT1011. Text annotations specify 'DELAY = 250ns' and '\* = 1% FILM RESISTOR'. The part number 'LT1055/56 TA06' is at the bottom right.


[illegible]

## TYPICAL APPLICATIONS


### 100kHz Voltage Controlled Oscillator

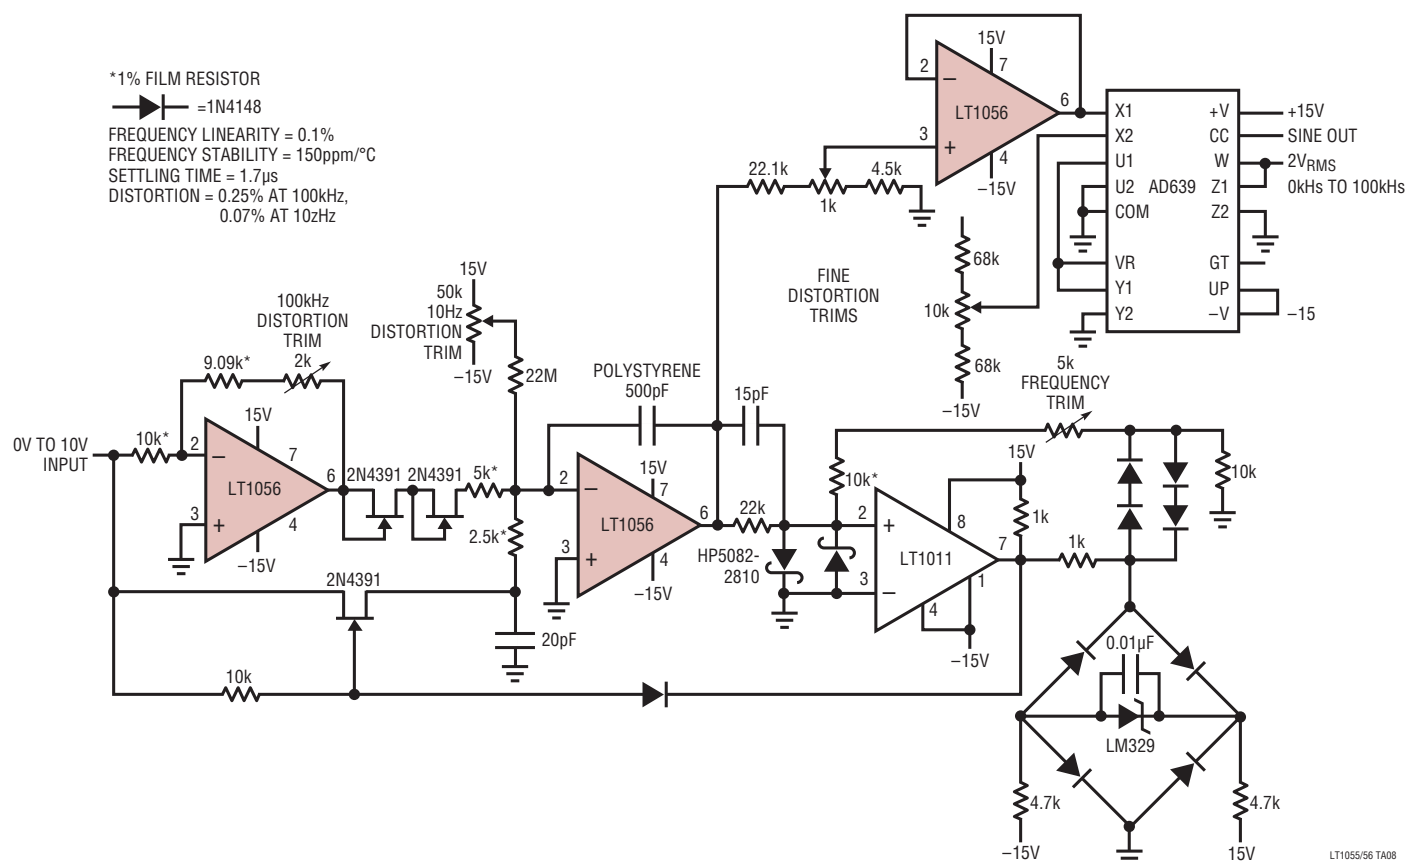

### 12-Bit Voltage Output D/A Converter

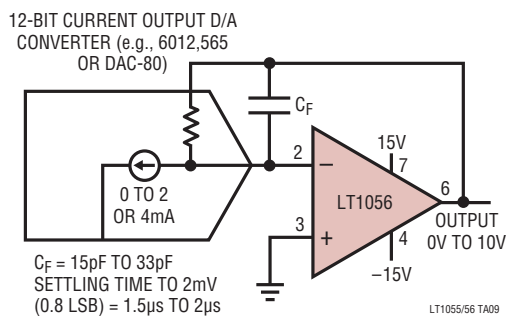

# SIMPLIFIED SCHEMATIC

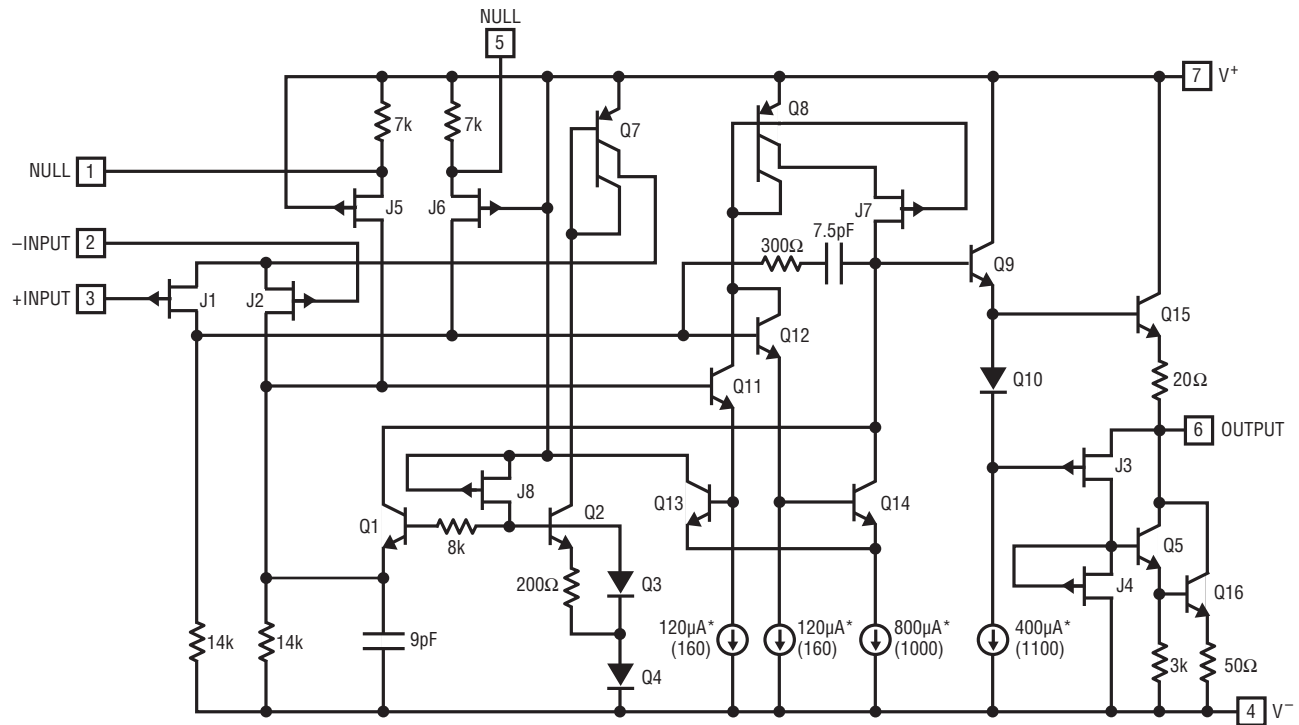


\*CURRENTS AS SHOWN FOR LT1055. (X) = CURRENTS FOR LT1056.

LT1055/56 SCHM

## PACKAGE DESCRIPTION

Please refer to <http://www.linear.com/designtools/packaging/> for the most recent package drawings.

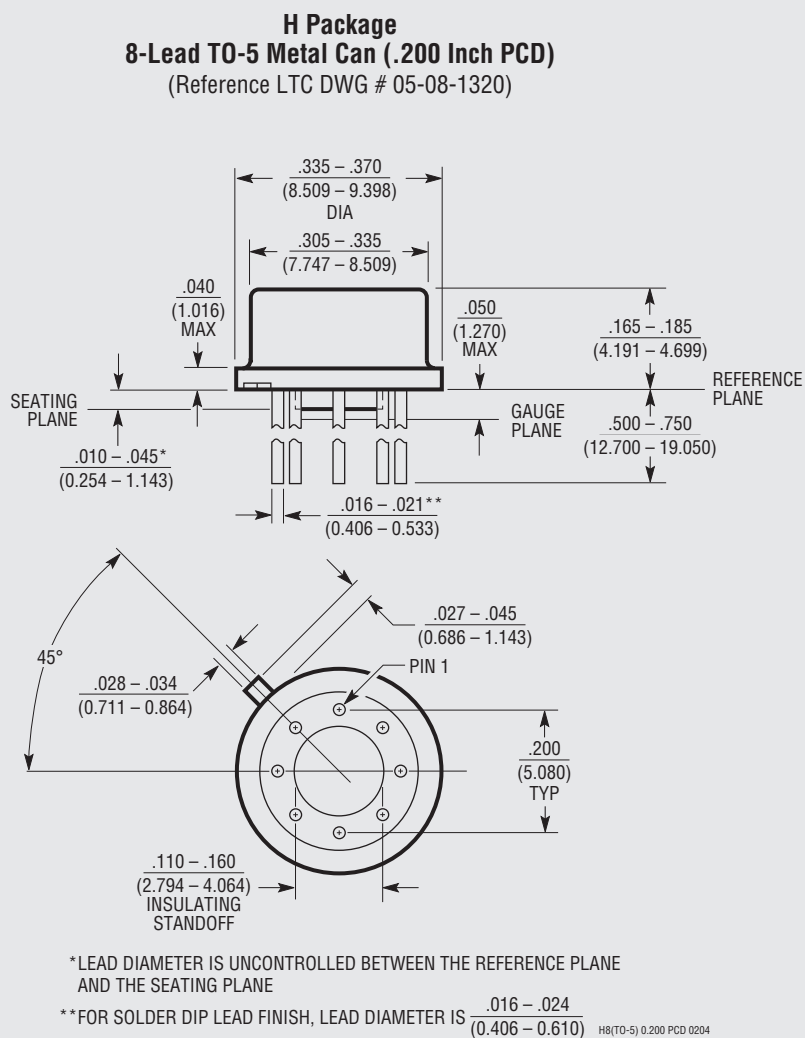


**OBSOLETE PACKAGE**

## PACKAGE DESCRIPTION

Please refer to <http://www.linear.com/designtools/packaging/> for the most recent package drawings.


### N Package 8-Lead PDIP (Narrow .300 Inch) (Reference LTC DWG # 05-08-1510 Rev I)

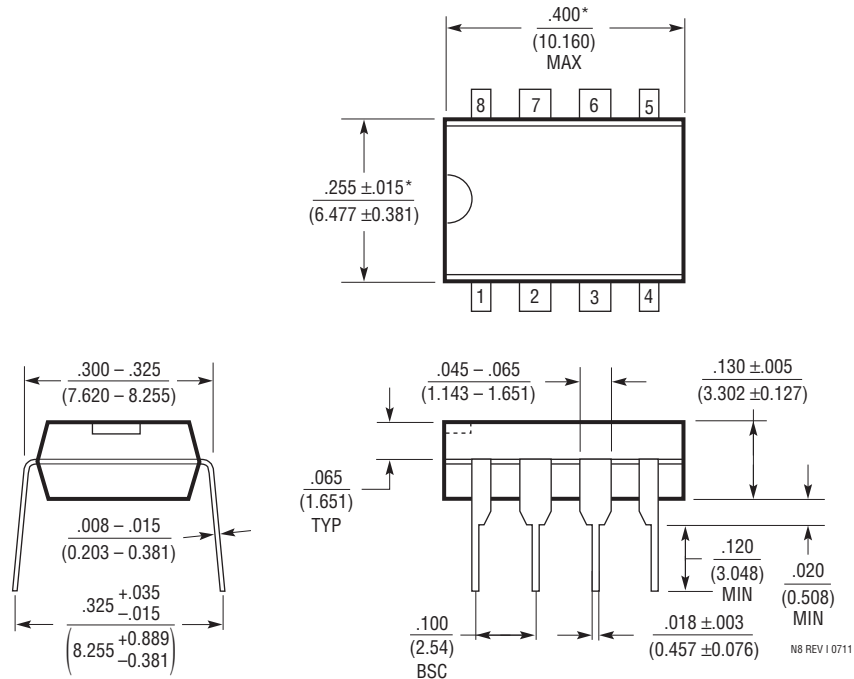

## PACKAGE DESCRIPTION

Please refer to <http://www.linear.com/designtools/packaging/> for the most recent package drawings.


### S8 Package 8-Lead Plastic Small Outline (Narrow .150 Inch) (Reference LTC DWG # 05-08-1610 Rev G)

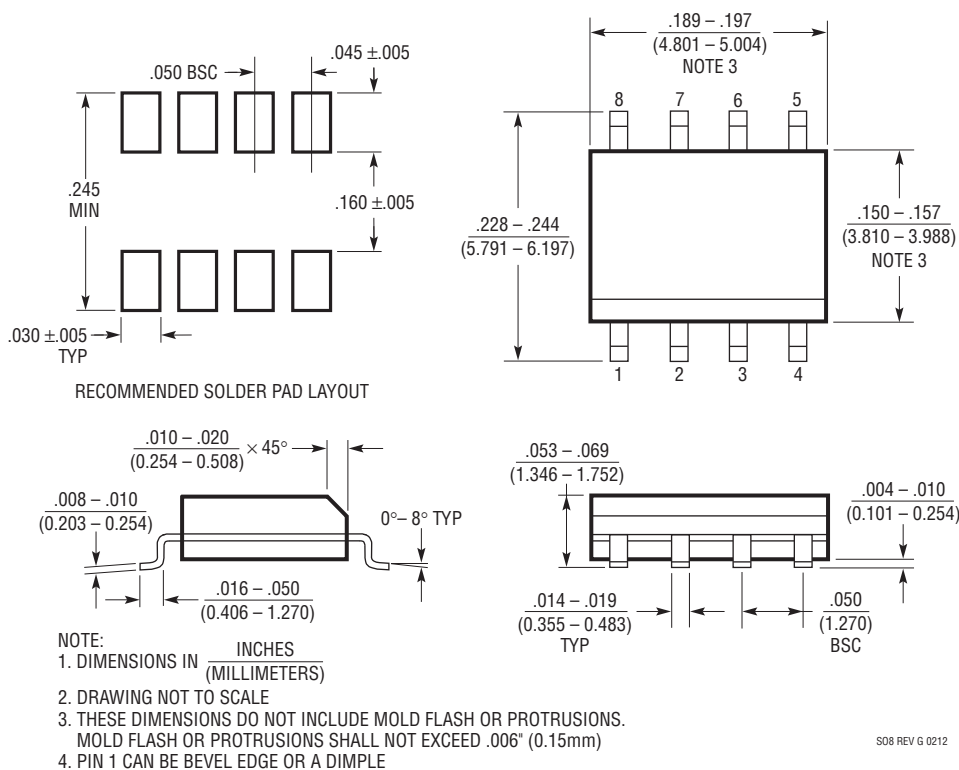

**REVISION HISTORY** (Revision history begins at Rev D)

| REV | DATE  | DESCRIPTION                    | PAGE NUMBER |
|-----|-------|--------------------------------|-------------|
| D   | 08/15 | Corrected application circuit. | 20          |

TYPICAL APPLICATION

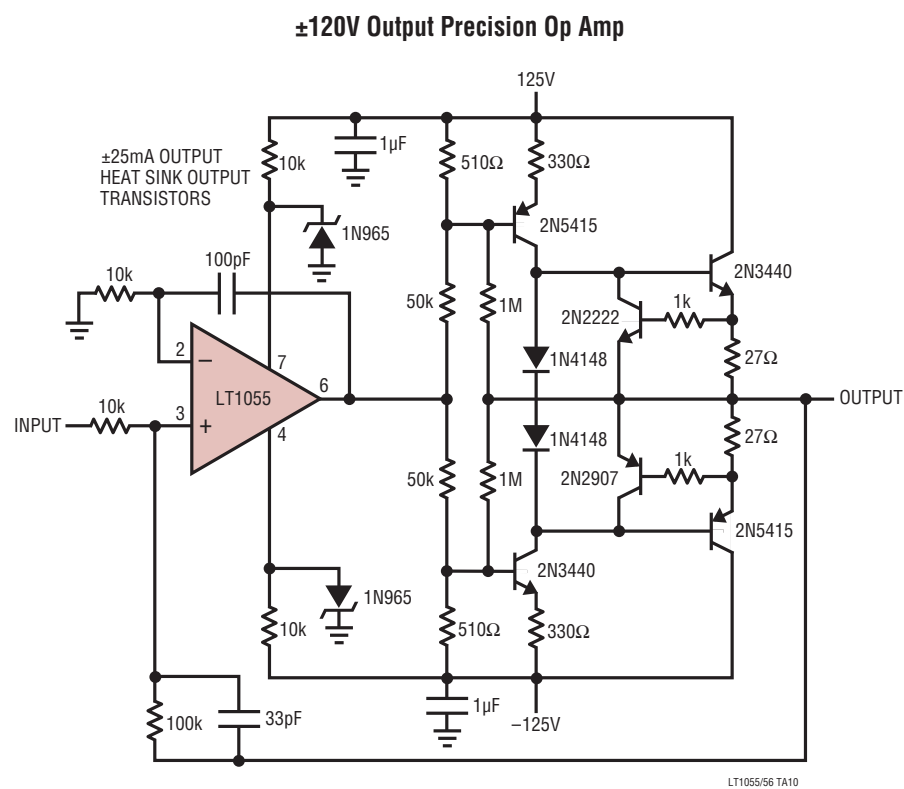

RELATED PARTS

| PART NUMBER            | DESCRIPTION               | COMMENTS                                      |
|------------------------|---------------------------|-----------------------------------------------|
| <a href="#">LT1122</a> | Fast Settling JFET Op Amp | 340ns Settling Time, GBW = 14MHz, SR = 60V/μs |
| <a href="#">LT1792</a> | Low Noise JFET Op Amp     | $e_n = 6nV/\sqrt{Hz}$ Max at $f = 1kHz$       |

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А