



EMC filters

1-line filters

Feedthrough filters

Rated current 16 to 500 A





Series/Type: **B85321**

Date: January 2006

1-line filters

Feedthrough components

Overview of available types

| Type | Dia- meter mm | New | Rated current (A) | Rated voltage (VAC) | Rated capacitance (μF) | Terminal type | Insertion loss in the frequency range (Hz) | | | Page |
|--------------------------------|-------------------------|-----|----------------------|------------------------|---|---|---|--------|--------|------|
| | | | | | | | 10^5 | 10^6 | 10^7 | |
| Feedthrough filters | | | | | | | | | | |
| B85321A*+160 | 16 | ● | 16 | 250 | 2×0.0025 |  | | | | 6 |
| B85321A*+160 | 20 | ● | 25 | 250, 500 | 2×0.0025 |  | | | | 8 |
| B85321A*A250 B85321A*A750 | 30 | ● | 25, 75 | 250 | $2 \times 0.1 \dots$ 2×1.0 |  | | | | 10 |
| B85321A*A630, A101 ... A501 | 55 | ● | 63 ... 500 | 250 | $2 \times 0.5 \dots$ 2×4.7 |  | | | | 11 |

Legend

Terminal type:  Tab connectors
 Axial leads
 Soldering tags
 Threaded studs

General

Feedthrough components from EPCOS are used for EMI suppression of all electrical installations and equipment. This new type series is also outstandingly well suited for telephone exchanges and base stations. Thanks to broadband EMI suppression up to the GHz range, it prevents external interference pulses being transmitted to the inside of the equipment via the supply network and vice-versa.

The essential features of this new type series are its modular design and the solder-free contacting technology developed by EPCOS with the aid of mesh contact.

Mesh contact technology permits uniform concentric contacting of the MKP capacitor winding and avoids the thermal stress associated with soldering. The result is an even higher insertion loss, a high insulation resistance and a particularly compact case.

The modular system used in this new technology for feedthrough capacitors and filters allows the cost-effective implementation of a wide range of standard types. Other capacitance values can also be supplied for special applications upon request.



Feedthrough components fitted into a shielding wall.

In feedthrough capacitors, the conductor carrying the operating current is connected concentrically to one electrode and is run centrally through the capacitor. The other electrode is contacted concentrically to the capacitor case.

Feedthrough capacitors are dimensioned so that they perform well from low frequencies to far above 300 MHz. The capacitor element with low inductance contacted securely on the face side is incorporated in a metal case provided with a screw thread.

The feedthrough filters are constructed in a π -circuit. They consist of two identical capacitive transverse elements and an inductive longitudinal element. The concentric layout of the components allows high insertion loss values to be attained in a frequency range to above 1 GHz.

Safety note

Feedthrough components with high capacitances require the implementation of safety measures in line with the applicable specifications! (See also Chapter "Mounting instructions".)

1-line filters

Feedthrough components

Mounting instructions

To fully utilize their RF properties, the feedthrough components must be mounted directly into shielding walls. The case must be contacted seamlessly (sealed against RF signals) to the shielding wall. This can be best done by screwing it into a threaded hole or bushing so that contact is made via the threads.

Alternatively, the feedthrough components may be screwed into feed-through holes on the shielding wall by means of attachment nuts. The contact between case and the shielding wall is then set up via the contact surface of the thread.

Caution

Contacts with rigid copper busbars are not permitted in view of mechanical stresses of the bushings due to impacts and vibrations.

For types with screw connections, the connecting cable must be secured between two nuts to exclude a torque on the feedthrough pins. The use of two flat wrenches is recommended.


Recommended tightening torques for feedthrough components (capacitors, filters)

| Thread dimensions | Tightening torque (Nm) | Tolerance (Nm) | Terminal | Thread base attachment |
|-------------------|------------------------|----------------|----------|------------------------|
| M2 | 0.2 | +0.05 | × | |
| M3 | 0.6 | +0.1 | × | |
| M4 | 1.2 | +0.1 | × | |
| M5 | 2 | +0.5 | × | |
| M6 | 3 | +0.5 | × | |
| M8 | 5 | +0.5 | × | |
| M10 | 8 | +2 | × | |
| M12 | 12 | +2 | × | |
| M16 | 28 | +2 | × | |
| M18 | 35 | +2 | × | |
| | | | | |
| M10 × 0.75 | 3 | +0.5 | | × |
| M12 × 0.75 | 4 | +0.5 | | × |
| M20 × 1 | 10 | +1 | | × |
| M24 × 1.5 | 12 | +1.5 | | × |
| M27 × 1.5 | 16 | +2 | | × |
| M32 × 1.5 | 24 | +2.5 | | × |

Feedthrough filters
Rated voltage 250 V AC
Rated current 16 to 500 A
Rated capacitance 2×0.0025 to $2 \times 4.7 \mu\text{F}$
Construction

- Building-block system
- MKP technology (dry, self-healing)
Dielectric: polypropylene, metallized
- Metal case, polyurethane potting (UL 94 V-0)
- For central screw fixing

Features

- Compact dimensions
- Versions with rated voltage 440 V AC available on request
- High insertion loss
- Easy to install
- High contact reliability thanks to central screw fixing
- Comply with EN 133200
- UL approval 

Applications

Broadband interference suppression
for AC/DC supply lines, e.g. in

- shielded rooms
- telephone exchanges, base stations
- electrical machines and systems
- power supplies

Terminals

- Threaded studs
- Axial leads
- Soldering tag
- Tab connector

Marking

Manufacturer, ordering code, rated capacitance,
rated voltage, rated current, climatic category,
circuit diagram, date of manufacture (MM.YY), approvals

Circuit diagram


SSB1274-B




| | |
|---------------------|---------------|
| 1-line filters | B85321A*+160 |
| Feedthrough filters | Ø 16 mm, 16 A |

Feedthrough filters Ø 16 mm

Technical data and measuring conditions

| | |
|---------------------------------|---|
| Rated voltage V_R | 250 V AC, 50/60 Hz 600 V DC |
| Rated current I_R | Referred to 40 °C ambient temperature Reduced current values at 400 Hz |
| Capacitance tolerance | ±20% |
| Climatic category (IEC 60068-1) | 40/085/56 (-40 °C/+85 °C/56 days damp heat test) |
| Screw cap fixing | M10 × 0.75 |
| Approvals | UL 1283, 250 V |

Characteristics and ordering codes

| I_R A | C_R µF | V_R V AC | V_R V DC | V_{test} V DC | Terminal | Fig. | Ordering code | Approvals  |
|------------|-------------|---------------|---------------|--------------------|-------------------------|------|-----------------|--|
| 16 | 2 × 0.0025 | 250 | 600 | 2700 | M2 | 1 | B85321A2502X160 | × |
| | 2 × 0.0025 | 250 | 600 | 2700 | Soldering tag | 2 | B85321A2502Y160 | × |
| | 2 × 0.0025 | 250 | 600 | 2700 | Leads Ø 2 mm | 3 | B85321A2502Z160 | × |
| | 2 × 0.0025 | 250 | 600 | 2700 | Tab connector 6.3 mm | 4 | B85321A2502W160 | × |


× = approval granted

Insertion loss (dB); typical values at 50 Ω

| C_R (µF) | 10 kHz | 100 kHz | 1 MHz | 10 MHz | 100 MHz | 1 GHz |
|------------|--------|---------|-------|--------|---------|-------|
| 2 × 0.0025 | – | – | – | 25 | > 80 | > 80 |

Dimensional drawings


Figure 1, B85321A2502X160

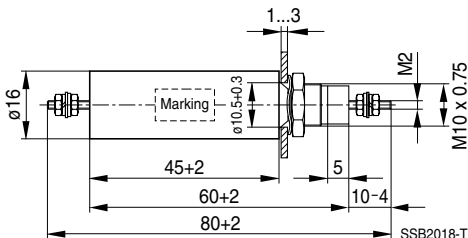

| Thread | Tightening torque |
|------------|-------------------|
| M2 | 0.2 +0.05 Nm |
| M10 × 0.75 | 3 +0.5 Nm |


| | |
|---------------------|---------------|
| 1-line filters | B85321A*+160 |
| Feedthrough filters | ∅ 16 mm, 16 A |

Figure 2, B85321A2502Y160

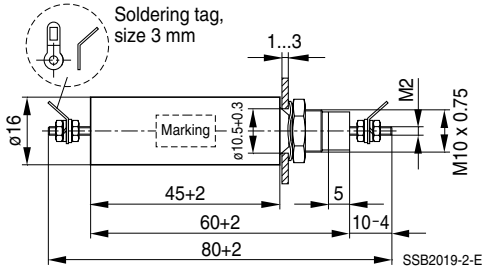


| Thread | Tightening torque |
|------------|-------------------|
| M2 | 0.2 +0.05 Nm |
| M10 × 0.75 | 3 +0.5 Nm |

Figure 3, B85321A2502Z160

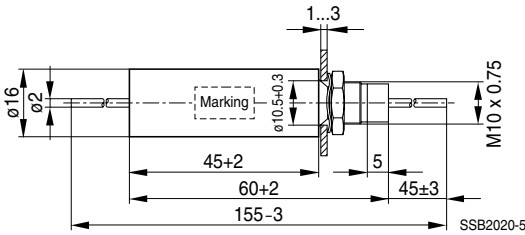

Tightening torque: 3 +0.5 Nm

Figure 4, B85321A2502W160

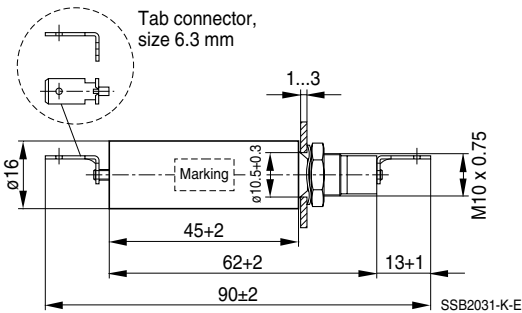

Tightening torque: 3 +0.5 Nm


| | |
|----------------------------|----------------------|
| 1-line filters | B85321A*+160 |
| Feedthrough filters | ∅ 20 mm, 25 A |

Feedthrough filters ∅ 20 mm

Technical data and measuring conditions

| | |
|---------------------------------|---|
| Rated voltage V_R | 250 and 500 V AC, 50/60 Hz 600 and 700 V DC |
| Rated current I_R | Referred to 40 °C ambient temperature Reduced current values at 400 Hz |
| Capacitance tolerance | ±20% |
| Climatic category (IEC 60068-1) | 40/085/56 (-40 °C/+85 °C/56 days damp heat test) |
| Screw cap fixing | M12 × 0.75 |
| Approvals | UL 1283, 250 V |

Characteristics and ordering codes

| I_R A | C_R μF | V_R V AC | V_R V DC | V_{test} V DC | Terminal | Figure | Ordering code | Approvals  |
|------------|-------------|---------------|---------------|--------------------|-----------------|--------|-----------------|--|
| 25 | 2 × 0.0025 | 250 | 600 | 2700 | M4 | 1 | B85321A2502A160 | × |
| | 2 × 0.0025 | 250 | 600 | 2700 | Leads ∅ 2 mm | 2 | B85321A2502B160 | × |
| | 2 × 0.0025 | 500 | 700 | 3000 | | | B85321A4502C160 | × |


× = approval granted

Insertion loss (dB); typical values at 50 Ω

| C_R (μF) | 10 kHz | 100 kHz | 1 MHz | 10 MHz | 100 MHz | 1 GHz |
|------------|--------|---------|-------|--------|---------|-------|
| 2 × 0.0025 | – | – | – | 25 | > 80 | > 80 |


Dimensional drawings

Figure 1, B85321A2502A160

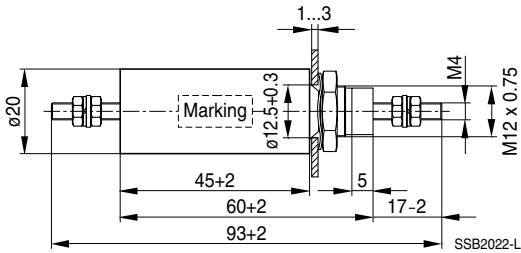

| Thread | Tightening torque |
|------------|-------------------|
| M4 | 1.2 +0.1 Nm |
| M12 x 0.75 | 4.0 +0.5 Nm |

Figure 2, B85321A2502B160, B85321A4502C160

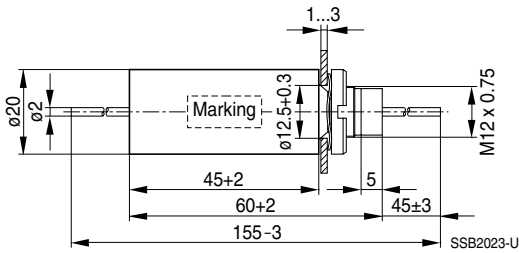

Tightening torque: 4 +0.5 Nm


| | |
|---------------------|---------------------|
| 1-line filters | B85321A*A250, A750 |
| Feedthrough filters | ∅ 30 mm, 25 A, 75 A |

Feedthrough filters ∅ 30 mm

Technical data and measuring conditions

| | |
|---------------------------------|---|
| Rated voltage V_R | 250 V AC, 50/60 Hz 500 and 600 V DC |
| Rated current I_R | Referred to 40 °C ambient temperature Reduced current values at 400 Hz |
| Capacitance tolerance | ±20% |
| Climatic category (IEC 60068-1) | 40/085/56 (-40 °C/+85 °C/56 days damp heat test) |
| Screw cap fixing | M20 × 1 |
| Approvals | UL 1283, 250 V |

Characteristics and ordering codes


| I_R A | C_R μF | V_R V AC | V_R V DC | V_{test} V DC | Terminal | Ordering code | Approvals  |
|------------|-------------|---------------|---------------|--------------------|----------|-----------------|--|
| 25 | 2 × 0.1 | 250 | 600 | 3000 | M6 | B85321A2204A250 | × |
| | 2 × 0.5 | 250 | 600 | 2000 | M6 | B85321A2105A250 | × |
| | 2 × 1.0 | 250 | 500 | 1700 | M6 | B85321A2205A250 | × |
| 75 | 2 × 0.1 | 250 | 600 | 3000 | M6 | B85321A2204A750 | × |
| | 2 × 0.5 | 250 | 600 | 2000 | M6 | B85321A2105A750 | — |
| | 2 × 1.0 | 250 | 500 | 1700 | M6 | B85321A2205A750 | × |

× = approval granted

Insertion loss (dB); typical values at 50 Ω

| C_R (μF) | 10 kHz | 100 kHz | 1 MHz | 10 MHz | 100 MHz | 1 GHz |
|------------|--------|---------|-------|--------|---------|-------|
| 2 × 0.1 | 2 | 10 | 25 | 70 | > 100 | > 100 |
| 2 × 0.5 | 5 | 25 | 45 | 80 | > 100 | > 100 |
| 2 × 1.0 | 10 | 30 | 60 | 90 | > 100 | > 100 |

Dimensional drawing

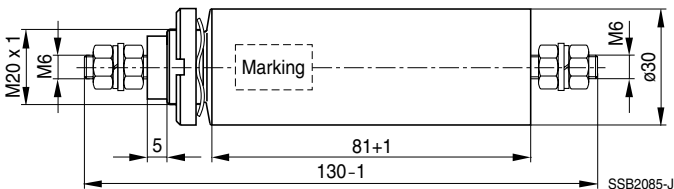

| Thread | Tightening torque |
|---------|-------------------|
| M6 | 3 +0.5 Nm |
| M20 × 1 | 10 +1 Nm |


| | |
|---------------------|-----------------------------|
| 1-line filters | B85321A*A630, A101 ... A501 |
| Feedthrough filters | ∅ 55 mm, 63 ... 500 A |

Feedthrough filters ∅ 55 mm

Technical data and measuring conditions


| | |
|---------------------------------|---|
| Rated voltage V_R | 250 V AC, 50/60 Hz 350 and 600 V DC |
| Rated current I_R | Referred to 40 °C ambient temperature Reduced current values at 400 Hz |
| Capacitance tolerance | ±20% |
| Climatic category (IEC 60068-1) | 40/085/56 (−40 °C/+85 °C/56 days damp heat test) |
| Screw cap fixing | Standard M32 × 1.5 Special fixing M27 × 1.5 for filters up to 300 A on request |
| Approvals | UL 1283, 250 V |

Characteristics and ordering codes

| I_R A | C_R μF | V_R V AC | V_R V DC | V_{test} V DC | Terminal | Dimensions (mm) | | | Ordering code | Approvals  |
|------------|-------------|---------------|---------------|--------------------|----------|-----------------|-------------------|-------------------|-----------------|--|
| | | | | | | l +1 | l ₁ −1 | l ₂ −3 | | |
| 63 | 2 × 0.5 | 250 | 600 | 3000 | M6 | 100 | 166 | 45 | B85321A2105A630 | × |
| | 2 × 1.0 | 250 | 600 | 2500 | M6 | 100 | 166 | 45 | B85321A2205A630 | × |
| | 2 × 2.0 | 250 | 600 | 2500 | M6 | 100 | 166 | 45 | B85321A2405A630 | × |
| | 2 × 4.7 | 250 | 350 | 1700 | M6 | 100 | 166 | 45 | B85321A2945A630 | × |
| 100 | 2 × 0.5 | 250 | 600 | 3000 | M8 | 100 | 180 | 52 | B85321A2105A101 | × |
| | 2 × 1.0 | 250 | 600 | 2500 | M8 | 100 | 180 | 52 | B85321A2205A101 | × |
| | 2 × 2.0 | 250 | 600 | 2500 | M8 | 100 | 180 | 52 | B85321A2405A101 | × |
| | 2 × 4.7 | 250 | 350 | 1700 | M8 | 100 | 180 | 52 | B85321A2945A101 | × |
| 200 | 2 × 0.5 | 250 | 600 | 3000 | M10 | 100 | 185 | 55 | B85321A2105A201 | × |
| | 2 × 1.0 | 250 | 600 | 2500 | M10 | 100 | 185 | 55 | B85321A2205A201 | × |
| | 2 × 2.0 | 250 | 600 | 2500 | M10 | 100 | 185 | 55 | B85321A2405A201 | × |
| | 2 × 4.7 | 250 | 350 | 1700 | M10 | 100 | 185 | 55 | B85321A2945A201 | × |
| 300 | 2 × 0.5 | 250 | 600 | 3000 | M12 | 100 | 195 | 60 | B85321A2105A301 | × |
| | 2 × 1.0 | 250 | 600 | 2500 | M12 | 100 | 195 | 60 | B85321A2205A301 | × |
| | 2 × 2.0 | 250 | 600 | 2500 | M12 | 100 | 195 | 60 | B85321A2405A301 | − |
| | 2 × 4.7 | 250 | 350 | 1700 | M12 | 100 | 195 | 60 | B85321A2945A301 | × |
| 400 | 2 × 0.5 | 250 | 600 | 3000 | M16 | 130 | 245 | 72 | B85321A2105A401 | − |
| | 2 × 1.0 | 250 | 600 | 2500 | M16 | 130 | 245 | 72 | B85321A2205A401 | − |
| | 2 × 2.0 | 250 | 600 | 2500 | M16 | 130 | 245 | 72 | B85321A2405A401 | − |
| | 2 × 4.7 | 250 | 350 | 1650 | M16 | 130 | 245 | 72 | B85321A2945A401 | − |

× = approval granted


Characteristics and ordering codes

| I_R A | C_R μF | V_R V AC | V_R V DC | V_{test} V DC | Terminal | Dimensions (mm) | | | Ordering code | Approvals  |
|------------|------------------------|---------------|---------------|---------------------------|----------|-----------------|----------|----------|-----------------|--|
| | | | | | | l_{+1} | l_{-1} | l_{-3} | | |
| 500 | 2×0.5 | 250 | 600 | 3000 | M18 | 130 | 250 | 75 | B85321A2105A501 | – |
| | 2×1.0 | 250 | 600 | 2500 | M18 | 130 | 250 | 75 | B85321A2205A501 | – |
| | 2×2.0 | 250 | 600 | 2500 | M18 | 130 | 250 | 75 | B85321A2405A501 | – |
| | 2×4.7 | 250 | 350 | 1650 | M18 | 130 | 250 | 75 | B85321A2945A501 | – |

× = approval granted

Insertion loss (dB); typical values at 50 Ω

| C_R (μF) | 10 kHz | 100 kHz | 1 MHz | 10 MHz | 100 MHz | 1 GHz |
|-------------------------|--------|---------|-------|--------|---------|-------|
| 2×0.5 | 5 | 25 | 45 | 80 | > 100 | > 100 |
| 2×1.0 | 10 | 30 | 60 | > 100 | > 100 | > 100 |
| 2×2.0 | 15 | 35 | 70 | > 100 | > 100 | > 100 |
| 2×4.7 | 25 | 40 | 90 | > 100 | > 100 | > 100 |

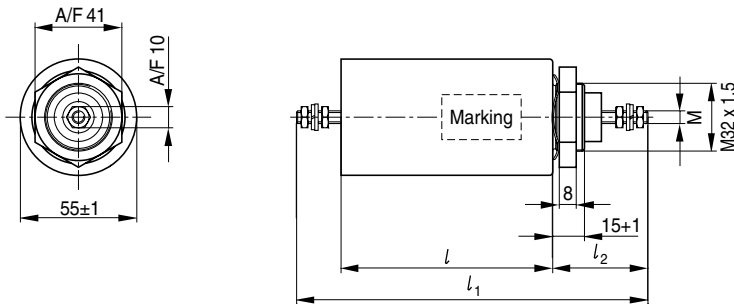
Dimensional drawing


SSB1273-3-E

| Thread | Tightening torque |
|--------|-------------------|
| M6 | 3 +0.5 Nm |
| M8 | 5 +0.5 Nm |
| M10 | 8 +2 Nm |
| M12 | 12 +2 Nm |
| M16 | 28 +2 Nm |
| M18 | 35 +2 Nm |

| Thread | Tightening torque |
|-----------|-------------------|
| M27 × 1.5 | 16 +2 Nm |
| M32 × 1.5 | 24 +2.5 Nm |

Important information

Please read all safety and warning notes carefully before installing the EMC filter and putting it into operation (see ). The same applies to the warning signs on the filter. Please ensure that the signs are not removed nor their legibility impaired by external influences.

Death, serious bodily injury and substantial material damage to equipment may occur if the appropriate safety measures are not carried out or the warnings in the text are not observed.

Using according to the terms

The EMC filters may be used only for their intended application within the specified values in low-voltage networks in compliance with the instructions given in the data sheets and the data book. The conditions at the place of application must comply with all specifications for the filter used.

Warnings

- It shall be ensured that only qualified persons (electricity specialists) are engaged on work such as planning, assembly, installation, operation, repair and maintenance. They must be provided with the corresponding documentation.
- Danger of electric shock. EMC filters contain components that store an electric charge. Dangerous voltages can continue to exist at the filter terminals for longer than five minutes even after the power has been switched off.
- The protective earth connections shall be the first to be made when the EMC filter is installed and the last to be disconnected. Depending on the magnitude of the leakage currents, the particular specifications for making the protective-earth connection must be observed.
- Impermissible overloading of the EMC filter, such as impermissible voltages at higher frequencies that may cause resonances etc. can lead to destruction of the filter housing.
- EMC filters must be protected in the application against impermissible exceeding of the rated currents by suitable overcurrent protective.

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of passive electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of a passive electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of a passive electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as “hazardous”)**. Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order.
We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the “General Terms of Delivery for Products and Services in the Electrical Industry” published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, EPCOS-Jones, Baoke, CeraDiode, CSSP, MLSC, PhaseCap, PhaseMod, SIFI, SIKOREL, SilverCap, SIMID, SIOV, SIP5D, SIP5K, UltraCap, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А