


ON Semiconductor®



KAC-06040 IMAGE SENSOR
2832 (H) X 2128 (V) CMOS IMAGE SENSOR

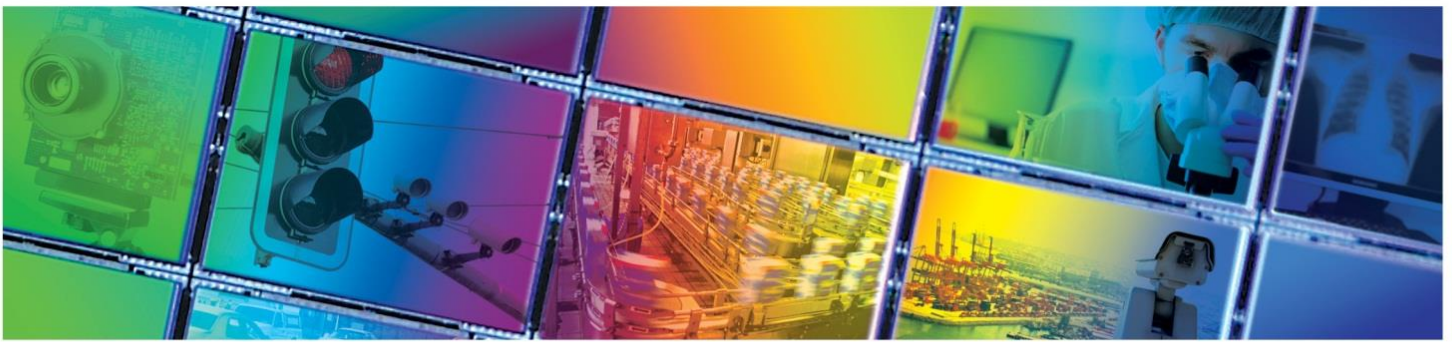

JUNE 13, 2014
DEVICE PERFORMANCE SPECIFICATION
REVISION 1.1 PS-1593



TABLE OF CONTENTS

| | |
|--|-----------|
| Summary Specification | 5 |
| Description | 5 |
| Features | 5 |
| Applications | 5 |
| Ordering Information | 6 |
| KAC-06040 Image Sensor | 6 |
| Evaluation Support..... | 6 |
| Device Description | 7 |
| Architecture | 7 |
| Physical Orientation..... | 8 |
| Primary Pin Description | 9 |
| Power Pin Description..... | 9 |
| LVDS Pin Description | 10 |
| Imaging Performance | 11 |
| Typical Operation Conditions..... | 11 |
| Performance Specifications All Configurations..... | 11 |
| KAC-06040-ABA Configuration (Monochrome) | 12 |
| KAC-06040-CBA Configuration (Bayer RGB) | 12 |
| Typical Performance Curves | 13 |
| Quantum Efficiency..... | 13 |
| Monochrome with Microlens..... | 13 |
| Color (Bayer RGB) with Microlens | 14 |
| Angular Quantum Efficiency..... | 15 |
| Dark Current versus Temperature | 17 |
| Power vs Frame Rate | 18 |
| Power and Frame Rate vs ADC Bit depth | 19 |
| Defect Definitions | 21 |
| Operation Conditions for Defect Testing | 21 |
| Defect Definitions for Testing | 21 |
| Test Definitions | 22 |
| Test Regions of Interest | 22 |
| Tests..... | 22 |
| Operation | 28 |
| Register Addresses | 28 |
| Sensor States | 28 |
| Encoded Syncs | 29 |
| Line Time | 30 |
| Frame Time | 31 |
| Global Shutter Readout | 32 |
| Rolling Shutter Readout | 33 |
| 8 Bank LVDS Data Readout | 34 |
| LVDS Banks | 34 |
| Ports per LVDS Bank..... | 34 |
| 8 Bank Pixel Order | 35 |
| De-Serializer Settings | 36 |
| Register Definition | 37 |
| Absolute Maximum Ratings | 38 |
| Supplies..... | 38 |
| CMOS Inputs | 38 |
| Operating Ratings | 39 |
| Input Clock Conditions | 39 |
| Operating Temperature..... | 39 |



CMOS IN/OUT39

Supplies40

SPI (Serial Peripheral Interface)41

 Clock Polarity and Phase.....41

 SPI Protocol.....42

 SPI interface.....44

 SPI timing specification.....44

LVDS Interface45

 Standard LVDS characteristics45

 Sub-LVDS characteristics45

 In-block LVDS timing specification.....46

 Inter-block LVDS timing specification46

Storage and Handling47

 Storage Conditions.....47

 ESD47

 Cover Glass Care and Cleanliness47

 Environmental Exposure47

 Soldering Recommendations47

Mechanical Information48

 Completed Assembly.....48

 MAR (Multi-layer Anti-Reflective coating) Cover Glass.....52

Quality Assurance and Reliability.....53

 Quality and Reliability53

 Replacement.....53

 Liability of the Supplier53

 Liability of the Customer53

 Test Data Retention.....53

 Mechanical.....53

Life Support Applications Policy53

Revision Changes.....54



TABLE OF FIGURES

Figure 1: Block Diagram 7

Figure 2: Package Pin Orientation – Top x-ray view 8

Figure 3: Monochrome QE (with Microlens) 13

Figure 4: Bayer QE (with Microlens) 14

Figure 5: Monochrome Relative Angular QE (with Microlens) 15

Figure 6: Monochrome Relative Angular QE (with Microlens) 16

Figure 7: Dark Current vs Temperature 17

Figure 8: Dual-Scan Power vs Frame Rate, 10 bit mode 18

Figure 9: Tri-Scan Power vs Frame Rate, 10 bit mode 18

Figure 10: Dual-Scan ADC Bit Depth impact on Frame Rate and Power 19

Figure 11: Tri-Scan vs Dual-Scan Power 20

Figure 12: Regions of Interest 22

Figure 13: Sensor State Diagram 28

Figure 14: Encoded Frame Syncs 29

Figure 15: Dual-Scan Line Time Relationship 30

Figure 16: Tri-Scan Line Time Relationship 30

Figure 17: Default frame time configuration (Frame A) 31

Figure 18: Frame time with extended integration time 31

Figure 19: Illustration of frame time for Global Shutter readout 32

Figure 20: Illustration of Frame time for Rolling Shutter readout 33

Figure 21: LVDS Bank labeling 34

Figure 22: Number of LVDS pairs (ports) used vs. bit depth 34

Figure 23: Pixel readout order diagram 35

Figure 24: Pixel readout order table 36

Figure 25: Data stream of one LVDS Bank for 10bits ADC resolution 36

Figure 26: CPOL = 1 and CPHA = 1 configuration 41

Figure 27: SPI Write byte order 42

Figure 28: SPI Read byte order 42

Figure 29: SPI Read with FBRB handshaking 43

Figure 30: SPI timing chronogram 44

Figure 31: LVDS timing chronogram 46

Figure 32: Completed Assembly (1 of 5) 48

Figure 33: Completed Assembly (2 of 5) 49

Figure 34: Completed Assembly (3 of 5) 50

Figure 35: Completed Assembly (4 of 5) 51

Figure 36: Completed Assembly (5 of 5) 51

Figure 37: MAR Cover Glass Specification 52



Summary Specification

KAC-06040 Image Sensor

DESCRIPTION

The KAC-06040 Image Sensor is a high-speed 6 megapixel CMOS image sensor in a 1" optical format based on a 4.7 μm 5T CMOS platform. The image sensor features very fast frame rate, excellent NIR sensitivity, and flexible readout modes with multiple regions of interest (ROI). The readout architecture enables use of 8, 4, or 2 LVDS output banks for full resolution readout of 160 frames per second.

Each LVDS output bank consists of up to 8 differential pairs operating at 200 MHz DDR for a 400 Mbps data rate per pair. The pixel architecture allows rolling shutter operation for motion capture with optimized dynamic range or global shutter for precise still image capture.

The image sensor has a pre-configured QHD (4 x 720p, 16:9) video mode, fully programmable, multiple ROI for windowing, programmable sub-sampling, and reverse readout (flip and mirror). The two ADCs can be configured for 8-bit, 10-bit, 12-bit or 14-bit conversion and output.


Additional features include interspersed video streams (dual-video), on-chip responsivity calibration, black clamping, overflow pixel for blooming reduction, black-sun correction (anti-eclipse), column and row noise correction, and integrated timing generation with SPI control, 4:1 and 9:1 averaging decimation modes.

FEATURES

- Global shutter and rolling shutter
- Very fast frame rate
- High NIR sensitivity
- Multiple regions of interest
- Interspersed video streams

APPLICATIONS

- Machine Vision
- Intelligent Transportation Systems
- Surveillance

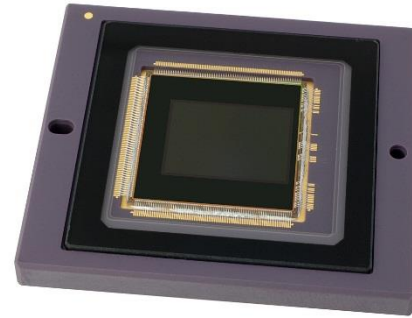

| Parameter | Typical Value |
|---------------------------------------|--|
| Architecture | 5T Global Shutter CMOS |
| Resolution | 6 megapixels |
| Aspect Ratio | 4:3 |
| Pixel Size | 4.7 μm (H) x 4.7 μm (V) |
| Total Number of Pixels | 3024 (H) x 2320 (V) |
| Number of Effective Pixels | 2848 (H) x 2144 (V) |
| Number of Active Pixels | 2832 (H) x 2128 (V) |
| Active Image Size | 13.1 mm (H) x 10.0 mm (V) 16.65 mm (diag.), 1" optical format |
| Master Clock Input Speed | 5 MHz to 50 MHz |
| Maximum Pixel Clock Speed | 200 MHz DDR LVDS, 400 Mbps |
| Number of LVDS Outputs | 64 differential pairs |
| Number of Output Banks | 8, 4, or 2 |
| Frame Rate, 6 MP | 1 - 160 fps 10 bits |
| Charge Capacity | 17,000 electrons |
| Quantum Efficiency | |
| KAC-06040-CBA | 40%, 47%, 45% (470, 540, 620 nm) |
| KAC-06040-ABA | 53%, 15%, 10% (500, 850, 900 nm) |
| Read Noise (at maximum LVDS clock) | 3.4 e^- rms, Rolling Shutter 25 e^- rms, Global Shutter |
| Dynamic Range | 74 dB, Rolling Shutter 57 dB, Global Shutter |
| Blooming Suppression | >10,000x |
| Image Lag | 1.6 electron |
| Digital Core Supply | 2.0 V |
| Analog Core Supply | 1.8 V |
| Pixel Supply | 2.8 V & 3.5 V |
| Power Consumption | 2.3 W for 6 Mp @ 160 fps 10 bits |
| Package | 267 pin ceramic micro-PGA |
| Cover Glass | AR Coated, 2-sides |

All parameters are specified at T = 40 °C unless otherwise noted



Ordering Information

KAC-06040 IMAGE SENSOR

| Catalog Number | Product Name | Description | Marking Code |
|----------------|---------------------|--|-----------------------------|
| 4H2284 | KAC-06040-ABA-JD-AA | Monochrome, micro-PGA Package, Sealed Clear Cover Glass with AR coating(both sides), Standard Grade | KAC-06040-ABA Serial Number |
| 4H2286 (1) | KAC-06040-ABA-JD-AE | Monochrome, micro-PGA Package, Sealed Clear Cover Glass with AR coating(both sides), Engineering Grade | KAC-06040-ABA Serial Number |
| 4H2287 | KAC-06040-CBA-JD-AA | Bayer (RGB) Color Filter Pattern, micro-PGA Package, Sealed Clear Cover Glass with AR coating(both sides), Standard Grade | KAC-06040-CBA Serial Number |
| 4H2289 (1) | KAC-06040-CBA-JD-AE | Bayer (RGB) Color Filter Pattern, micro-PGA Package, Sealed Clear Cover Glass with AR coating(both sides), Engineering Grade | KAC-06040-CBA Serial Number |

Notes:

1. Engineering Grade samples might not meet final production testing limits, especially for cosmetic defects such as clusters, but also possibly column and row artifacts. Overall performance is representative of final production parts.

EVALUATION SUPPORT

| Catalog Number | Product Name | Description |
|----------------|----------------------|---|
| 4H2306 | KEK-TBD-KAC-06040-CB | Evaluation Hardware for KAC-06040 Image Sensor (Bayer). Includes Image Sensor. |
| 4H2307 | KEK-TBD-KAC-06040-AB | Evaluation Hardware for KAC-06040 Image Sensor (monochrome). Includes Image Sensor. |
| 4H2211 | Lens Mount Kit | Lens Mount Kit that supports C, CS, and F mount lenses. Includes IR cut-filter for color imaging. |

See Application Note Product Naming Convention for a full description of the naming convention used for image sensors. For reference documentation, including information on evaluation kits, please visit our web site at www.truesenseimaging.com.

Please address all inquiries and purchase orders to:

Truesense Imaging, Inc.
1964 Lake Avenue
Rochester, New York 14615

Phone: (585) 784-5500
E-mail: info@truesenseimaging.com

ON Semiconductor reserves the right to change any information contained herein without notice. All information furnished by ON Semiconductor is believed to be accurate.



Device Description

ARCHITECTURE

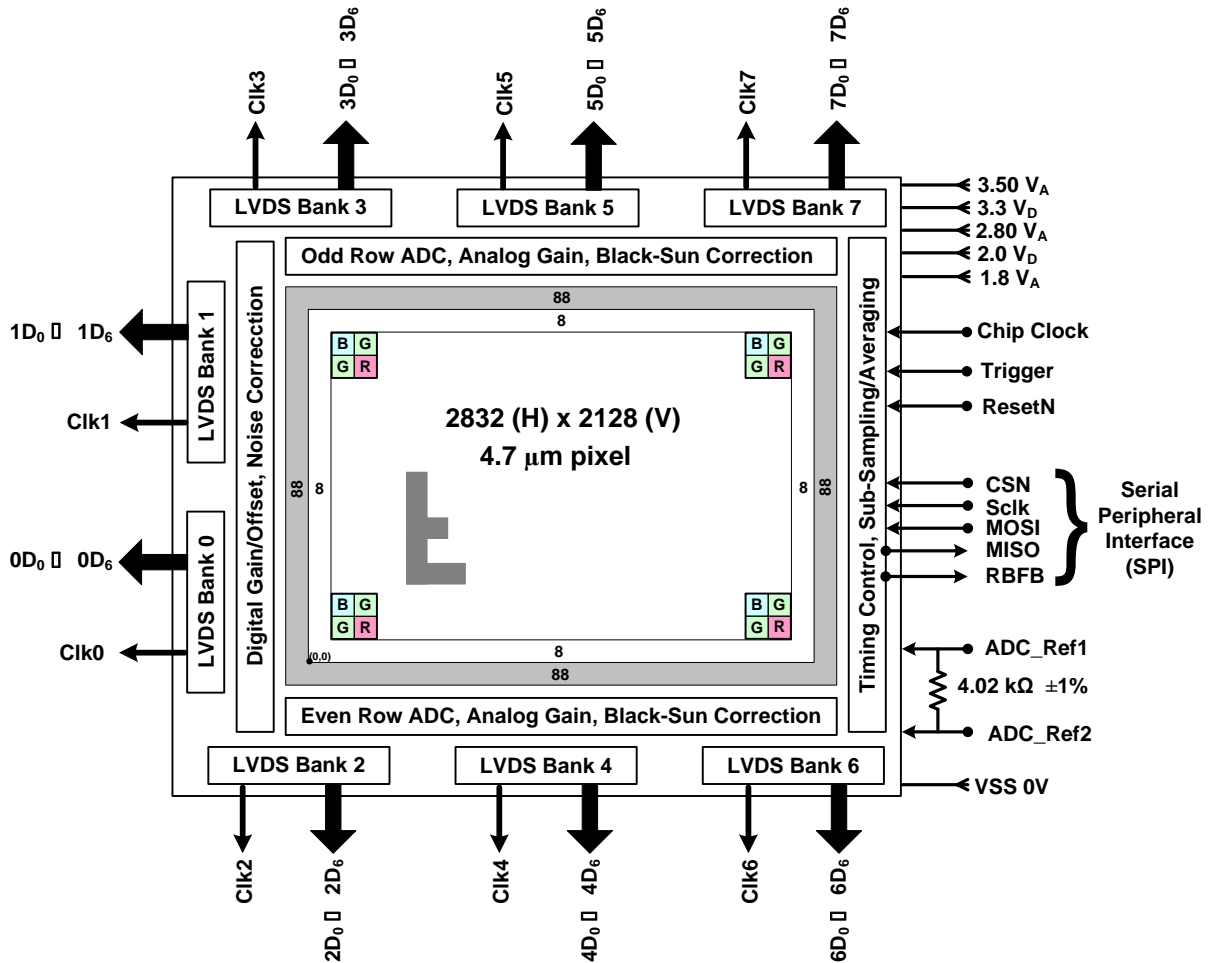


Figure 1: Block Diagram



PHYSICAL ORIENTATION

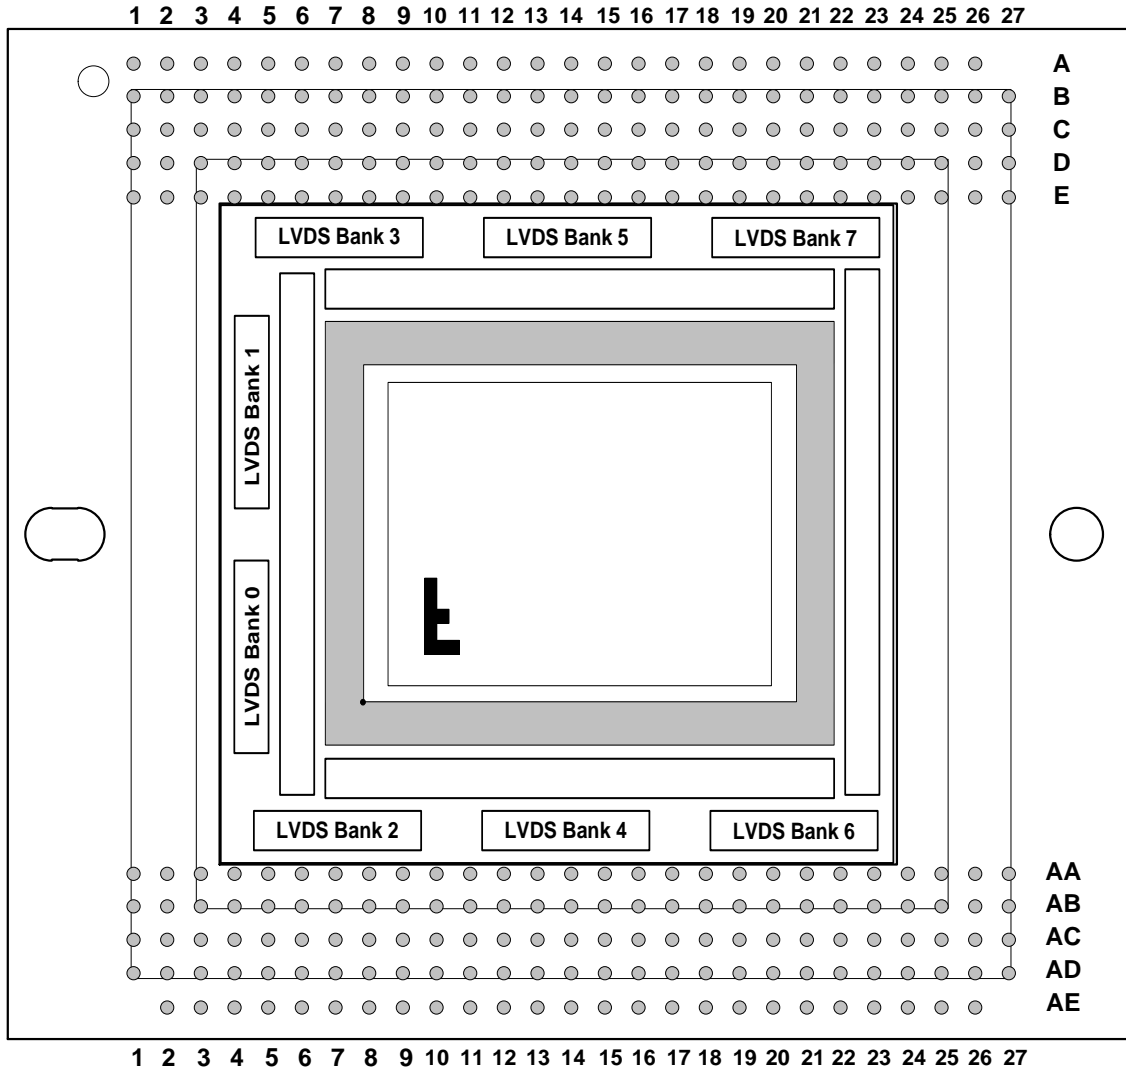


Figure 2: Package Pin Orientation – Top x-ray view

Notes:

1. The center of the pixel array is aligned to the physical package center.
2. The region under the sensor die is clear of pins enabling the use of a heat sink.
3. Non-symmetric mounting holes provide orientation and mounting precision.
4. Non-symmetric pins prevent incorrect placement in PCB.
5. Letter "F" indicator shows default readout direction relative to package pin 1



PRIMARY PIN DESCRIPTION

| Pin | Name | Type | Description |
|------|----------|------|---|
| AB09 | RESETN | DI | Sensor reset (0 V = Reset State) |
| E07 | CLK_In1 | DI | Sensor Input Clk_In1 (5 – 50 MHz) |
| D08 | CLK_In2 | DI | Sensor Input Clk_In2 (connect to Clk1) |
| AB08 | TRIGGER | DI | Trigger input (optional) |
| AA05 | SCLK | DI | SPI Master Clock |
| AA06 | CSN | DI | SPI Chip Select (0 V = Selected) |
| AA07 | MISO | DO | SPI Master Input, Slave Output |
| AA08 | MOSI | DI | SPI Master Output Slave Input |
| AB05 | FB | DO | SPI register read feedback |
| D07 | SPI_MS | DI | SPI CPOL/CPHA mode select |
| AA14 | ADC_Ref1 | AO | 4.02 kΩ ±1% resistor between Ref1 & Ref2 |
| AA15 | ADC_Ref2 | AO | 4.02 kΩ ±1% resistor between Ref1 & Ref2 |
| AB06 | FLO | DO | Flash output sync (optional) |
| AB07 | MSO | DO | Mechanical Shutter output sync (optional) |
| E05 | FEN | DO | Frame ENable reference output (optional) |
| E06 | LEN | DO | Line ENable reference output (optional) |

Notes:

1. DI = Digital Input, DO = Digital Output, AO = Analog Output
2. Tie unused DI pins to Ground, No Connect (NC) unused DO pins
3. By default Clk_In2 should equal Clk_In1 and should be the same source clock.
4. The RESETN pin has a 62 kΩ internal pull-up resistor, so if left floating the chip will not be in reset mode.
5. The TRIGGER pin has an internal 100 kΩ pull down resistor. If left floating (and at default polarity) then the sensor state will not be affected by this pin (ie defaults to 'not triggered' mode if floated)
6. All of the DI and DO pins nominally operate at 0 V → 2.0 V and are associated with the VDD_DIG power supply.
7. The SPI_MS pin has an internal 100 kΩ pull down resistor. If left floating the CPOL/CPHA will be compatible with CPOL=CPHA=0 or CPOL=CPHA=1

POWER PIN DESCRIPTION

| Name | Voltage | Pins | Description |
|------------|---------|--|---|
| VDD_LVDS | 3.3V D | C04, C05, C23, C24, D04, D24, E04, E24, AA04, AA24, AB04, AB24, AC04, AC05, AC23, AC24 | LVDS output supply |
| VDD_DIG | 2.0V D | C18, C19, C20, C21, C22, D18, D19, D20, D21, D22, D23, E08, E18, E20, E21, E22, AA18, AA20, AA21, AA22, AB18, AB19, AB20, AB21, AB22, AB23, AC18, AC19, AC20, AC21, AC22, AB15 | Digital core supply |
| VDD_HV | 3.5V A | C11, D11, E11, AA11, AB11, AC11, C10, D10, E10, AA10, AB10, AC10 | Pixel supply 1 |
| Vref_P | 2.8V A | C13, D13, E13, AA13, AB13, AC13 | Pixel supply 2 |
| AVDD_LV | 1.8V A | C17, D16, D17, E17, AA17, AB16, AB17, AC17 | Analog low voltage supply |
| Vpixel_low | 0 V | E09 | Pixel Supply 3. Combine with VSS for normal operation. Can be pulsed for Extended Dynamic Range Operation |
| VSS | 0 V | A02, A14, A26, B14, C03, C06, C12, C14, C25, D03, D12, D14, D25, E03, E12, E19, E23, E25, AA03, AA12, AA19, AA23, AA25, AB03, AB12, AB14, AB25, AC03, AC06, AC12, AC14, AC25, AD14, AE02, AE14, AE26, D15, E15, AA09 | Sensor ground reference |
| No Connect | NA | A01, E14, E16, C09, D09, D05, D06, AA16, AC09 | Unused and test-only pins. These pins must be floated. |



LVDS PIN DESCRIPTION

| Pin | Name | Descr | Pin | Name | Descr | Pin | Name | Descr | Pin | Name | Descr |
|-----|---------|-------------------|-----|---------|-------------------|-----|---------|-------------------|-----|---------|-------------------|
| E01 | 1DCLK+ | Bank 1 LVDS Clock | C07 | 3DCLK+ | Bank 3 LVDS Clock | C15 | 5DCLK+ | Bank 5 LVDS Clock | A22 | 7DCLK+ | Bank 7 LVDS Clock |
| E02 | 1DCLK- | | C08 | 3DCLK- | | C16 | 5DCLK- | | B22 | 7DCLK- | |
| D01 | 1DATA0+ | Bank 1 LVDS Data | A07 | 3DATA0+ | Bank 3 LVDS Data | A15 | 5DATA0+ | Bank 5 LVDS Data | A23 | 7DATA0+ | Bank 7 LVDS Data |
| D02 | 1DATA0- | | B07 | 3DATA0- | | B15 | 5DATA0- | | B23 | 7DATA0- | |
| C01 | 1DATA1+ | | A08 | 3DATA1+ | | A16 | 5DATA1+ | | A24 | 7DATA1+ | |
| C02 | 1DATA1- | | B08 | 3DATA1- | | B16 | 5DATA1- | | B24 | 7DATA1- | |
| B01 | 1DATA2+ | | A09 | 3DATA2+ | | A17 | 5DATA2+ | | A25 | 7DATA2+ | |
| B02 | 1DATA2- | | B09 | 3DATA2- | | B17 | 5DATA2- | | B25 | 7DATA2- | |
| A03 | 1DATA3+ | | A10 | 3DATA3+ | | A18 | 5DATA3+ | | B27 | 7DATA3+ | |
| B03 | 1DATA3- | | B10 | 3DATA3- | | B18 | 5DATA3- | | B26 | 7DATA3- | |
| A04 | 1DATA4+ | | A11 | 3DATA4+ | | A19 | 5DATA4+ | | C27 | 7DATA4+ | |
| B04 | 1DATA4- | | B11 | 3DATA4- | | B19 | 5DATA4- | | C26 | 7DATA4- | |
| A05 | 1DATA5+ | | A12 | 3DATA5+ | | A20 | 5DATA5+ | | D27 | 7DATA5+ | |
| B05 | 1DATA5- | | B12 | 3DATA5- | | B20 | 5DATA5- | | D26 | 7DATA5- | |
| A06 | 1DATA6+ | | A13 | 3DATA6+ | | A21 | 5DATA6+ | | E27 | 7DATA6+ | |
| B06 | 1DATA6- | | B13 | 3DATA6- | | B21 | 5DATA6- | | E26 | 7DATA6- | |

| Pin | Name | Descr | Pin | Name | Descr | Pin | Name | Descr | Pin | Name | Descr |
|------|---------|-------------------|------|---------|-------------------|------|---------|-------------------|------|---------|-------------------|
| AA01 | 0DCLK+ | Bank 0 LVDS Clock | AC07 | 2DCLK+ | Bank 2 LVDS Clock | AC15 | 4DCLK+ | Bank 4 LVDS Clock | AE22 | 6DCLK+ | Bank 6 LVDS Clock |
| AA02 | 0DCLK- | | AC08 | 2DCLK- | | AC16 | 4DCLK- | | AD22 | 6DCLK- | |
| AB01 | 0DATA0+ | Bank 0 LVDS Data | AE07 | 2DATA0+ | Bank 2 LVDS Data | AE15 | 4DATA0+ | Bank 4 LVDS Data | AE23 | 6DATA0+ | Bank 6 LVDS Data |
| AB02 | 0DATA0- | | AD07 | 2DATA0- | | AD15 | 4DATA0- | | AD23 | 6DATA0- | |
| AC01 | 0DATA1+ | | AE08 | 2DATA1+ | | AE16 | 4DATA1+ | | AE24 | 6DATA1+ | |
| AC02 | 0DATA1- | | AD08 | 2DATA1- | | AD16 | 4DATA1- | | AD24 | 6DATA1- | |
| AD01 | 0DATA2+ | | AE09 | 2DATA2+ | | AE17 | 4DATA2+ | | AE25 | 6DATA2+ | |
| AD02 | 0DATA2- | | AD09 | 2DATA2- | | AD17 | 4DATA2- | | AD25 | 6DATA2- | |
| AE03 | 0DATA3+ | | AE10 | 2DATA3+ | | AE18 | 4DATA3+ | | AD26 | 6DATA3+ | |
| AD03 | 0DATA3- | | AD10 | 2DATA3- | | AD18 | 4DATA3- | | AD27 | 6DATA3- | |
| AE04 | 0DATA4+ | | AE11 | 2DATA4+ | | AE19 | 4DATA4+ | | AC26 | 6DATA4+ | |
| AD04 | 0DATA4- | | AD11 | 2DATA4- | | AD19 | 4DATA4- | | AC27 | 6DATA4- | |
| AE05 | 0DATA5+ | | AE12 | 2DATA5+ | | AE20 | 4DATA5+ | | AB26 | 6DATA5+ | |
| AD05 | 0DATA5- | | AD12 | 2DATA5- | | AD20 | 4DATA5- | | AB27 | 6DATA5- | |
| AE06 | 0DATA6+ | | AE13 | 2DATA6+ | | AE21 | 4DATA6+ | | AA26 | 6DATA6+ | |
| AD06 | 0DATA6- | | AD13 | 2DATA6- | | AD21 | 4DATA6- | | AA27 | 6DATA6- | |

Notes:

1. All LVDS Data and Clock lines must be routed with 100 Ω differential transmission line traces.
2. All the traces for a single LVDS Bank should be the same physical length to minimize skew between the clock and data lines.
3. In 2 Bank mode, only LVDS banks 0 and 1 are active.
4. In 4 Bank mode, only LVDS bank 0, 1, 2, and 3 are active.
5. Float the pins of unused LVDS Banks to conserve power.
6. Unused pins in active banks (due to ADC bit depth <14) are automatically tri-stated to save power, but these can also be floated.



Imaging Performance

TYPICAL OPERATION CONDITIONS

Unless otherwise noted, the Imaging Performance Specifications are measured using the following conditions.

| Description | Condition | Notes |
|------------------|--|-------|
| Light Source | Continuous red, green and blue LED illumination | 1 |
| Temperature | Measured die temperature: 40 °C and 27 °C | |
| Integration Time | 16.6 msec (1400d LL, register 0201h) | |
| Readout Mode | Dual-Scan, Global Shutter, 320 MHz PLL2 | |
| Clamps | Column/Row Noise Correction active, Frame Black Level Clamp active | |
| ADC Bit Depth | 10 bit | |
| Analog Gain | Unity gain or referred back to unity gain. | |

Notes:

1. For monochrome sensor, only green LED used.

PERFORMANCE SPECIFICATIONS ALL CONFIGURATIONS

| Description | Symbol | Min. | Nom. | Max. | Units | Sampling Plan | Temperature Tested At (°C) | Test | Notes |
|--|----------|------|--|------|------------------------------|---------------|----------------------------|------|--------|
| Photodiode Charge Capacity | PNe | - | 17 | - | ke ⁻ | Die | 27 & 40 | 16 | |
| Read Noise | ne-T | - | 3.4 RS/GR DS 3.7 RS/GR TS 2.5 GS DS/TS | - | e ⁻ rms | Die | 27 | 8 | |
| Total Pixelized Noise | TPN | - | 3.6 RS/GR DS 3.9 RS/GR TS 2.5 GS DS/TS | - | e ⁻ rms | Die | 27 | 19 | |
| Dynamic Range | DR | - | 74 RS/GR DS 73 RS/GR TS 57 GS DS/TS | - | dB | Die | 27 | | 3 |
| Column Noise | Cn | - | 0.4 RS/GR DS/TS 2.4 GS DS/TS | - | e ⁻ rms | Die | 27 | 9 | 5 |
| Row Noise | Rn | - | 0.4 RS/GR DS 0.7 RS/GR TS 2.7 GS DS/TS | - | e ⁻ rms | Die | 27 | 10 | 6 |
| Dark Field Local Non-Uniformity Floor | DSNU_flr | - | 1.3 RS/GR DS 1.7 RS/GR TS 10 GS DS/TS | - | e ⁻ rms | Die | 27 & 40 | 1 | 4 |
| Bright Field Local Photoresponse Non-Uniformity | PRNU_1 | - | 1.1 Mono 1.5 Bayer | - | %rms | Die | 27 & 40 | 2 | 1 |
| Bright Field Global Photoresponse Non-Uniformity | PRNU_2 | - | 3.7 Mono 5.4 Bayer | - | %pp | Die | 27 & 40 | 3 | 1 |
| Maximum Photoresponse Nonlinearity | NL | - | 5.4 | - | % | Die | 27 & 40 | 11 | 2 |
| Maximum Gain Difference Between Outputs | ΔG | - | 0.3 | - | % | Die | 27 & 40 | 12 | 7 |
| Photodiode Dark Current | Ipd | - | 6.6 | - | e/p/s | Die | 40 | 13 | 8 |
| Storage Node Dark Current | Ivd | - | 1490 | - | e/p/s | Die | 40 | 14 | 4 |
| Image Lag | Lag | - | 1.6 | - | e ⁻ | Design | 27, 40 | 15 | |
| Black-Sun Anti-Blooming | Xab | - | 15 >10,000 | - | W/cm ² xlumSat | Design | 27 | 7 | 13 |
| Parasitic Light Sensitivity | PLS | - | 728 | - | - | Design | 27 | 6 | 9 |
| Dual-Video WDR | | - | 140 RS 120 GS | - | dB | Design | 27 | | 10, 11 |
| Pulsed Pixel WDR (GS only) | | - | 100 | - | dB | Design | 27 | | 12, 11 |

RS = Rolling Shutter operation mode, GS = Global Shutter operation mode, GR = Global Reset

DS = Dual-Scan, TS = Tri-Scan



KAC-06040-ABA Configuration (Monochrome)

| Description | Symbol | Wavelength (nm) | Nom. | Units | Sampling Plan | Temperature Tested At (°C) | Notes | Test |
|-------------------------|-----------------------|-------------------|-----------------|------------------------|---------------|----------------------------|-------|------|
| Peak Quantum Efficiency | Green NIR1 NIR2 | 550 850 900 | 52 15 9.0 | % | Design | 27 | | |
| Responsivity | | | 83 | $\frac{ke^-}{Lux * s}$ | Design | 27 | | 20 |
| Responsivity | | | 7.3 | $\frac{V}{Lux * s}$ | Design | 27 | | 21 |

KAC-06040-CBA Configuration (Bayer RGB)

| Description | Symbol | Wavelength h (nm) | Nom. | Units | Sampling Plan | Temperature Tested At (°C) | Notes | Test |
|-------------------------|--------|---------------------------------|-----------------------------|------------------------|---------------|----------------------------|-------|------|
| Peak Quantum Efficiency | Green | 470 540 620 850 900 | 42 47 44 16 9.8 | % | Design | 27 | | |
| Responsivity | | Blue Green Red | 18 36 39 | $\frac{ke^-}{Lux * s}$ | Design | 27 | | 20 |
| Responsivity | | Blue Green Red | 1.6 3.1 3.4 | $\frac{V}{Lux * s}$ | Design | 27 | | 21 |

Notes

1. Measured per color, worst of all colors reported
2. Value is over the range of 10% to 90% of photodiode saturation, Green response used.
3. Uses 20LOG(PNe/ ne-T)
4. Photodiode dark current made negligible
5. Column Noise Correction active
6. Row Noise Correction active
7. Measured at ~70% illumination
8. Storage node dark current made negligible
9. GSE (Global Shutter Efficiency) = 1-1/PLS
10. Min vs Max integration time at 30 fps
11. WDR measures expanded exposure latitude from linear mode DR
12. Min/Max responsivity in a 30 fps image
13. Saturation Illumination referenced to a three line time integration.



Typical Performance Curves

QUANTUM EFFICIENCY

Monochrome with Microlens

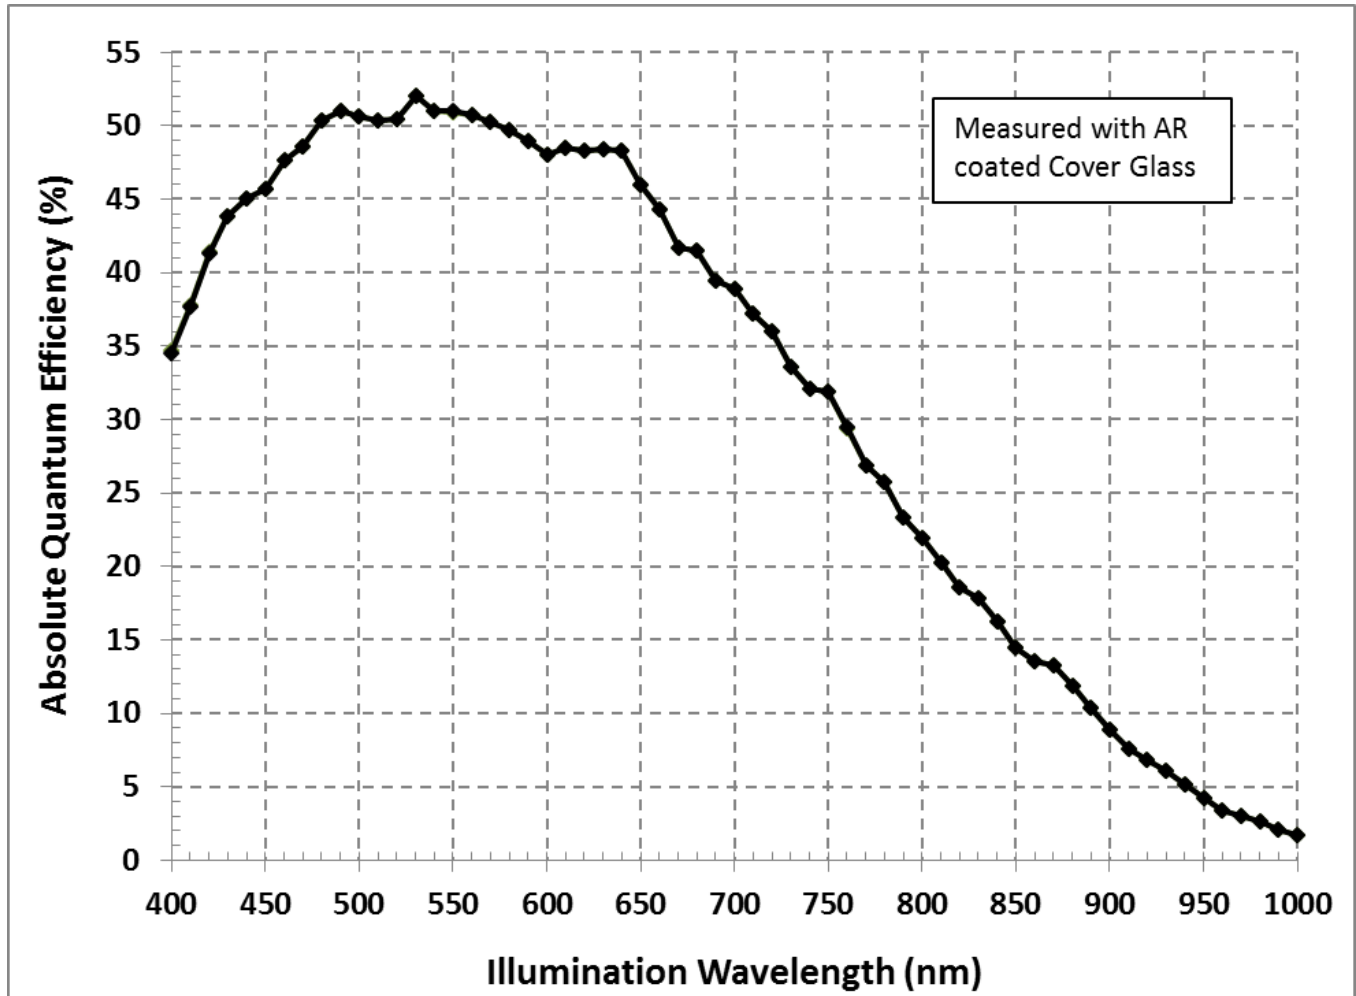


Figure 3: Monochrome QE (with Microlens)



Color (Bayer RGB) with Microlens

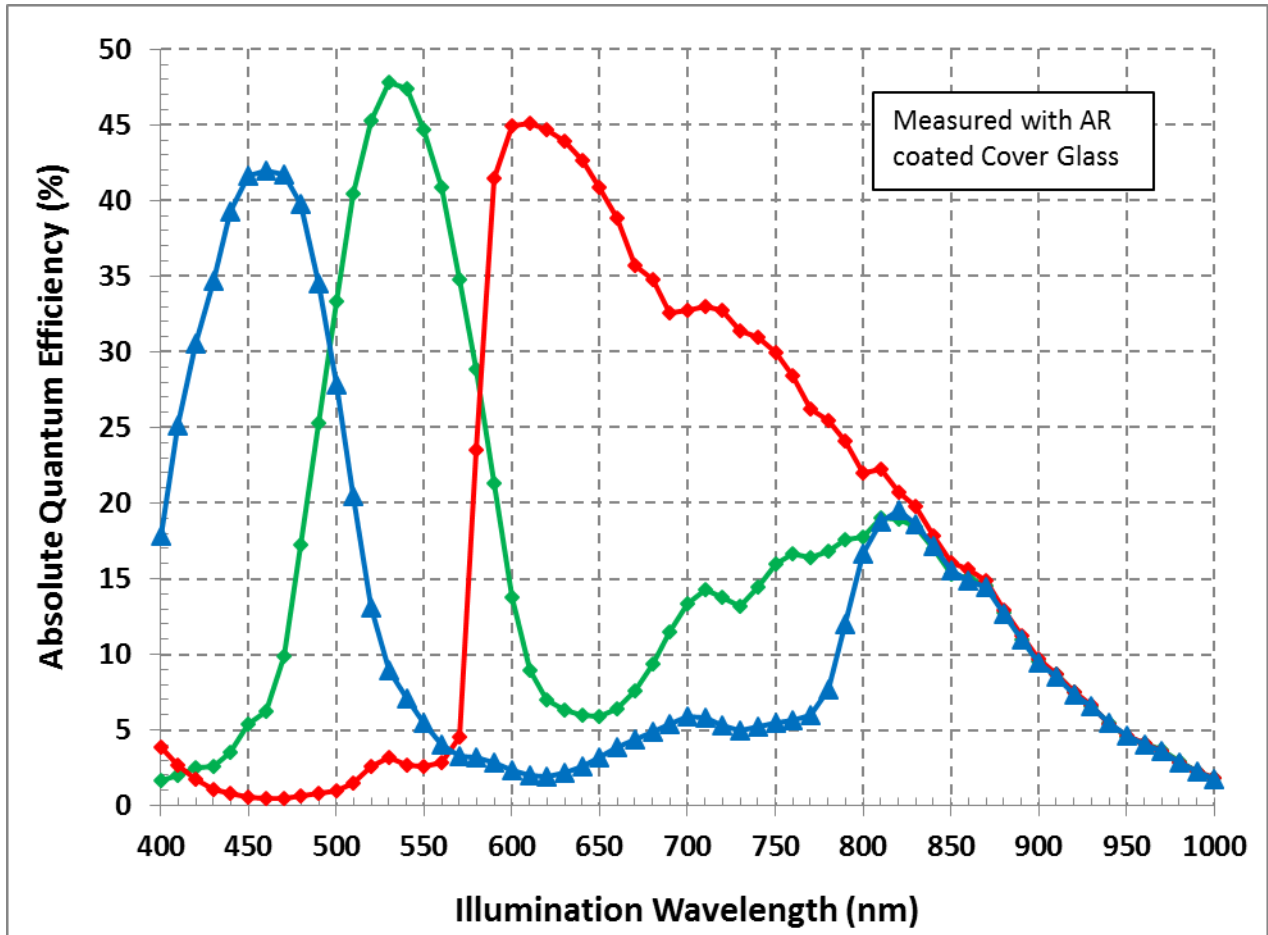


Figure 4: Bayer QE (with Microlens)



ANGULAR QUANTUM EFFICIENCY

For the curves marked "Horizontal", the incident light angle is varied along the wider array dimension.

For the curves marked "Vertical", the incident light angle is varied along the shorter array dimension.

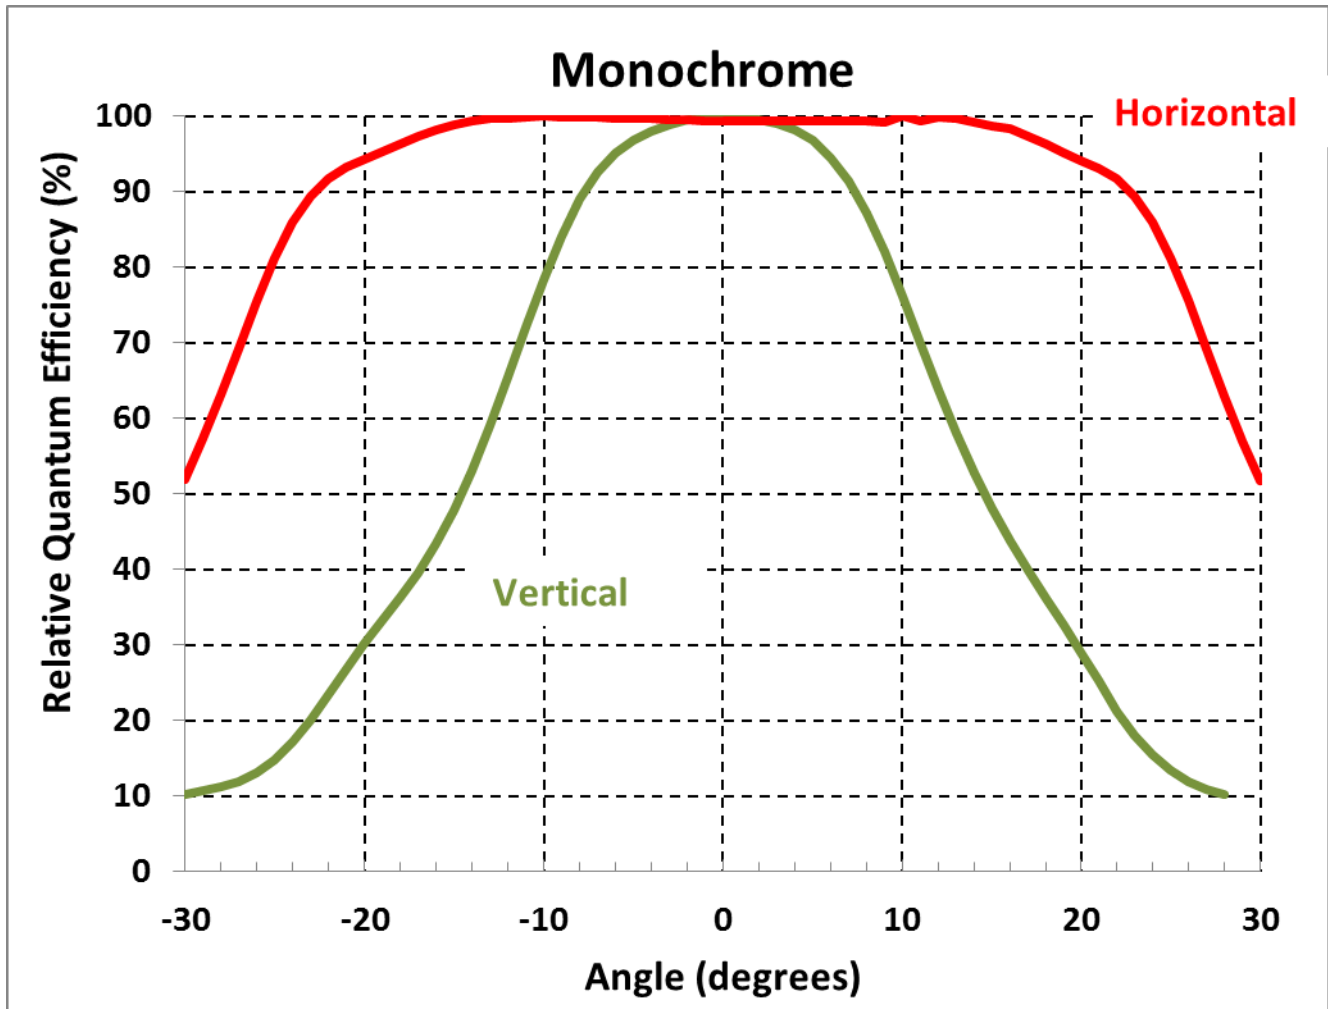


Figure 5: Monochrome Relative Angular QE (with Microlens)

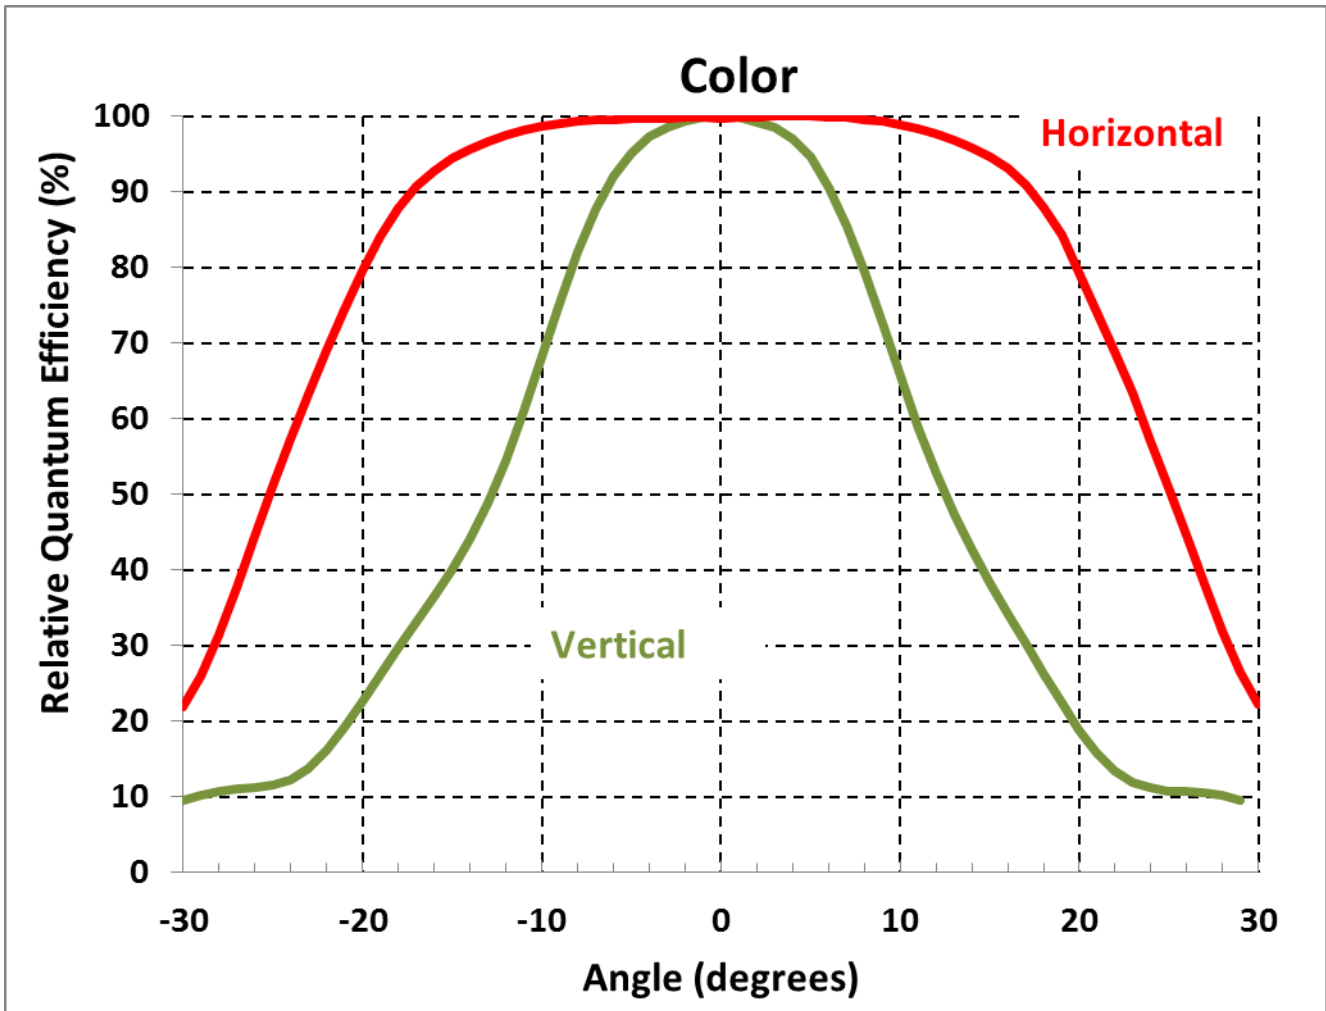


Figure 6: Monochrome Relative Angular QE (with Microlens)



DARK CURRENT VERSUS TEMPERATURE

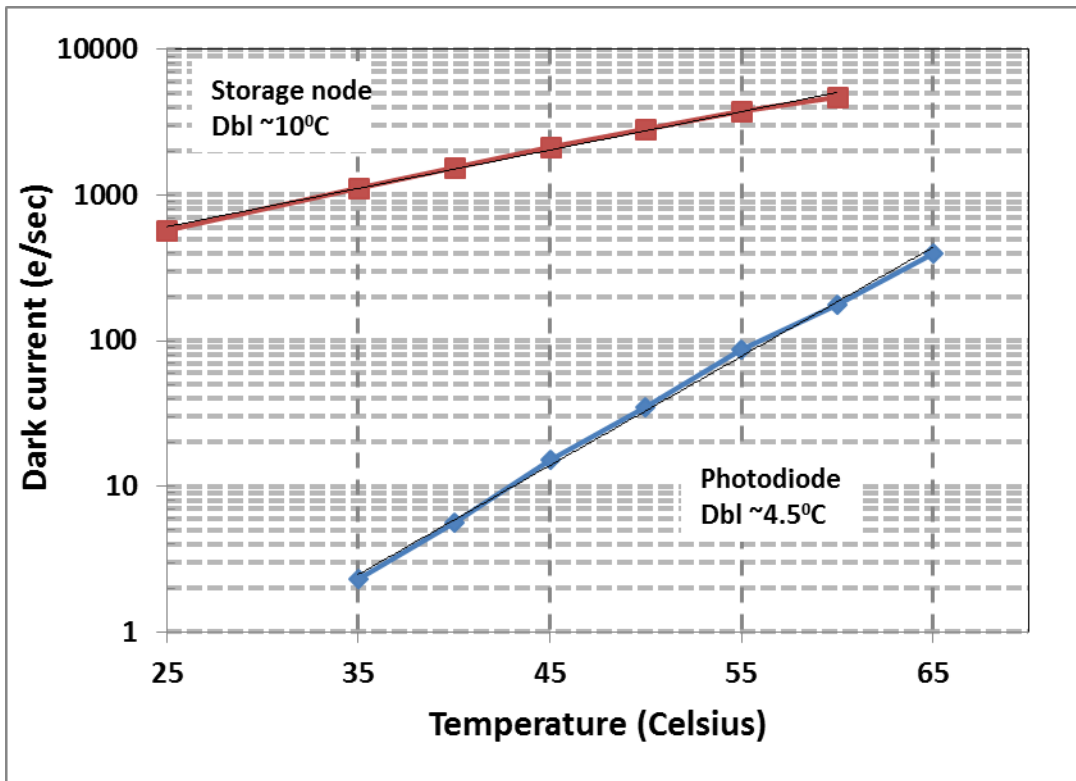


Figure 7: Dark Current vs Temperature

Note: "Dbl" denotes an approximate doubling temperature for the dark current for the displayed temperature range.



POWER VS FRAME RATE

The most effective method to set the frame rate is to use vertical blanking (Register 01F1h). Unnecessary chip operations are suspended during vertical blanking conserving significant power consumption and also minimizing the image storage time on the storage node when in Global Shutter Operation. Tri-scan can reach higher frame rates, but consumes more power at all frame rates. It is recommended use Dual-Scan unless the frame rate required can only be reached with Tri-Scan. The LVDS clock is 1/2 the PLL2 clock frequency.

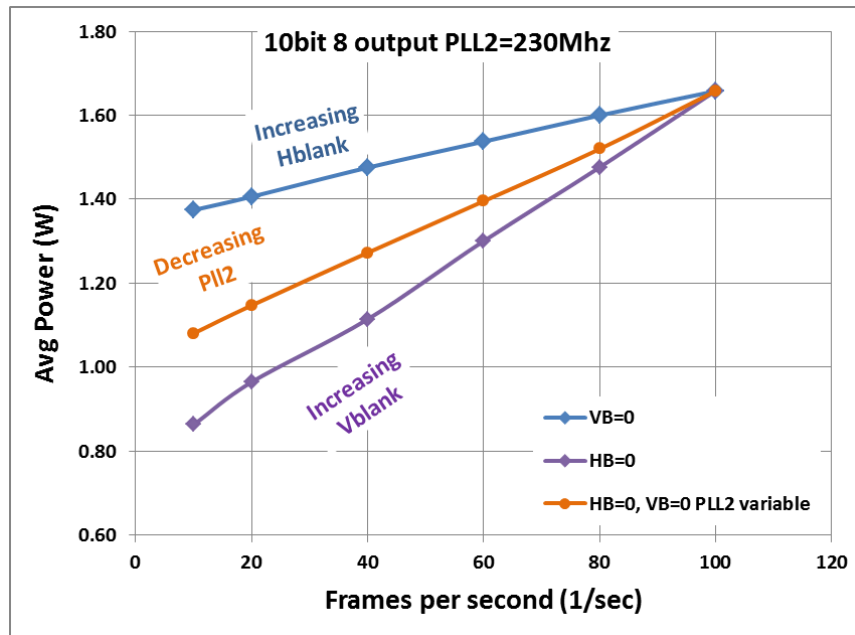


Figure 8: Dual-Scan Power vs Frame Rate, 10 bit mode

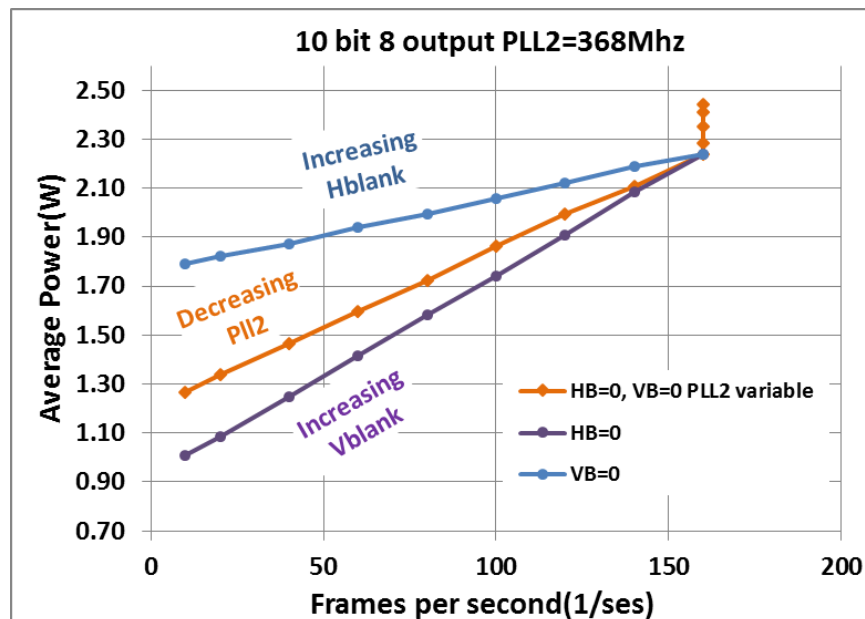


Figure 9: Tri-Scan Power vs Frame Rate, 10 bit mode



Power and Frame Rate vs ADC Bit depth

Increasing the ADC bit depth impacts the frame rate by changing the ADC conversion time. The following figure shows the power and Frame rate range for several typical cases. For optimum image quality and power consumption the PLL2 and vertical blanking have been optimized for each bit depth and target frame rate. Because of the different parameters impacting the line time, Tri-Scan only has significant benefit at 10 bit operation. At 8 bit operation the LVDS readout time dominates the line time; and at 12 and 14 bit the ADC time dominates the line time and the pixel time is not significant. But at 10 bit operation Tri-Scan can almost halve the line time at the cost of additional power consumption.

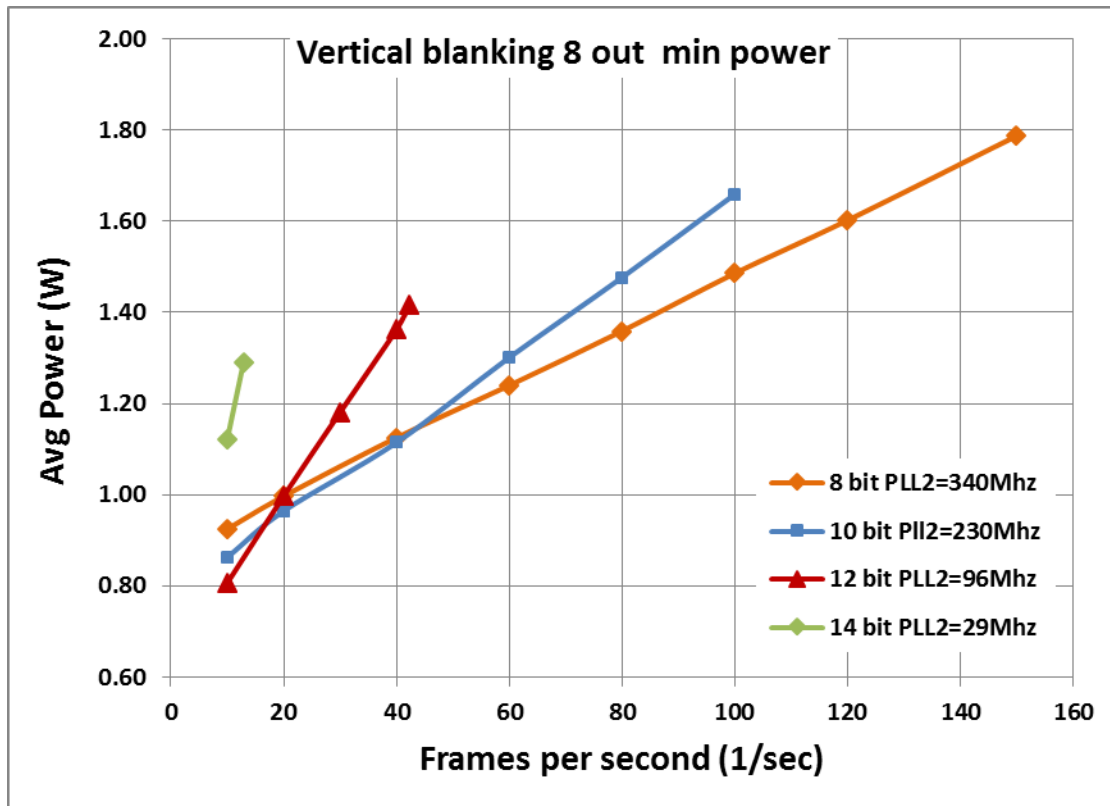


Figure 10: Dual-Scan ADC Bit Depth impact on Frame Rate and Power

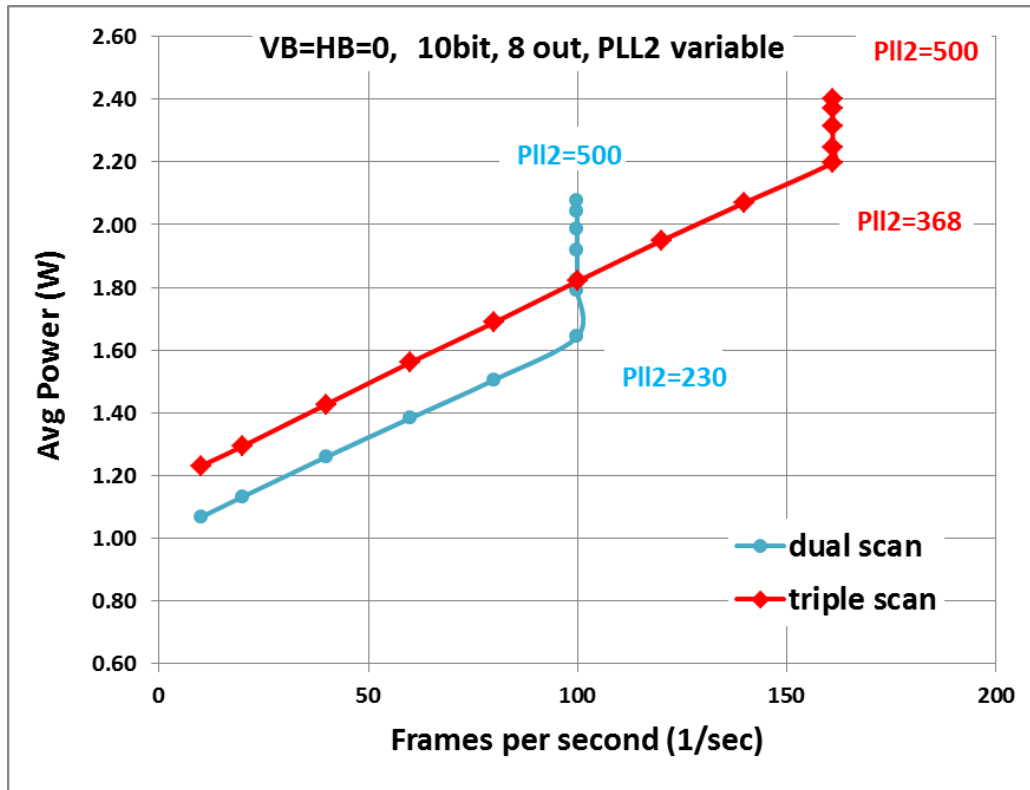


Figure 11: Tri-Scan vs Dual-Scan Power



Defect Definitions

OPERATION CONDITIONS FOR DEFECT TESTING

| Description | Condition | Notes |
|-----------------------------|--|-------|
| Operational Mode | 10 bit ADC, 8 LVDS outputs, Global Shutter and Rolling Shutter modes, Dual-Scan, Black Level Clamp on, Column/Row Noise Correction on, 1x Analog Gain, 1x Digital Gain | |
| Pixels Per Line | 2832 | |
| Lines Per Frame | 2128 | |
| Line Time | 6.875 μsec | |
| Frame Time | 8.25 msec | |
| Photodiode Integration Time | 33 msec | |
| Storage Readout Time | 7.85 msec | |
| Temperature | 40 °C and 30 °C | |
| Light Source | Continuous red, green and blue LED illumination (green only for monochrome sensor) | |
| Operation | Nominal operating voltages and timing, PLL1 = 320 MHz, PLL2 = 410 MHz | |

DEFECT DEFINITIONS FOR TESTING

| Description | Definition | Limit | Test | Notes | |
|--------------------------------------|--|--|------|-------|------|
| Dark Field Defective Pixel | 29 °C RS: Defect ≥ 20 dn GS: Defect ≥ 180 dn | 40 °C RS: Defect ≥ 30 dn GS: Defect ≥ 240 dn | 60 | 4 | 3, 4 |
| Bright Field Defective Pixel | Defect ≥ ±12% from local mean | | | 5 | 1, 4 |
| Cluster Defect | A group of 2 to 10 contiguous defective pixels, but no more than 3 adjacent defects horizontally | | 11 | | 2 |
| Column/Row Major Defect | A group of more than 10 contiguous defective pixels along a single column or row | | 0 | | |
| Dark Field Faint Column/Row Defect | RS: 3 dn threshold GS: 10 dn threshold | | 0 | 17 | |
| Bright Field Faint Column/Row Defect | RS: 12 dn threshold GS: 18 dn threshold | | 0 | 18 | |

Notes:

RS = Rolling Shutter, GS = Global Shutter

1. For the color devices, all bright defects are defined within a single color plane, each color plane is tested
2. Cluster defects are separated by no less than two good pixels in any direction.
3. Rolling Shutter Dark Field points are dominated by photodiode integration time, Global Shutter Dark Field defects are dominated by the readout time.
4. The net sum of all bright and dark field pixel defects in rolling and global shutter are combined and then compared to the test limit



Test Definitions

TEST REGIONS OF INTEREST

Image Area ROI: Pixel (0, 0) to Pixel (2847, 2143)

Active Area ROI: Pixel (8, 8) to Pixel (2839, 2135)

Only the Active Area ROI pixels are used for performance and defect tests.

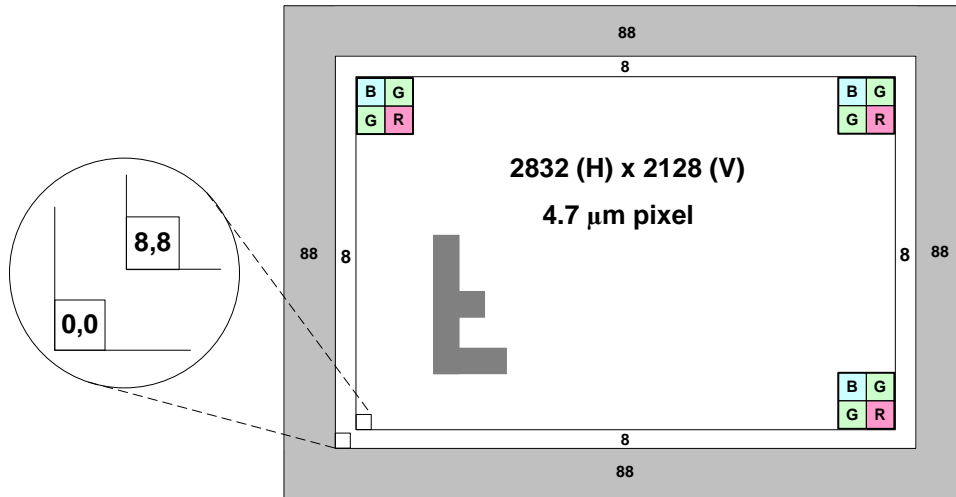


Figure 12: Regions of Interest

TESTS

1) Dark Field Local Non-Uniformity Floor (DSNU_flr)

This test is performed under dark field conditions. A 4 frame average image is collected. This image is partitioned into 180 subregions of interest, each of which is 190 by 178 pixels in size. For each sub-region the standard deviation of all its pixels is calculated. The dark field local non-uniformity is the largest standard deviation found from all the sub regions of interest. Units: e⁻ rms (electrons rms)

2) Bright Field Local Photoresponse Non-Uniformity (PRNU_1)

The sensor illuminated to 70% of saturation (~700 dn). In this condition a 4 frame average image is collected. From this 4 frame average image a 4 frame average dark image is subtracted. The Active Area Standard Deviation is the standard deviation of the resultant image and the Active Area Signal is the average of the resultant image.

$$PRNU_1 = 100 * \left(\frac{\text{Active Area Standard Deviation}}{\text{Active Area Signal}} \right) \text{ Units: \%rms}$$



3) Bright Field Global Non-Uniformity (PRNU_2)

This test is performed with the sensor uniformly illuminated to 70% of saturation (~700 dn), a 4 frame average image is collected and a 4 frame averaged dark image is subtracted. The resultant image is partitioned into 180 subregions of interest, each of which is 190 by 178 pixels in size. The average signal level of each sub regions of interest (sub-ROI) is calculated.

The highest sub-ROI average (Maximum Signal) and the lowest sub-ROI average (Minimum Signal) are then used in the following formula to calculate PRNU_2.

$$\text{PRNU}_2 = 100 * \frac{\text{Maximum Signal} - \text{Minimum Signal}}{\text{Active Area Signal}} \quad \text{Units: \%pp}$$

4) Dark Field Defect Test

This test is performed under dark field conditions. The sensor is partitioned into 390 subregions of interest, each of which is 128 by 128 pixels in size. In each region of interest, the median value of all pixels is found. For each region of interest, a pixel is marked defective if it is greater than or equal to the median value of that region of interest plus the defect threshold specified in the Defect Definition Table section.

5) Bright Field Defect Test

This test is performed with the imager illuminated to a level such that the output is at approximately 700 dn. The average signal level of all active pixels is found. The bright and dark thresholds are set as:

Dark defect threshold = Active Area Signal * threshold

Bright defect threshold = Active Area Signal * threshold

The sensor is then partitioned into 390 subregions of interest, each of which is 128 by 128 pixels in size. In each region of interest, the average value of all pixels is found. For each region of interest, a pixel is marked defective if it is greater than or equal to the median value of that region of interest plus the bright threshold specified or if it is less than or equal to the median value of that region of interest minus the dark threshold specified.

Example for bright field defective pixels:

- Average value of all active pixels is found to be 700 dn
- Lower defect threshold: $700 \text{ dn} * 12 \% = 84 \text{ dn}$
- A specific 128 x 128 ROI is selected:
 - Median of this region of interest is found to be 690 dn.
 - Any pixel in this region of interest that is $\leq (690 - 84 \text{ dn})$ in intensity will be marked defective.
 - Any pixel in this region of interest that is $\geq (690 + 84 \text{ dn})$ in intensity will be marked defective
- All remaining 299 sub regions of interest are analyzed for defective pixels in the same manner.



6) Parasitic Light Sensitivity (PLS)

Parasitic Light Sensitivity is the ratio of the light sensitivity of the photodiode to the light sensitivity of the storage node in Global Shutter. There is no equivalent distortion in Rolling Shutter. A low PLS value can provide distortion of the image on the storage node by the scene during readout.

$$PLS = \frac{\text{Photodiode Responsivity}}{\text{Storage Node Responsivity}} \quad (\text{unitless ratio})$$

GSE (Global Shutter Efficiency) is a related unit. $GSE = \left(1 - \frac{1}{PLS}\right) \%$

Detailed method: Photodiode Responsivity:

The sensor is set in global shutter serial mode (integration time not overlapping readout) and the FLO signal is used to control a 550 nm normal incident (or large f# focused) illumination source so that the sensor is illuminated only during photodiode integration time (not illuminated during readout time). The integration time is not critical but should be large enough to create a measurable mean during this time. A 16 frame-average illuminated photodiode image is recorded. A 16 frame-average dark frame using the same sensor settings is captured and is subtracted from the illuminated image.

Detailed method: Storage Node Responsivity:

The sensor is set to a special characterization mode where the PD signal is discarded and does not impact the storage node. A long total frame time (storage node exposure time) is used to increase the storage node signal. A 16 frame-average dark frame is captured. The sensor is illuminated by the same 550nm incident light source used for the photodiode responsivity. A 16 frame-average illuminated photodiode image is recorded; the dark frame image is subtracted from this. The integration time is not critical but should be set such that a significant response is detected, typically several orders of magnitude greater than the photodiode integration time.

7) Black-Sun Anti-blooming

A typical CMOS image sensor has a light response profile that goes from 0 dn to saturation (1023 dn for KAC-06040 in 10 bit ADC mode) and, with enough light, back to 0 dn. The sensor reaching 0 dn at very bright illumination is often called the "Black-sun" artifact and is undesirable. Black-sun artifact is typically the dominant form of anti-blooming image distortion. For the KAC-06040 the Black-sun artifact threshold is measured at the onset of saturation distortion, not at the point where the output goes to 0 dn. To first order the onset of black-sun artifact for the KAC-06040 is not proportional to the integration time or readout time.

The sensor is placed in the dark at unity gain and illuminated with a 532 nm laser with the intensity of about 26 W/cm² at the center of the sensor. The laser is strong enough to make the center of the laser spot below 1020 dn without any ND filters. ND filters are added to adjust the laser intensity until the signal in the region at the center of the spot increases to >1020 dn.

This illumination intensity at this ND filter is recorded (W/cm²) as the Black-Sun Anti-blooming.

The 'xllumSat' unit is calculated using and integration time of 100 μsec.

Exposing the sensor to very strong illumination for extended periods of time will permanently alter the sensor performance in that localized region.



8) Read Noise

This test is performed with no illumination and one line of integration time. The read noise is defined as one standard deviation of the frequency histogram containing the values of all pixels after the excessively deviant pixels (\pm three standard deviations) are removed.

9) Column Noise

After all rows are averaged together. Shading (low frequency change wrt column address) is removed. A frequency histogram is constructed of the resulting column values. The column noise is the standard deviation of the frequency histogram of the column values. This Metric includes both temporal and FPN.

10) Row Noise

All columns are averaged together. Shading (low frequency change wrt row address) is removed. A frequency histogram is constructed of the resulting row values. The row noise is the standard deviation of the frequency histogram of the row values. This Metric includes both temporal and FPN.

11) Maximum Photoresponse Non-Linearity

The photoresponse nonlinearity is defined as the deviation from the best fit of the sensor response using 70% of saturation and zero signal as the reference points. The different signal levels are determined by varying the integration time. The sensor saturation level is (1023-dark offset). The dark offset is subtracted from the image for the following M_{avg} and L_{avg} .

- The integration time is varied until the integration time required to reach the 70% saturation is determined. M_{avg} = the active array mean at the 70% saturation integration time.
- The integration is set to 1/14 (5% exposure point). L_{avg} = meant at the 5% exposure point
- $PRNL (@ 5\% \text{ saturation}) = ((L_{avg}/M_{avg}) * (14/1) - 1) * 100$

12) Maximum Gain Difference Between Outputs

The LVDS outputs contain no gain or offset error since these are purely digital segmentations. The predominant output mismatch comes from the pixel array readout segmentation. The sensor contains two ADC banks and four channels of analog line stores in its highest frame rate configuration, Tri-Scan. The sensor is factory calibrated to match the gain differences between all four possible gain channels. The gain variations are manifest as an every 4th row gain pattern. In tri-scan, and an even/odd row gain difference in Dual-Scan. The sensor is factory calibrated to match the four possible row gains. This test is performed in Tri-Scan mode to test the worst case gain error including all possible 4 row gains after the calibration has been applied. The sensor is illuminated at 70% of saturation. The entire test frame ROI into 4 groups of every 4th row. The first row group(average) is used as a reference and the following three row groups are compared to the first. The largest error is reported.

$$((\text{Second Row Average}/\text{First Row Average}) - 1) * 100$$

$$((\text{Third Row Average}/\text{First Row Average}) - 1) * 100$$

$$((\text{Fourth Row Average}/\text{First Row Average}) - 1) * 100$$



13) Photodiode Dark Current

The photodiode dark current is measured in rolling shutter read out mode using 105 msec integration time and an analog gain = 8. The value is converted to electrons/pix/sec using the formula:

$$\text{Photodiode dark current} = \text{average signal (DN)} * \text{el-per-DN (gain=8)} / .105 \text{ seconds}$$

where 'average signal (DN)' is the average of all pixels in the sensor array, and 'el-per-DN(gain=8)' is measured on each sensor using the photon transfer method.

14) Storage Node Dark Current

The storage node dark current is measured in global shutter read out mode using a special timing mode to prevent the photodiode dark current from being transferred to the storage node. In global shutter mode, the integration time of the storage node is the time it takes to read out a frame. The sensor analog gain is set to 2:

$$\text{Storage node dark current} = \text{average signal (DN)} * \text{el-per-DN (gain=2)} / .0138 \text{ seconds}$$

where 'average signal (DN)' is the average of all pixels in the sensor array and 'el-per-DN(gain=2)' is measured on each sensor using the photon transfer method.

15) Lag

Lag is measured as the number of electrons left in the photodiode after readout when the sensor is illuminated at 70% of Photodiode Charge Capacity.

Analog gain is set to 8. With no illumination a 64 average dark image is recorded (Dark_ref). The 'el-per-DN' is measured using the photon transfer method.

Illumination is adjusted blink every other frame such that the mean image output is 70% of the Photodiode Charge Capacity for even frames, and with no illumination for odd frames. A 64 frame average of Odd Dark Frames is recorded as Dark_Lag.

$$\text{Lag} = (\text{Dark_Lag} - \text{Dark_Ref}) * \text{el-per-DN}' \text{ Units: electrons rms}$$

16) Photodiode Charge Capacity

The sensor analog gain is reduced to <1 to prevent ADC clipping at 1023 dn. The 'el-per-DN' is measured using the photon transfer method. The sensor is illuminated at a light level ~1.5x the illumination at which the pixel output no longer linearly changes with illumination level. The Photodiode Charge Capacity is equal to the average signal (DN) * el-per-DN. Units: electrons rms.

17) Dark Field Faint Column/Row Defect

A 4 frame average, no illumination image is acquired at one line time of integration. Major defective pixels are removed (> 5 Sigma). All columns or rows are averaged together. The average of the local ROI of 128 columns or rows about the column/row being tested is determined. Any columns/rows greater than the local average by more than the threshold are identified.



18) Bright Field Faint Column/Row Defect

A 4 frame average, 70% illumination image is acquired at one line time of integration. Major defective pixels are removed (> 5 Sigma). All columns or rows are averaged together. The average of the local ROI of 128 columns or rows about the column/row being tested is determined. Any columns/rows greater than the local average by more than the threshold are identified.

19) Total Pixelized Noise

This test is performed with no illumination and one line of integration time. A single image is captured including both Temporal and Fixed Pattern Noise (FPN). A spatial low pass filter is applied to remove shading and excessively deviant pixels (\pm three standard deviations) are removed. The Total Pixelized Noise is defined as one standard deviation of the frequency histogram.

20) Responsivity ke/lux-sec

This number is calculated by integrating the multiplication of the sensor QE by the human photopic response assuming a 3200K light source with a QT100 IR filter. This is a sharp 650nm cutoff filter. If the IR filter is removed a higher response value will result.

21) Responsivity V/lux-sec

Voltage levels are not output from the sensor. This value uses the pixel output before analog gain to match the ADC input range. Including the ADC matching gain will result in a larger responsivity value.



Operation

This section is a brief discussion of the most common features and functions assuming default conditions. See the *KAC-06040 User Guide* for a full explanation of the sensor operation modes, options, and registers.

REGISTER ADDRESSES

The last bit of any register address is a Read/Write bit. Most references in this document refer to the Write address. All SPI reads are to an even address, all SPI writes are to an odd address.

SENSOR STATES

Figure 13 shows the sensor states, see the *KAC-06040 User Guide* for detailed explanation of the States.

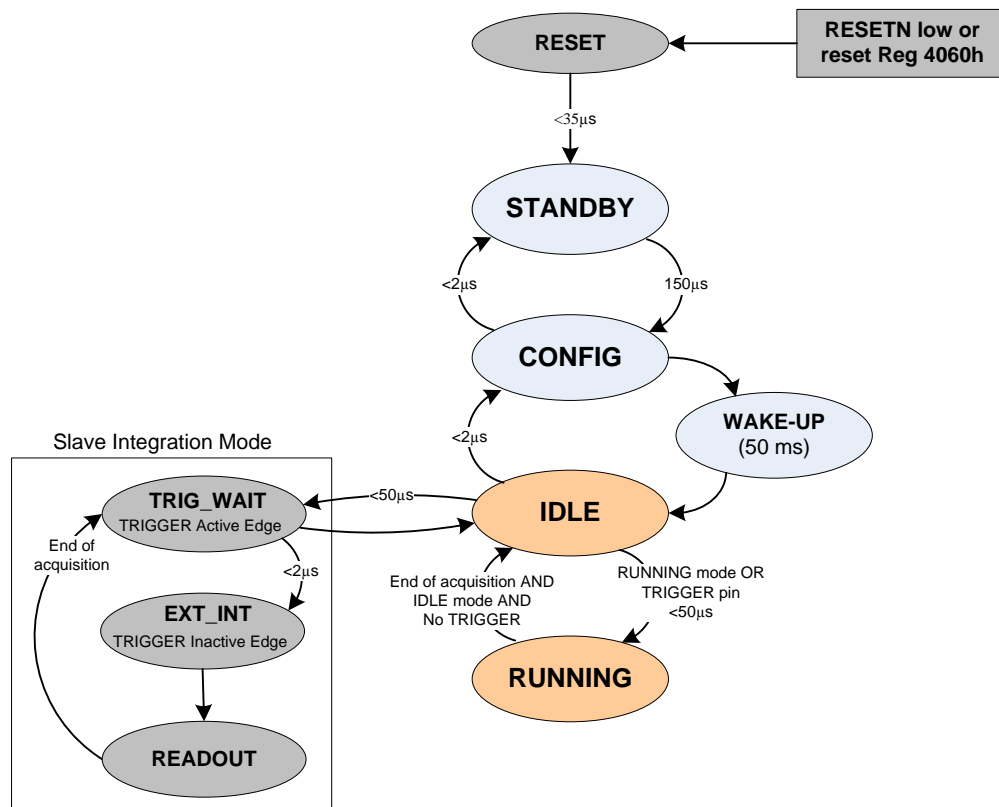


Figure 13: Sensor State Diagram



ENCODED SYNCs

To facilitate system acquisition synchronization the KAC-06040 places synchronization words (SW) at the beginning and at the end of each output row as indicated in the following Figure 14. This is performed for each of the 8 LVDS output banks providing frame, line, and output synchronization. See the *KAC-06040 User Guide* for additional detail on LVDS and Encoded Sync output.

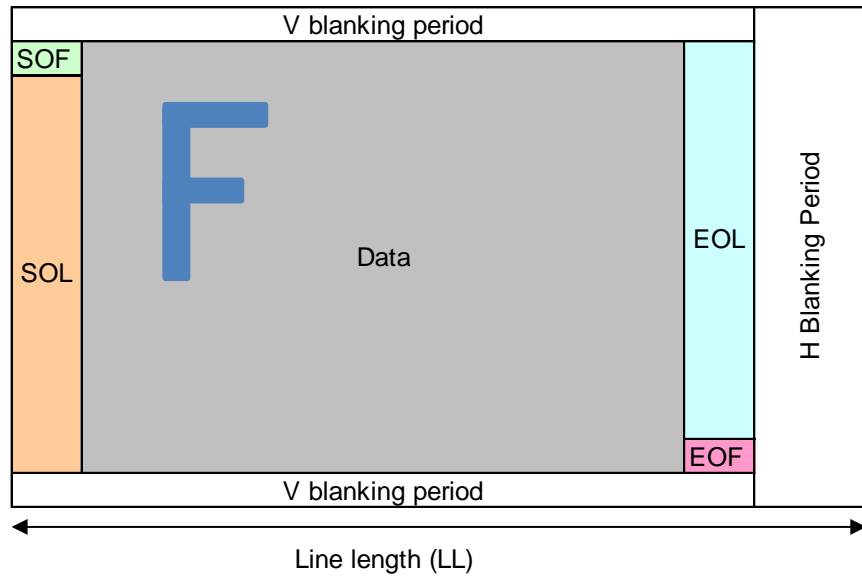


Figure 14: Encoded Frame Syncs



LINE TIME

This Datasheet presumes the recommended startup script that is defined in the *KAC-06040 User Guide* has been applied. The KAC-06040 defaults to Dual-Scan mode. In this mode the LVDS data readout overlaps the pixel readout and ADC conversion time. The Pixel read time is fixed, and the ADC Conversion Time is dependent on the ADC bit depth selected. The LVDS time will be dependent on the PLL2 frequency selected. Depending on the ADC bit depth and the PLL2 frequency the LVDS readout or the (Pixel + ADC conversion) may limit the minimum possible line time. The Line Time is not impacted by the selection of Rolling Shutter or Global Shutter mode.

Tri-scan mode can be used in for shorter line times and faster frame rates (at elevated power consumption). Tri-scan is of most value when the Pixel time and ADC conversion time and LVDS readout time are similar in size. For full resolution this corresponds to 8 LVDS bank and 10 bit ADC bit depth. In Tri-Scan mode the longest of the three components will define the minimum line time.

The KAC-06040 architecture always outputs two rows at once, one row from the top ADC, and one from the bottom ADC. Each ADC then divides up the pixel into 1 → 4 parallel pixel output LVDS Banks. The default is 4 output banks per ADC for a total of 8 parallel pixel outputs to minimize the LVDS data output time. Since the sensor always outputs 2 rows at a time the timing and registers are based on a Line Time (LT) or Line Length (LL) where one LT = the time to readout 2 rows in parallel (one even row and one odd row).

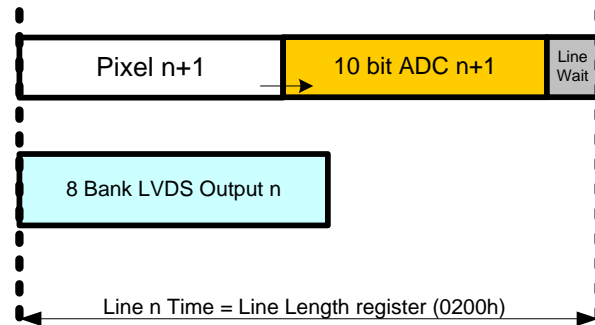


Figure 15: Dual-Scan Line Time Relationship

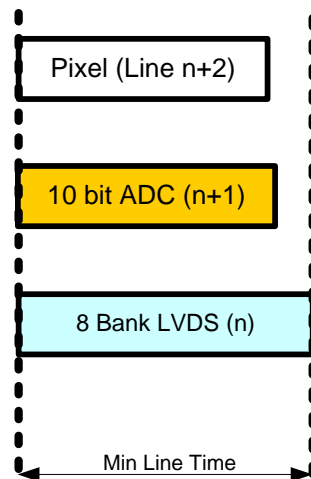


Figure 16: Tri-Scan Line Time Relationship



FRAME TIME

The frame time is defined in units of Line Time. 1 Line Time unit = 2 output rows. To first-order the frame rate is not directly impacted by selection of Global Shutter, Rolling Shutter, Dual-Scan, or Tri-Scan.

The Frame Time is made up of three phases:

1. Integration Phase
2. Readout Phase
3. Frame Wait Phase (Vertical Blanking, Vblank)

By default the Integration Phase overlaps the Readout and Frame Wait Phases. If the Integration Phase is larger than the Readout + Frame Wait time, then the Integration Phase will determine the video frame rate. Otherwise the frame rate will be set by the Readout + Frame Wait time. In other words, if the programmed integration time is larger than the minimum readout time (and vertical blanking) then extra vertical blanking will be added and the frame rate will slow to accommodate the requested integration time.

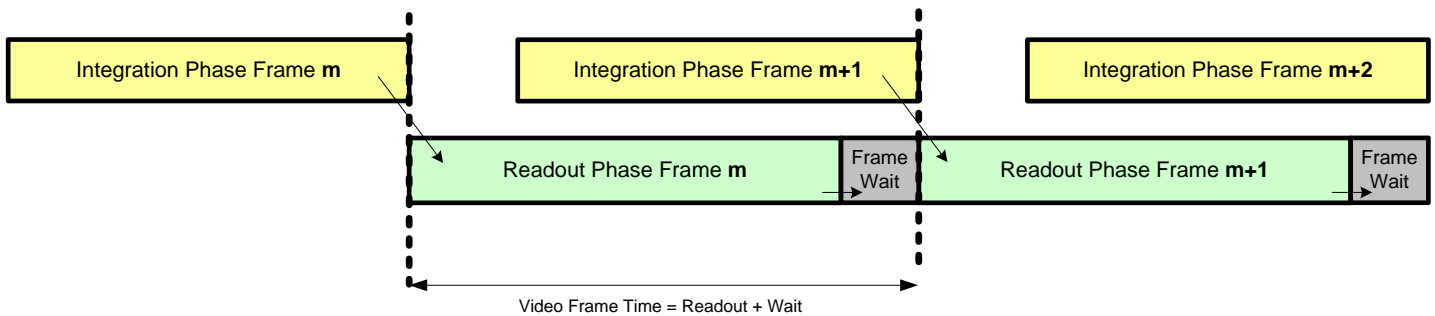


Figure 17: Default frame time configuration (Frame A)

If the Integration Phase is less than the Readout Phase then the start of integration is automatically delayed to minimize the storage time and dark current.

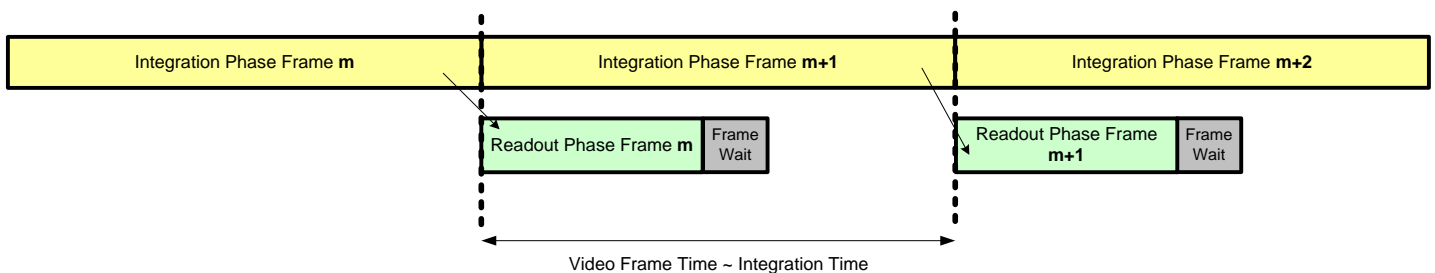


Figure 18: Frame time with extended integration time.

If the Readout Phase (+ Vblanking) is less than the Integration Phase, then the readout occurs as soon the integration is complete to minimize the storage time and dark current.

See the *KAC-06040 User Guide* for detailed calculation of the Integration Phase, Readout Phase, and Frame Wait.

To first-order the Readout Phase is equal to the number of rows * row_time.



GLOBAL SHUTTER READOUT

Global Shutter readout provides the maximum precision for freezing scene motion. Any motion artifacts will be 100% defined by an ideal integration time edge. Every pixel in the array starts and stops integration at the same time.

Figure 19 illustrates a Global Shutter Frame readout assuming the recommended Start-up Script defined in the *KAC-06040 User Guide* (8 LVDS banks, Dual-Scan, 8.75 μSec line time). The Frame Wait Phase is not shown due to its small default size (1 LL) and for clarity.

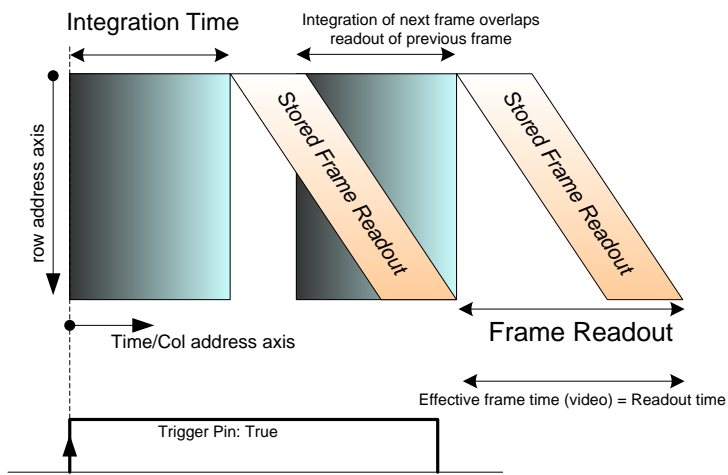


Figure 19: Illustration of frame time for Global Shutter readout

Global Shutter readout mode is selected using Bits [1:0] of Register 01D1h.

Images can be initiated by setting and holding the TRIGGER input pin or by placing the sensor into RUNNING mode by writing 03d to register 4019h. If the TRIGGER input pin is true when at the start of the integration time for the next frame then the sensor will complete an additional frame integration and readout. In the case shown in Figure 19 two frames will be output.



ROLLING SHUTTER READOUT

The KAC-06040 high speed Rolling Shutter readout provides the maximum dynamic range while still providing excellent motion capture. In Rolling Shutter the readout more closely matches a film camera shutter. Each row of the image receives the same integration time, but each row starts and ends at a different time as the shutter travels from the top of the array to the bottom. In the Figure 20 frame time illustration this 'moving shutter' displays as a sloped edge for the blue pixel array region, just as the readout edge is sloped.

The Figure 20 illustration shows a 2 frame output sequence using the external TRIGGER pin.

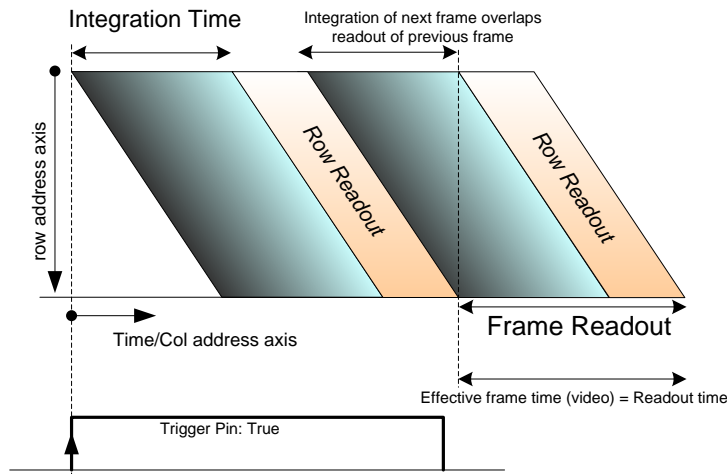


Figure 20: Illustration of Frame time for Rolling Shutter readout

Rolling Readout mode can be selected using Bits [1:0] of Register 01D1h.

Images can be initiated by setting and holding the TRIGGER input pin or by placing the sensor into RUNNING mode by writing 03d to register 4019h. If the TRIGGER input pin is True when at the start of the integration time for the next frame then the sensor will complete an additional frame integration and readout.



8 Bank LVDS Data Readout

LVDS BANKS

The KAC-06040 provides 8 parallel pixel banks, each consisting of 8 LVDS differential pairs (7 data pairs + 1 clock pair). This allows the output of 8 pixels per LVDS clock period. All 7 data pairs, of each bank, are used only in 14 bit operation mode. By default only 5 data pairs are used for 10 bit mode (D4 → D0). The unused pairs are held in low-power high impedance mode.

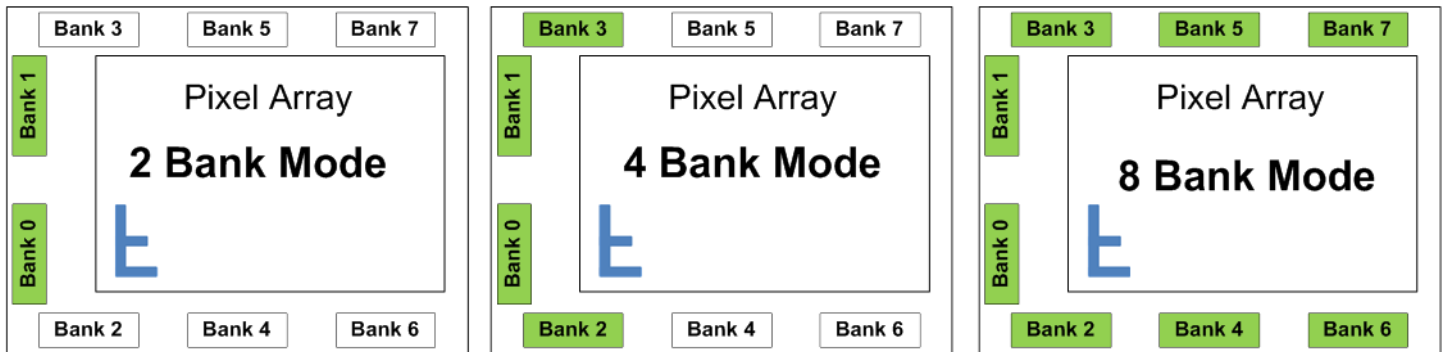


Figure 21: LVDS Bank labeling

The number of output banks used is independent of the ADC bit depth chosen. By default the KAC-06040 uses all 8 output banks for maximum frame rate. If technical restrictions prevent the use of 8 LVDS banks, the sensor can be programmed to use 4 or 2 banks, however this can result in reduced frame rate and reduction of image quality. It is recommended that 8 banks be used when possible. Only the 8 bank option is discussed in detail in this specification, see the *KAC-06040 User Guide* for additional detail on 4 and 2 bank mode.

In order to minimize the LVDS clock rate (and power) for a given data rate the pixels are output in DDR (Double Data Rate) where the MSB is always sent first (on rising edge) and the LSB second (falling edge) This is not programmable.

PORTS PER LVDS BANK

The MSB comes out first on the falling edge, followed by the LSB on the net rising edge.

| Bit Depth | Edge of DATA_CLK | Data0 | Data1 | Data2 | Data3 | Data4 | Data5 | Data6 |
|-----------|----------------------|-------|-------|-------|-------|-------|-------|-------|
| 14 bits | Falling (MSB nibble) | D7 | D8 | D9 | D10 | D11 | D12 | D13 |
| | Rising (LSB nibble) | D0 | D1 | D2 | D3 | D4 | D5 | D6 |
| 12 bits | Falling (MSB nibble) | D6 | D7 | D8 | D9 | D10 | D11 | HiZ |
| | Rising (LSB nibble) | D0 | D1 | D2 | D3 | D4 | D5 | HiZ |
| 10 bits | Falling (MSB nibble) | D5 | D6 | D7 | D8 | D9 | HiZ | HiZ |
| | Rising (LSB nibble) | D0 | D1 | D2 | D3 | D4 | HiZ | HiZ |
| 8 bits | Falling (MSB nibble) | D4 | D5 | D6 | D7 | HiZ | HiZ | HiZ |
| | Rising (LSB nibble) | D0 | D1 | D2 | D3 | HiZ | HiZ | HiZ |

Figure 22: Number of LVDS pairs (ports) used vs. bit depth



8 BANK PIXEL ORDER

The KAC-06040 always processes two rows at a time. Even row decodes are sent to the bottom ADC and LVDS output banks (0, 2, 4, 6). Odd rows are sent to the top ADC and LVDS banks (1, 3, 5, 7). The ROI must be (and is internally forced to) an even size and always starting on an even row decode.

The rows are read out progressively left to right (small column address to large). Eight pixels are sent out of the chip at once, one pixel per LVDS bank per LVDS clock cycle.

Pixel Readout order:

1. Two rows are selected, the even row is sent to the bottom ADC and the odd row to the top ADC.
2. Each ADC converts its row of pixel data at once and stores the result in a line buffer.
3. At default settings there are 4 output LVDS banks for each ADC.
4. Each LVDS Bank outputs one pixel per clock cycle, so 4 pixels of each row are output each full LVDS clock cycle, two rows in parallel for 8 pixels per clock cycle total.
5. The pixels are sent out from left to right (low column number to high column number). So the first 4 pixels are sent out on clock cycle 1, and the next 4 pixels to the right are sent out on clock cycle 2.
6. To conserve the number of wires per port, the 10 bits per pixel are sent out DDR (Dual Data Rate) over 5 ports. On the falling edge the upper 5 MSB bits are sent out, and on the rising edge the lower 5 bits LSB are sent out. Completing one full LVDS clock cycle and one set of eight pixels.

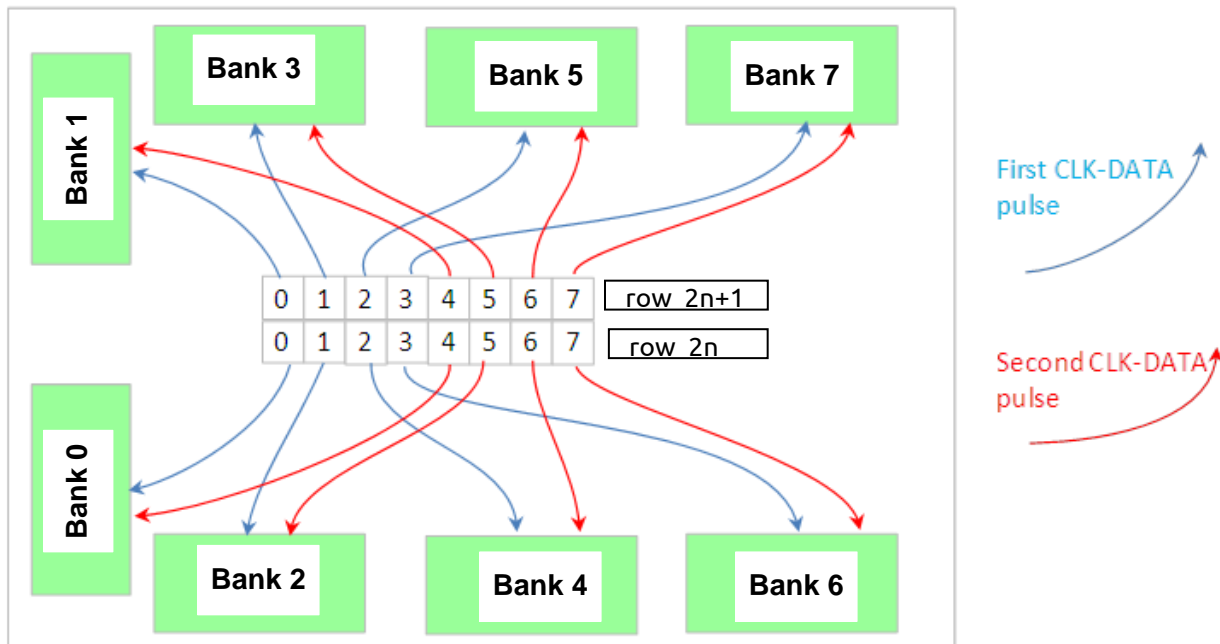


Figure 23: Pixel readout order diagram



| LVDS Bank | Row | Pixel number | | | | |
|------------------|-------------|--------------|---|----|----|----|
| Bank 0 | 2 n (even) | 0 | 4 | 8 | 12 | 16 |
| Bank 2 | 2 n (even) | 1 | 5 | 9 | 13 | 17 |
| Bank 4 | 2 n (even) | 2 | 6 | 10 | 14 | 18 |
| Bank 6 | 2 n (even) | 3 | 7 | 11 | 15 | 19 |
| Bank 1 | 2 n+1 (odd) | 0 | 4 | 8 | 12 | 16 |
| Bank 3 | 2 n+1 (odd) | 1 | 5 | 9 | 13 | 17 |
| Bank 5 | 2 n+1 (odd) | 2 | 6 | 10 | 14 | 18 |
| Bank 7 | 2 n+1 (odd) | 3 | 7 | 11 | 15 | 19 |
| LVDS Clock Cycle | | 1 | 2 | 3 | 4 | 5 |

Figure 24: Pixel readout order table

DE-SERIALIZER SETTINGS

Figure 25 shows the data stream of one LVDS bank for 10 bit resolution.

Data serialization is fixed at 2 cycle DDR for all bit depths. Data output order is MSB first on the falling edge, and LSB following on the rising edge.

Four pixel values per synchronization word are embedded into the video stream per LVDS bank.

The SOL/SOF synchronization words are sent out of each LVDS bank before the first valid pixel data from that bank. Each bank outputs all 4 syncs of the SOF or SOL.

And each of the active LVDS banks each output all 4 sync codes for the EOL/EOF.

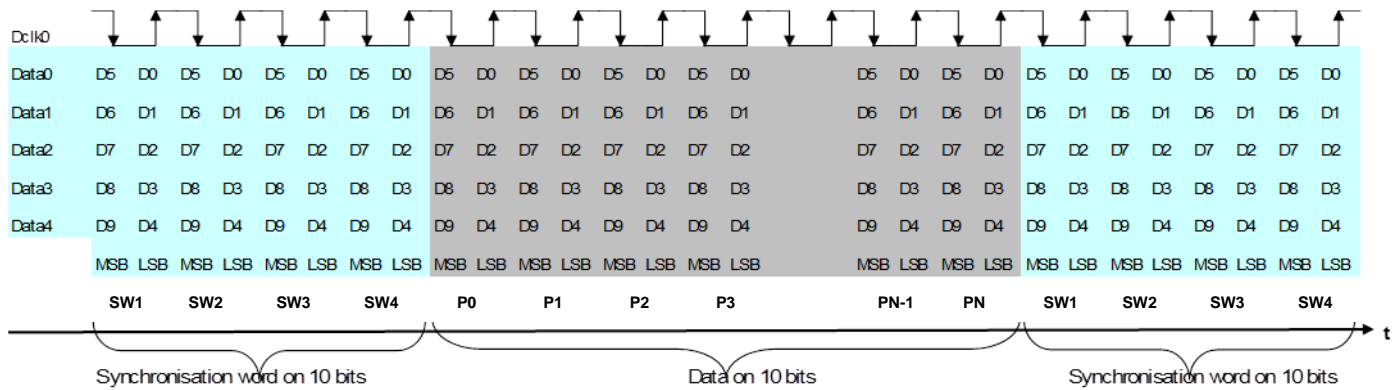


Figure 25: Data stream of one LVDS Bank for 10bits ADC resolution



Register Definition

| 16 bit addr (Hex) | Reset Value Hex/Dec | SPI State | Register Name | |
|-------------------|---------------------|-----------------------------|-----------------------------|----------------|
| 0001 | 0d | Any | Frame A ROI y1 | |
| 0009 | 2144d | | Frame A ROI h1 | |
| 0011 | 0d | | Frame A ROI x1 | |
| 0019 | 2848d | | Frame A ROI w1 | |
| 0021 | 0d | | Frame A sub-ROI y2 | |
| 0029 | 0d | | Frame A sub-ROI h2 | |
| 0031 | 0d | | Frame A sub-ROI x2 | |
| 0039 | 0d | | Frame A sub-ROI w2 | |
| 0041 | 0d | | Frame A sub-ROI y3 | |
| 0049 | 0d | | Frame A sub-ROI h3 | |
| 0051 | 0d | | Frame A sub-ROI x3 | |
| 0059 | 0d | | Frame A sub-ROI w3 | |
| 0061 | 0d | | Frame A sub-ROI y4 | |
| 0069 | 0d | | Frame A sub-ROI h4 | |
| 0071 | 0d | | Frame A sub-ROI x4 | |
| 0079 | 0d | | Frame A sub-ROI w4 | |
| 0081 | 0011h | | Frame A Decimation | |
| 0089 | 0d | | Frame A Video Blanking | |
| 0091 | 3430d | | Frame A Integration Rows | |
| 0099 | 0d | | Frame A Integration Sub-Row | |
| 00A1 | 10d | | Frame A Black Level | |
| 00A9 | 001Fh | | Frame A Gain | |
| 00E9 | 344d | | Any | Frame B ROI y1 |
| 00F1 | 1456d | | | Frame B ROI h1 |
| 00F9 | 136d | Frame B ROI x1 | | |
| 0101 | 2576d | Frame B ROI w1 | | |
| 0109 | 0d | Frame B sub-ROI y2 | | |
| 0111 | 0d | Frame B sub-ROI h2 | | |
| 0119 | 0d | Frame B sub-ROI x2 | | |
| 0121 | 0d | Frame B sub-ROI w2 | | |
| 0129 | 0d | Frame B sub-ROI y3 | | |
| 0131 | 0d | Frame B sub-ROI h3 | | |
| 0139 | 0d | Frame B sub-ROI x3 | | |
| 0141 | 0d | Frame B sub-ROI w3 | | |
| 0149 | 0d | Frame B sub-ROI y4 | | |
| 0151 | 0d | Frame B sub-ROI h4 | | |
| 0159 | 0d | Frame B sub-ROI x4 | | |
| 0161 | 0d | Frame B sub-ROI w4 | | |
| 0169 | 0011h | Frame B Decimation | | |
| 0171 | 0d | Frame B Video Blanking | | |
| 0179 | 3430d | Frame B Integration Rows | | |
| 0181 | 0d | Frame B Integration Sub-Row | | |
| 0189 | 10d | Frame B Black Level | | |
| 0191 | 001Fh | Frame B Gain | | |

| 16 bit addr (Hex) | Reset Value Hex/Dec | SPI State | Description |
|-------------------|---------------------|----------------|----------------------------|
| 01D1 | FC10h | CONFIG only | Config1 |
| 01D9 | 0500h | CONFIG or IDLE | Config2 |
| 01E1 | 00AAh | CONFIG or IDLE | Analog/Digital Power Mode |
| 01E9 | 0000h | CONFIG or IDLE | Dual-Video Repetition |
| 01F1 | 0d | CONFIG or IDLE | Vertical Blanking |
| 01F9 | 3431d | CONFIG or IDLE | Fixed Frame Period |
| 0201 | 1400d | CONFIG or IDLE | Line Length (LL) |
| 0209 | 002Dh | CONFIG or IDLE | ADC Bit Depth |
| 0211 | 0000h | CONFIG or IDLE | FLO Edge Delay |
| 0219 | 0000h | CONFIG or IDLE | MSO Edge Delay |
| 0708 | 0000h | Any | Sensor Type FB |
| 0710 | 0000h | Any | Temperature Sensor FB |
| 0718 | 0000h | Any | General Feedback |
| 0720 | 0000h | Any | Minimum LL FB |
| 0730 | 0000h | Any | User OTP1 FB |
| 0738 | 0000h | Any | User OTP2 FB |
| 2059 | 0300h | CONFIG only | Output Bank Select 1 |
| 2099 | 2877h | CONFIG only | PLL1 Setting |
| 20A1 | 0861h | CONFIG only | PLL2 Setting |
| 2449 | 1C32h | CONFIG only | Sub-LVDS Enable |
| 2479 | 10B8h | Any | BSC Clamp Threshold A |
| 2481 | 20C7h | Any | BSC Clamp Threshold B |
| 2499 | 0000h | CONFIG or IDLE | Test Pattern Control 1 |
| 24A1 | 536d | CONFIG or IDLE | Test Pattern Control 2 |
| 24B9 | 202d | CONFIG only | Companding Slope 1 Length |
| 24C1 | 101d | CONFIG only | Companding Slope 2 Length |
| 24C9 | 101d | CONFIG only | Companding Slope 3 Length |
| 24D1 | 101d | CONFIG only | Companding Slope 4 Length |
| 24D9 | 101d | CONFIG only | Companding Slope 5 Length |
| 24E1 | 420d | CONFIG only | Companding Slope 6 Length |
| 24E9 | 0083h | CONFIG only | Companding Slope 1/2 Gain |
| 24F1 | 038Fh | CONFIG only | Companding Slope 3/4 Gain |
| 24F9 | 0FBFh | CONFIG only | Companding Slope 5/6 Gain |
| 2501 | 1F9Fh | CONFIG only | Companding Slope 7 Gain |
| 2559 | 7804h | Any | Defect Avoidance Threshold |
| 2561 | 003Fh | Any | Defect Avoidance Enable |
| 25C1 | 0003h | CONFIG or IDLE | Encoded Sync Config |
| 2619 | 000Bh | CONFIG only | Output Bank Select 2 |
| 4000 | 4100h | Any | Chip Revision Code |
| 4008 | 0011h | Any | Chip ID Code MSB |
| 4010 | 0080h | Any | Chip ID Code LSB |
| 4019 | 0000h | Any | Set Sensor State |
| 4021 | 0000h | CONFIG or IDLE | OTP Address |
| 4029 | 0000h | CONFIG or IDLE | OTP Write Data |
| 4031 | 0000h | CONFIG or IDLE | Command_Done_FB |
| 4041 | 0000h | CONFIG or IDLE | OTP Read Data |
| 4061 | 0000h | CONFIG or IDLE | Soft Reset |

See Notes on following page.



Notes – SPI State (the Sensor State from which the register can be set):

1. "Any": Can be written from any state (including RUNNING)
2. "CONFIG or IDLE": These registers can be changed in IDLE or CONFIG states
3. "CONFIG only": Sensor must be in CONFIG state to set these registers
4. Only Register 4018h and 4060h may be set when the sensor is in STANDBY state
5. FB = Feedback, a read-only register that provides some error or status

Notes - Decimal, hexadecimal, binary values:

1. "b" denotes a binary number, a series of bits: MSB is on the left, LSB is on the right.
2. "h" or "hex" denotes a hexadecimal number (Base 16, 1-9, A-F). The letters in a hex number are always capitalized
3. "d" denotes a decimal number.
4. Note that "0" and "1" are the same value in all number base systems and sometimes the base notation is omitted.

The KAC-06040 features an embedded microprocessor by Cortus.

Absolute Maximum Ratings

For Supplies and Inputs the maximum rating is defined as a level or condition that should not be exceeded at any time. If the level or the condition is exceeded, the device will be degraded and may be damaged. Operation at these values will reduce Mean Time to Failure (MTTF).

SUPPLIES

| Parameter | Value |
|-----------------------------------|--------------------------|
| AVDD_LV, VDD_DIG | -0.25 V; 2.3 V |
| AVDD_HV, Vref_P, VDD_LVDS | -0.25 V; 4 V |
| DC Input voltage at any input pin | -0.25 V; VDD_DIG +0.25 V |

CMOS INPUTS

| Parameter | Symbol | Min | Typical | Max | Unit |
|--------------------------|----------|--------------|---------|--------------|------|
| Input voltage low level | V_{IL} | -0.3 | | 0.35 VDD_DIG | V |
| Input voltage high level | V_{IH} | 0.65 VDD_DIG | | VDD_DIG +0.3 | V |



Operating Ratings

INPUT CLOCK CONDITIONS

| Parameter | Min | Typical | Max | Unit |
|------------------------------------|-----|---------|-----|------|
| Frequency for Clk_In1 and Clk_In2 | 5 | 48 | 50 | MHz |
| Duty cycle for Clk_In1 and Clk_In2 | 40 | 50 | 60 | % |
| RESETN | 10 | | | ns |
| TRIGGER pin minimum pulse width | 20 | | | ns |

TRIGGER must be active at least 4 periods of PLL1 (~12.5 ns at 320 MHz) to start a capture cycle. The polarity of the active level is configurable by Register 01D8h Bit 0; the default is active high (ie pin = VDD_DIG = trigger request).

OPERATING TEMPERATURE

| Description | Symbol | Minimum | Maximum | Units | Notes |
|-----------------------|--------|---------|---------|-------|-------|
| Operating Temperature | TOP | -50 | +80 | °C | 1 |

Notes:

- Under conditions of no condensation on the sensor

CMOS IN/OUT

CMOS IN/OUT characteristics

| Parameter | Symbol | Min | Typical | Max | Unit |
|--|----------------------|--------------|---------|------|------|
| Output voltage low level | V _{OL} | | | 0.45 | V |
| Output voltage high level | V _{OH} | VDD_DIG-0.45 | | | V |
| Input Hysteresis voltage | V _{TH} | | 0.25 | | |
| Pull-up resistor value for RESETN pin | R _{PU} | 62 | | | kΩ |
| Pull-down resistor value for TRIGGER pin | R _{PD} | 100 | | | kΩ |
| Current on ADC_REF pin | I _{ADC_REF} | | 100 | | μA |



SUPPLIES

| Parameter | Symbol | Min | Typical | Max | Unit | Comment |
|---------------------------|----------|------|---------|------|------|---------|
| LVDS IO supply | VDD_LVDS | 3.15 | 3.30 | 3.63 | V | |
| Pixel high voltage supply | AVDD_HV | 3.40 | 3.50 | 3.60 | V | |
| Pixel low voltage supply | Vref_P | 2.71 | 2.80 | 2.88 | V | |
| Analog power supply | AVDD_LV | 1.71 | 1.80 | 1.89 | V | |
| Digital power supply | VDD_Dig | 1.9 | 2.00 | 2.10 | V | |
| AVDD_HV – Vref_P | | | 0.5 | | V | |

| Parameter | Symbol | Min | Typical | Max | Unit | Comment |
|--------------------------|---------------------------|-----|---------|-----|------|---------|
| Power in STANDBY State | | | 2 | | mW | |
| Current in STANDBY State | | | | | | |
| | VDD_LVDS | | < 0.5 | | mA | |
| | AVDD_HV | | < 0.5 | | mA | |
| | AVDD_LV | | < 0.5 | | mA | |
| | Vref_P | | < 0.5 | | mA | |
| | VDD_DIG | | 1 | | mA | |
| Power in CONFIG State | | | 320 | | mW | |
| Current in CONFIG State | | | | | | |
| | VDD_LVDS | | < 0.5 | | mA | |
| | AVDD_HV | | < 0.5 | | mA | |
| | AVDD_LV | | < 0.5 | | mA | |
| | Vref_P | | < 0.5 | | mA | |
| | VDD_DIG | | 162 | | mA | |
| Power in IDLE State | | | 510 | | mW | |
| Current in IDLE State | | | | | | |
| | VDD_LVDS | | < 0.5 | | mA | |
| | AVDD_HV | | 20 | | mA | |
| | AVDD_LV | | < 0.5 | | mA | |
| | Vref_P | | < 0.5 | | mA | |
| | VDD_DIG | | 222 | | mA | |
| Power in RUNNING State | | | 2.26 | | W | |
| Current in RUNNING State | | | | | | |
| | VDD_LVDS in Sub-LVDS mode | | 115 | | mA | |
| | AVDD_HV | | 100 | | mA | |
| | AVDD_LV | | 20 | | mA | |
| | Vref_P | | 20 | | mA | |
| | VDD_DIG | | 721 | | mA | |

Notes:

1. Voltages relative to VSS. Current measurements made in darkness.
2. Max Frame Rate (and thus maximum current mode)
 - a. Tri-Scan mode
 - b. 10 bit ADC
 - c. PLL2 = Max spec MHz,
 - d. No horizontal or vertical blanking and 8 active LVDS banks).



SPI (Serial Peripheral Interface)

The SPI communication interface lets the application system to control and configure the sensor. The sensor has an embedded slave SPI interface. The application system is the master of the SPI bus.

| Name | Sensor I/O direction | Description |
|------|----------------------|--|
| CSN | I | SPI chip select - Active low, this input activates the slave interface in the sensor |
| SCK | I | SPI clock – toggled by the master |
| MISO | O | SPI master serial data input – slave(sensor) serial data output |
| MOSI | I | SPI master serial data output – slave(sensor) serial data input |

| Parameter | Min | Typ | Max | Unit |
|-----------------------|-----|-----|-----|------|
| SPI SCK | 5 | 25 | 50 | MHz |
| Duty cycle on SPI SCK | 40 | 50 | 60 | % |

CLOCK POLARITY AND PHASE

CPOL(Clock POLarity) and CPHA(Clock PHase) are commonly defined in SPI protocol such as to define SCK clock phase and polarity. The KAC-06040 defaults to expecting the master to be configured with CPOL=1 (the base value of the clock is VDD_DIG) and CPHA=1 (data is valid on the clock rising edge).

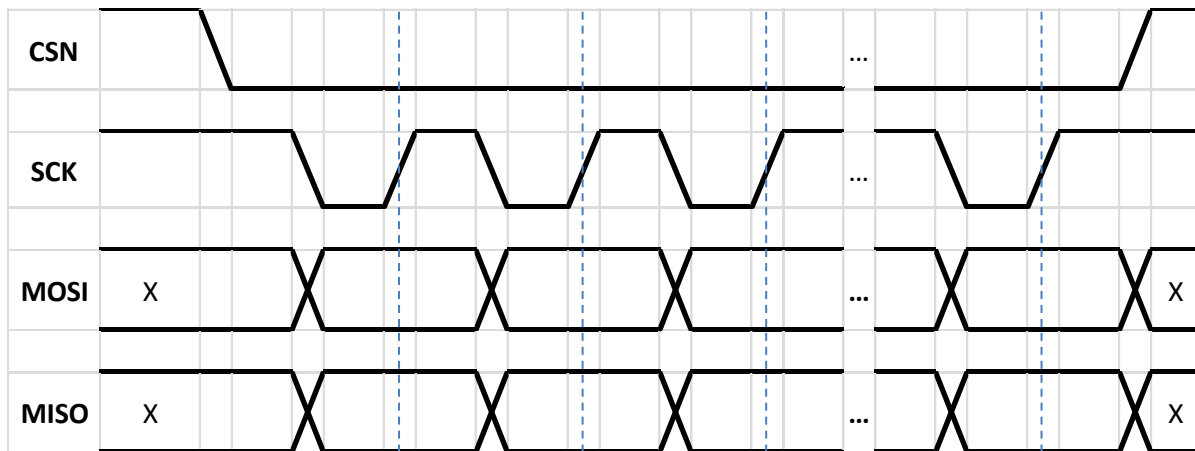


Figure 26: CPOL = 1 and CPHA = 1 configuration



SPI PROTOCOL

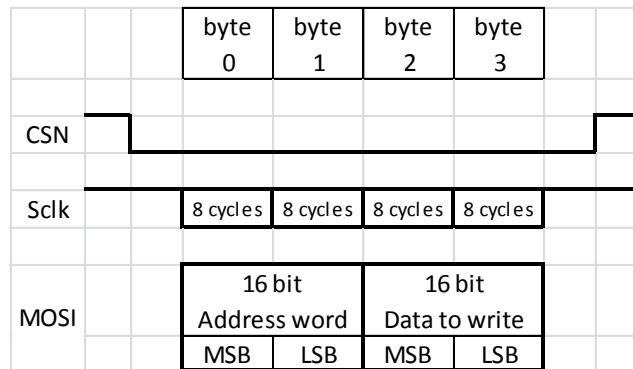


Figure 27: SPI Write byte order

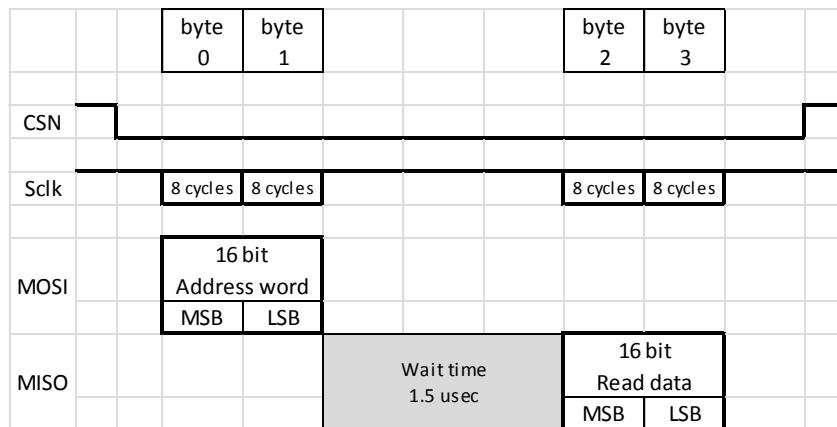


Figure 28: SPI Read byte order

There is a delay during readback between presenting the address to be read on the MOSI and being able to read the register contents on the MISO. This delay is not the same for all registers. Some are available immediately, some require a longer fetch time. The 1.5 μ sec shown in Figure 28 is the maximum time to fetch a register’s value when in CONFIG state (the recommended state for changing registers). Some registers can be adjusted during RUNNING state (see the register summary on page 37). If performing a readback during RUNNING state, the delay could be as long as 4.5 μ sec depending on when in the row the request was sent and the sensor’s microcontroller activity at that moment.

The SPI FB pin can be used to dynamically adjust the wait time for a register contents to be fetched. Figure 29 illustrates the use of the FB pin. The FB output will be low (VSS) until the requested register contents are ready to be clocked out of the MOSI pin. Once the FB pin goes high (VDD_DIG) then clocking the Sclk will transmit the requested register contents. The SPI FB pin is inactive by default, this function is enabled in register 4041h.

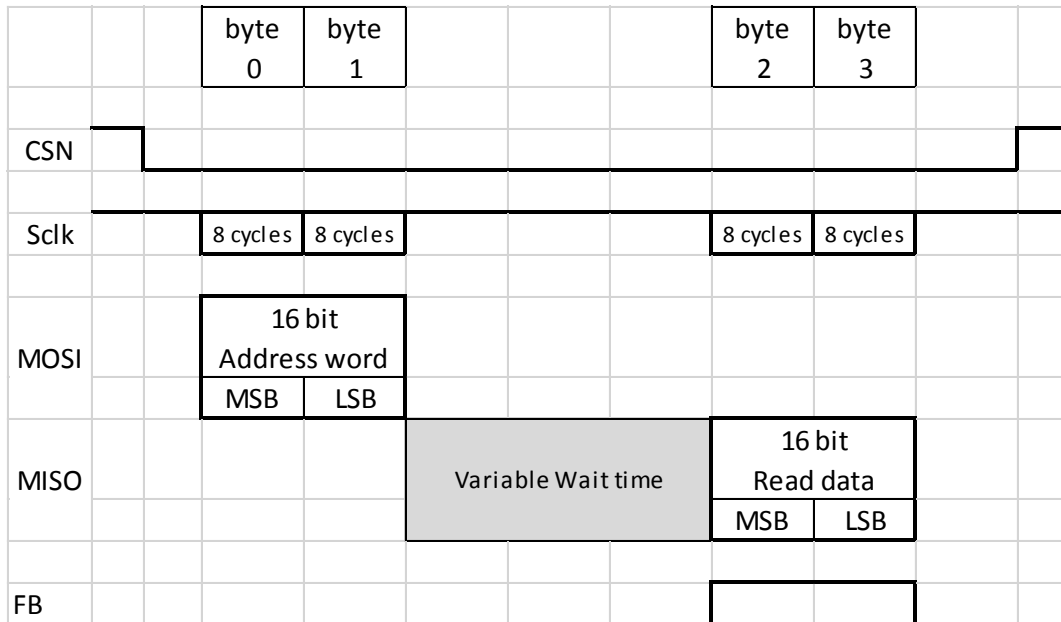


Figure 29: SPI Read with FBRB handshaking

Note that readback does not provide the actual register value being used, but reflects the next value to be used. All new register writes are placed in a shadow memory until they can be updated into the active memory. This active memory update occurs at the start of the next frame or upon entering the state listed in the Register Summary table on page 37. Register reads access this shadow memory not the active memory. For instance if the sensor is in RUNNING mode and you adjust the LL in register 200h. You can read back and confirm that your register change was received by the sensor; however, the LL will not change since register 200h can only be changed in CONFIG state. If you change the sensor state to CONFIG and then back to RUNNING, then the new LL will take effect.



SPI INTERFACE

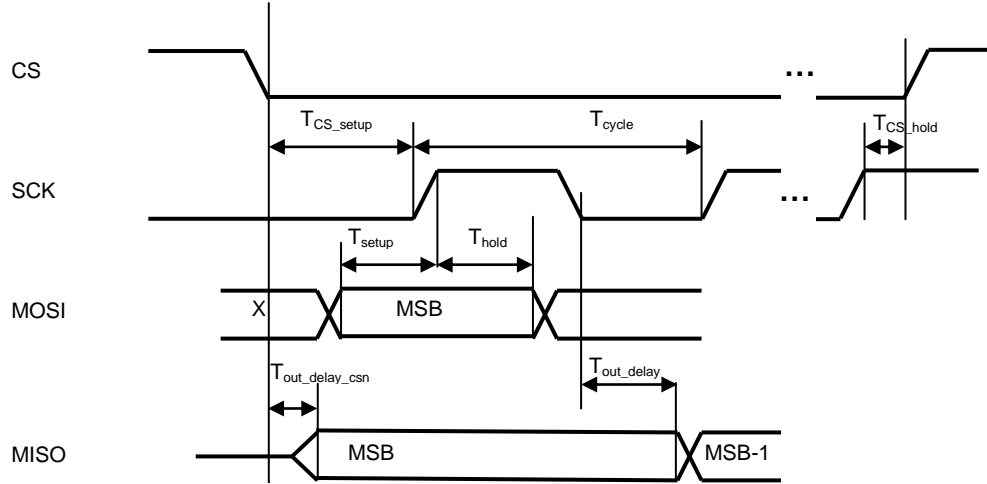


Figure 30: SPI timing chronogram

SPI TIMING SPECIFICATION

| Symbol | Min Value | Max Value |
|-----------------------|-----------|-----------|
| T_{cycle} | 25 ns | |
| T_{setup} | | 2.9 ns |
| T_{hold} | 0.8 ns | |
| T_{cs_setup} | 12.5 ns | |
| T_{cs_hold} | 12.5 ns | |
| $T_{out_delay_csn}$ | 3.1 ns | 4.7 ns |
| T_{out_delay} | 4.9 ns | 8.7 ns |



LVDS Interface

The data output can be configured to follow standard TIA/EIA-644-A LVDS specification or a low power mode compatible with common Sub-LVDS definition used in FPGA industry. (Please refer to the *KAC-06040 User Guide* for more information).

Unless otherwise noted, min/max characteristics are for $T = -40\text{ }^{\circ}\text{C}$ to $+85\text{ }^{\circ}\text{C}$, output termination resistance $R_L = 100\ \Omega \pm 1\%$, Typical values are at $V_{DD_LVDS} = 3.3\text{ V}$.

Use register 2449h to select standard or Sub-LVDS. This document assumes that Sub-LVDS is active for all power measurements. Standard LVDS can increase the average power consumption as much as 200 mW in the case of minimum horizontal and vertical blanking.

STANDARD LVDS CHARACTERISTICS

| Parameter | Symbol | Min | Typical | Max | Unit |
|---|------------------|--------------|---------|--------------|---------------|
| Differential output voltage | VOD | 250 | 355 | 450 | mV |
| VOD variation between complementary output states | ΔV_{OD} | -20 | | +20 | mV |
| Common mode output voltage | VOCM | 1.235 | 1.259 | 1.275 | V |
| VOCM variation between complementary output states | ΔV_{OCM} | -25 | | +25 | mV |
| High impedance leakage current | IOZD | -1 | | +1 | μA |
| Output short circuit current: when D+ or D- connected to ground when D+ or D- connected to 3.3V | IOSD | 2.9 12.25 | | 4.3 30.47 | mA |
| Output capacitance | CDO | | 1.3 | | pF |
| Maximum Transmission Capacitive Load Expected (for 260 MHz LVDS clock) | | | | 10 | pF |

SUB-LVDS CHARACTERISTICS

| Parameter | Symbol | Min | Typical | Max | Unit |
|---|------------------|--------------|---------|--------------|---------------|
| Differential output voltage | V_{OD} | 140 | 180 | 220 | mV |
| VOD variation between complementary output states | ΔV_{OD} | -5 | | +5 | mV |
| Common mode output voltage | V_{OCM} | 0.88 | 0.9 | 0.92 | V |
| VOCM variation between complementary output states | ΔV_{OCM} | -10 | | +10 | mV |
| High impedance leakage current | I_{OZD} | -1 | | +1 | μA |
| Output short circuit current: when D+ or D- connected to ground when D+ or D- connected to 3.3V | I_{OSD} | 1.4 10.21 | | 2.2 30.47 | mA |
| Output capacitance | C_{DO} | | 1.3 | | pF |
| Maximum Transmission Capacitive Load Expected (for 260 MHz LVDS clock) | | | | 10 | pF |

| Parameter | Min | Typical | Max | Unit |
|------------------------|-----|---------|-----|------|
| LVDS_CLK | 50 | 160 | 160 | MHz |
| Duty cycle on LVDS_CLK | | 50 | | % |



IN-BLOCK LVDS TIMING SPECIFICATION

The table below gives LVDS timing specification for one group of LVDS for nominal frequency of 260 MHz. There is no skew specification between groups.

| Parameter | Symbol | Min | Typical | Max | Unit |
|---|------------|-----|---------|-----|------|
| Minimum time between data change and clock rising edge | t_{SDLH} | 600 | | | ps |
| Minimum time between clock rising edge and data change | t_{hDLH} | 600 | | | ps |
| Minimum time between data change and clock falling edge | t_{SDHL} | 600 | | | ps |
| Minimum time between clock falling edge and data change | t_{hDHL} | 600 | | | ps |
| Maximum differential skew between the 7 data pairs | t_{SKD} | | 200 | 700 | ps |

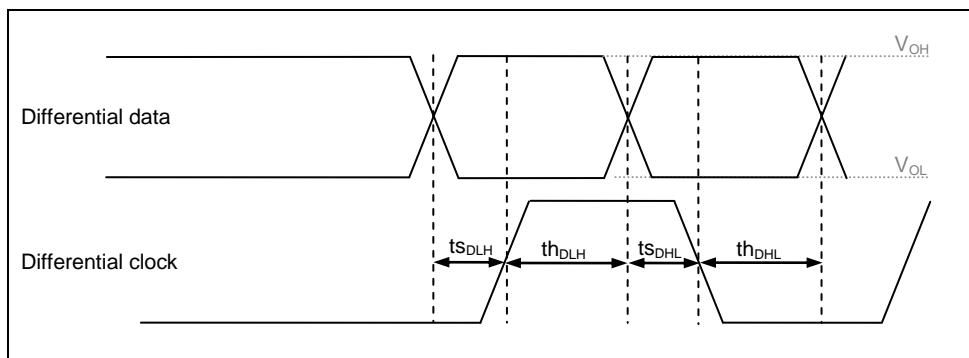


Figure 31: LVDS timing chronogram

INTER-BLOCK LVDS TIMING SPECIFICATION

| Parameter | Min | Typical | Max | Unit |
|------------------|-----|---------|-----|--------------------|
| Inter-block skew | | 6 | 12 | LVDS Clock periods |



Storage and Handling

STORAGE CONDITIONS

| Description | Symbol | Minimum | Maximum | Units | Notes |
|---------------------|--------|---------|---------|-------|-------|
| Storage Temperature | TST | -40 | +80 | °C | 1 |
| Humidity | RH | 5 | 90 | % | 2 |

Notes:

1. Long-term storage toward the maximum temperature will accelerate color filter degradation.
2. T=25 °C. Excessive humidity will degrade MTTF.

ESD

1. This device contains limited protection against Electrostatic Discharge (ESD). ESD events may cause irreparable damage to an image sensor either immediately or well after the ESD event occurred. Failure to protect the sensor from electrostatic discharge may affect device performance and reliability.
2. Devices should be handled in accordance with strict ESD procedures. Devices are shipped in static-safe containers and should only be handled at static-safe workstations.
3. See Application Note *Image Sensor Handling Best Practices* for proper handling and grounding procedures. This application note also contains workplace recommendations to minimize electrostatic discharge.
4. Store devices in containers made of electro-conductive materials.

COVER GLASS CARE AND CLEANLINESS

1. The cover glass is highly susceptible to particles and other contamination. Perform all assembly operations in a clean environment.
2. Touching the cover glass must be avoided.

3. Improper cleaning of the cover glass may damage these devices. Refer to Application Note *Image Sensor Handling Best Practices*.

ENVIRONMENTAL EXPOSURE

1. Extremely bright light can potentially harm image sensors. Do not expose to strong sunlight for long periods of time, as the color filters and/or microlenses may become discolored. In addition, long time exposures to a static high contrast scene should be avoided. Localized changes in response may occur from color filter/microlens aging.
2. Exposure to temperatures exceeding maximum specified levels should be avoided for storage and operation, as device performance and reliability may be affected.
3. Avoid sudden temperature changes.
4. Exposure to excessive humidity may affect device characteristics and may alter device performance and reliability, and therefore should be avoided.
5. Avoid storage of the product in the presence of dust or corrosive agents or gases, as deterioration of lead solderability may occur. It is advised that the solderability of the device leads be assessed after an extended period of storage, over one year.

SOLDERING RECOMMENDATIONS

1. For manual soldering the soldering iron tip temperature is not to exceed 370 °C. Higher temperatures may alter device performance and reliability.
2. Re-Flow soldering method is not recommended. Wave soldering may be employed, however solder should not touch the cover glass.



Mechanical Information

COMPLETED ASSEMBLY

Notes:

1. See Ordering Information for marking code.
2. No materials to interfere with clearance through package holes.
3. Imaging Array is centered at the package center.
4. Length dimensions in mm units

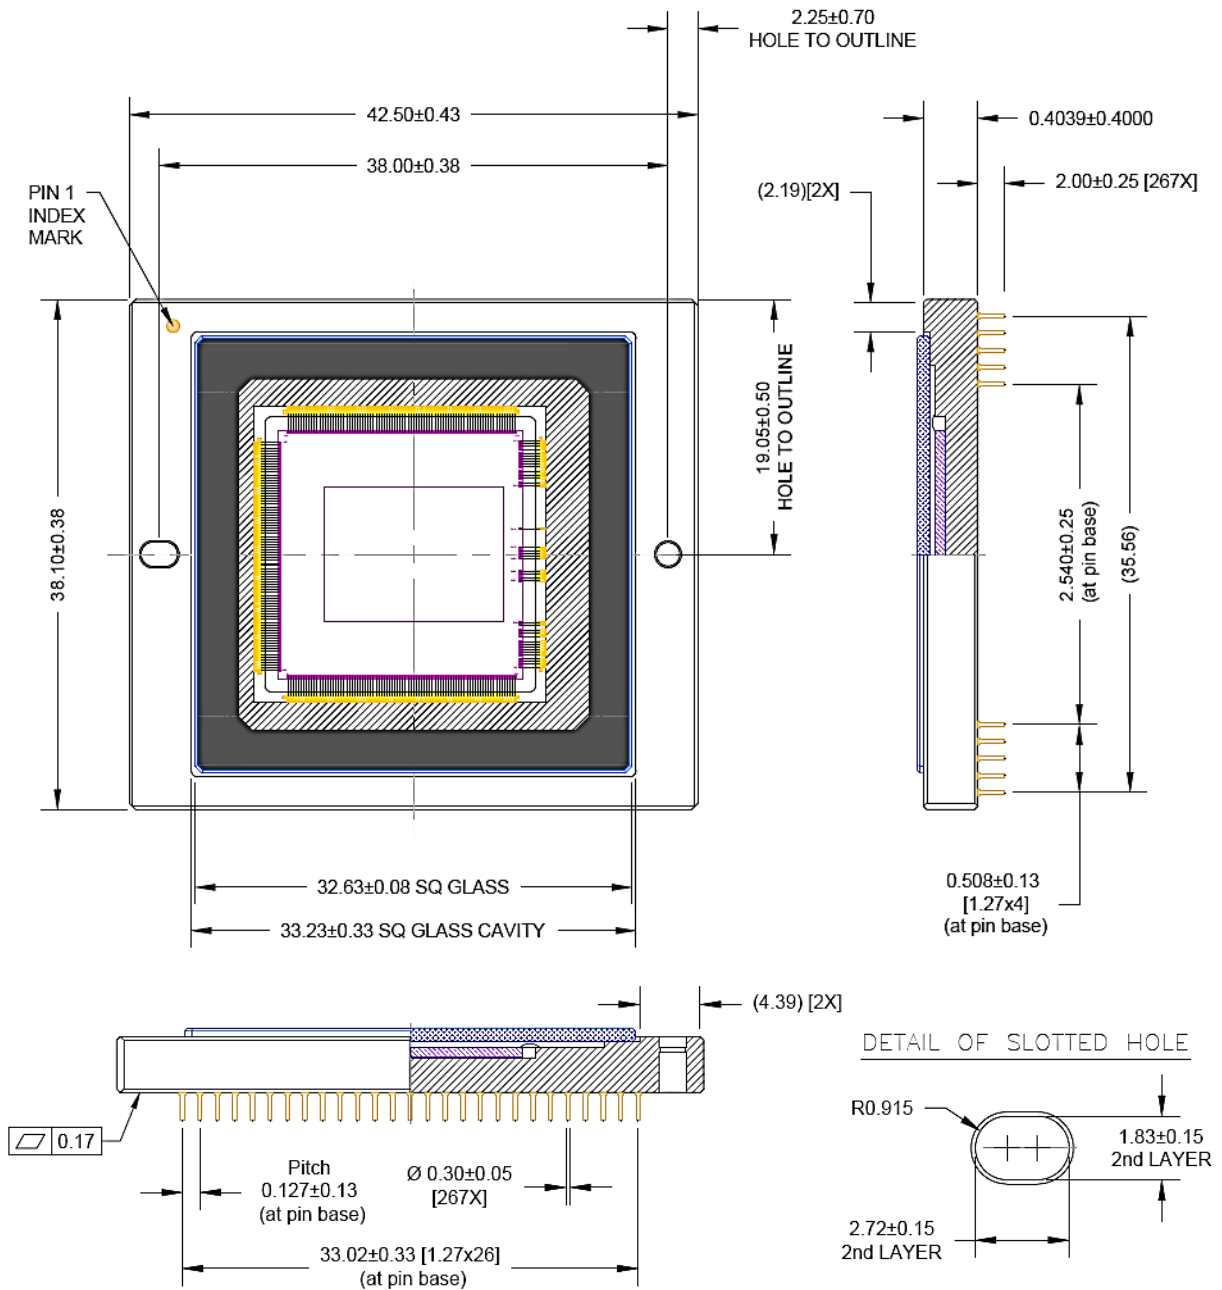


Figure 32: Completed Assembly (1 of 5)

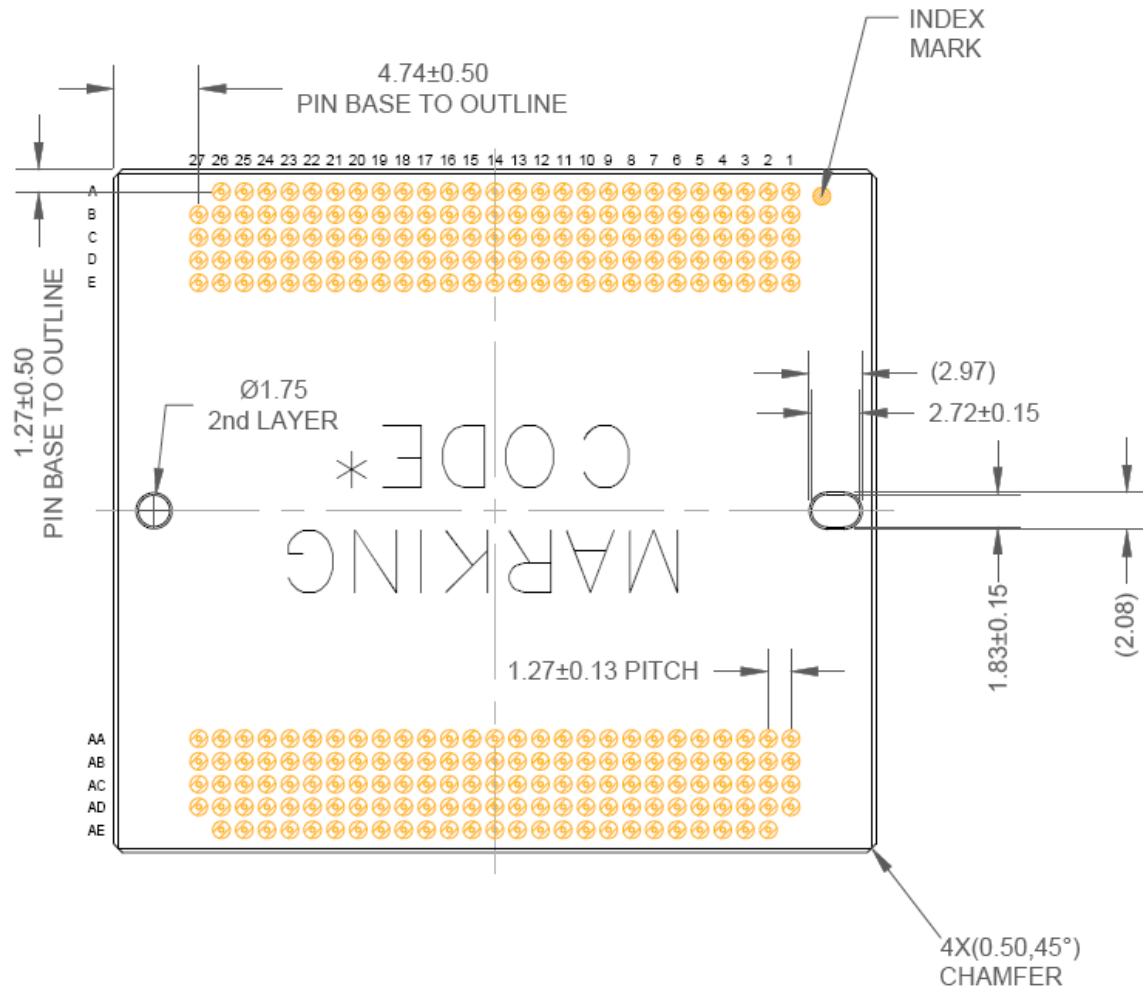


Figure 33: Completed Assembly (2 of 5)

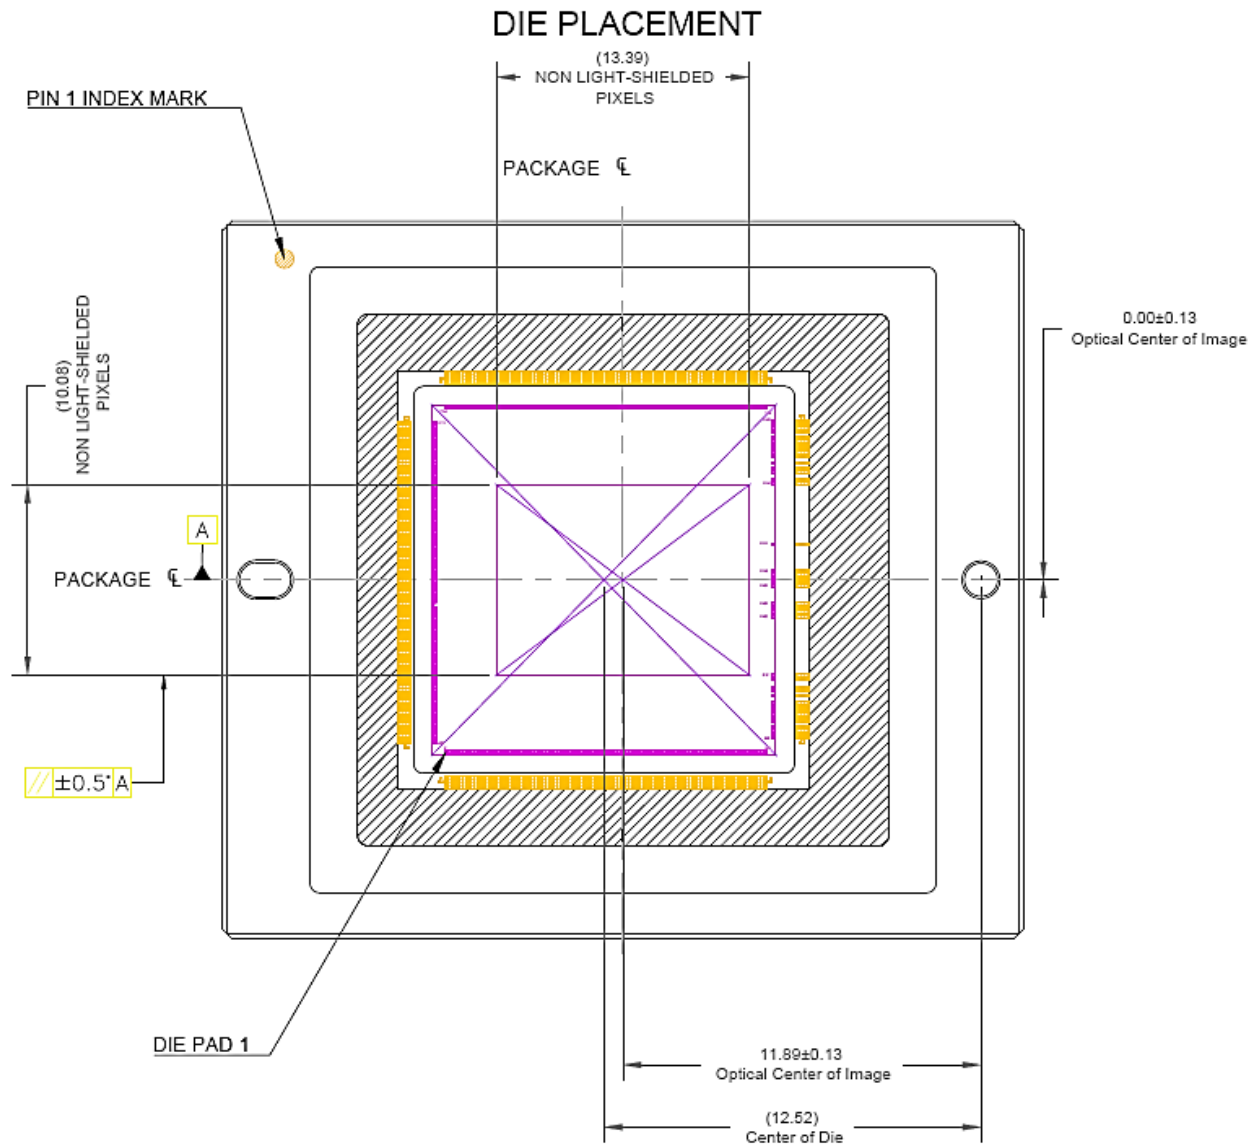


Figure 34: Completed Assembly (3 of 5)

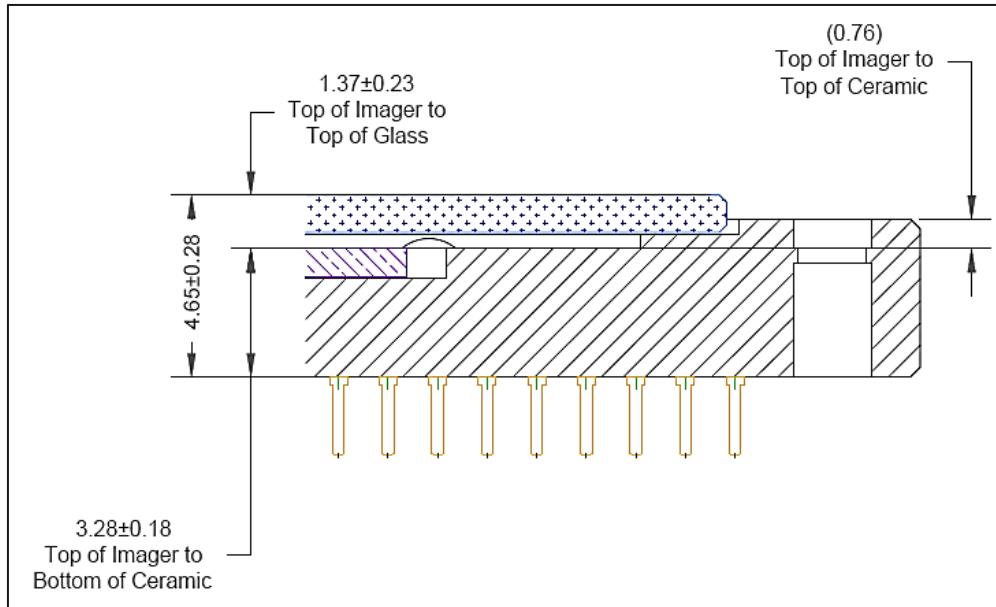


Figure 35: Completed Assembly (4 of 5)

IMAGE ORIENTATION

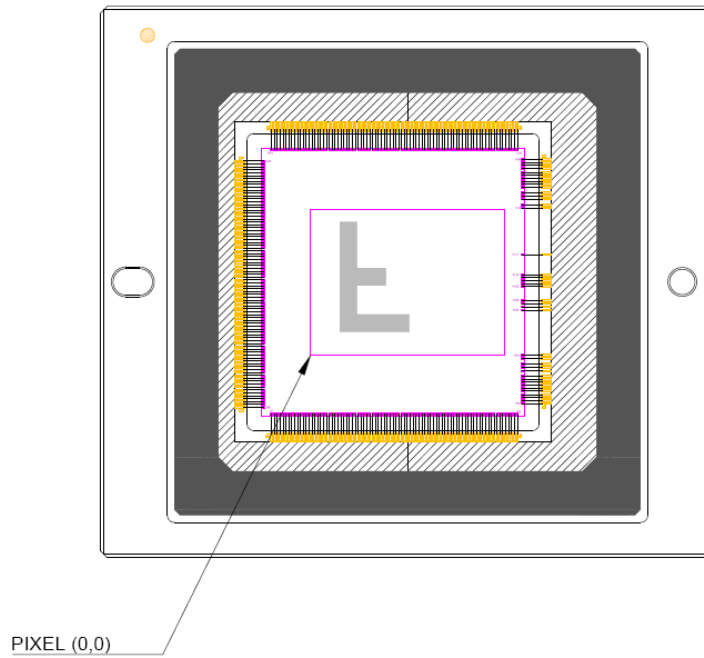




Figure 36: Completed Assembly (5 of 5)



MAR (MULTI-LAYER ANTI-REFLECTIVE COATING) COVER GLASS

Notes:

1. Units: IN [MM]
2. A-Zone Dust/Scratch Spec: 10 µm Maximum
3. Index of refraction: 1.5231

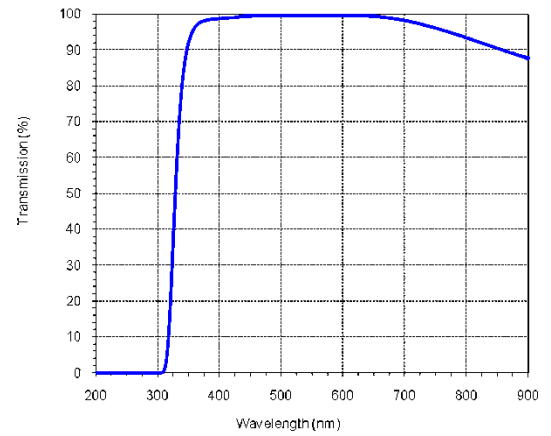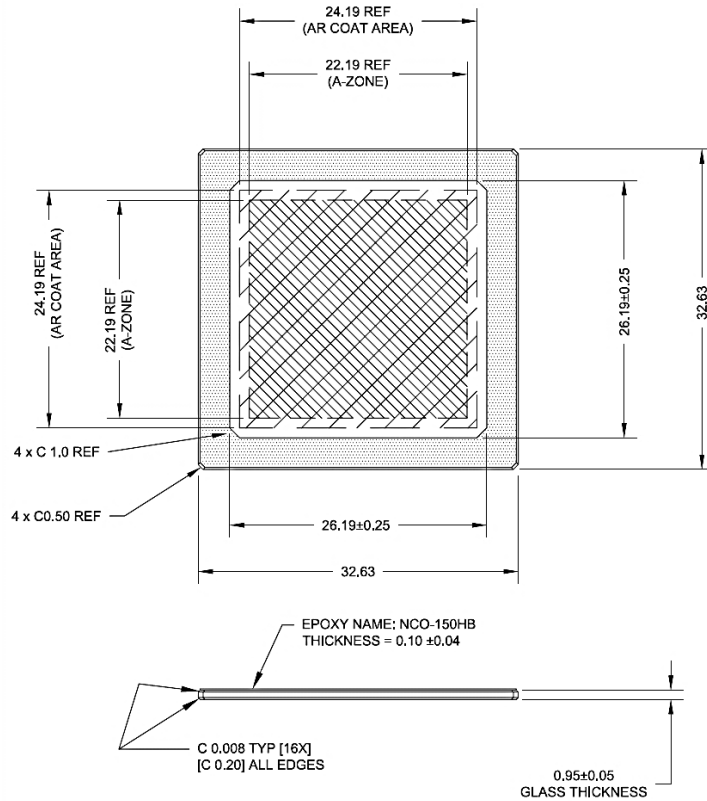

405-450 nm T > 98%
 450-650 nm T > 99%
 650-690 nm T > 98%
 690-770 nm T > 94%
 770-870 nm T > 88%

Figure 37: MAR Cover Glass Specification



Quality Assurance and Reliability

QUALITY AND RELIABILITY

All image sensors conform to the specifications stated in this document. This is accomplished through a combination of statistical process control and visual inspection and electrical testing at key points of the manufacturing process, using industry standard methods. Information concerning the quality assurance and reliability testing procedures and results are available from ON Semiconductor upon request. For further information refer to Application Note *Quality and Reliability*.

REPLACEMENT

All devices are warranted against failure in accordance with the *Terms of Sale*. Devices that fail due to mechanical and electrical damage caused by the customer will not be replaced.

LIABILITY OF THE SUPPLIER

A reject is defined as an image sensor that does not meet all of the specifications in this document upon receipt by the customer. Product liability is limited to the cost of the defective item, as defined in the *Terms of Sale*.

LIABILITY OF THE CUSTOMER

Damage from mishandling (scratches or breakage), electrostatic discharge (ESD), or other electrical misuse of the device beyond the stated operating or storage limits, which occurred after receipt of the sensor by the customer, shall be the responsibility of the customer.

TEST DATA RETENTION

Image sensors shall have an identifying number traceable to a test data file. Test data shall be kept for a period of 2 years after date of delivery.

MECHANICAL

The device assembly drawing is provided as a reference.

ON Semiconductor reserves the right to change any information contained herein without notice. All information furnished by ON Semiconductor is believed to be accurate.


Life Support Applications Policy

ON Semiconductor image sensors are not authorized for and should not be used within Life Support Systems without the specific written consent of ON Semiconductor.



Revision Changes

| Revision Number | Description of Changes |
|-----------------|---|
| 1.0 | <ul style="list-style-type: none"> Initial Release |
| 1.1 | <ul style="list-style-type: none"> Added SPI FB pin Added cover glass index of refraction Updated branding |

ON Semiconductor and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor
 P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
 USA/Canada
Europe, Middle East and Africa Technical Support:
 Phone: 421 33 790 2910
Japan Customer Focus Center
 Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «**JONHON**», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «**FORSTAR**».



JONHON

«**JONHON**» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«**FORSTAR**» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А