

MAX9995

Dual, SiGe, High-Linearity, 1700MHz to 2700MHz Downconversion Mixer with LO Buffer/Switch

General Description

The MAX9995 dual, high-linearity, downconversion mixer provides 6.1dB gain, +25.6dBm IIP3, and 9.8dB NF for WCDMA, TD-SCDMA, LTE, TD-LTE, and GSM/EDGE base-station applications.

This device integrates baluns in the RF and LO ports, a dual-input LO selectable switch, an LO buffer, two double-balanced mixers, and a pair of differential IF output amplifiers. The MAX9995 requires a typical LO drive of 0dBm and supply current is guaranteed to be below 380mA.

These devices are available in a compact 36-pin TQFN package (6mm x 6mm) with an exposed pad. Electrical performance is guaranteed over the extended temperature range, from $T_C = -40^{\circ}\text{C}$ to $+100^{\circ}\text{C}$.

Applications

WCDMA, TD-SCDMA,
and cdma2000® 3G
Base Stations

LTE and TD-LTE
Base Stations

GSM/EDGE
Base Stations

PHS/PAS Base Stations

Fixed Broadband
Wireless Access

Wireless Local Loop


Private Mobile Radio

Military Systems

Features

- ◆ 1700MHz to 2700MHz RF Frequency Range
- ◆ 1400MHz to 2600MHz LO Frequency Range
- ◆ 40MHz to 350MHz IF Frequency Range
- ◆ 6.1dB Conversion Gain
- ◆ +25.6dBm Input IP3
- ◆ 9.8dB Noise Figure
- ◆ 66dBc 2RF - 2LO Spurious Rejection at $\text{PRF} = -10\text{dBm}$
- ◆ Dual Channels Ideal for Diversity Receiver Applications
- ◆ Integrated LO Buffer
- ◆ Integrated RF and LO Baluns for Single-Ended Inputs
- ◆ Low -3dBm to +3dBm LO Drive
- ◆ Built-In SPDT LO Switch with 50dB LO1 - LO2 Isolation and 50ns Switching Time
- ◆ 44dB Channel-to-Channel Isolation

Pin Configuration/ Functional Diagram

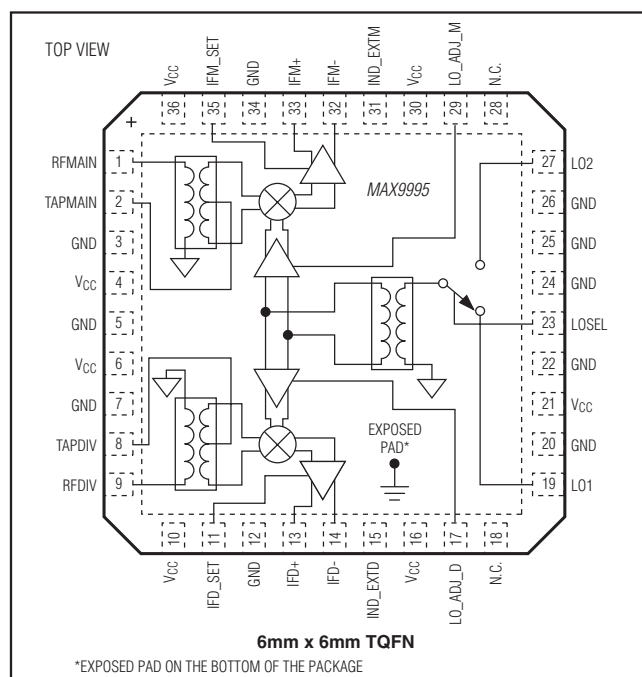

Ordering Information

PART	TEMP RANGE	PIN-PACKAGE
MAX9995ETX+	$T_C^* = -40^{\circ}\text{C}$ to $+100^{\circ}\text{C}$	36 TQFN-EP**
MAX9995ETX+T	$T_C^* = -40^{\circ}\text{C}$ to $+100^{\circ}\text{C}$	36 TQFN-EP**

+Denotes a lead(PB)-free and RoHS-compliant package.

* T_C = Case temperature.

**EP = Exposed pad.

T = Tape and reel.

cdma2000 is a registered trademark of Telecommunications Industry Association.

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim's website at www.maximintegrated.com.

MAX9995

Dual, SiGe, High-Linearity, 1700MHz to 2700MHz Downconversion Mixer with LO Buffer/Switch

ABSOLUTE MAXIMUM RATINGS

V_{CC} -0.3V to +5.5V
LO1, LO2 to GND $\pm 0.3V$
IFM₋, IFD₋, IFM_{SET}, IFD_{SET}, LOSEL,
LO_ADJ_M, LO_ADJ_D to GND -0.3V to ($V_{CC} + 0.3V$)
RFMAIN, RFDIV, and LO₋ Input Power +20dBm
RFMAIN, RFDIV Current
(RF is DC shorted to GND through balun) 50mA

Continuous Power Dissipation (Note 1) 6.75W
Operating Temperature Range (Note 2) ... $T_C = -40^{\circ}C$ to $+100^{\circ}C$
Maximum Junction Temperature $+150^{\circ}C$
Storage Temperature Range $-65^{\circ}C$ to $+150^{\circ}C$
Lead Temperature (soldering, 10s) $+300^{\circ}C$
Soldering Temperature (reflow) $+260^{\circ}C$

Note 1: Based on junction temperature $T_J = T_C + (\theta_{JC} \times V_{CC} \times I_{CC})$. This formula can be used when the temperature of the exposed pad is known while the device is soldered down to a PCB. See the *Applications Information* section for details. The junction temperature must not exceed $+150^{\circ}C$.

Note 2: T_C is the temperature on the exposed pad of the package. T_A is the ambient temperature of the device and PCB.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

PACKAGE THERMAL CHARACTERISTICS

TQFN

Junction-to-Ambient Thermal Resistance (θ_{JA})

(Note 3, 4) $38^{\circ}C/W$

Junction-to-Board Thermal Resistance (θ_{JB}) $12.2^{\circ}C/W$

Junction-to-Case Thermal Resistance (θ_{JC})

(Note 1, 4) $7.4^{\circ}C/W$

Note 3: Junction temperature $T_J = T_A + (\theta_{JA} \times V_{CC} \times I_{CC})$. This formula can be used when the ambient temperature of the PCB is known. The junction temperature must not exceed $+150^{\circ}C$.

Note 4: Package thermal resistances were obtained using the method described in JEDEC specification JESD51-7, using a four-layer board. For detailed information on package thermal considerations, refer to www.maximintegrated.com/thermal-tutorial.

DC ELECTRICAL CHARACTERISTICS

(Typical Application Circuit, no input RF or LO signals applied, $V_{CC} = 4.75V$ to $5.25V$, $T_C = -40^{\circ}C$ to $+85^{\circ}C$. Typical values are at $V_{CC} = 5.0V$, $T_C = +25^{\circ}C$, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Supply Voltage	V_{CC}		4.75	5	5.25	V
Supply Current	I_{CC}	Total supply current		332	380	mA
		V_{CC} (pin 16)		82	90	
		V_{CC} (pin 30)		97	110	
		IFM+/IFM- (total of both)		70	90	
		IFD+/IFD- (total of both)		70	90	
LOSEL Input High Voltage	V_{IH}		2			V
LOSEL Input Low Voltage	V_{IL}				0.8	V
LOSEL Input Current	I_{IL} and I_{IH}		-10		+10	μA

RECOMMENDED AC OPERATING CONDITIONS

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
RF Frequency Range	f_{RF}	(Note 5)	1700		2700	MHz
LO Frequency Range	f_{LO}	(Note 5)	1400		2600	MHz
IF Frequency Range	f_{IF}	(Note 5)	40		350	MHz
LO Drive Level	P_{LO}	(Note 5)	-3		+3	dBm

Dual, SiGe, High-Linearity, 1700MHz to 2700MHz Downconversion Mixer with LO Buffer/Switch

AC ELECTRICAL CHARACTERISTICS— f_{RF} = 1700MHz TO 2200MHz

(Typical Application Circuit, V_{CC} = 4.75V to 5.25V, RF and LO ports are driven from 50Ω sources, P_{LO} = -3dBm to +3dBm, f_{RF} = 1700MHz to 2200MHz, f_{LO} = 1400MHz to 2000MHz, f_{IF} = 200MHz, with $f_{RF} > f_{LO}$, T_C = -40°C to +85°C. Typical values are at V_{CC} = 5.0V, P_{LO} = 0dBm, f_{RF} = 1900MHz, f_{LO} = 1700MHz, f_{IF} = 200MHz, and T_C = +25°C, unless otherwise noted.) (Notes 6, 7)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNIT
Conversion Gain	G _C		f _{RF} = 1710MHz to 1875MHz	6		dB	
			f _{RF} = 1850MHz to 1910MHz	6.2			
			T _C = +100°C	4.6			
			f _{RF} = 2110MHz to 2170MHz	6.1			
Gain Variation from Nominal		V _{CC} = 5.0V, T _C = +25°C, P _{LO} = 0dBm, P _{RF} = -10dBm	f _{RF} = 1710MHz to 1875MHz	±0.5	±1	dB	
			f _{RF} = 1850MHz to 1910MHz	±0.5	±1		
			f _{RF} = 2110MHz to 2170MHz	±0.5	±1		
Gain Variation with Temperature				±0.75		dB	
Noise Figure	NF	No blockers present	f _{RF} = 1710MHz to 1875MHz	9.7		dB	
			f _{RF} = 1850MHz to 1910MHz	9.8			
			f _{RF} = 2110MHz to 2170MHz	9.9			
Noise Figure (with Blocker)		8dBm blocker tone applied to RF port at 2000MHz, f _{RF} = 1900MHz, f _{LO} = 1710MHz, P _{LO} = -3dBm		22		dB	
Input 1dB Compression Point	P _{1dB}	(Note 8)		9.5	12.6	dBm	
Input Third-Order Intercept Point	IIP3	(Notes 8, 9)		23	25.6	dBm	
		T _C = +100°C, Note 9		26.1			
2RF - 2LO Spur Rejection	2 x 2	f _{RF} = 1900MHz, f _{LO} = 1700MHz, f _{SPUR} = 1800MHz	P _{RF} = -10dBm	66		dBc	
			P _{RF} = -10dBm, T _C = +100°C	73.3			
			P _{RF} = -5dBm	61			
			P _{RF} = -5dBm, T _C = +100°C	68.3			
3RF - 3LO Spur Rejection	3 x 3	f _{RF} = 1900MHz, f _{LO} = 1700MHz, f _{SPUR} = 1766.7MHz	P _{RF} = -10dBm	70	88	dBc	
			P _{RF} = -10dBm, T _C = +100°C	84.5			
			P _{RF} = -5dBm	60	78		
			P _{RF} = -5dBm, T _C = +100°C	74.5			
Maximum LO Leakage at RF Port		f _{LO} = 1400MHz to 2000MHz		-29		dBm	
Maximum 2LO Leakage at RF Port		f _{LO} = 1400MHz to 2000MHz		-17		dBm	
Maximum LO Leakage at IF Port		f _{LO} = 1400MHz to 2000MHz		-25		dBm	
		T _C = +100°C		-50.4			
Minimum RF-to-IF Isolation		f _{RF} = 1700MHz to 2200MHz, f _{IF} = 200MHz		37		dB	
		T _C = +100°C		44			
LO1 - LO2 Isolation		P _{LO1} = 0dBm, P _{LO2} = 0dBm (Note 10)		40	50.5	dB	
Minimum Channel-to-Channel Isolation		P _{RF} = -10dBm, RFMAIN (RFDIV) power measured at IFDIV (IFMAIN), relative to IFMAIN (IFDIV), all unused ports terminated at 50Ω		40	44	dB	
			T _C = +100°C	54.7			
LO Switching Time		50% of LOSEL to IF settled to within 2°		50		ns	

MAX9995

Dual, SiGe, High-Linearity, 1700MHz to 2700MHz Downconversion Mixer with LO Buffer/Switch

AC ELECTRICAL CHARACTERISTICS— $f_{RF} = 2540\text{MHz}$

(Typical Application Circuit, RF and LO ports are driven from 50Ω sources, $f_{RF} > f_{LO}$, $V_{CC} = 5.0\text{V}$, $P_{RF} = -5\text{dBm}$, $P_{LO} = 0\text{dBm}$, $f_{RF} = 2540\text{MHz}$, $f_{LO} = 2400\text{MHz}$, $f_{IF} = 140\text{MHz}$, $T_C = +25^\circ\text{C}$, unless otherwise noted.) (Note 7)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
RF Return Loss				14		dB
LO Return Loss		LO port selected		18		dB
		LO port unselected		21		
IF Return Loss		LO driven at 0dBm, RF terminated into 50Ω (Note 11)		21		dB
Conversion Gain	G_C			5.2		dB
Input Third-Order Intercept Point	IIP3	Two tones: $f_{RF1} = 2540\text{MHz}$, $f_{RF2} = 2541\text{MHz}$, $P_{RF} = -5\text{dBm}/\text{tone}$		24.6		dBm
2RF - 2LO Spurious Response	2×2	$P_{RF} = -10\text{dBm}$		58		dBc
		$P_{RF} = -5\text{dBm}$		63		
3RF - 3LO Spurious Response	3×3	$P_{RF} = -10\text{dBm}$		72		dBc
		$P_{RF} = -5\text{dBm}$		82		
LO Leakage at IF Port				-45		dBm
RF-to-IF Isolation				49		dB
Channel-to-Channel Isolation		$P_{RF} = -10\text{dBm}$, RFMAIN (RFDIV) power measured at IFDIV (IFMAIN), relative to IFMAIN (IFDIV), all unused ports terminated at 50Ω		48		dB

Note 5: Operation outside this frequency band is possible but has not been characterized. See the *Typical Operating Characteristics*.

Note 6: Guaranteed by design and characterization.

Note 7: All limits reflect losses of external components. Output measurements taken at IF outputs of *Typical Application Circuit*.

Note 8: Production tested.




Note 9: Two tones 3MHz spacing, -5dBm per tone at RF port.

Note 10: Measured at IF port at IF frequency. f_{LO1} and f_{LO2} are offset by 1MHz.

Note 11: IF return loss can be optimized by external matching components.

Typical Operating Characteristics

(Typical Application Circuit, $V_{CC} = 5.0\text{V}$, $P_{RF} = -5\text{dBm}$, $P_{LO} = 0\text{dBm}$, LO is low-side injected for a 200MHz IF, $T_C = +25^\circ\text{C}$.)







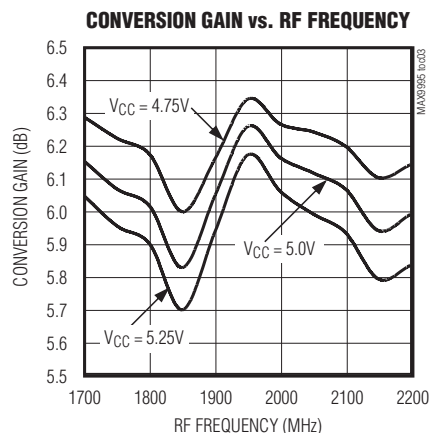
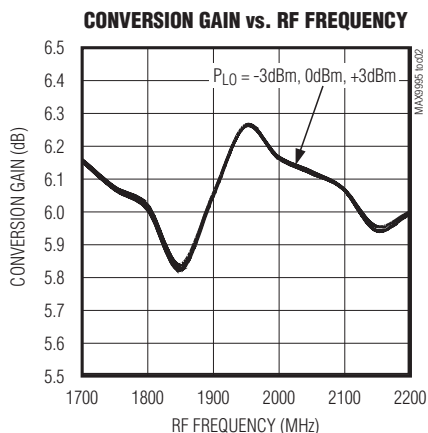
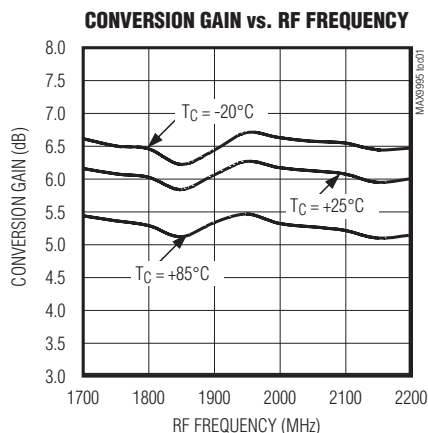


MAX9995

Dual, SiGe, High-Linearity, 1700MHz to 2700MHz Downconversion Mixer with LO Buffer/Switch

Typical Operating Characteristics (continued)

(Typical Application Circuit, $V_{CC} = 5.0V$, $P_{RF} = -5dBm$, $P_{LO} = 0dBm$, LO is low-side injected for a 200MHz IF, $T_C = +25^\circ C$.)

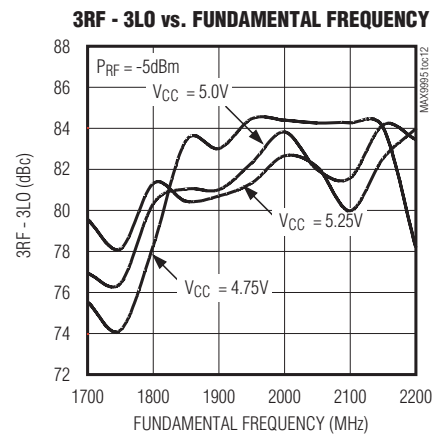
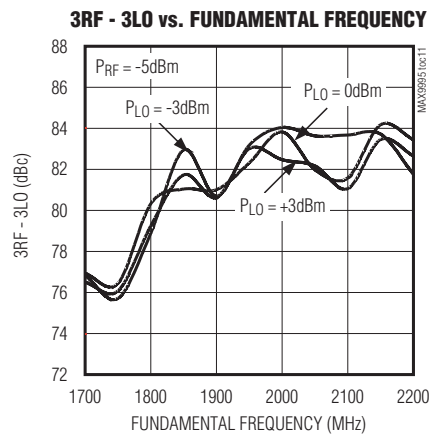
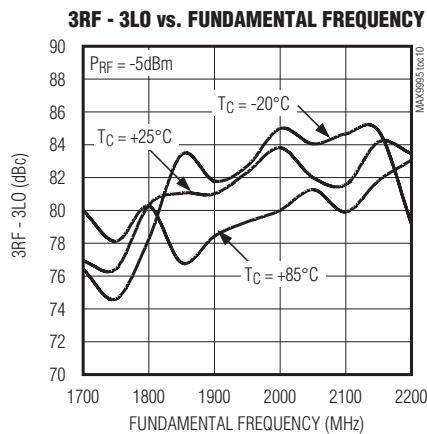
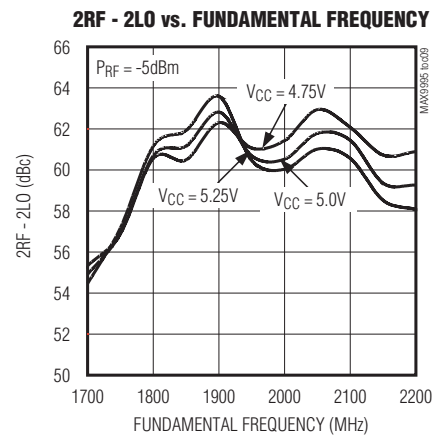
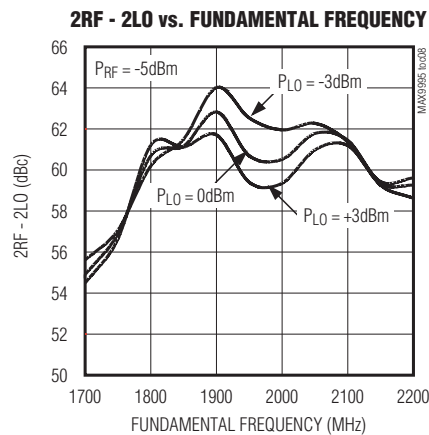
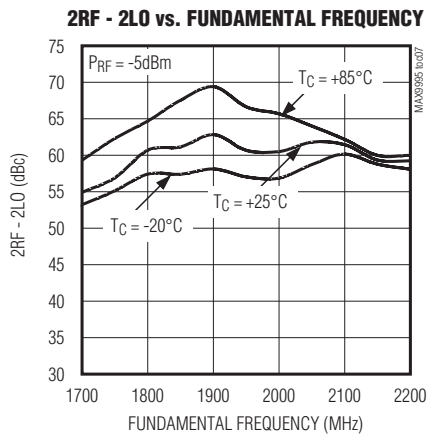
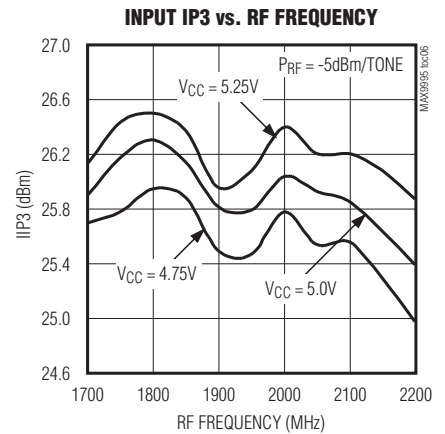
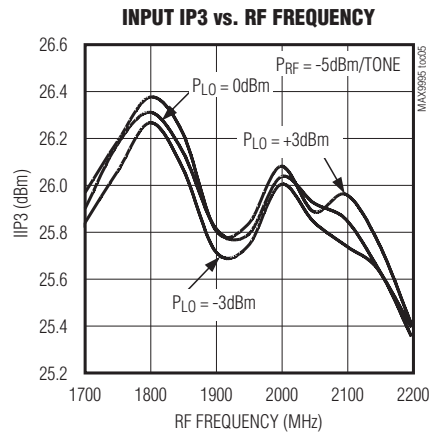
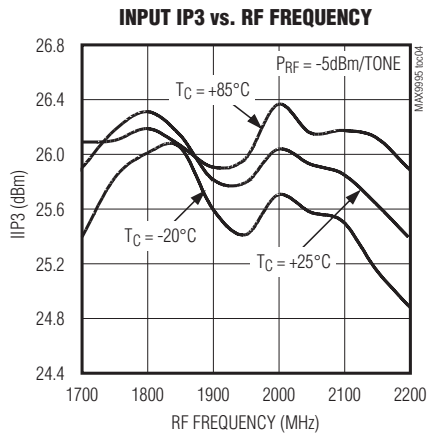


MAX9995

Dual, SiGe, High-Linearity, 1700MHz to 2700MHz Downconversion Mixer with LO Buffer/Switch

Typical Operating Characteristics (continued)

(Typical Application Circuit, $V_{CC} = 5.0V$, $P_{RF} = -5dBm$, $P_{LO} = 0dBm$, LO is low-side injected for a 200MHz IF, $T_C = +25^\circ C$.)

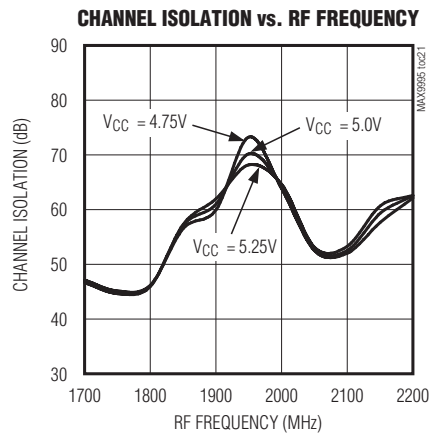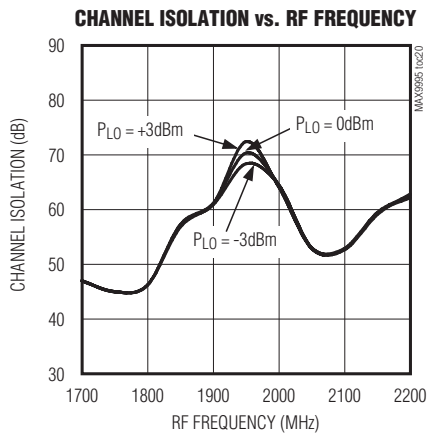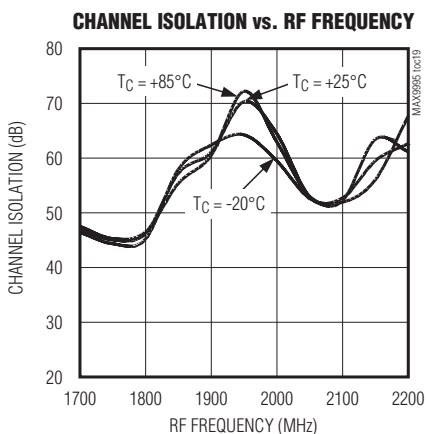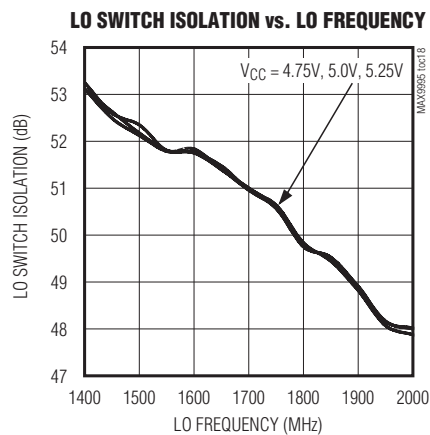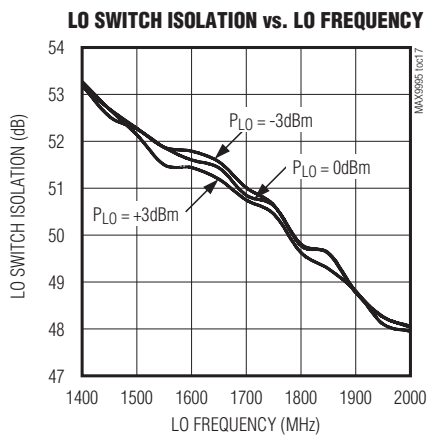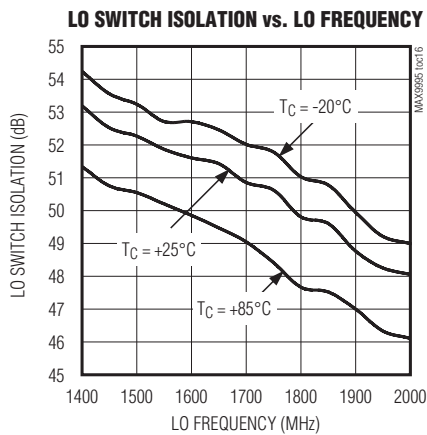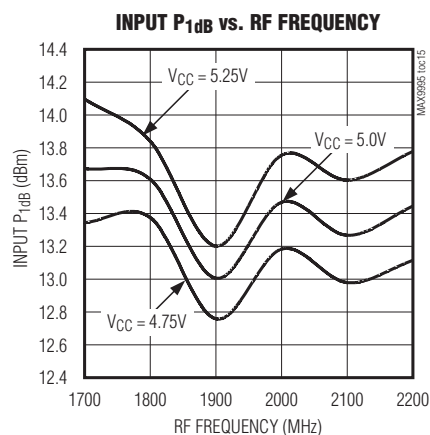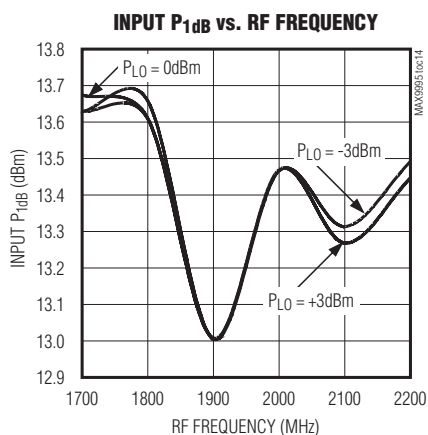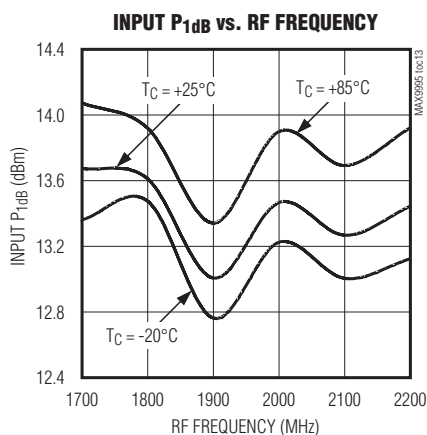


MAX9995

Dual, SiGe, High-Linearity, 1700MHz to 2700MHz Downconversion Mixer with LO Buffer/Switch


Typical Operating Characteristics (continued)

(Typical Application Circuit, $V_{CC} = 5.0V$, $P_{RF} = -5dBm$, $P_{LO} = 0dBm$, LO is low-side injected for a 200MHz IF, $T_C = +25^\circ C$.)


LO LEAKAGE AT IF PORT vs. LO FREQUENCY

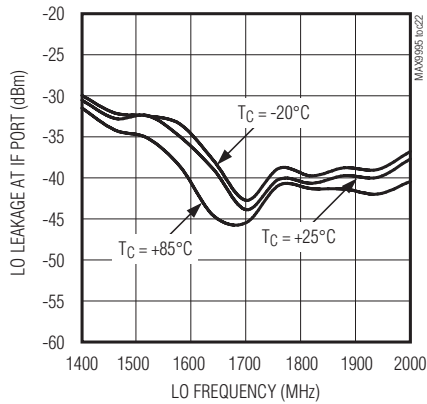


LO LEAKAGE AT IF PORT vs. LO FREQUENCY

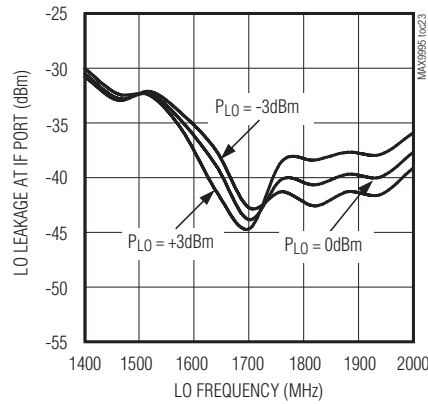


LO LEAKAGE AT IF PORT vs. LO FREQUENCY

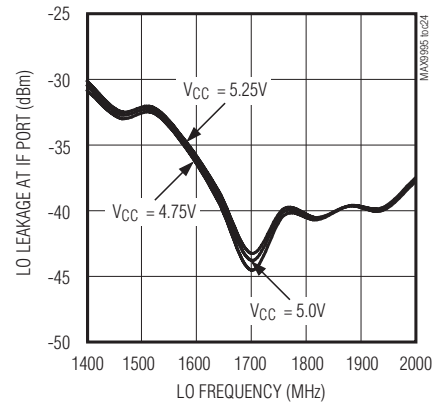


LO LEAKAGE AT RF PORT vs. LO FREQUENCY

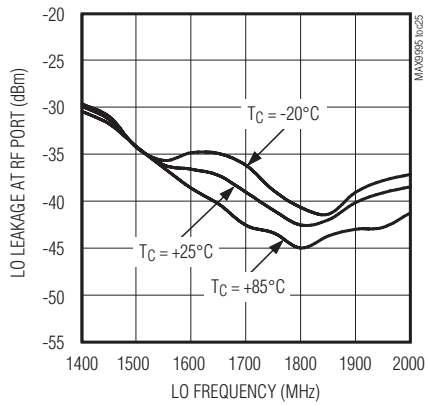


LO LEAKAGE AT RF PORT vs. LO FREQUENCY

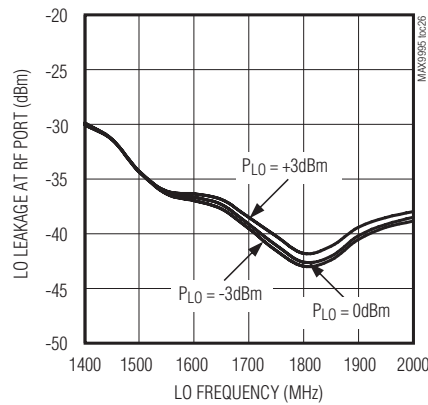


LO LEAKAGE AT RF PORT vs. LO FREQUENCY

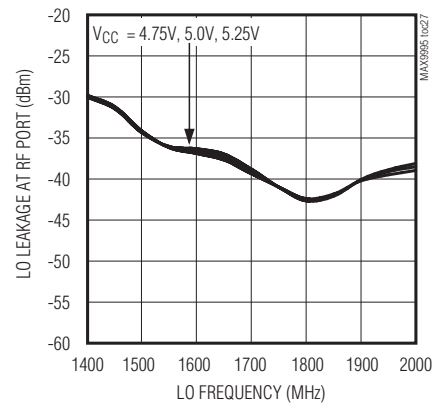


RF-TO-IF ISOLATION vs. RF FREQUENCY

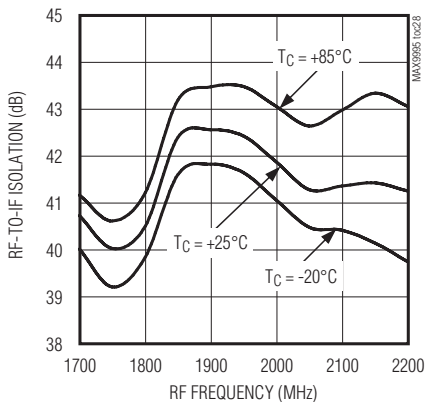

RF-TO-IF ISOLATION vs. RF FREQUENCY

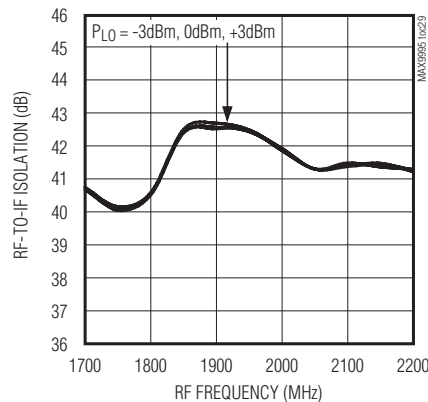

RF-TO-IF ISOLATION vs. RF FREQUENCY








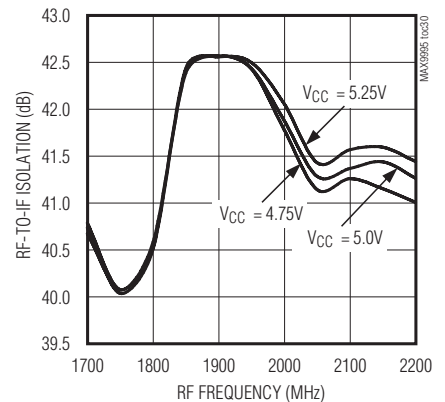


MAX9995

Dual, SiGe, High-Linearity, 1700MHz to 2700MHz Downconversion Mixer with LO Buffer/Switch

Typical Operating Characteristics (continued)

(Typical Application Circuit, $V_{CC} = 5.0V$, $P_{RF} = -5dBm$, $P_{LO} = 0dBm$, LO is low-side injected for a 200MHz IF, $T_C = +25^\circ C$.)

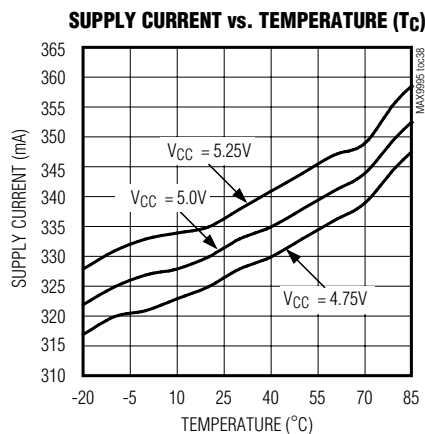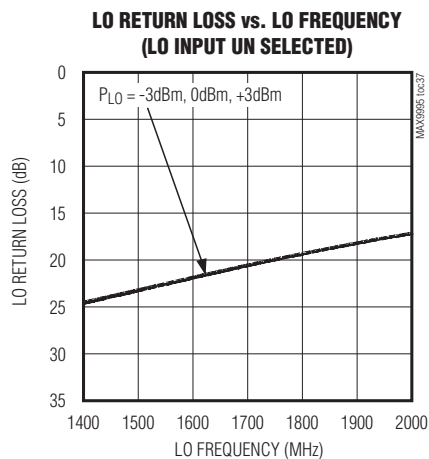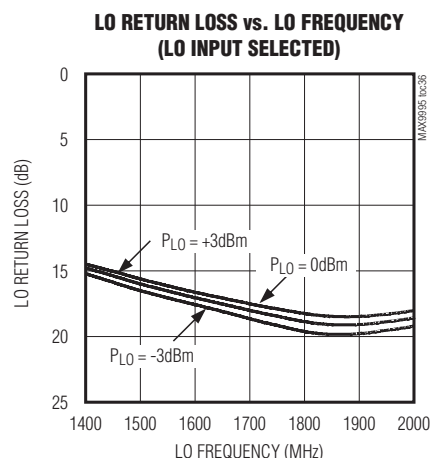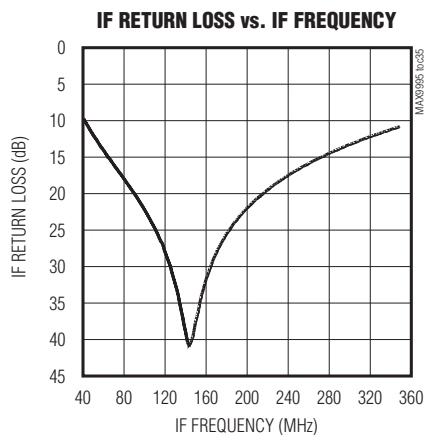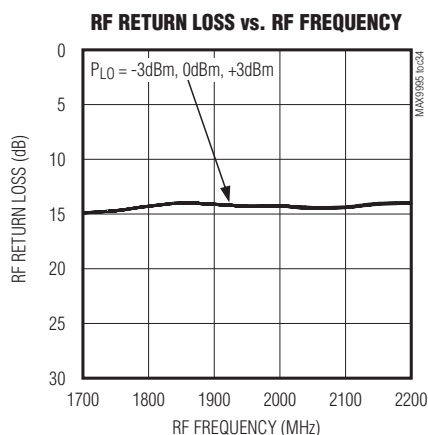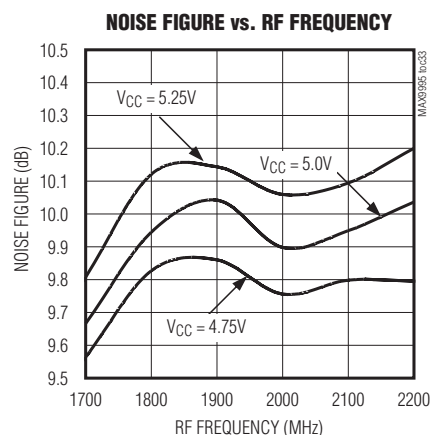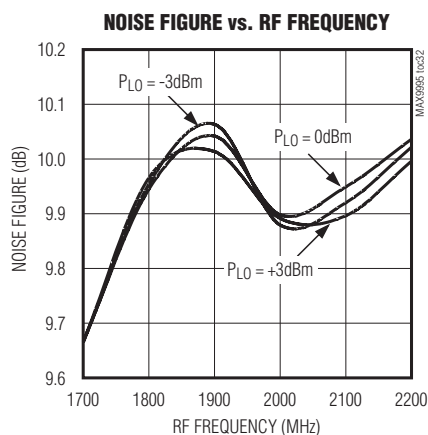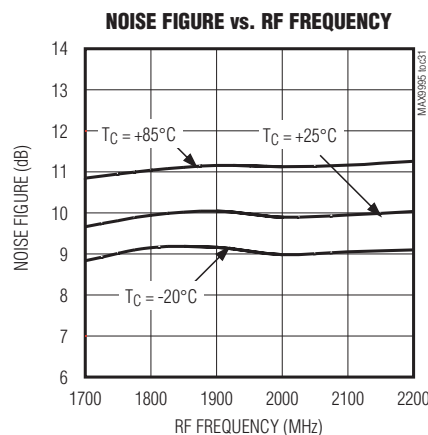

MAX9995

Dual, SiGe, High-Linearity, 1700MHz to 2700MHz Downconversion Mixer with LO Buffer/Switch

Pin Description

PIN	NAME	FUNCTION
1	RFMAIN	Main Channel RF Input. Internally matched to 50 Ω . Requires an input DC-blocking capacitor.
2	TAPMAIN	Main Channel Balun Center Tap. Connect a 0.033 μ F capacitor from this pin to the board ground.
3, 5, 7, 12, 20, 22, 24, 25, 26, 34	GND	Ground
4, 6, 10, 16, 21, 30, 36	V _{CC}	Power Supply. Connect bypass capacitors as close as possible to the pin (see the <i>Typical Application Circuit</i>).
8	TAPDIV	Diversity Channel Balun Center Tap. Connect a 0.033 μ F capacitor from this pin to the ground.
9	RFDIV	Diversity Channel RF Input. Internally matched to 50 Ω . Requires an input DC-blocking capacitor.
11	IFD_SET	IF Diversity Amplifier Bias Control. Connect a 1.2k Ω resistor from this pin to ground to set the bias current for the diversity IF amplifier.
13, 14	IFD+, IFD-	Diversity Mixer Differential IF Output. Connect pullup inductors from each of these pins to V _{CC} (see the <i>Typical Application Circuit</i>).
15	IND_EXTD	Connect a 10nH inductor from this pin to ground to increase the RF-IF and LO-IF isolation.
17	LO_ADJ_D	LO Diversity Amplifier Bias Control. Connect a 392 Ω resistor from this pin to ground to set the bias current for the diversity LO amplifier.
18, 28	N.C.	No Connection. Not internally connected.
19	LO1	Local Oscillator 1 Input. This input is internally matched to 50 Ω . Requires an input DC-blocking capacitor.
23	LOSEL	Local Oscillator Select. Set this pin to high to select LO1. Set to low to select LO2.
27	LO2	Local Oscillator 2 Input. This input is internally matched to 50 Ω . Requires an input DC-blocking capacitor.
29	LO_ADJ_M	LO Main Amplifier Bias Control. Connect a 392 Ω resistor from this pin to ground to set the bias current for the main LO amplifier.
31	IND_EXTM	Connect a 10nH inductor from this pin to ground to increase the RF-IF and LO-IF isolation.
32, 33	IFM-, IFM+	Main Mixer Differential IF Output. Connect pullup inductors from each of these pins to V _{CC} (see the <i>Typical Application Circuit</i>).
35	IFM_SET	IF Main Amplifier Bias Control. Connect a 1.2k Ω resistor from this pin to ground to set the bias current for the main IF amplifier.
—	EP	Exposed Pad. Internally connected to GND. Solder this exposed pad to a PCB pad that uses multiple ground vias to provide heat transfer out of the device into the PCB ground planes. These multiple via grounds are also required to achieve the noted RF performance.

MAX9995

Dual, SiGe, High-Linearity, 1700MHz to 2700MHz Downconversion Mixer with LO Buffer/Switch

Detailed Description

The MAX9995 dual, high-linearity, downconversion mixer provides 6.1dB gain and +25.6dBm IIP3, with a 9.8dB noise figure. Integrated baluns and matching circuitry allow 50 Ω single-ended interfaces to the RF and LO ports. A single-pole, double-throw (SPDT) LO switch provides 50ns switching time between LO inputs, with 50dB LO-to-LO isolation. Furthermore, the integrated LO buffer provides a high drive level to the mixer core, reducing the LO drive required at the MAX9995's inputs to -3dBm. The IF port incorporates a differential output, which is ideal for providing enhanced 2RF - 2LO performance.

Specifications are guaranteed over broad frequency ranges to allow for use in WCDMA, TD-SCDMA, LTE, TD-LTE, and GSM/EDGE base stations. The MAX9995 is specified to operate over an RF input range of 1700MHz to 2700MHz, an LO range of 1400MHz to 2600MHz, and an IF range of 40MHz to 350MHz. Operation beyond this is possible; however, performance is not characterized. This device is available in a compact 6mm x 6mm, 36-pin TQFN package with an exposed pad.

RF Input and Balun

The MAX9995's two RF inputs (RFMAIN and RFDIV) are internally matched to 50 Ω , requiring no external matching components. DC-blocking capacitors are required as the inputs are internally DC shorted to ground through the on-chip baluns. Input return loss is typically 14dB over the entire RF frequency range of 1700MHz to 2700MHz.

LO Input, Switch, Buffer, and Balun

The mixers can be used for either high-side or low-side injection applications with an LO frequency range of 1400MHz to 2600MHz. As an added feature, the MAX9995 includes an internal LO SPDT switch that can be used for frequency-hopping applications. The switch selects one of the two single-ended LO ports, allowing the external oscillator to settle on a particular frequency before it is switched in. LO switching time is typically less than 50ns, which is more than adequate for virtually all GSM applications. If frequency hopping is not employed, set the switch to either of the LO inputs. The switch is controlled by a digital input (LOSEL): logic-high selects LO1, and logic-low selects LO2. LO1 and LO2 inputs are internally matched to 50 Ω , requiring only a 22pF DC-blocking capacitor.

A two-stage internal LO buffer allows a wide input power range for the LO drive. All guaranteed specifications are for an LO signal power from -3dBm to +3dBm. The on-chip low-loss balun, along with an LO buffer, drives the double-balanced mixer. All interfacing and matching components from the LO inputs to the IF outputs are integrated on-chip.

High-Linearity Mixers

The core of the MAX9995 is a pair of double-balanced, high-performance passive mixers. Exceptional linearity is provided by the large LO swing from the on-chip LO buffer. When combined with the integrated IF amplifiers, the cascaded IIP3, 2RF - 2LO rejection, and NF performance is typically +25.6dBm, 66dBc, and 9.8dB, respectively.

Differential IF Output Amplifiers

The MAX9995 mixers have an IF frequency range of 40MHz to 350MHz. The differential, open-collector IF output ports require external pullup inductors to V_{CC}. Note that these differential outputs are ideal for providing enhanced 2RF - 2LO rejection performance. Single-ended IF applications require a 4:1 balun to transform the 200 Ω differential output impedance to a 50 Ω single-ended output. After the balun, VSWR is typically 1.5:1.

Applications Information

Input and Output Matching

The RF and LO inputs are internally matched to 50 Ω . No matching components are required. Return loss at each RF port is typically 14dB over the entire input range (1700MHz to 2700MHz), and return loss at the LO ports is typically 18dB (1400MHz to 2000MHz). RF and LO inputs require only DC-blocking capacitors for interfacing.

The IF output impedance is 200 Ω (differential). For evaluation, an external low-loss 4:1 (impedance ratio) balun transforms this impedance down to a 50 Ω single-ended output (see the *Typical Application Circuit*).

Bias Resistors

Bias currents for the LO buffer and the IF amplifier are optimized by fine tuning the resistors (R1, R2, R4, and R5). If reduced current is required at the expense of performance, contact the factory. If the $\pm 1\%$ bias resistor values are not readily available, substitute standard $\pm 5\%$ values.

Dual, SiGe, High-Linearity, 1700MHz to 2700MHz Downconversion Mixer with LO Buffer/Switch

INDEX™ and INDEX™ Inductors

Short INDEX™ and INDEX™ to ground using 0Ω resistors. For applications requiring improved RF-to-IF and LO-to-IF isolation, use 10nH inductors (L3 and L6) in place of the 0Ω resistors. However, to ensure stable operation, the mixer IF ports must be presented with low common-mode load impedance. Contact the factory for details. Since approximately 100mA flows through INDEX™ and INDEX™, it is important to use low-DCR wire-wound inductors.

Layout Considerations

A properly designed PCB is an essential part of any RF/microwave circuit. Keep RF signal lines as short as possible to reduce losses, radiation, and inductance. For the best performance, route the ground pin traces directly to the exposed pad under the package. The PCB exposed pad **MUST** be connected to the ground plane of the PCB. It is suggested that multiple vias be used to connect this pad to the lower-level ground planes. This method provides a good RF/thermal-conduction path for the device. Solder the exposed pad on the bottom of the device package to the PCB. The MAX9995 evaluation kit can be used as a reference for board layout. Gerber files are available upon request at www.maximintegrated.com.

Power-Supply Bypassing

Proper voltage-supply bypassing is essential for high-frequency circuit stability. Bypass each VCC pin with a capacitor as close as possible to the pin (*Typical Application Circuit*).

Exposed Pad RF/Thermal Considerations

The exposed pad (EP) of the MAX9995's 36-pin TQFN-EP package provides a low thermal-resistance path to the die. It is important that the PCB on which the MAX9995 is mounted be designed to conduct heat from the EP. In addition, provide the EP with a low-inductance path to electrical ground. The EP **MUST** be soldered to a ground plane on the PCB, either directly or through an array of plated via holes.

Table 1. Component Values

COMPONENT	VALUE	DESCRIPTION
C1, C8	4pF	Microwave capacitors (0402)
C2, C7	10pF	Microwave capacitors (0402)
C3, C6	0.033μF	Microwave capacitors (0603)
C4, C5, C14, C16	22pF	Microwave capacitors (0402)
C9, C13, C15, C17, C18	0.01μF	Microwave capacitors (0402)
C10, C11, C12, C19, C20, C21	150pF	Microwave capacitors (0603)
L1, L2, L4, L5	330nH	Wire-wound high-Q inductors (0805)
L3, L6	10nH	Wire-wound high-Q inductors (0603)
R1, R4	1.21kΩ	±1% resistors (0402)
R2, R5	392Ω	±1% resistors (0402)
R3, R6	10Ω	±1% resistors (1206)
T1, T2	4:1 (200:50)	IF baluns

Chip Information

PROCESS: SiGe BiCMOS

Lead-Free/RoHS Considerations

<http://www.maximintegrated.com/emmi/faq.cfm>

Reliability Information:

<http://www.maximintegrated.com/reliability/product/MAX9995.pdf>

Package Information

For the latest package outline information and land patterns (footprints), go to www.maximintegrated.com/packages. Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

PACKAGE TYPE	PACKAGE CODE	OUTLINE NO.	LAND PATTERN NO.
36 TQFN-EP	T3666+2	21-0141	90-0049

Dual, SiGe, High-Linearity, 1700MHz to 2700MHz Downconversion Mixer with LO Buffer/Switch

The schematic diagram illustrates the MAX9995 integrated circuit, a monolithic IC designed for RF and IF applications. The chip is shown with its internal components, including two mixers, two modulators, and two IF amplifiers. The pin connections are as follows:

- RF MAIN INPUT:** Connected to pin 1 (RFMAIN) via capacitor C1.
- TAPMAIN:** Connected to pin 2 (TAPMAIN) via capacitor C2.
- RF DIV INPUT:** Connected to pin 8 (RFDIV) via capacitor C8.
- IFM+ and IFM-:** Connected to pins 34 and 33, respectively, via capacitors C18 and C17.
- IND_EXTM:** Connected to pin 32 via capacitor C19.
- LO_ADJ_M:** Connected to pin 29 via capacitor C20.
- LO_SELECT:** Connected to pin 23 via capacitor C16.
- LO1:** Connected to pin 19 via capacitor C14.
- LO2:** Connected to pin 27 via capacitor C15.
- IF DIV OUTPUT:** Connected to pin 17 via capacitor C10.
- IF MAIN OUTPUT:** Connected to pin 31 via capacitor C21.

The diagram also shows various other components, including resistors (R1, R2, R3, R4, R5, R6), inductors (L1, L2, L3, L4, L5, L6), and capacitors (C3, C4, C5, C6, C7, C9, C11, C12, C13, C17, C18, C19, C20, C21). The chip is labeled "MAX9995" and "EXPOSED PAD".

MAX9995

Dual, SiGe, High-Linearity, 1700MHz to 2700MHz Downconversion Mixer with LO Buffer/Switch

Revision History

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
0	8/04	Initial release	—
1	3/11	Updated the band coverage throughout the data sheet	1–13
2	12/12	Updated the <i>Electrical Characteristic</i> table and <i>Ordering Information</i> ; updated <i>Package Thermal Characteristics</i>	1, 2, 3



Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the *Electrical Characteristics* table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.

Maxim Integrated 160 Rio Robles, San Jose, CA 95134 USA 1-408-601-1000

13

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А