

**S5U1S65K01H4100**  
**Camera Board**  
**Technical Manual**

## NOTICE


---

No part of this material may be reproduced or duplicated in any form or by any means without the written permission of Seiko Epson. Seiko Epson reserves the right to make changes to this material without notice. Seiko Epson does not assume any liability of any kind arising out of any inaccuracies contained in this material or due to its application or use in any product or circuit and, further, there is no representation that this material is applicable to products requiring high level reliability, such as, medical products. Moreover, no license to any intellectual property rights is granted by implication or otherwise, and there is no representation or warranty that anything made in accordance with this material will be free from any patent or copyright infringement of a third party. This material or portions thereof may contain technology or the subject relating to strategic products under the control of the Foreign Exchange and Foreign Trade Law of Japan and may require an export license from the Ministry of Economy, Trade and Industry or other approval from another government agency.


All other product names mentioned herein are trademarks and/or registered trademarks of their respective companies.

## Configuration of product number

### ●DEVICES

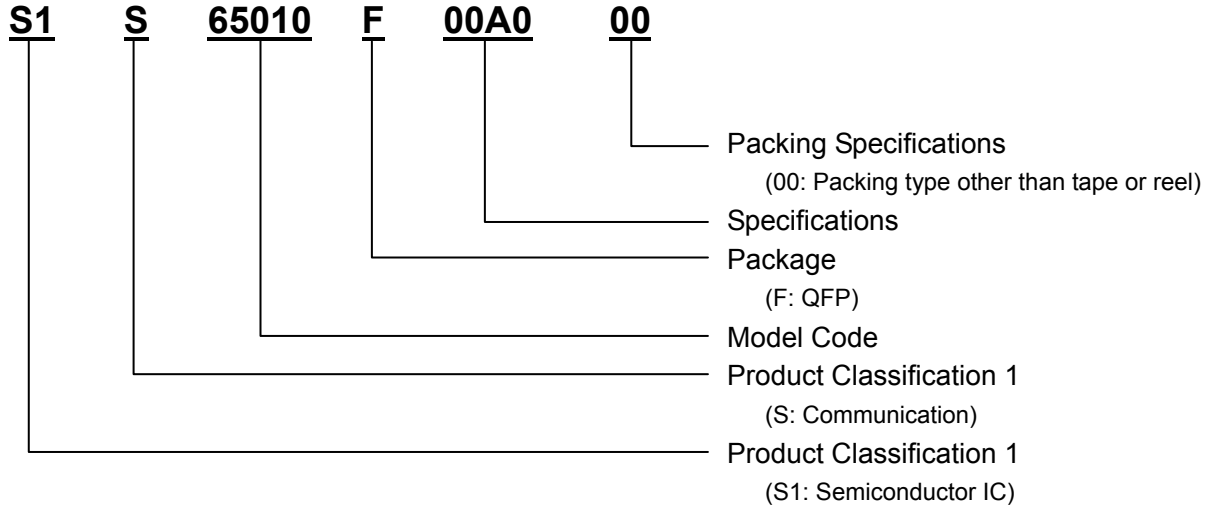

### ●Evaluation Board

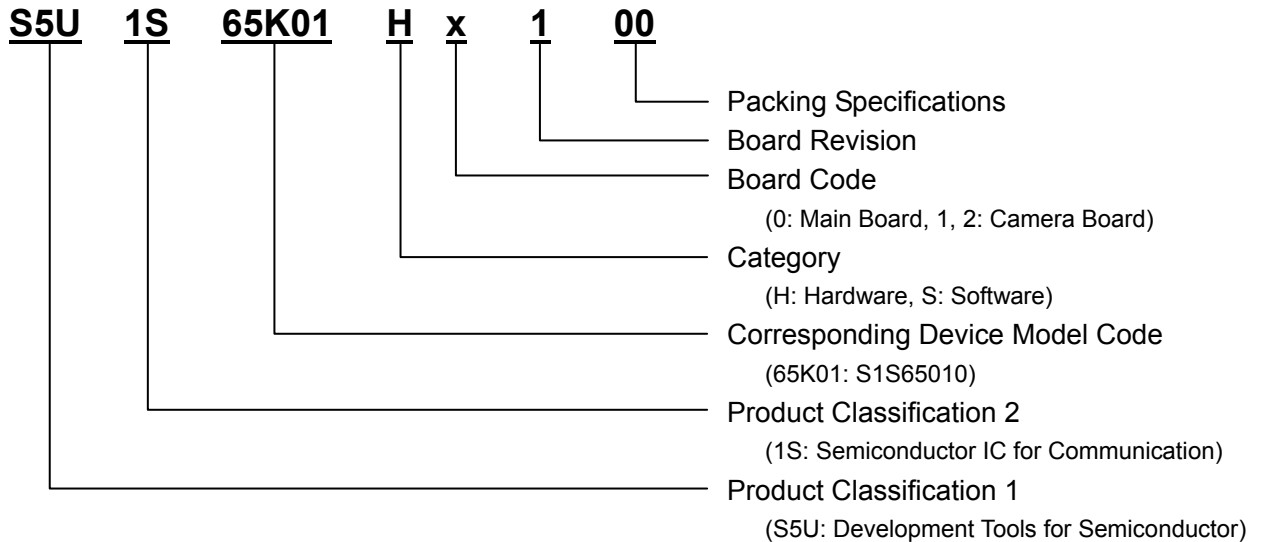

## Table of Contents

|   |           |
|---|-----------|
| <b>1. OVERVIEW</b> .....  | <b>1</b>  |
| <b>2. COMPONENTS</b> .....                                      | <b>1</b>  |
| 2.1 Main Parts .....  | 1         |
| 2.2 Block Diagram .....   | 1         |
| <b>3. MECHANICAL SPECIFICATIONS</b> .....                       | <b>2</b>  |
| <b>4. EXTERNAL PINS</b> .....                                   | <b>3</b>  |
| <b>4.1 Interface Connectors</b> .....                           | <b>3</b>  |
| 4.1.1 Main Board Interfaces .....                               | 3         |
| 4.1.2 Serial (RS232-C) Interface (CN6: XG8W-1031).....          | 6         |
| 4.1.3 Audio Interface Connectors (CN7 to CN10: A2PA-3PGG) ..... | 6         |
| 4.1.4 Camera Module Connectors (CN1 CN2, and CN5).....          | 6         |
| <b>5. FUNCTIONAL DESCRIPTION</b> .....                          | <b>7</b>  |
| 5.1 GPIOB DIP Switches (SW1) .....                              | 7         |
| 5.2 UART DIP Switches (SW2).....                                | 8         |
| 5.3 AUDIO CODEC DIP Switches (SW3).....                         | 9         |
| 5.4 Camera's I <sup>2</sup> C address DIP Switches (SW4) .....  | 10        |
| 5.5 AUDIO CODEC clock input (J3).....                           | 10        |
| <b>6. PARTS LISTS</b> .....                                     | <b>11</b> |
| <b>REVISION HISTORY</b> .....                                   | <b>12</b> |

## 1. OVERVIEW

This product is an evaluation board used when it connects with the S65K series evaluation board and the network camera and the drive recorder are constructed.

It connects with the board that mounts SEIKO EPSON S1S65010 or S2S65A00 and it uses it.

## 2. COMPONENTS

### 2.1 Main Parts

|                |   |
|----------------|---|
| CAMERA         | CMOS Camera Module (TOKO TMV1320)   |
| Audio CODEC    | Monaural CODEC (ASAHIKASEI AK4631)  |
| Main Board I/F | Preparation of the connector of 40/16pin for S65K series evaluation board joint |
| Audio I/F      | Speaker, MIC, Line Input, Line Output   |

### 2.2 Block Diagram

The following figure gives block diagram for camera board. This board provides three (mutually exclusive) connectors for connecting a CMOS camera module.

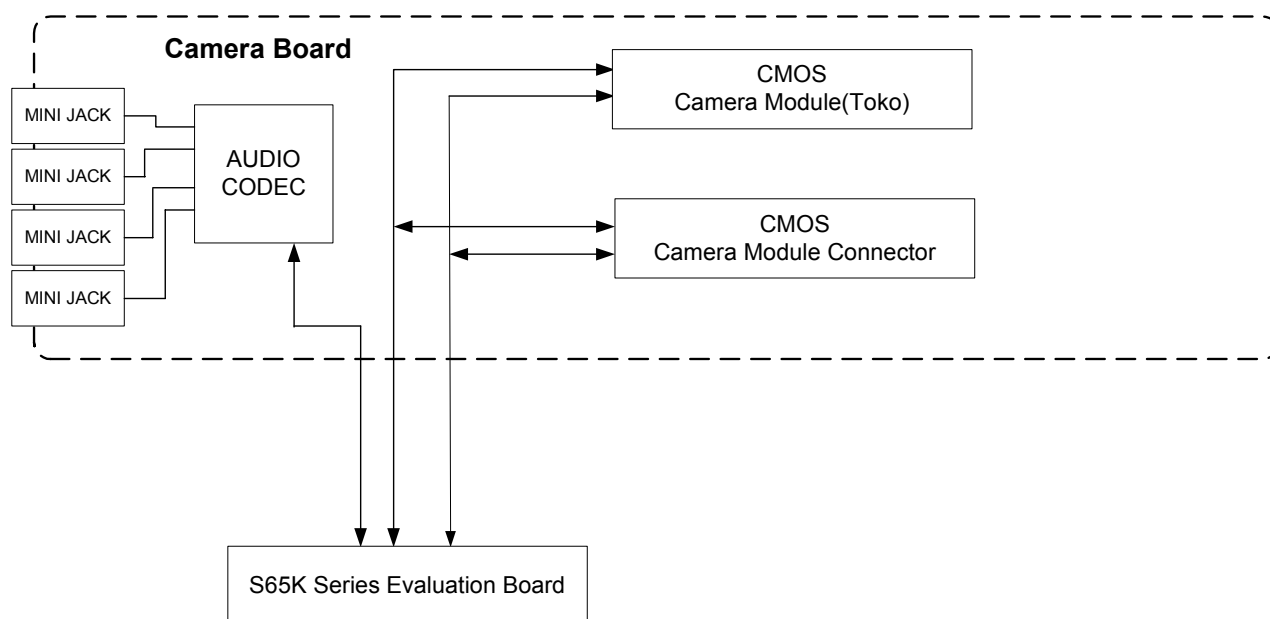


Fig.2.1 Block Diagram

### 3. MECHANICAL SPECIFICATIONS

### 3. MECHANICAL SPECIFICATIONS

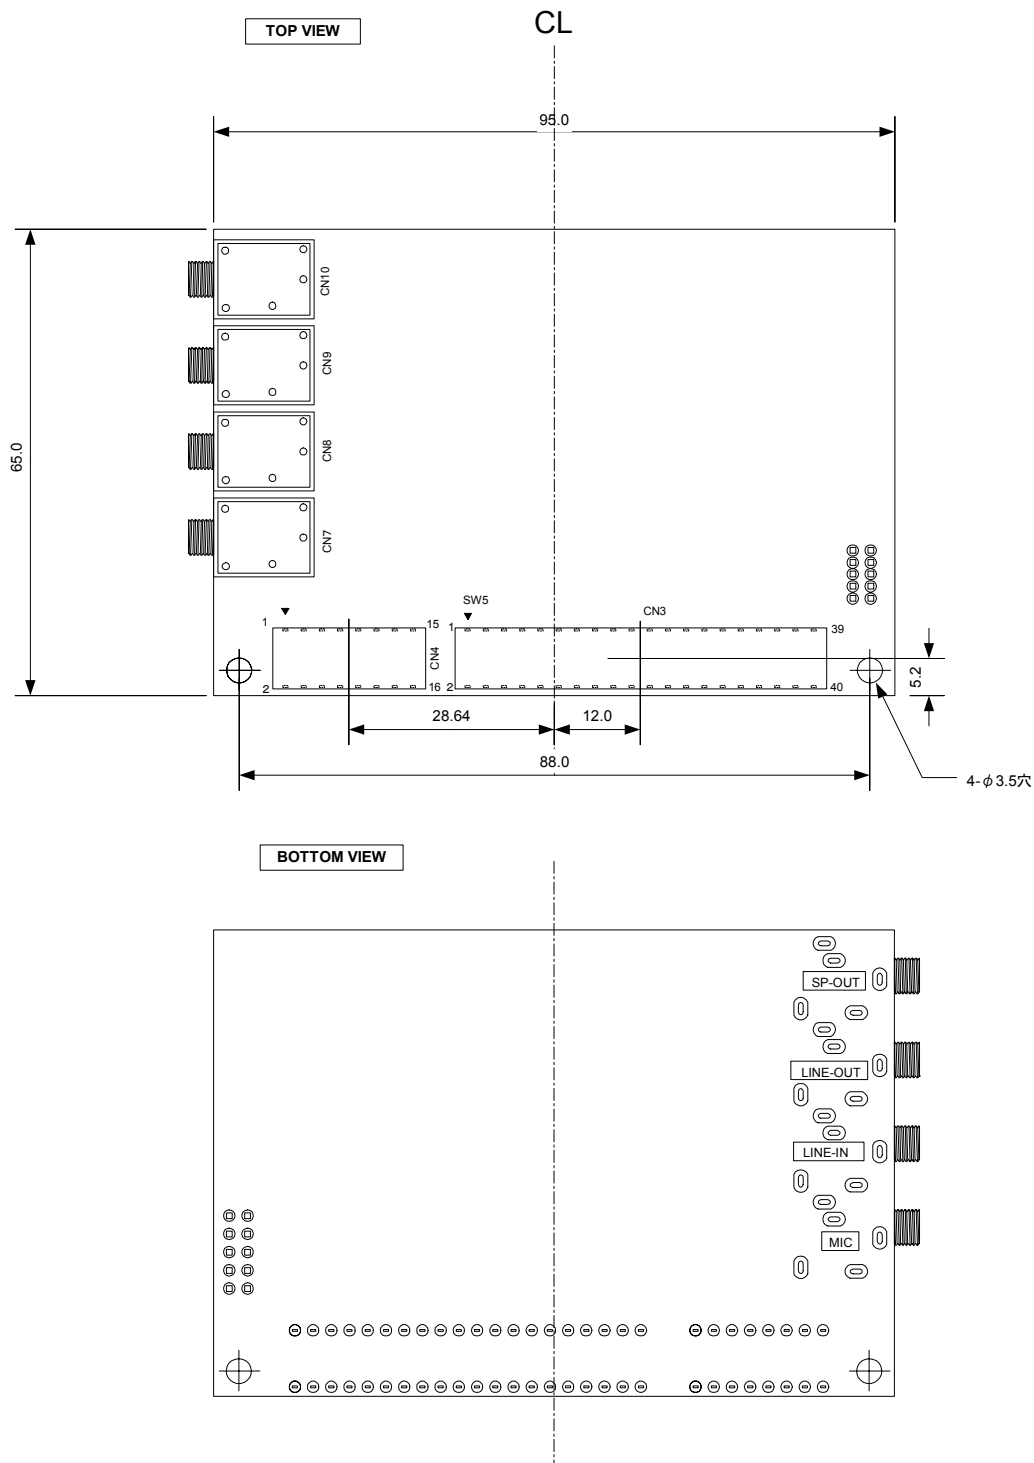


Fig.3.1 Camera Board Dimensions

## 4. EXTERNAL PINS

### 4.1 Interface Connectors

The following Figure shows the locations of the external interface connectors on the camera board. The Tables in the following four subsections list their pin assignments.

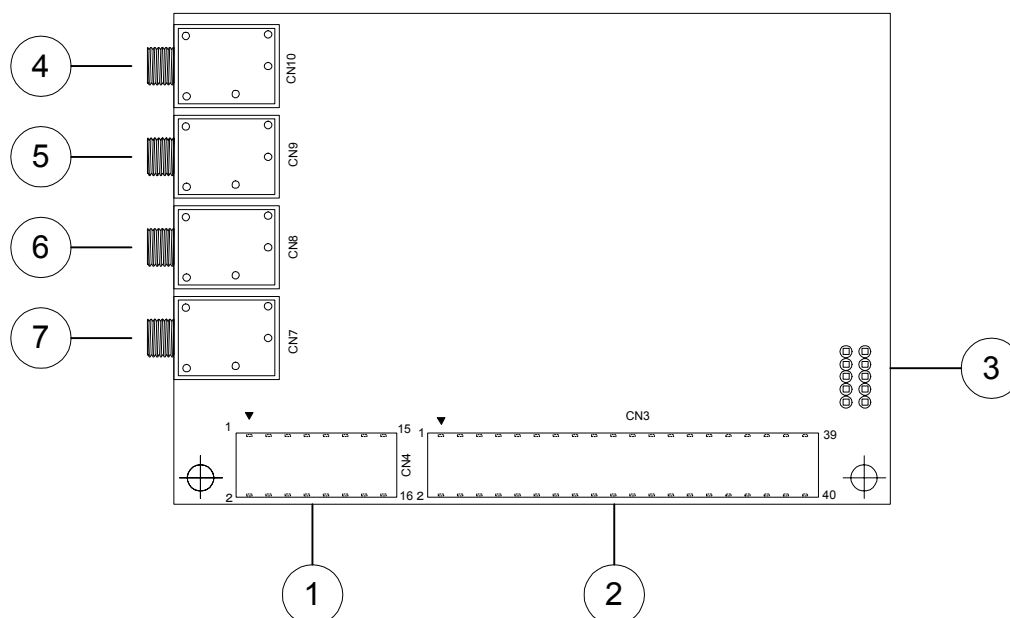


Fig.4.1 Camera Board Interface Connector Layout

#### 4.1.1 Main Board Interfaces

① 5V, Reset (CN3 : HIF3H-16DB-2.54S)

① in Fig.4.1

| Pin Number | Function | Pin Number | Function |
|------------|----------|------------|----------|
| 1          | 5V       | 2          | 5V       |
| 3          | NC       | 4          | NC       |
| 5          | NC       | 6          | NC       |
| 7          | NC       | 8          | NC       |
| 9          | NC       | 10         | NC       |
| 11         | NC       | 12         | NC       |
| 13         | RESET#   | 14         | GND      |
| 15         | GND      | 16         | GND      |

## 4. EXTERNAL PINS

② Camera interface and expansion connector (CN1: HIF3H-40DB-2.54DS)

② in Fig.4.1

②-1 S1S65010 Evaluation Board (S5U1S65K01H0x00) case of joint

| Pin Number | Function                | Pin Number | Function                  |
|------------|-------------------------|------------|---------------------------|
| 1          | GND                     | 2          | GND                       |
| 3          | CAMDATA0                | 4          | CAMDATA1                  |
| 5          | CAMDATA2                | 6          | CAMDATA3                  |
| 7          | CAMDATA4                | 8          | CAMDATA5                  |
| 9          | CAMDATA6                | 10         | CAMDATA7                  |
| 11         | CMCLKOUT                | 12         | CMCLKIN                   |
| 13         | CMVREF                  | 14         | CMHREF                    |
| 15         | CAMVDD                  | 16         | CAMVDD                    |
| 17         | I2C_SDA                 | 18         | I2C_SCL                   |
| 19         | 3.3V                    | 20         | 3.3V                      |
| 21         | GPIOA0                  | 22         | GPIOA1                    |
| 23         | GPIOA2<br>(TXD1/SPI_SS) | 24         | GPIOA3<br>(RXD1/SPI_SCLK) |
| 25         | GPIOA4<br>(SPI_MISO)    | 26         | GPIOA5<br>(SPI_MOSI)      |
| 27         | GPIOA6                  | 28         | GPIOA7                    |
| 29         | GPIOB0<br>(I2S0_WS)     | 30         | GPIOB1<br>(I2S0_SCK)      |
| 31         | GPIOB2<br>(I2S0_SD)     | 32         | GPIOB3<br>(I2S1_SD)       |
| 33         | GPIOB4<br>(Timer1out)   | 34         | GPIOB5                    |
| 35         | GPIOB6                  | 36         | GPIOB7                    |
| 37         | GIOD0                   | 38         | GIOD1                     |
| 39         | GND                     | 40         | GND                       |



②-2 S2S65A00 Evaluation Board (S5U2S65A00H0x00) CN7 case of joint

| Pin Number | Function                | Pin Number | Function                  |
|------------|-------------------------|------------|---------------------------|
| 1          | GND                     | 2          | GND                       |
| 3          | CAMDATA0                | 4          | CAMDATA1                  |
| 5          | CAMDATA2                | 6          | CAMDATA3                  |
| 7          | CAMDATA4                | 8          | CAMDATA5                  |
| 9          | CAMDATA6                | 10         | CAMDATA7                  |
| 11         | CMCLKOUT                | 12         | CMCLKIN                   |
| 13         | CMVREF                  | 14         | CMHREF                    |
| 15         | CAMVDD                  | 16         | CAMVDD                    |
| 17         | I2C_SDA                 | 18         | I2C_SCL                   |
| 19         | 3.3V                    | 20         | 3.3V                      |
| 21         | NC                      | 22         | NC                        |
| 23         | GPIOC4<br>(TXD3/SPI_SS) | 24         | GPIOC5<br>(RXD3/SPI_SCLK) |
| 25         | NC                      | 26         | SPI_MOSI                  |
| 27         | NC                      | 28         | NC                        |
| 29         | GPIOB0<br>(I2S0_WS)     | 30         | GPIOB1<br>(I2S_SCK)       |
| 31         | GPIOB2<br>(I2S_SDO)     | 32         | GPIOB3<br>(I2S_SDI)       |
| 33         | GPIOB4<br>(TimerA0out)  | 34         | NC                        |
| 35         | NC                      | 36         | NC                        |
| 37         | NC                      | 38         | NC                        |
| 39         | GND                     | 40         | GND                       |

②-3 S2S65A00 Evaluation Board (S5U2S65A00H0x00) CN8 case of joint

| Pin Number | Function | Pin Number | Function |
|------------|----------|------------|----------|
| 1          | GND      | 2          | GND      |
| 3          | CAMDATA0 | 4          | CAMDATA1 |
| 5          | CAMDATA2 | 6          | CAMDATA3 |
| 7          | CAMDATA4 | 8          | CAMDATA5 |
| 9          | CAMDATA6 | 10         | CAMDATA7 |
| 11         | CMCLKOUT | 12         | CMCLKIN  |
| 13         | CMVREF   | 14         | CMHREF   |
| 15         | CAMVDD   | 16         | CAMVDD   |
| 17         | I2C_SDA  | 18         | I2C_SCL  |
| 19         | 3.3V     | 20         | 3.3V     |
| 21         | NC       | 22         | NC       |
| 23         | NC       | 24         | NC       |
| 25         | NC       | 26         | NC       |
| 27         | NC       | 28         | NC       |
| 29         | NC       | 30         | NC       |
| 31         | NC       | 32         | NC       |
| 33         | NC       | 34         | NC       |
| 35         | NC       | 36         | NC       |
| 37         | NC       | 38         | NC       |
| 39         | GND      | 40         | GND      |

## 4. EXTERNAL PINS

---

### 4.1.2 Serial (RS232-C) Interface (CN6: XG8W-1031)

③ in Fig.4.1

| Pin Number | Function | Pin Number | Function |
|------------|----------|------------|----------|
| 1          | NC       | 2          | RXD      |
| 3          | TXD      | 4          | NC       |
| 5          | GND      | 6          | NC       |
| 7          | NC       | 8          | NC       |
| 9          | NC       | 10         | NC       |

### 4.1.3 Audio Interface Connectors (CN7 to CN10: A2PA-3PGG)

These are for a microphone, a speaker, and line I/O.

④ to ⑦ in Fig.4.1

| Connector | Function         | Note |
|-----------|------------------|------|
| CN7       | Microphone input | ⑦    |
| CN8       | Line input       | ⑥    |
| CN9       | Line output      | ⑤    |
| CN10      | Speaker output   | ④    |

### 4.1.4 Camera Module Connectors (CN1 CN2, and CN5)

This board provides three (mutually exclusive) connectors for connecting a CMOS camera module.

| Connector | Function        | Product Number                  |
|-----------|-----------------|---------------------------------|
| CN1       | TMV1320         | 086262022340829+ (Kyocera-elco) |
| CN2       | TMV1303         | AXK730127G (MATSUSHITA)         |
| CN5       | General purpose | 8526-4500PL (3M)                |

## 5. FUNCTIONAL DESCRIPTION

Fig.5.1 show component locations on the board. The following nine subsections describe their functions.

- Please do not turn on SW1 and SW3 together.
- Please do not turn on SW1[2:1] and SW2 together.

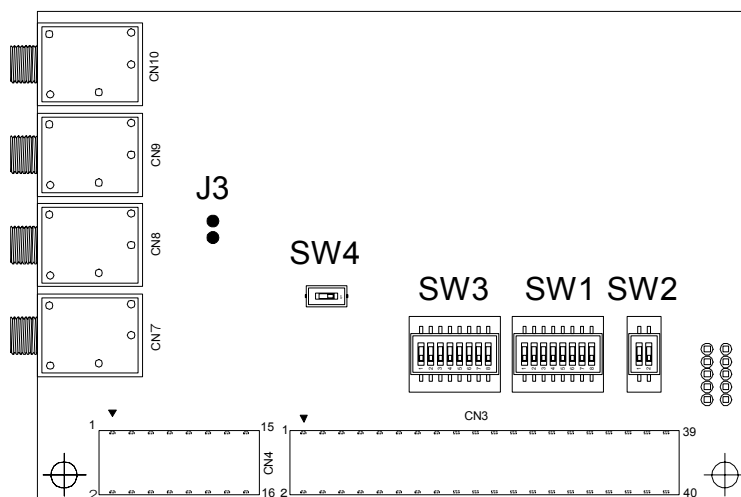


Fig.5.1 Camera Board (Top View)

### 5.1 GPIOB DIP Switches (SW1)

It is possible to control the LED by GPIOB from S1S65010, S2S65A00 evaluation board. It is the switch that joints the LED and GPIOB.

Table 5.1 S1S65010 Evaluation Board (S5U1S65K01H0x00) case of joint

| Pin Number | Abbreviation | Function      |        | Notes |
|------------|--------------|---------------|--------|-------|
|            |              | 0 (OFF)       | 1 (ON) |       |
| 1          | LED7         | No connecting | GPIOB7 |       |
| 2          | LED6         | No connecting | GPIOB6 |       |
| 3          | LED5         | No connecting | GPIOB5 |       |
| 4          | LED4         | No connecting | GPIOB4 |       |
| 5          | LED3         | No connecting | GPIOB3 |       |
| 6          | LED2         | No connecting | GPIOB2 |       |
| 7          | LED1         | No connecting | GPIOB1 |       |
| 8          | LED0         | No connecting | GPIOB0 |       |

## 5. FUNCTIONAL DESCRIPTION

Table 5.2 S2S65A00 Evaluation Board (S5U2S65A00H0x00) CN7 case of joint

| Pin Number | Abbreviation | Function      |        | Note |
|------------|--------------|---------------|--------|------|
|            |              | 0 (OFF)       | 1 (ON) |      |
| 1          | LED7         | No Connecting |        |      |
| 2          | LED6         | No Connecting |        |      |
| 3          | LED5         | No Connecting |        |      |
| 4          | LED4         | No Connecting | GPIOB4 |      |
| 5          | LED3         | No Connecting | GPIOB3 |      |
| 6          | LED2         | No Connecting | GPIOB2 |      |
| 7          | LED1         | No Connecting | GPIOB1 |      |
| 8          | LED0         | No Connecting | GPIOB0 |      |

Table 5.3 S2S65A00 Evaluation Board (S5U2S65A00H0x00) CN8 case of joint

| Pin Number | Abbreviation | Function      |        | Note |
|------------|--------------|---------------|--------|------|
|            |              | 0 (OFF)       | 1 (ON) |      |
| 1          | LED7         | No Connecting |        |      |
| 2          | LED6         |               |        |      |
| 3          | LED5         |               |        |      |
| 4          | LED4         |               |        |      |
| 5          | LED3         |               |        |      |
| 6          | LED2         |               |        |      |
| 7          | LED1         |               |        |      |
| 8          | LED0         |               |        |      |

It is not possible the control of the LED on the camera board from CN8 of the S2S65A00 evaluation board.

### 5.2 UART DIP Switches (SW2)

It is the switch that joints RS232C IC on the camera board and UART of the S1S65010/S2S6500 evaluation board.

Table 5.4 S1S65010 Evaluation Board (S5U1S65K01H0x00) case of joint

| Pin Number | Function      |               | Note |
|------------|---------------|---------------|------|
|            | 0 (OFF)       | 1 (ON)        |      |
| 1          | No Connecting | UART Lite TXD |      |
| 2          | No Connecting | UART Lite RXD |      |

Table 5.5 S2S65A00 Evaluation Board (S5U2S65A00H0x00) CN7 case of joint

| Pin Number | Function      |           | Note |
|------------|---------------|-----------|------|
|            | 0 (OFF)       | 1 (ON)    |      |
| 1          | No Connecting | UART TXD3 |      |
| 2          | No Connecting | UART RXD3 |      |

Table 5.6 S2S65A00 Evaluation Board (S5U2S65A00H0x00) CN8 case of joint

| Pin Number | Function      |        | Note |
|------------|---------------|--------|------|
|            | 0 (OFF)       | 1 (ON) |      |
| 1          | No Connecting |        |      |
| 2          |               |        |      |

### 5.3 AUDIO CODEC DIP Switches (SW3)

It is the switch that joints Audio CODEC IC on the camera board and I2S,SPI of the S1S65010/S2S6500 evaluation board.

Table 5.7 S1S65010 Evaluation Board (S5U1S65K01H0x00) case of joint

| Pin Number | Function      |           | Note |
|------------|---------------|-----------|------|
|            | 0 (OFF)       | 1 (ON)    |      |
| 1          | No Connecting | SPI_SS    |      |
| 2          | No Connecting | SPI_SCLK  |      |
| 3          | No Connecting | SPI_MOSI  |      |
| 4          | No Connecting | TIMER1OUT |      |
| 5          | No Connecting | I2S0_SD   |      |
| 6          | No Connecting | I2S1_SD   |      |
| 7          | No Connecting | I2S0_WS   |      |
| 8          | No Connecting | I2S0_SCK  |      |

Table 5.8 S2S65A00 Evaluation Board (S5U2S65A00H0x00) CN7 case of joint

| Pin Number | Function      |            | Note |
|------------|---------------|------------|------|
|            | 0 (OFF)       | 1 (ON)     |      |
| 1          | No Connecting | SPI_SS     |      |
| 2          | No Connecting | SPI_SCLK   |      |
| 3          | No Connecting | SPI_MOSI   |      |
| 4          | No Connecting | TIMERA0OUT |      |
| 5          | No Connecting | I2S_SDO    |      |
| 6          | No Connecting | I2S_SDI    |      |
| 7          | No Connecting | I2S_WS     |      |
| 8          | No Connecting | I2S_SCLK   |      |

Table 5.9 S2S65A00 Evaluation Board (S5U2S65A00H0x00) CN8 case of joint

| Pin Number | Function      |        | Note |
|------------|---------------|--------|------|
|            | 0 (OFF)       | 1 (ON) |      |
| 1          | No Connecting |        |      |
| 2          |               |        |      |
| 3          |               |        |      |
| 4          |               |        |      |
| 5          |               |        |      |
| 6          |               |        |      |
| 7          |               |        |      |
| 8          |               |        |      |

## 5. FUNCTIONAL DESCRIPTION

---

### 5.4 Camera's I<sup>2</sup>C address DIP Switches (SW4)

It is the switch of the I<sup>2</sup>C address binding of a camera module. Sample software is using address 0x90.  
ON:0x90  
OFF:0xB8

### 5.5 AUDIO CODEC clock input (J3)

J3 selects of the clock source of AUDIO CODEC AK4631. Sample software is using Timer Out of the main board for the clock. In the case that the crystal oscillator on the board is used it does J3 the short and please make bit4 of SW3 the open. The frequency of the crystal oscillator is 12.288MHz.

## 6. PARTS LISTS

The following Table lists the major parts on the camera board—that is, all parts except resistors and capacitors.

Table 6.1 Camera Board Parts

| PARTS NO  | PARTS NAME | STANDARD            |                | QTY |
|---|------------|---------------------|----------------|-----|
|   | PCB        |                     |                | 1   |
| U1  | IC         | TC74VHC05FT         | TOHSHIBA       | 1   |
| U2  |            | ADM3222ARUZ         | Analog Devices | 1   |
| U3  |            | AK4631VN            | Asahi-Kasei    | 1   |
| SW1,SW3   | SWITCH     | CHS-08B             | COPAL          | 2   |
| SW2   |            | CHS-02B             | COPAL          | 1   |
| SW4   |            | CHS-01B             | COPAL          | 1   |
| CN1   | CONNECTOR  | 086262022340829+    | KYOCERA-elco   | 1   |
| CN2   |            | AXK730127G          | Matsushita     | 1   |
| CN3   |            | HIF3H-40DB-2.54DS   | HIROSE         | 1   |
| CN4   |            | HIF3H-16DB-2.54DS   | HIROSE         | 1   |
| CN7, CN8, CN9, CN10                               | Mini JACK  | A2PA-3PGG           |                | 4   |
| FL1   | FILTER     | NFM18PC105R0J3      | MURATA         | 1   |
| LED1, LED2, LED3, LED4,<br>LED5, LED6, LED7, LED8 | LED        | SML-310MTT86        | ROHM           | 8   |
| X1  | OSC        | SG-310SCF 12.288MHz | EPSON TOYOCOM  | 1   |

## REVISION HISTORY

---

### REVISION HISTORY

| Rev | Date       | Description   | Person   |
|-----|------------|---------------|----------|
| 1.0 | 2007/07/18 | First Edition | T.Suzuki |
|     |            |               |          |
|     |            |               |          |
|     |            |               |          |
|     |            |               |          |



### AMERICA

#### EPSON ELECTRONICS AMERICA, INC.

##### HEADQUARTERS

2580 Orchard Parkway  
San Jose , CA 95131,USA  
Phone: +1-800-228-3964      FAX: +1-408-922-0238

##### SALES OFFICES

###### Northeast

301 Edgewater Place, Suite 210  
Wakefield, MA 01880, U.S.A.  
Phone: +1-800-922-7667      FAX: +1-781-246-5443

### EUROPE

#### EPSON EUROPE ELECTRONICS GmbH

##### HEADQUARTERS

Riesstrasse 15  
80992 Munich, GERMANY  
Phone: +49-89-14005-0      FAX: +49-89-14005-110

### ASIA

#### EPSON (CHINA) CO., LTD.

23F, Beijing Silver Tower 2# North RD DongSanHuan  
ChaoYang District, Beijing, CHINA  
Phone: +86-10-6410-6655      FAX: +86-10-6410-7320

##### SHANGHAI BRANCH

7F, High-Tech Bldg., 900, Yishan Road,  
Shanghai 200233, CHINA  
Phone: +86-21-5423-5522      FAX: +86-21-5423-5512

#### EPSON HONG KONG LTD.

20/F., Harbour Centre, 25 Harbour Road  
Wanchai, Hong Kong  
Phone: +852-2585-4600      FAX: +852-2827-4346  
Telex: 65542 EPSCO HX

#### EPSON Electronic Technology Development (Shenzhen) LTD.

12/F, Dawning Mansion, Keji South 12th Road,  
Hi- Tech Park, Shenzhen  
Phone: +86-755-2699-3828      FAX: +86-755-2699-3838

#### EPSON TAIWAN TECHNOLOGY & TRADING LTD.

14F, No. 7, Song Ren Road,  
Taipei 110  
Phone: +886-2-8786-6688      FAX: +886-2-8786-6660

#### EPSON SINGAPORE PTE., LTD.

1 HarbourFront Place,  
#03-02 HarbourFront Tower One, Singapore 098633  
Phone: +65-6586-5500      FAX: +65-6271-3182

#### SEIKO EPSON CORPORATION

##### KOREA OFFICE

50F, KLI 63 Bldg., 60 Yoido-dong  
Youngdeungpo-Ku, Seoul, 150-763, KOREA  
Phone: +82-2-784-6027      FAX: +82-2-767-3677

##### GUMI OFFICE

2F, Grand B/D, 457-4 Songjeong-dong,  
Gumi-City, KOREA  
Phone: +82-54-454-6027      FAX: +82-54-454-6093

---

#### SEIKO EPSON CORPORATION SEMICONDUCTOR OPERATIONS DIVISION

##### IC Sales Dept.

##### IC International Sales Group

421-8, Hino, Hino-shi, Tokyo 191-8501, JAPAN  
Phone: +81-42-587-5814      FAX: +81-42-587-5117

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Epson:

[S5U1S65K01H0400](#) [S5U1S65K01H4100](#)

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А