

G3VM-41PR11

MOS FET Relays

Smallest Class in market, USOP Package MOS FET Relays with Low Output Capacitance and ON Resistance ($C_xR=5pF \cdot \Omega$)

- Dielectric strength of 500Vrms between I/O.



NEW

Note: The actual product is marked differently from the image shown here.



RoHS Compliant

Refer to "Common Precautions".

Application Examples

- Semiconductor test equipment
- Communication equipment
- Test & measurement equipment
- Data loggers

Terminal Arrangement/Internal Connections



Note: The actual product is marked differently from the image shown here.

List of Models

Package type	Contact form	Terminals	Load voltage (peak value) (See note.)	Model	Minimum package quantity
					Number per tape & reel
USOP4	1a (SPST-NO)	Surface-mounting terminals	40V	G3VM-41PR11	—
				G3VM-41PR11 (TR05)	500
				G3VM-41PR11 (TR)	1,500

Note 1. Ask you OMRON representative for orders under 1,500 pcs or 500 pcs.

2. Tape-cut USOPs are packaged without humidity resistance. Use manual soldering to mount them. Refer to common precautions.

3. The AC peak and DC value is given for the load voltages.

Absolute Maximum Ratings (Ta = 25°C)


Item	Symbol	Rating	Unit	Measurement conditions	
Input	LED forward current	IF	50	mA	
	LED forward current reduction rate	$\Delta I_f / ^\circ C$	-0.5	mA/°C	Ta ≥ 25°C
	LED reverse voltage	VR	5	V	
Connection temperature	TJ	125	°C		
Output	Load voltage (AC peak/DC)	V _{OFF}	40	V	
	Continuous load current (AC peak/DC)	Io	140	mA	
	ON current reduction rate	$\Delta I_o / ^\circ C$	-1.4	mA/°C	Ta ≥ 25°C
	Pulse ON current	I _{OP}	420	mA	t = 100ms, Duty = 1/10
	Connection temperature	TJ	125	°C	
Dielectric strength between I/O (See note 1.)	V _{I-O}	500	Vrms	AC for 1 min	
Ambient operating temperature	Ta	-40~+85	°C	With no icing or condensation	
Ambient storage temperature	Tstg	-40~+125	°C	With no icing or condensation	
Soldering temperature	—	260	°C	10s	

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

Electrical Characteristics (Ta = 25°C)

Item	Symbol	Minimum	Typical	Maximum	Unit	Measurement conditions	
Input	LED forward voltage	V _F	1.0	1.15	1.3	V	I _F = 10mA
	Reverse current	I _R	—	—	10	μA	V _R = 5V
	Capacity between terminals	C _T	—	15	—	pF	V = 0, f = 1MHz
	Trigger LED forward current	I _{FT}	—	1.0	3	mA	I _O = 100mA
Output	Maximum resistance with output ON	R _{ON}	—	7	10	Ω	I _F = 5mA, I _O = 140mA, t < 1s
	Current leakage when the relay is open	I _{LEAK}	—	—	1	nA	V _{OFF} = 40V
	Capacity between terminals	C _{OFF}	—	0.7	1.3	pF	V = 0, f = 100MHz, t < 1s
	Capacity between I/O terminals	C _{I-O}	—	0.4	—	pF	f = 1MHz, V _S = 0V
	Insulation resistance between I/O terminals	R _{I-O}	1000	—	—	MΩ	V _{I-O} = 500VDC, RoH ≤ 60%
Turn-ON time	t _{ON}	—	0.04	0.2	ms	I _F = 5mA, R _L = 200Ω, V _{DD} = 20V (See note 2.)	
Turn-OFF time	t _{OFF}	—	0.14	0.2	ms		

Note: 2. Turn-ON and Turn-OFF Times




Recommended Operating Conditions

Use the G3VM under the following conditions so that the Relay will operate properly.


Item	Symbol	Minimum	Typical	Maximum	Unit
Load voltage (AC peak/DC)	V _{DD}	-	-	32	V
Operating LED forward current	I _F	5	7.5	20	mA
Continuous load current (AC peak/DC)	I _O	-	-	140	mA
Ambient operating temperature	T _a	-20	-	65	°C

Engineering Data


LED forward current vs. Ambient temperature
I_F - T_a

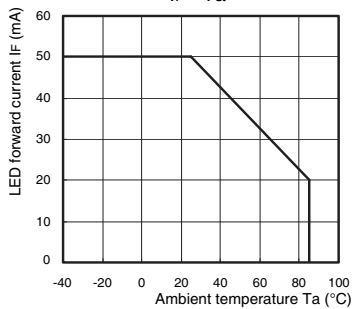


Continuous load current vs. Ambient temperature
I_O - T_a

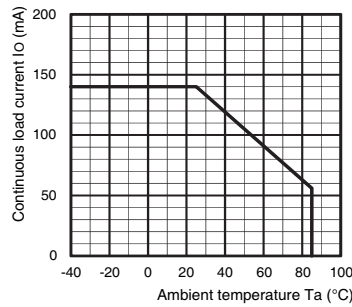


LED forward current vs. LED forward voltage
I_F - V_F

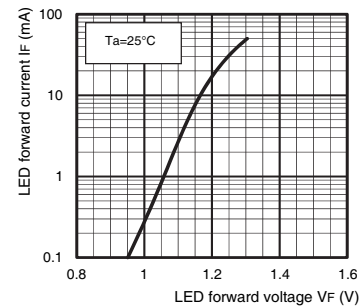


Continuous load current vs. On-state voltage
I_O - V_{ON}




On-state resistance vs. Ambient temperature
R_{ON} - T_a




Trigger LED forward current vs. Ambient temperature
I_{FT} - T_a

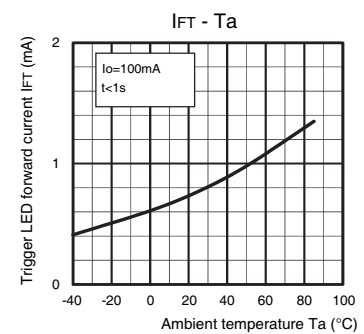


Turn ON, Turn OFF time vs. LED forward current
t_{ON}, t_{OFF} - I_F

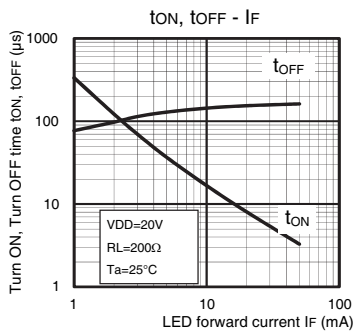


Turn ON, Turn OFF time vs. Ambient temperature
t_{ON}, t_{OFF} - T_a

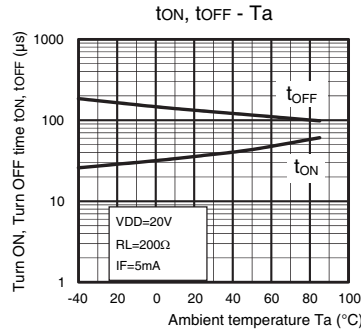

Current leakage vs. Load voltage
I_{LEAK} - V_{OFF}

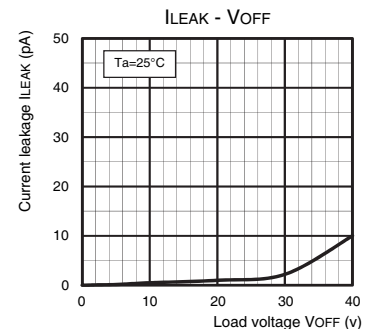

Output terminal capacitance COFF/COFF(ov) vs. Load voltage
C_{OFF} - V_{OFF}

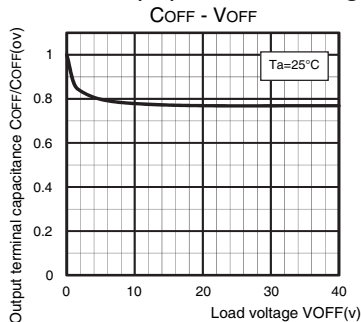


Safety Precautions

- Refer to "Common Precautions" for all G3VM models.

■Appearance

USOP (Ultra Small Outline Package)
USOP4



Note: The actual product is marked differently from the image shown here.




■Dimensions

(Unit: mm)




Surface-mounting Terminals

Weight: 0.03g



Actual Mounting Pad Dimensions

(Recommended Value, Top View)



Note: The actual product is marked differently from the image shown here.

- Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
- Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А