



PLK & PLR SERIES **Professional keylock or rotary switches**

NEW RANGE

- Miniature & subminiature
- 2 to 12 positions
- 1 to 4 poles



A P E M

PLK - PLR SERIES

PROFESSIONAL KEYLOCK OR ROTARY SWITCHES

Distinctive features

PLK SERIES - KEYLOCK SWITCHES

- Tapered lock face
- 2 or 3 positions
- Single or double pole
- Indexing : 90° (single pole) or 60° (double pole)
- Up to 200 different keys
- Double entry keys (can be inserted into the lock either way up)
- 5 disc lock type
- Miniature size, occupy small panel area
- Rear projection less than 30 mm from panel
- Easily assembled through front of panel
- Option : sealed terminals
- *Models with straight lock face available on request*



PLR SERIES - MINIATURE ROTARY SWITCHES

- 2 to 12 positions
- 1 to 4 poles
- Indexing : 30° on standard models, 60° or 90° optional
- Models with continuous rotation
- Adjustable stop to restrict number of position
- Shorting (make before break) or non shorting (break before make) contacts
- Solder lugs or PCB pins
- Options available :
 - no bush version
 - rear drive version
 - sealed terminations



PLRT SERIES - SUBMINIATURE ROTARY SWITCHES

- Standard TO-5 housing
- 2 to 8 positions
- Single or double pole
- 45° indexing
- Continuous rotation available on 8-position models
- Actuator : spindle
- Option : protective cover
- *Models with screwdriver slot available on request*



Dimensions : First dimensions are in mm while inches are shown as bracketted numbers.

Tolerance : The general tolerance for dimensions in this brochure is +/- 0,3 (.012).

Dimensions, specifications and data shown in this brochure are subject to change without notice.

PLK SERIES

PROFESSIONAL KEYLOCK SWITCHES

Tapered lock face


GENERAL SPECIFICATIONS

- Max. current/voltage rating (resistive) : 0,5A 30VDC
- Life : 10.000 cycles
- Initial contact resistance : 20 mΩ max.
- Insulation resistance : 100 MΩ min.
- Dielectric strength : 750 Vrms.
- Operating temperature : -20°C to +65°C
- Lock type : 5 disc
- Standard hardware supplied : 1 hex nut

MATERIALS


- Case : polyester, glass filled
- Bushing : zinc alloy, chrome plated
- Contacts : brass, silver plated

PANEL CUT-OUT



| Movement | Number of positions | Number of poles | Key withdrawal position | Indexing | Number of keys | Key sets | MODEL NO | Switching diagram |
|----------|---------------------|-----------------|-------------------------|----------|----------------|---------------|----------|-------------------|
| 90° | 2 | 1 | 1-4 | 90° | 2 | same | PLKB3220 | |
| 90° | 2 | 1 | 1-4 | 90° | 2 | 200 different | PLKB3221 | |
| 90° | 2 | 1 | 1 | 90° | 2 | same | PLKB3120 | |
| 60° | 2 | 2 | 1-3 | 60° | 2 | same | PLKB4220 | |
| 60° | 2 | 2 | 1 | 60° | 2 | same | PLKB4120 | |
| 180° | 3 | 1 | 1-4-7 | 90° | 2 | 200 different | PLKB8321 | |

Dimensions

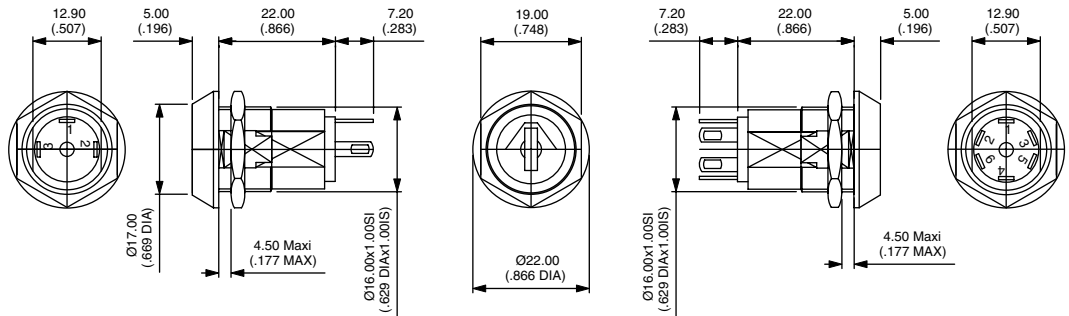

PLR SERIES

PROFESSIONAL MINIATURE ROTARY SWITCHES


GENERAL SPECIFICATIONS

- Max. voltage (resistive) : 250V AC/DC
- Max. current : 150mA
- Initial contact resistance : 20 mΩ max.
- Insulation resistance: 1.000 MΩ min.
- Dielectric strength : 1.000 Vrms
- Life : 10.000 cycles
- Operating torque : 8,6 Ncm ±2
- End stop torque : 1,13 Ncm min.
- Fixing torque : 1,1 Ncm max.
- Operating temperature : -30°C to +85°C
- Standard hardware supplied : 1 hex nut and 1 locking ring
- Special accessories (buttons) : see page 7


MATERIALS

- Moulded parts : PA 6/6, glass filled
- Contacts : brass, gold or silver plated, depending on version

PANEL CUT-OUT




Dimensions

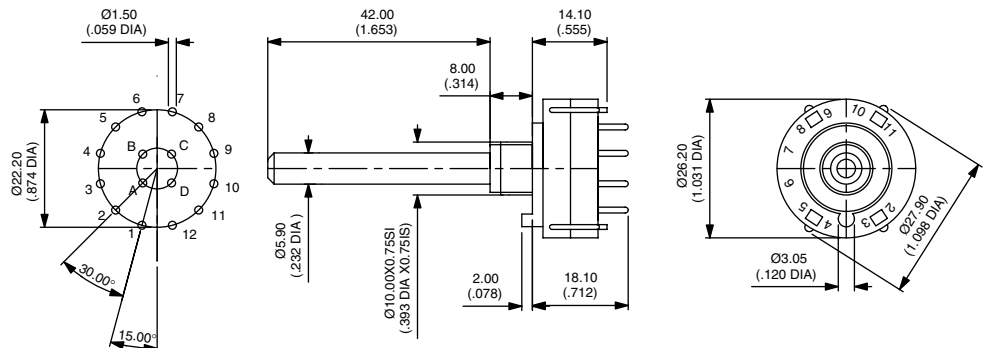


Available configurations (top view)


30° INDEXING (standard)
(models listed opposite)




1 pole, 12 pos.



2 poles, 6 pos.




3 poles, 4 pos.




4 poles, 3 pos.


60° INDEXING
(on request)




1 pole, 6 pos.



2 poles, 3 pos.




3 poles, 2 pos.




4 poles, 2 pos.


90° INDEXING
(on request)



1 pole, 4 pos.



2 poles, 2 pos.



3 poles, 2 pos.

PLR SERIES

PROFESSIONAL MINIATURE ROTARY SWITCHES

Models with 30° indexing

- Metric type
- Spindle diameter : 6 mm

- Spindle length : 42 mm
- Bushing : L 8 mm, M10 x 0,75

Preferred

| DESCRIPTION | Contact material | Shorting | Non-shorting |
|--|------------------|----------|--------------|
| 1 pole, 12 positions | | | |
| Solder lugs | Silver plated | PLR3259 | PLR3249 |
| | Gold plated | PLR3728 | PLR3723 |
| PCB pins | Silver plated | PLR3279 | PLR3269 |
| | Gold plated | PLR3732 | PLR3726 |
| 1 pole, 12 positions, continuous rotation | | | |
| Solder lugs | Silver plated | PLR3258 | PLR3248 |
| | Gold plated | PLR3753 | PLR3757 |
| PCB pins | Silver plated | PLR3278 | PLR3268 |
| | Gold plated | PLR3754 | PLR3758 |
| 2 poles, 6 positions | | | |
| Solder lugs | Silver plated | PLR3260 | PLR3250 |
| | Gold plated | PLR3729 | PLR3716 |
| PCB pins | Silver plated | PLR3280 | PLR3270 |
| | Gold plated | PLR3733 | PLR3693 |
| 2 poles, 6 positions, continuous rotation | | | |
| Solder lugs | Silver plated | PLR3334 | PLR3338 |
| | Gold plated | PLR3755 | PLR3759 |
| PCB pins | Silver plated | PLR3339 | PLR3333 |
| | Gold plated | PLR3756 | PLR3760 |
| 3 poles, 4 positions | | | |
| Solder lugs | Silver plated | PLR3261 | PLR3251 |
| | Gold plated | PLR3730 | PLR3734 |
| PCB pins | Silver plated | PLR3281 | PLR3271 |
| | Gold plated | PLR3734 | PLR3720 |
| 4 poles, 3 positions | | | |
| Solder lugs | Silver plated | PLR3262 | PLR3252 |
| | Gold plated | PLR3731 | PLR3725 |
| PCB pins | Silver plated | PLR3282 | PLR3272 |
| | Gold plated | PLR3735 | PLR3727 |

PLRT SERIES

PROFESSIONAL SUBMINIATURE ROTARY SWITCHES

Spindle models


GENERAL SPECIFICATIONS

- Max. current/voltage rating (resistive) : 0,5A 24VAC - 0,2A 48VAC - 0,3A 30VDC
- Contact resistance :
 - initial : 50 mΩ max.
 - after 10.000 cycles : 100mΩ max
- Insulation resistance : 1.000 MΩ min at 500VDC
- Dielectric strength : 1.000 Vrms
- Life : 10.000 cycles
- Operating torque : 1,4 to 2,8 Ncm
- Operating temperature : -30°C to +65°C
- Accessory (protective cover) : see page 7.

MATERIALS

- Case : polyester, glass filled
- Contacts : brass, gold plated
- Terminals : copper alloy, gold plated


DIAGRAM



Model numbers and dimensions




| Movement | Number of positions | MODEL NO |
|----------|----------------------|----------|
| 360° | 8 Continuous rot. | PLRT842 |
| 90° | 3 | PLRT331 |
| 135° | 4 | PLRT431 |
| 180° | 5 | PLRT531 |
| 315° | 8 | PLRT833 |

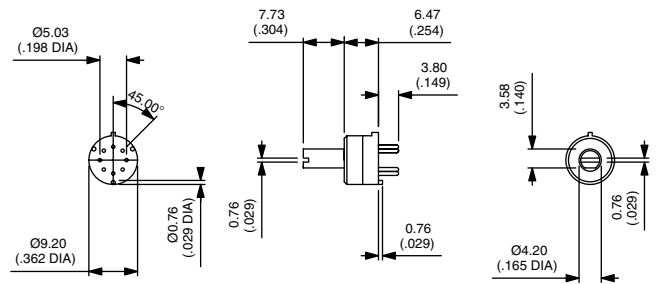

ACCESSORIES

For PLR and PLRT series


Straight knurl knob for PLR series



Natural anodized aluminium
U6107

Black anodized aluminium
U6106


Ribbed knob for PLR series



Black plastic
U6108



Protective cover for PLRT series



U6105


The APEM subminiature range




Z series




T series

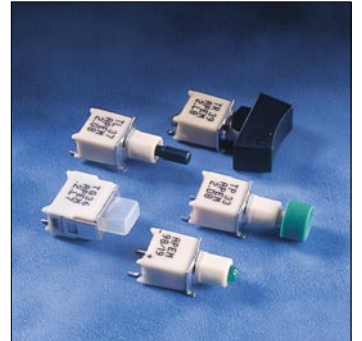

SMT T series



IK series



NK series



PHAP series



CR65 series




9000 series

Corporate sales

APEM

Centre d'Affaires Paris Nord - BP 200
Tour "Le Continental"
93153 Le Blanc Mesnil Cedex - France
Tel.: (+33) 1 48 14 92 65 - Fax: (+33) 1 48 14 92 84
e-mail : apem.com@wanadoo.fr



A P E M

Customer Service and Registered Office

APEM

55, avenue Edouard Herriot - BP 1
82303 Caussade Cedex - France
Tel.: (+33) 5 63 93 14 98 - Fax: (+33) 5 63 93 19 03
e-mail : commercial@apem.fr
web : www.apem.fr

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А