

MAX16833 Evaluation Kit

Evaluates: MAX16833/MAX16833B

General Description

The MAX16833 evaluation kit (EV kit) provides a proven design to evaluate the MAX16833 high-voltage HB LED driver with integrated high-side current sense. The EV kit is set up for boost and buck-boost configurations and operates from a 5V to 18V DC supply voltage. The EV kit is configured to deliver up to 1A to one string of LEDs. The total voltage of the string can vary from 3V to 36V. The anode of the LED string should be connected to the LED+ terminal. The cathode of the LED string can be connected either to the PGND (boost mode) or LED- (buck-boost mode) terminal. In the case of the boost mode, the input voltage should not exceed the LED string voltage.

The EV kit PCB comes with a MAX16833AUE+ installed, which is the frequency-dithering version. The EV kit also comes with the pin-compatible MAX16833BAUE+, which is the reference-voltage output version.

Features

- ◆ Configured for Boost and Buck-Boost
- ◆ Analog Dimming Control
- ◆ Proven PCB Layout
- ◆ Fully Assembled and Tested

Ordering Information

| PART | TYPE |
|----------------|--------|
| MAX16833EVKIT+ | EV Kit |

+Denotes lead(Pb)-free and RoHS compliant.

Component List

| DESIGNATION | QTY | DESCRIPTION |
|------------------|-----|---|
| C1 | 1 | 22 μ F \pm 20%, 50V electrolytic capacitor (6.3mm x 7.7mm) SUN Electronic 50CE22PC |
| C2, C5, C13, C14 | 4 | 4.7 μ F \pm 10%, 100V X7R ceramic capacitors (2220) Murata GRM55ER72A475K |
| C3, C4 | 2 | 1 μ F \pm 10%, 16V X7R ceramic capacitors (0603) Murata GRM188R71C05K |
| C6, C11, C15 | 3 | 4.7 μ F \pm 10%, 50V X7R ceramic capacitors (1210) Murata GRM32ER71H475K |
| C7, C10 | 2 | 0.1 μ F \pm 10%, 16V X7R ceramic capacitors (0603) Murata GRM188R71C104K |
| C8 | 1 | 680pF \pm 5%, 50V C0G ceramic capacitor (0603) Murata GRM1885C1H681JA01D |
| C9 | 1 | 33000pF \pm 10%, 16V X7R ceramic capacitor (0603) Murata GRM188R71C333KA01D |

| DESIGNATION | QTY | DESCRIPTION |
|-------------|-----|--|
| C12 | 1 | 4.7 μ F \pm 10%, 25V X7R ceramic capacitor (1206) Murata GRM31CR71E475M |
| C16 | 1 | 0.1 μ F \pm 10%, 50V X7R ceramic capacitor (0603) Murata GRM188R71H104K |
| C17 | 1 | 22pF \pm 10%, 50V C0G ceramic capacitor (0603) Murata GRM1885C1H220J |
| C18 | 1 | 1000pF \pm 10%, 50V X7R ceramic capacitor (0603) Murata GCM188R71H102KA37D |
| D1 | 1 | 100V, 3A Schottky diode (SMC) Vishay 30BQ100TRPbF |
| D2 | 1 | 75V, 15mA diode (3 SOT323) Diodes Inc. MMBD4148W |
| D3 | 0 | Not installed, diode (3 SOT323) |
| D4 | 1 | 40V, 350mA Schottky diode (3 SOD323) Diodes Inc. SD103AWS-7-F |
| JU1, JU2 | 2 | 2-pin headers |
| JU3 | 1 | 3-pin header |

MAX16833 Evaluation Kit

Evaluates: MAX16833/MAX16833B

Component List (continued)

| DESIGNATION | QTY | DESCRIPTION |
|-------------|-----|---|
| L1 | 1 | 9.5μH, 8.5A inductor (14.9mm x 14.9mm) Sumida CDEP147NP-9R5MC-95 |
| M1 | 1 | 100V, 42A n-channel MOSFET (DPAK) International Rectifier IRLR3110ZPbF |
| M2 | 1 | 100V, 12A p-channel MOSFET (D ² PAK) Vishay SiHF9530S |
| M3 | 0 | Not installed, MOSFET (DPAK) |
| R1, R16 | 0 | Not installed, resistors (0603) R1 is shorted by PC trace; R16 is open |
| R2, R14 | 2 | 0.05Ω ±1% sense resistors (2512) IRC LRC-LR2512LF-01-R050-F |
| R3 | 1 | 536kΩ ±1% resistor (0603) |
| R4 | 1 | 0.2Ω ±1% sense resistor (2010) IRC LRC-LR2010LF-01-R200-F |
| R5, R8 | 2 | 10kΩ ±1% resistors (0603) |

| DESIGNATION | QTY | DESCRIPTION |
|-------------|-----|---|
| R6 | 1 | 22Ω ±1% resistor (0603) |
| R7 | 1 | 44.2kΩ ±1% resistor (0603) |
| R9 | 1 | 150kΩ ±1% resistor (0603) |
| R10 | 1 | 20kΩ ±1% resistor (0603) |
| R11 | 1 | 49.9kΩ ±1% resistor (0603) |
| R12 | 1 | 2.2Ω ±5% resistor (0603) |
| R13 | 1 | 4.02kΩ ±1% resistor (0603) |
| R15 | 1 | 10Ω ±5% resistor (0603) |
| R17 | 1 | 100Ω ±1% resistor (0603) |
| R18 | 1 | 50kΩ potentiometer (9.53mm x 4.83mm x 10.03mm) |
| R19 | 1 | 24.9kΩ ±1% resistor (0603) |
| R20 | 1 | 220Ω ±1% resistor (0603) |
| U1 | 1 | LED driver (16 TSSOP-EP*) Maxim MAX16833AUE+ |
| — | 1 | LED driver (16 TSSOP-EP*) Maxim MAX16833BAUE+ |
| — | 3 | Shunts |
| — | 1 | PCB: MAX16833 EVALUATION KIT+ |

*EP = Exposed pad.

Component Suppliers

| SUPPLIER | PHONE | WEBSITE |
|--|--------------|-----------------------------|
| Diodes Incorporated | 805-446-4800 | www.diodes.com |
| International Rectifier | 310-322-3331 | www.irf.com |
| IRC, Inc. | 361-992-7900 | www.ircit.com |
| Murata Electronics North America, Inc. | 770-436-1300 | www.murata-northamerica.com |
| SUN Electronic Industries Corporation | 619-661-8288 | www.sunelec.co.jp |
| Sumida Corp. | 847-545-6700 | www.sumida.com |
| Vishay | 402-563-6866 | www.vishay.com |

Note: Indicate that you are using the MAX16833 when contacting these component suppliers.

MAX16833 Evaluation Kit

Evaluates: MAX16833/MAX16833B

Quick Start

Required Equipment

- MAX16833 EV kit
- 5V to 18V, 8A DC power supply
- A series-connected LED string rated at 1A
- Oscilloscope with a current probe

Procedure

The EV kit is fully assembled and tested. Follow the steps below to verify the board operation. **Caution: Do not turn on power supply until all connections are completed.**

- 1) Verify that all jumpers (JU1, JU2, and JU3) are in their default positions, as shown in Table 1.
- 2) Connect the positive terminal of the DC supply to the VIN pad and the negative terminal to the nearest PGND pad.

- 3) Connect the LED string across the LED+ and LED-pads of the EV kit for buck-boost configuration (for boost configuration, connect the LED string across the LED+ and PGND pads of the EV kit. The LED string voltage should be higher than the input voltage in this configuration).
- 4) Clip the current probe on the wire connected to the LED string.
- 5) Turn on the DC power supply.
- 6) Verify that the LEDs turn on.
- 7) Verify that the oscilloscope displays approximately 1A.

Table 1. Jumper Descriptions (JU1, JU2, JU3)

| JUMPER | SHUNT POSITION | DESCRIPTION |
|--------|----------------|--|
| JU1 | 1-2* | Connects the ICTRL pin of the MAX16833 to a voltage higher than 1.23V. The LED current level is now using the internal reference. The shunt of JU2 must not be installed for proper operation. |
| | Open | Disconnects the ICTRL pin of the MAX16833 from the external voltage-divider on the VCC pin. Allows the user to apply an external voltage to set the LED current level. |
| JU2 | 1-2 | Used only for the MAX16833B. For the MAX16833, this jumper is open. For the MAX16833B, this allows adjustment of the voltage on the ICTRL pin by adjusting potentiometer R18. |
| | Open* | Disconnects the ICTRL pin of the MAX16833/MAX16833B from potentiometer R18. An external voltage between 0 and 5.5V can be applied to the ICTRL pad. |
| JU3 | 1-2* | Install for the default position for both the MAX16833 and MAX16833B. |
| | 2-3 | Allows dithering of the switching frequency to achieve spread spectrum for the MAX16833. The shunt of JU2 must not be installed for proper operation. |
| | Open | The voltage at the ICTRL pin of the MAX16833 is determined by the voltage at the ICTRL pad, or if JU1 is installed, the voltage-divider R7 and R8. |

*Default position.

MAX16833 Evaluation Kit

Evaluates: MAX16833/MAX16833B

Detailed Description of Hardware

The MAX16833 EV kit provides a proven design to evaluate the MAX16833 high-voltage HB LED driver with integrated high-side current sense. The EV kit is set up for boost and buck-boost configurations and operates from a 5V to 18V DC supply voltage. The EV kit is configured to deliver up to 1A to a series LED string. The string forward voltage can vary from 3V to 36V.

Analog Dimming Control (ICTRL)

When JU1 is installed, the ICTRL pin is connected to the voltage-divider of R7 and R8, which sets the voltage at ICTRL (V_{ICTRL}) to 1.29V when input supply is above 7V and 890mV when the input supply is 5V. When $V_{ICTRL} > 1.23V$, the internal reference sets the LED current (I_{LED}) using the following formula:

$$I_{LED} = \frac{200mV}{R4}$$

In the case of the EV kit, I_{LED} is set to 1A. If $V_{ICTRL} < 1.23V$, then V_{ICTRL} sets the LED current level.

Alternatively, the analog dimming can be controlled by removing the shunt of JU1 and applying a voltage between 0 and 5.5V on the ICTRL pad of the EV kit.

Pulse-Dimming Input (PWMDIM)

Pulse dimming can be achieved by applying a pulsating voltage source on the PWMDIM pad of the EV kit. When PWMDIM is pulled low, DIMOUT is pulled high and the pulse-width modulated (PWM) switching is disabled.

Frequency Dithering (LFRAMP)

When JU3 is in the 2-3 position and JU2 is not installed, frequency dithering is achieved.

Frequency Synchronization (RT/SYNC)

The devices can be synchronized to an external clock by applying a synchronizing pulse on the RT/SYNC input pin. Refer to the MAX16833/MAX16833B IC data sheet for more information regarding synchronizing to an external clock. Frequency dithering must be disabled for external frequency synchronization.

Evaluating the MAX16833B

For evaluating the MAX16833B, replace the MAX16833 on the EV kit with a MAX16833B. The jumper configurations are as follows: JU1 (open shunt position), JU2 (1-2 shunt position), JU3 (1-2 shunt position). See Table 1 for details.

MAX16833 Evaluation Kit

Evaluates: MAX16833/MAX16833B

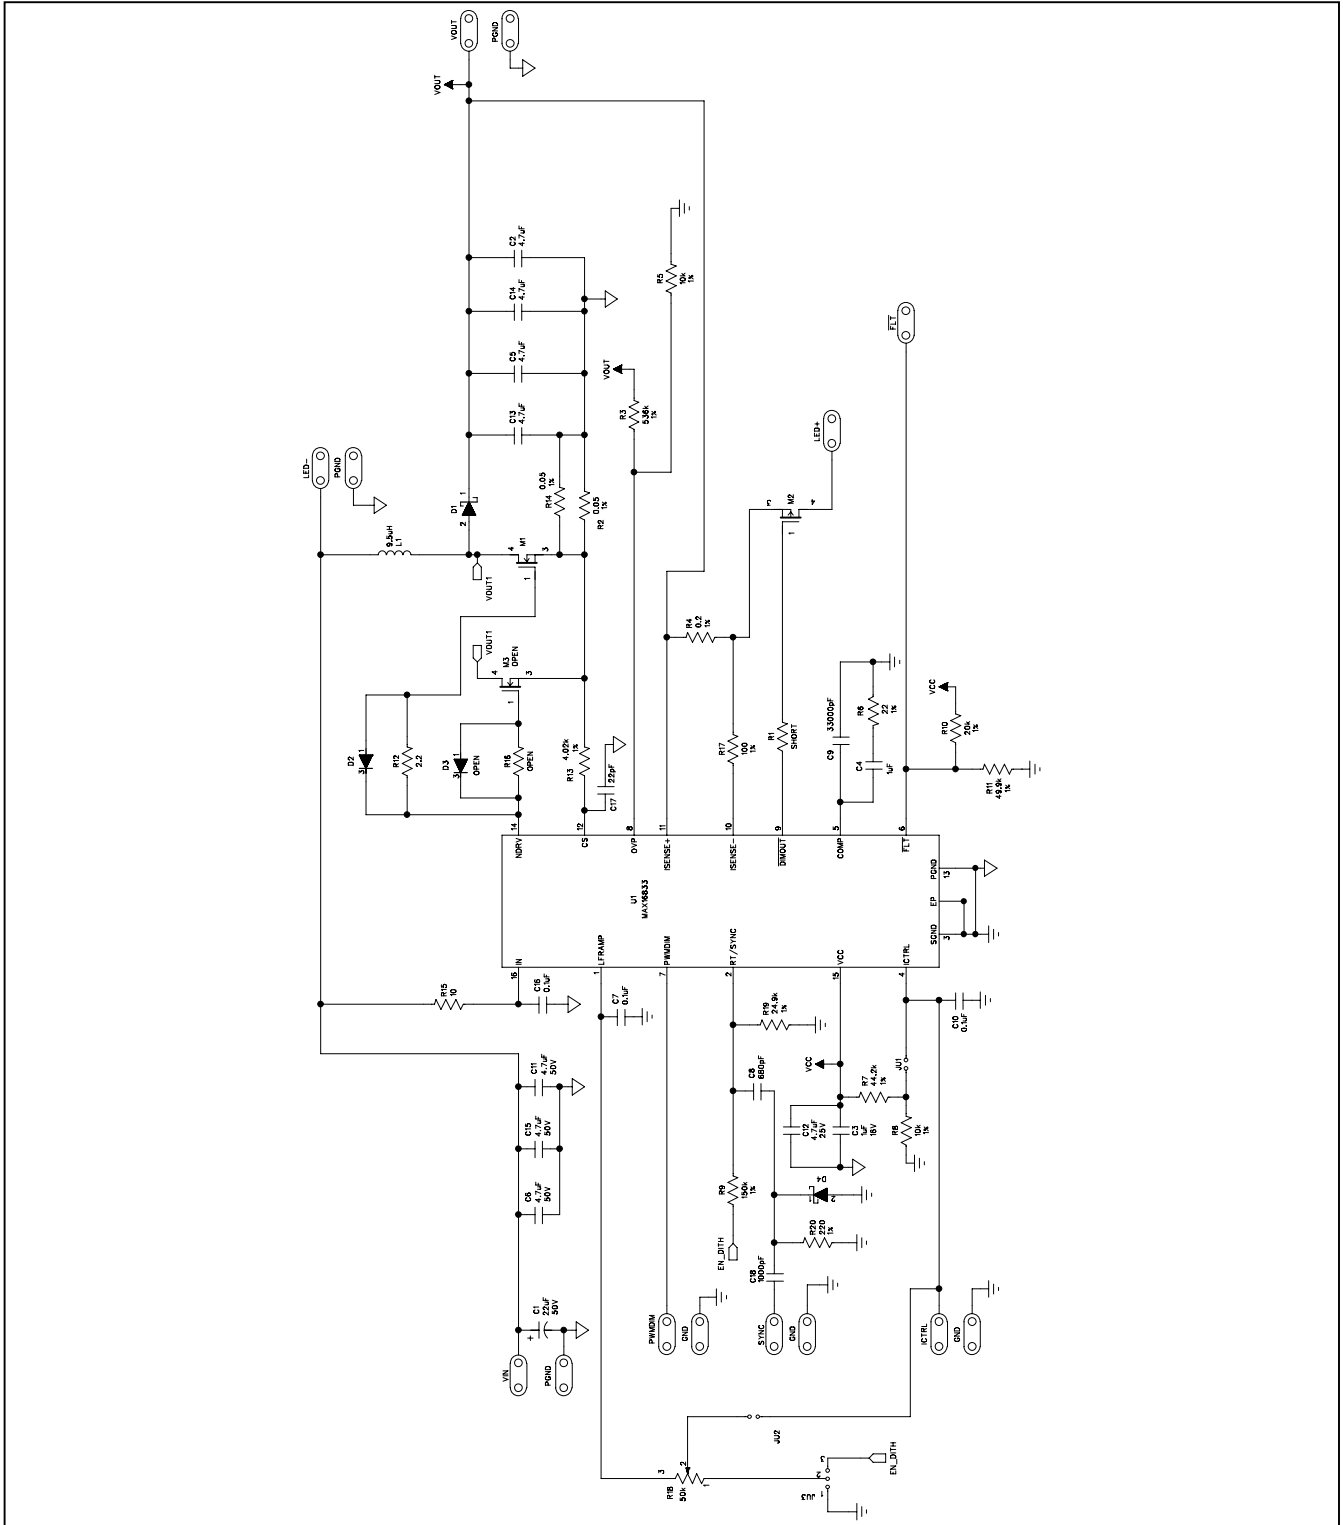


Figure 1. MAX16833 EV Kit Schematic

MAX16833 Evaluation Kit

Evaluates: MAX16833/MAX16833B

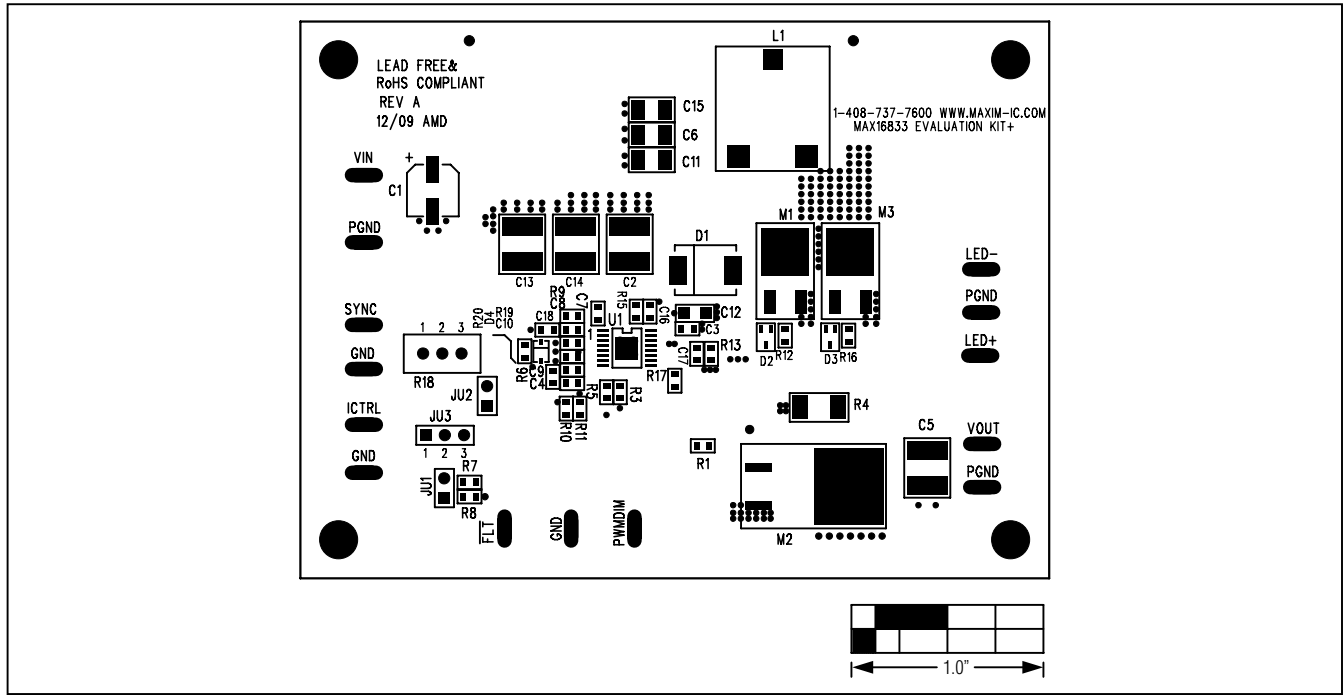


Figure 2. MAX16833 EV Kit Component Placement Guide—Component Side

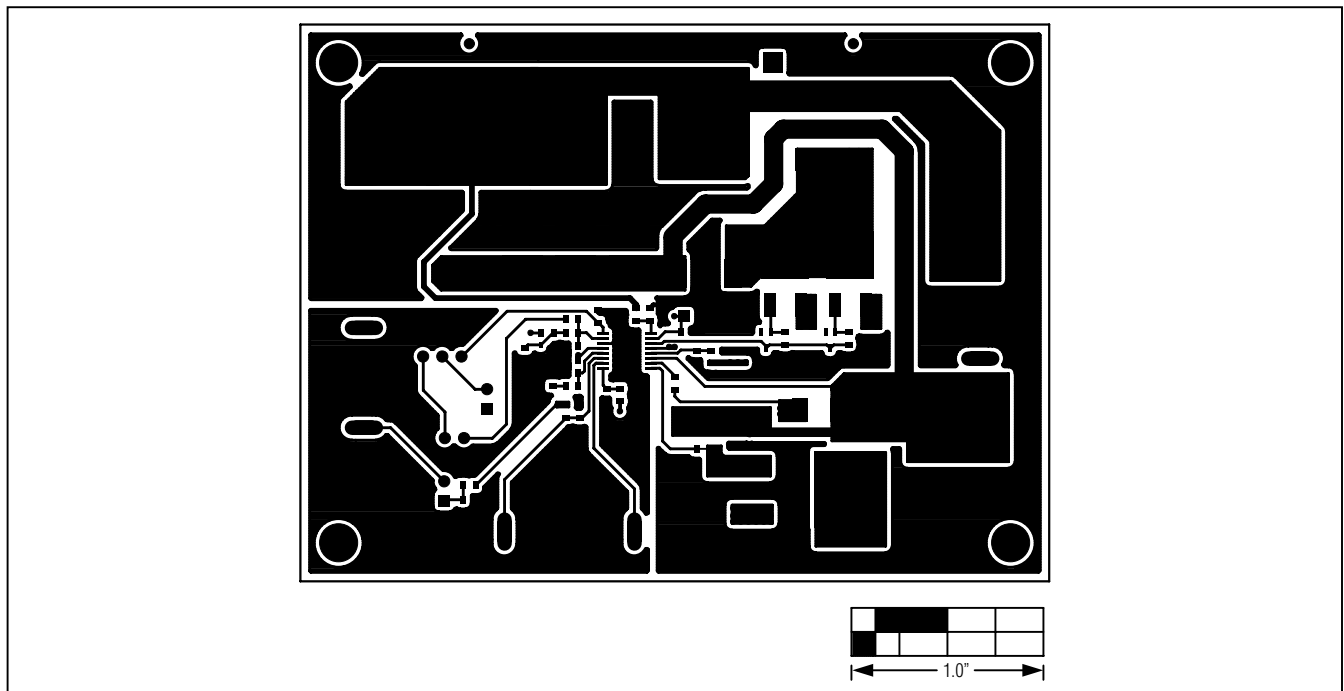


Figure 3. MAX16833 EV Kit Component PCB Layout—Component Side

MAX16833 Evaluation Kit

Evaluates: MAX16833/MAX16833B

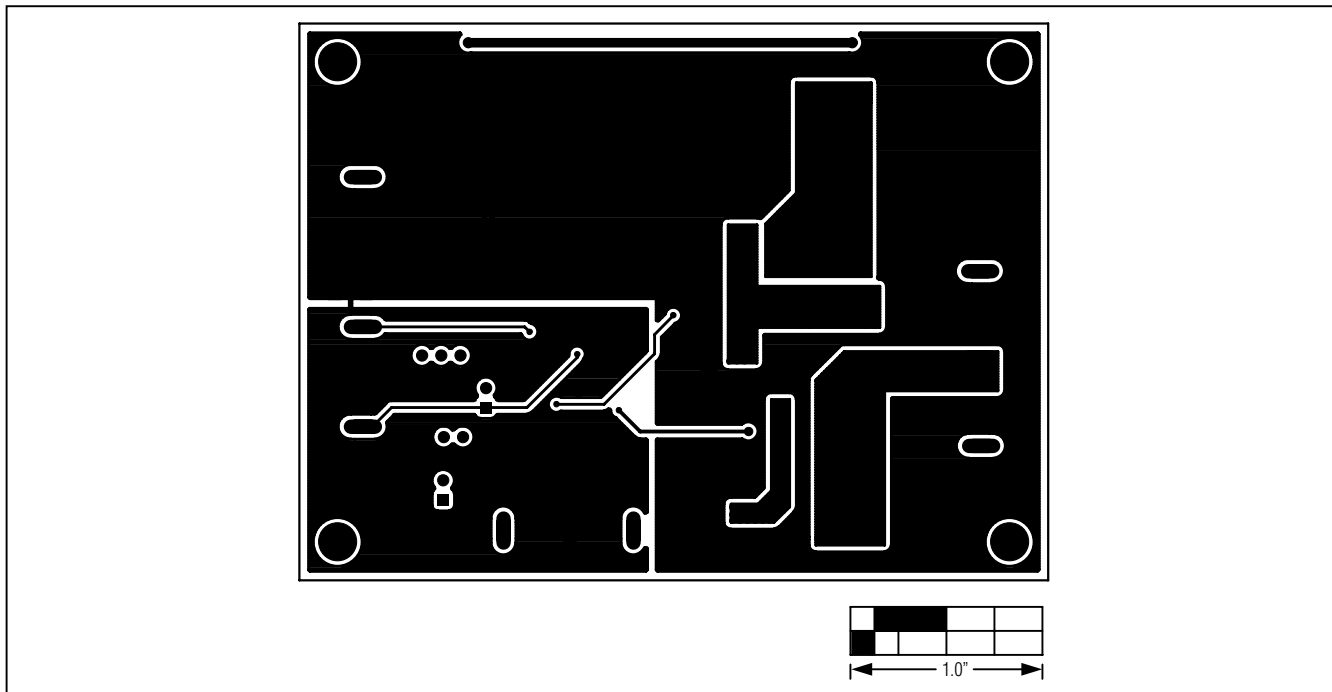


Figure 4. MAX16833 EV Kit PCB Layout—Solder Side

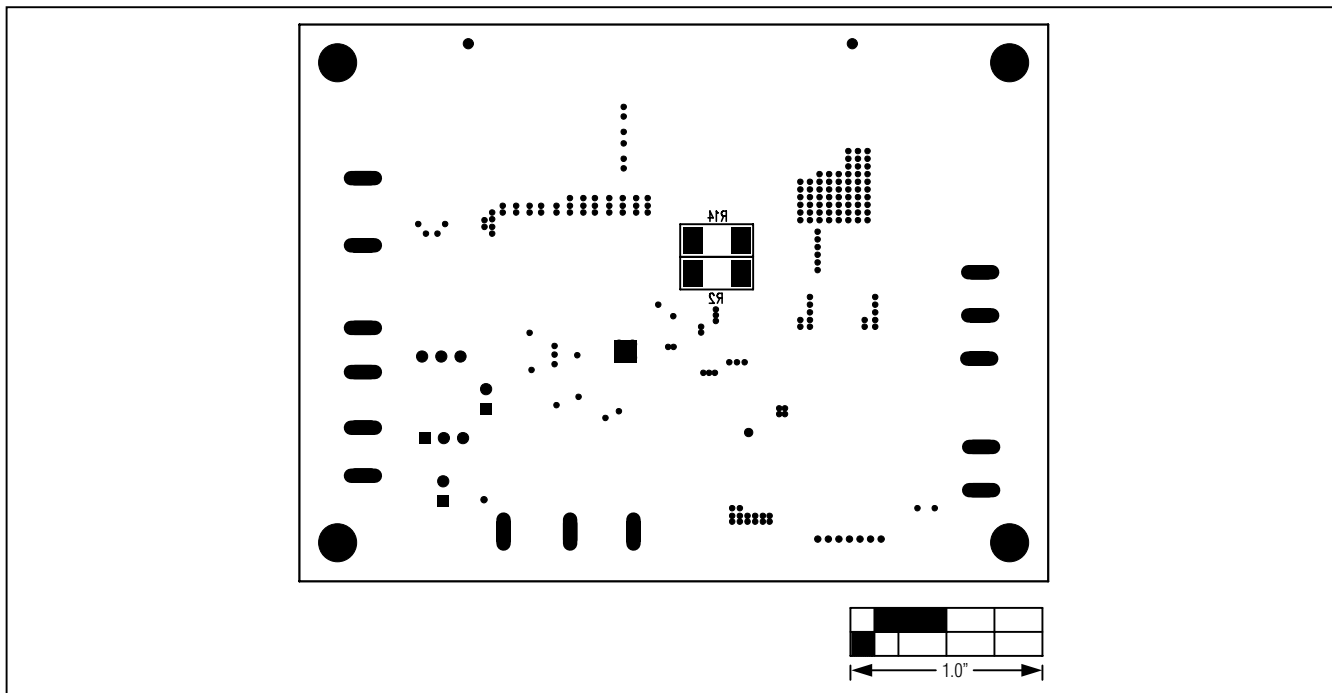


Figure 5. MAX16833 EV Kit Component Placement Guide—Solder Side

MAX16833 Evaluation Kit

Evaluates: MAX16833/MAX16833B

Revision History

| REVISION NUMBER | REVISION DATE | DESCRIPTION | PAGES CHANGED |
|-----------------|---------------|---|---------------|
| 0 | 6/10 | Initial release | — |
| 1 | 10/12 | Changed description for R4 in <i>Component List</i> | 2 |



Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time.

8 **Maxim Integrated 160 Rio Robles, San Jose, CA 95134 USA 1-408-601-1000**

© 2012 Maxim Integrated Products, Inc. Maxim Integrated and the Maxim Integrated logo are trademarks of Maxim Integrated Products, Inc.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А