



# MAX15058 Evaluation Kit

## General Description

The MAX15058 evaluation kit (EV kit) provides a proven design to evaluate the MAX15058 high-efficiency, 3A, step-down regulator with integrated switches. The EV kit is preset for 1.8V output at load currents up to 3A from a 2.8V to 5.5V input supply. The IC features a 1MHz fixed switching frequency, which allows the EV kit to achieve an all-ceramic capacitor design and fast transient responses.

## Features

- ◆ Operates from a 2.8V to 5.5V Input Supply
- ◆ All-Ceramic Capacitor Design
- ◆ 1MHz Switching Frequency
- ◆ Output Voltage Range: 0.6V Up to (0.94 x V<sub>IN</sub>)
- ◆ Enable Input/Power-Good Output
- ◆ Selectable Skip-Mode Functionality
- ◆ Proven PCB Layout
- ◆ Fully Assembled and Tested

## Ordering Information

PART	TYPE
MAX15058EVKIT+	EV Kit

+Denotes lead(Pb)-free and RoHS compliant.

## Component List

DESIGNATION	QTY	DESCRIPTION
C1, C8	0	Not installed, ceramic capacitors (1206)
C2, C7, C10	3	22 $\mu$ F $\pm$ 20%, 6.3V X5R ceramic capacitors (1206) Murata GRM31CR60J226K TDK C3216X5R0J226M
C3, C6	2	1000pF $\pm$ 10%, 50V X7R ceramic capacitors (0603) TDK C1608X7R1H102K Murata GRM188R71H102K
C4	1	22000pF $\pm$ 10%, 50V X7R ceramic capacitor (0603) Murata GRM188R71H223K TDK C1608X7R1H223K
C5	0	Not installed, ceramic capacitor (0603)
C9	1	100pF $\pm$ 10%, 6.3V X7R ceramic capacitor (0603) TDK C1608X7R1H101K

DESIGNATION	QTY	DESCRIPTION
JU1, JU3	2	3-pin headers
JU2	1	2-pin header
L1	1	1 $\mu$ H, 9A, 13.1m $\Omega$ inductor (5.2mm x 5.5mm x 3mm) Vishay IHLP2020CZER1R0M11 Vishay IHLP2020CZER1R0M01 ICE IN06142 (5mm x 5mm x 3mm, 5.8A)
R1	1	8.06k $\Omega$ $\pm$ 1% resistor (0603)
R2	1	4.02k $\Omega$ $\pm$ 1% resistor (0603)
R3	1	5.36k $\Omega$ $\pm$ 1% resistor (0603)
R4	1	20k $\Omega$ $\pm$ 5% resistor (0603)
R5	1	1.2 $\Omega$ $\pm$ 5% resistor (0603)
R6	1	1k $\Omega$ $\pm$ 5% resistor (0603)
U1	1	3A step-down regulator (9 WLP) Maxim MAX15058EWL+
—	3	Shunts
—	1	PCB MAX15058 EVALUATION KIT+

Evaluates: MAX15058

# MAX15058 Evaluation Kit

## Component Suppliers

SUPPLIER	PHONE	WEBSITE
Murata Electronics North America, Inc.	770-436-1300	www.murata-northamerica.com
TDK Corp.	847-803-6100	www.component.tdk.com
Vishay	402-563-6866	www.vishay.com

**Note:** Indicate that you are using the MAX15058 when contacting these component suppliers.

### Quick Start

#### Recommended Equipment

- MAX15058 EV kit
- 5V, 2A DC power supply
- Load capable of 3A
- Digital voltmeter

#### Procedure

The EV kit is fully assembled and tested. Follow the steps below to verify the board operation.

**Caution: Do not turn on power supply until all connections are completed.**

- 1) Connect the positive terminal of the 5V supply to the IN pad and the negative terminal to the nearest PGND pad.
- 2) Connect the positive terminal of the 3A load to the OUT pad and the negative terminal to the nearest PGND pad.
- 3) Connect the digital voltmeter across the OUT pad and the nearest PGND pad.
- 4) Verify that a shunt is installed on pins 1-2 of jumper JU1.
- 5) Verify that a shunt is installed on pins 2-3 of jumper JU3.
- 6) Turn on the DC power supply.
- 7) Enable the load.
- 8) Verify that the voltmeter displays 1.8V.

### Detailed Description of Hardware

The MAX15058 EV kit provides a proven design to evaluate the MAX15058 high-efficiency, 3A, step-down regulator with integrated switches. The applications include distributed power systems, portable devices, and preregulators. The EV kit is preset for 1.8V output at load currents up to 3A from a 2.8V to 5.5V input supply. The IC features a 1MHz fixed switching frequency, which allows the EV kit to achieve an all-ceramic capacitor design and fast transient responses.

### Reference Input and Soft-Start (SS/REFIN)

The device utilizes an adjustable soft-start function to limit inrush current during startup. The soft-start time is adjusted by the value of C4, the external capacitor from SS/REFIN to GND. By default, C4 is currently 22000pF, which gives a soft-start time of approximately 1.3ms. To adjust the soft-start time, determine C4 using the following formula:

$$C4 = (10\mu A \times t_{SS})/0.6V$$

where  $t_{SS}$  is the required soft-start time in seconds and C4 is in farads. C4 should be a minimum 1nF capacitor between SS/REFIN and GND.

When no external reference is applied at SS/REFIN, the device uses the internal 0.6V reference.

### Setting the Output Voltage

The EV kit can be adjusted from 0.6V up to  $0.94 \times V_{IN}$  by changing the values of resistors R1 and R2. To determine the value of the resistor-divider, first select R1 between 2k $\Omega$  and 10k $\Omega$  and then use the following equation to calculate R2:

$$R2 = (V_{FB} \times R1)/(V_{OUT} - V_{FB})$$

where  $V_{FB}$  is equal to the reference voltage at SS/REFIN and  $V_{OUT}$  is the output. If no external reference is applied at SS/REFIN, the internal reference is automatically selected and  $V_{FB}$  becomes 0.6V. In the case of  $V_{OUT} = 0.6V$ , set R2 to 0 $\Omega$ .

When R2 is changed, compensation components C5, C6, and R3 must be recalculated to ensure loop stability (refer to the *Compensation Design Guidelines* section in the MAX15058 IC data sheet).

### Regulator Enable (EN)

The IC features an enable input. For normal operation, a shunt should be installed on pins 1-2 of jumper JU1. To disable the output, install a shunt on pins 2-3 of JU1. See Table 1 for JU1 shunt positions.

# MAX15058 Evaluation Kit

Evaluates: MAX15058

**Table 1. Regulator Enable (EN) Jumper JU1 Description**

SHUNT POSITION	DEVICE OUTPUT
1-2*	Enabled
2-3	Disabled

\*Default position.

**Table 2. Skip-Mode Input (SKIP) Jumper JU2 Description**

SHUNT POSITION	SKIP PIN	MODE
Installed	Connected to EN	Skip-mode operation
Not installed*	Unconnected	Normal operation

\*Default position.

**Table 3. R4 Pullup Reference Jumper JU3 Description**

SHUNT POSITION	R4 PULLUP REFERENCE
1-2	External user-supplied voltage
2-3*	On-board IN supply

\*Default position.

## **Skip-Mode Input (SKIP)**

The device offers selectable skip-mode functionality to reduce current consumption and achieve a higher efficiency at light loads. To operate in skip mode, install a shunt on jumper JU2. For normal operation, remove the shunt from JU2. See Table 2 for JU2 shunt positions.

## **Power Good (PGOOD)**

PGOOD is an open-drain output that deasserts when  $V_{FB}$  is above 555mV (typ), and asserts low if  $V_{FB}$  is below 533mV (typ). On the EV kit, the PGOOD PCB pad is pulled up through resistor R4. The EV kit gives the option to pull up PGOOD to the IN supply or a user-supplied external voltage through configuration of jumper JU3. See Table 3 for JU3 shunt positions.

# MAX15058 Evaluation Kit

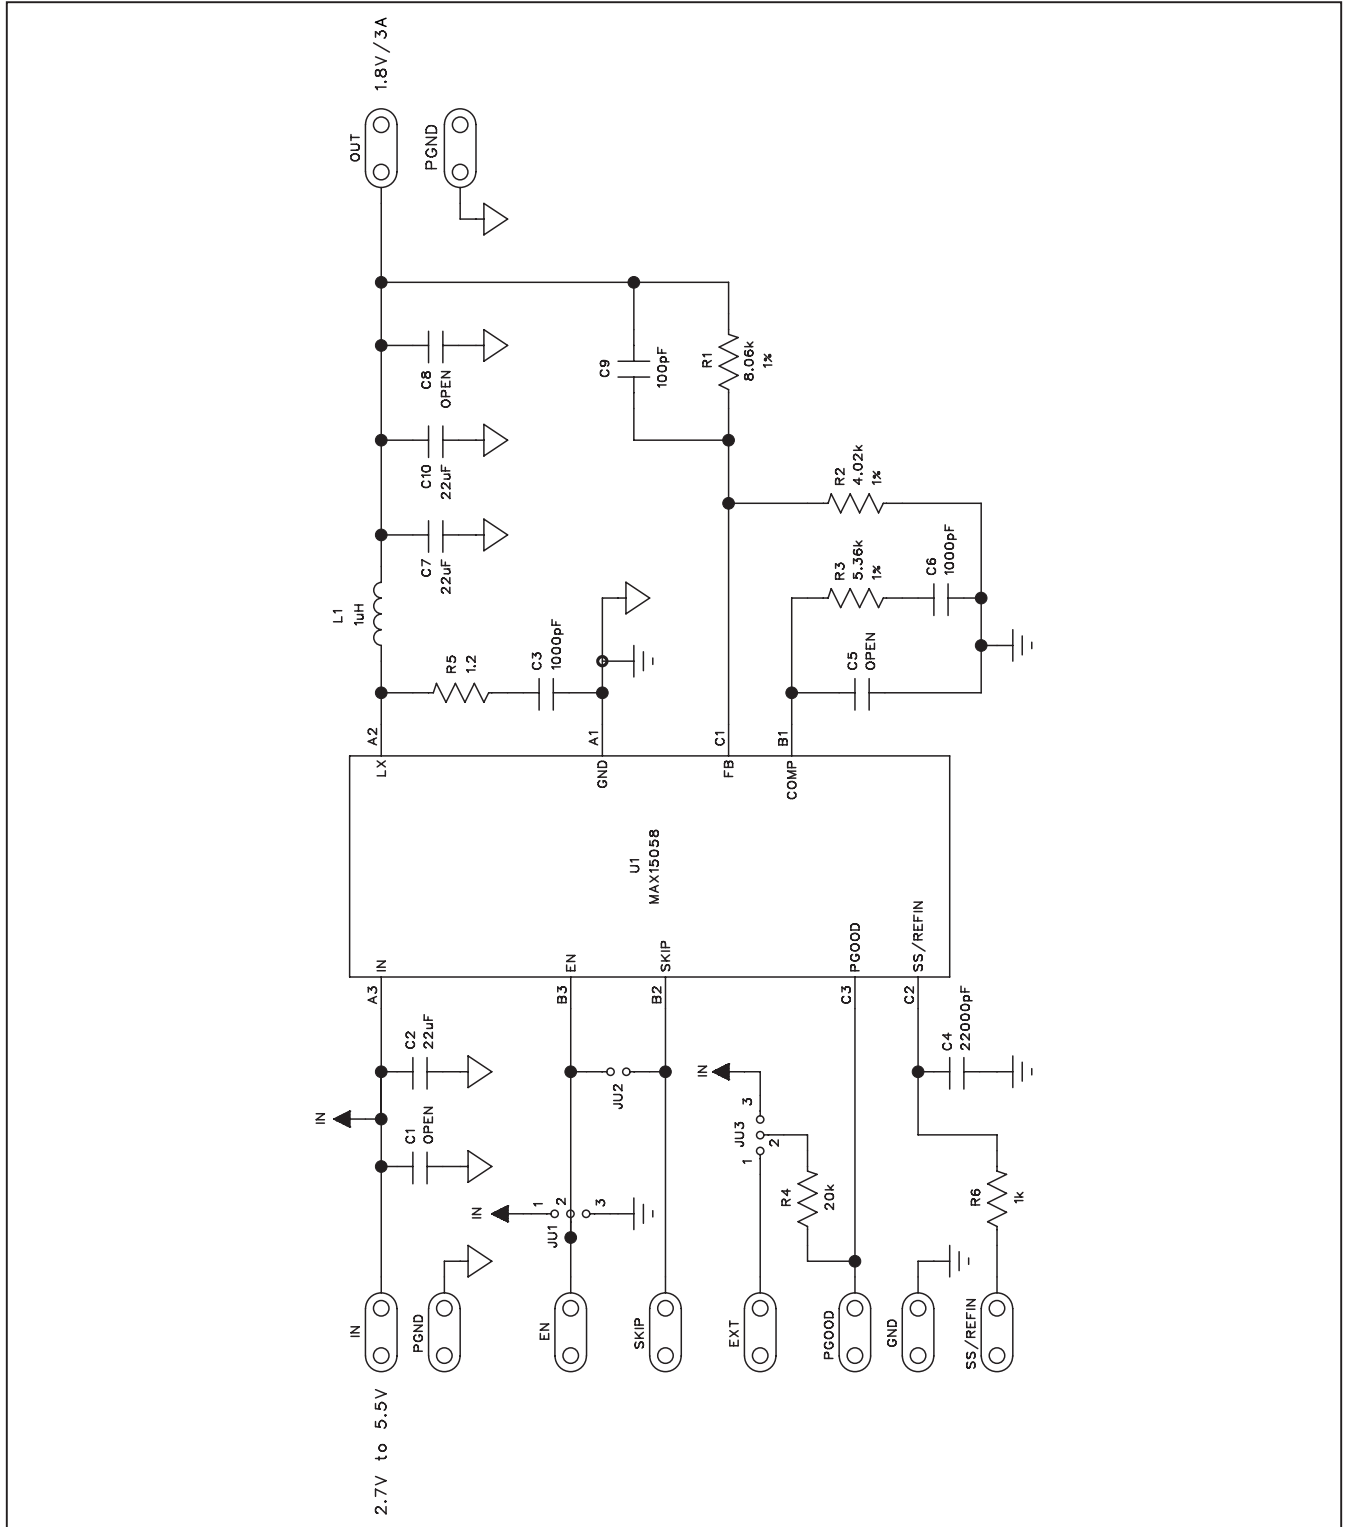


Figure 1. MAX15058 EV Kit Schematic

# MAX15058 Evaluation Kit

Evaluates: MAX15058

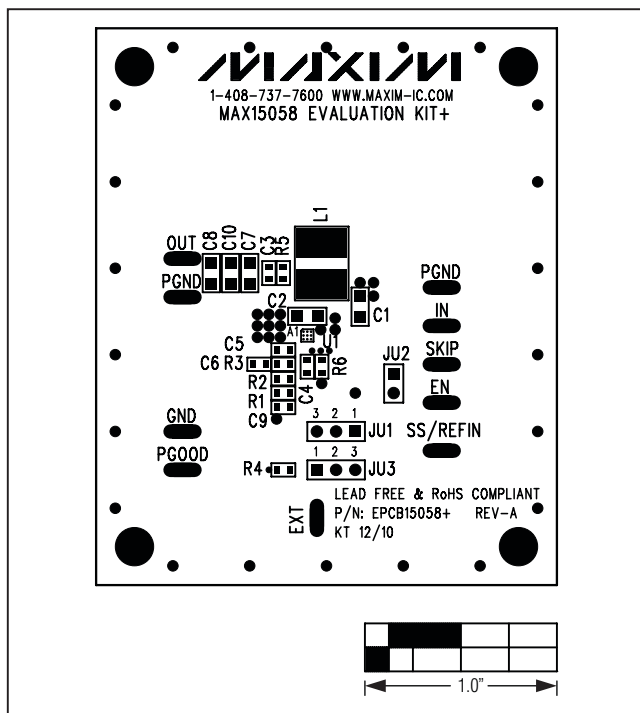


Figure 2. MAX15058 EV Kit Component Placement Guide—Component Side

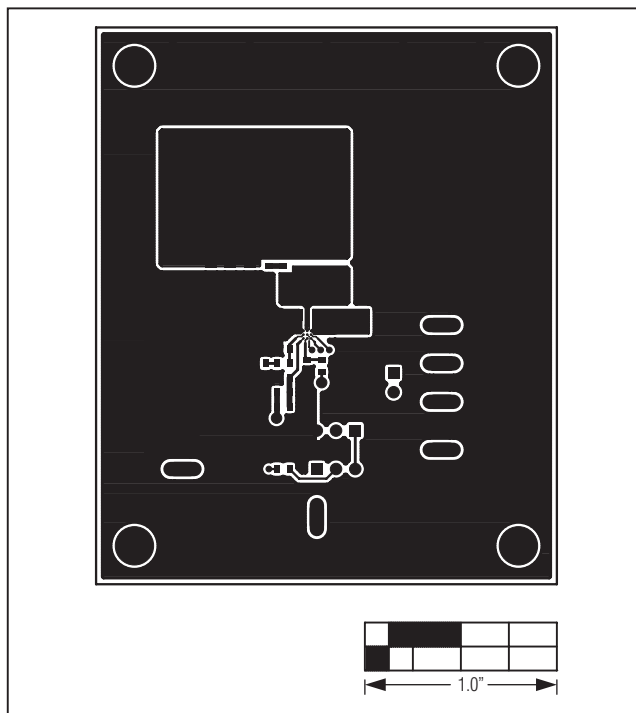


Figure 3. MAX15058 EV Kit Component PCB Layout—Component Side

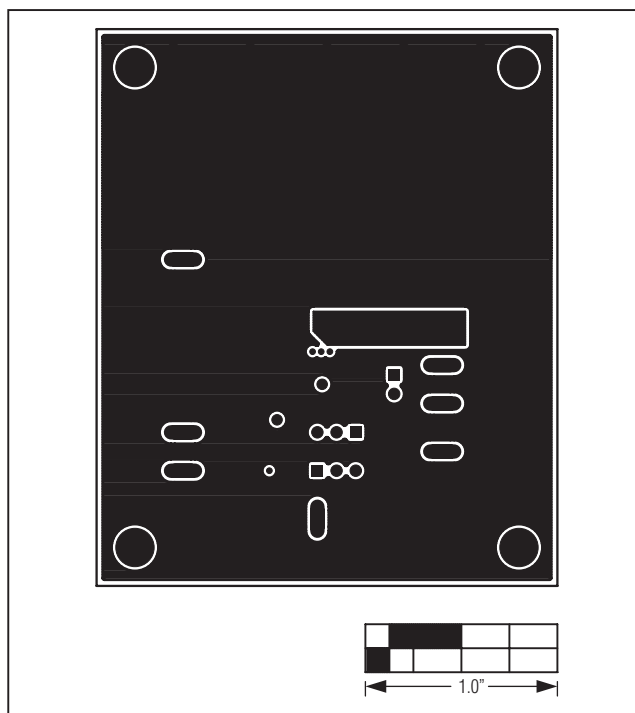


Figure 4. MAX15058 EV Kit PCB Layout—Inner Layer 2

# MAX15058 Evaluation Kit

Evaluates: MAX15058

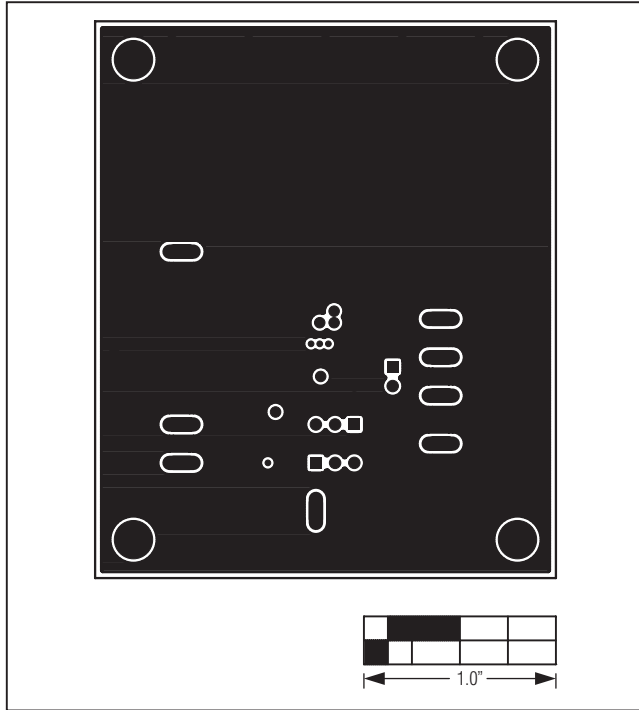


Figure 5. MAX15058 EV Kit PCB Layout—Inner Layer 3

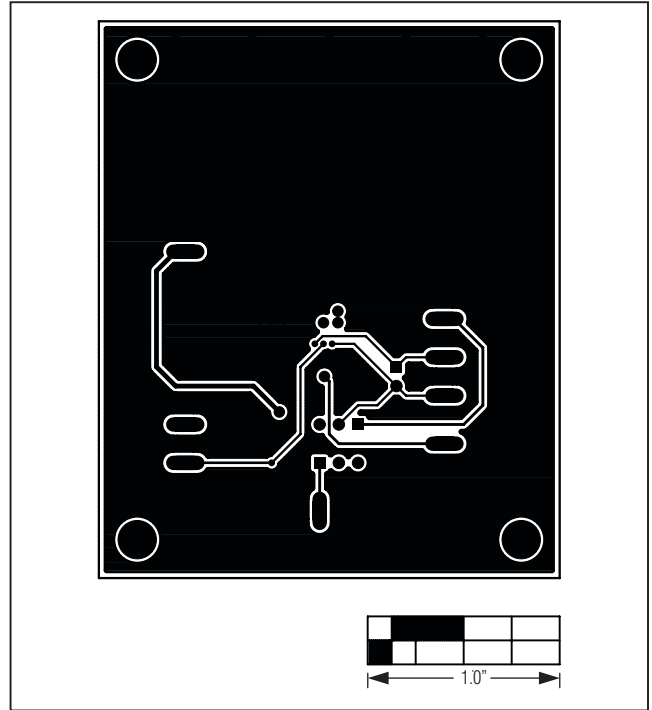


Figure 6. MAX15058 EV Kit PCB Layout—Solder Side

# MAX15058 Evaluation Kit

## Revision History

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
0	12/10	Initial release	—

**Evaluates: MAX15058**

*Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.*

**Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600 \_\_\_\_\_ 7**

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «**JONHON**», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «**FORSTAR**».



## JONHON

«**JONHON**» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«**FORSTAR**» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А