

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 653A DUAL 15A HIGH FREQUENCY STEP-DOWN DC/DC CONVERTER

LTC3802EGN

DESCRIPTION

Demonstration circuit 653A is a dual 15A high frequency step-down DC/DC converter featuring the LTC3802EGN. The LTC3802EGN itself is a synchronous voltage mode controller. The nominal switching frequency of the LTC3802 is 550kHz and its phase lockable synchronization range is 330kHz to 750kHz, typical. Output #1 of demonstration circuit 653A is a 3.3V / 15A rail and output #2 is a 2.5V / 15A rail. The input voltage range is 7V to 24V.

Features of the LTC3802EGN highlighted by demonstration circuit 653A include programmable up/down rail tracking, high efficiency, and a fast load step response. Typical applications include notebook computers, portable instruments, and battery operated devices.

Design files for this circuit board are available. Call the LTC factory.

Table 1. Performance Summary ($T_A = 25^\circ\text{C}$)

PARAMETER	CONDITION	VALUE
Minimum Input Voltage		7V
Maximum Input Voltage		24V
Output Voltage V_{OUT1}	$V_{IN} = 7V \text{ to } 24V, I_{OUT1} = 0A \text{ to } 15A$	3.3V $\pm 3\%$
Output Voltage V_{OUT2}	$V_{IN} = 7V \text{ to } 24V, I_{OUT2} = 0A \text{ to } 15A$	2.5V $\pm 3\%$
Maximum Output Current V_{OUT1}	I_{OUT1}	15A
Maximum Output Current V_{OUT2}	I_{OUT2}	15A
Typical Efficiency V_{OUT1} (5V bias supplied externally, V_{OUT2} disabled)	$V_{IN} = 24V, I_{OUT1} = 15A$	92.3%
	$V_{IN} = 12V, I_{OUT1} = 15A$	94.3%
	$V_{IN} = 7V, I_{OUT1} = 15A$	94.5%
Typical Efficiency V_{OUT2} (5V bias supplied externally, V_{OUT1} disabled)	$V_{IN} = 24V, I_{OUT2} = 15A$	90.2%
	$V_{IN} = 12V, I_{OUT2} = 15A$	93.0%
	$V_{IN} = 7V, I_{OUT2} = 15A$	93.0%
Airflow	$T_{AMB} \leq 30^\circ\text{C}$	No airflow required

QUICK START PROCEDURE

Demonstration circuit 653A is easy to set up to evaluate the performance of the LTC3802EGN. Refer to Figure 1 for the proper measurement equipment setup and follow the procedure below.

1. Make sure JP1 is in the INT5V position, JP4 is in either the RATIOMETRIC or COINCIDENT position and JP2 is in either the 90 DEG. or 0 DEG. position.
2. Connect load to Vout1 and Vout2. Set to 15A.
3. With power off, connect the input power supply from Vin to GND.
4. Turn on the input power supply and set the input voltage to 12.0V.
5. Check for the proper output voltages.
Vout1 = 3.201V to 3.399V
Vout2 = 2.425V to 2.575V
6. Apply 15A load to each of the outputs and re-check regulation.
7. Once the proper output voltages are established, adjust the loads and input voltage within their respective operating range and observe the output voltage regulation, ripple voltage, efficiency and other parameters. Refer to Figures 4 through 13 for efficiency curves and plots showing the output voltage ripple, load step response and rail tracking performance.

EXTERNAL 5V BIAS

Demonstration circuit 653A contains an on-board 5V buck regulator to provide a nominal 5V bias to the LTC3802EGN. This 5V bias is used to power the gate drivers and internal logic of the LTC3802EGN. To use the internal supply, put jumper JP1 in the INT5V position. To use an external lab supply, put jumper in the EXT5V position and connect output of lab supply from EXT5V to GND.

NOTE: The external bias voltage needs to be between 4.5V and 6.0V.

LOAD STEP TESTING

The load step response can be tested with on-board MOSFETs located at the output of each rail and pulse generator. Refer to Figure 3 and follow the steps below to measure the load step response.

1. Set the output of the pulse generator for a duty cycle of less than 5% and an amplitude of 1V or below.
2. Connect the output of pulse generator from PULSE GEN1 to GND or from PULSE GEN2 to GND.
3. Connect PULSED LOAD1 CURRENT or PULSED LOAD2 current coaxial output to oscilloscope to monitor load step current waveform. 10mV = 1A.
4. Connect oscilloscope probe to output voltage.
5. Apply input voltage to demonstration circuit 653A and the desired amount of static load to the output.
6. Increase the amplitude of the pulse generator output to obtain the desired load step height.

RAIL TRACKING

Either ratiometric or coincident rail tracking can be implemented with the LTC3802. Use jumper JP4 to select the rail tracking mode. A controlled ramp-down and ramp-up can be implemented by shorting the PHASE pin to ground and then releasing the short. Refer to Figures 9 – 13 for examples.

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 653A

DUAL 15A HIGH FREQUENCY STEP-DOWN DC/DC CONVERTER

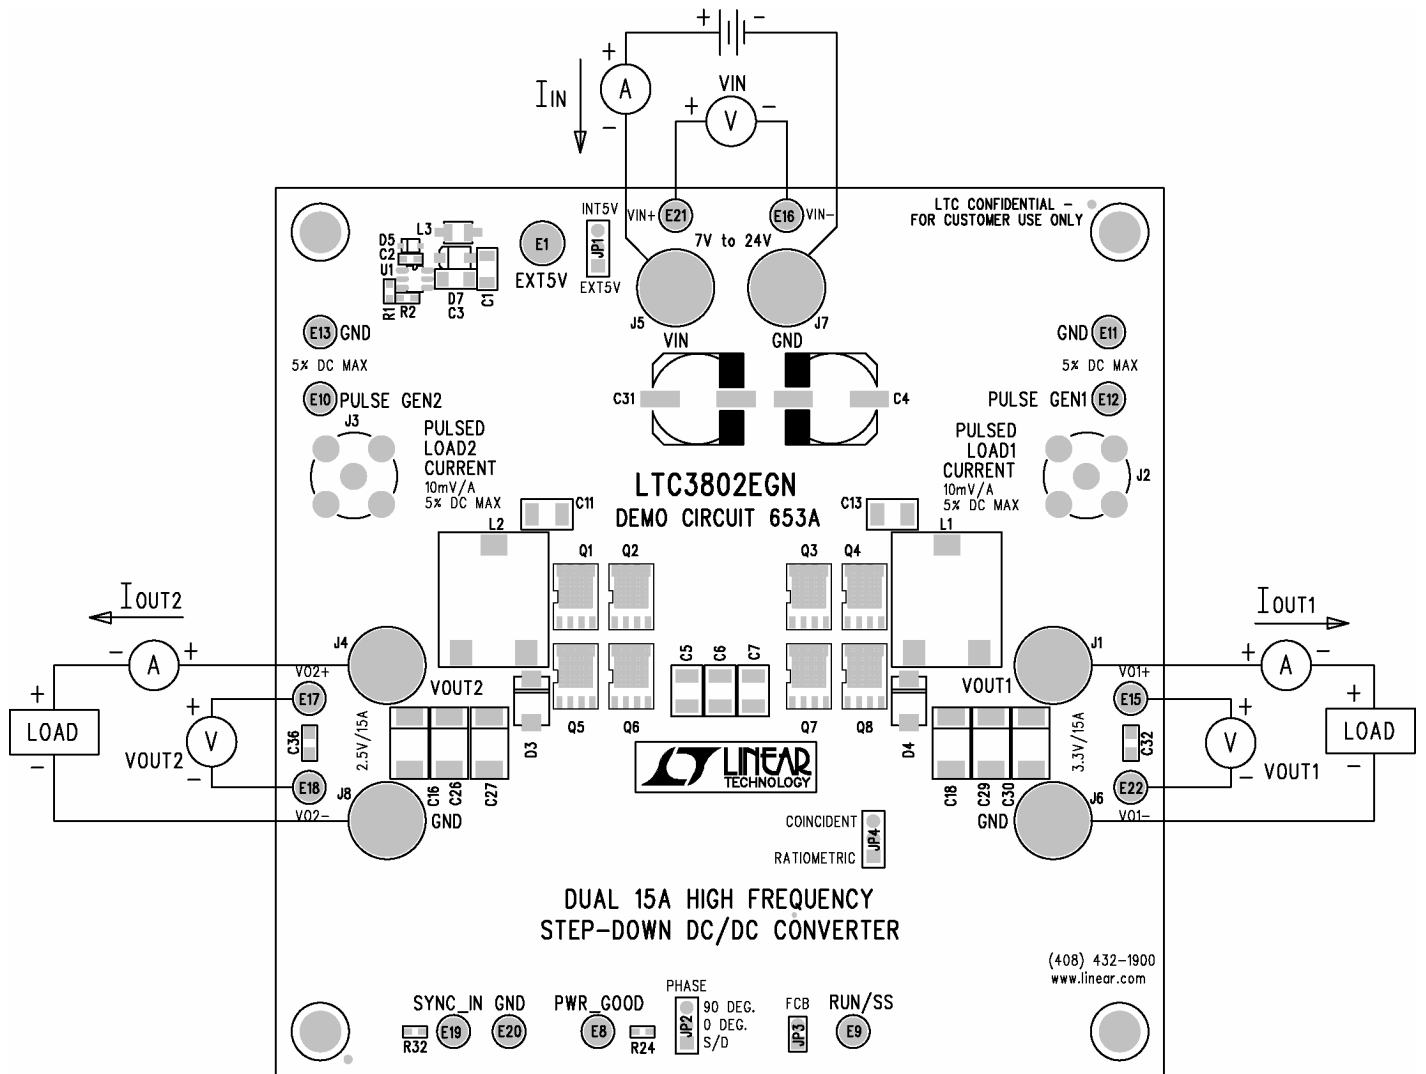


Figure 1. Proper setup of measurement equipment.




Figure 2. Measuring input or output voltage ripple.

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 653A

DUAL 15A HIGH FREQUENCY STEP-DOWN DC/DC CONVERTER

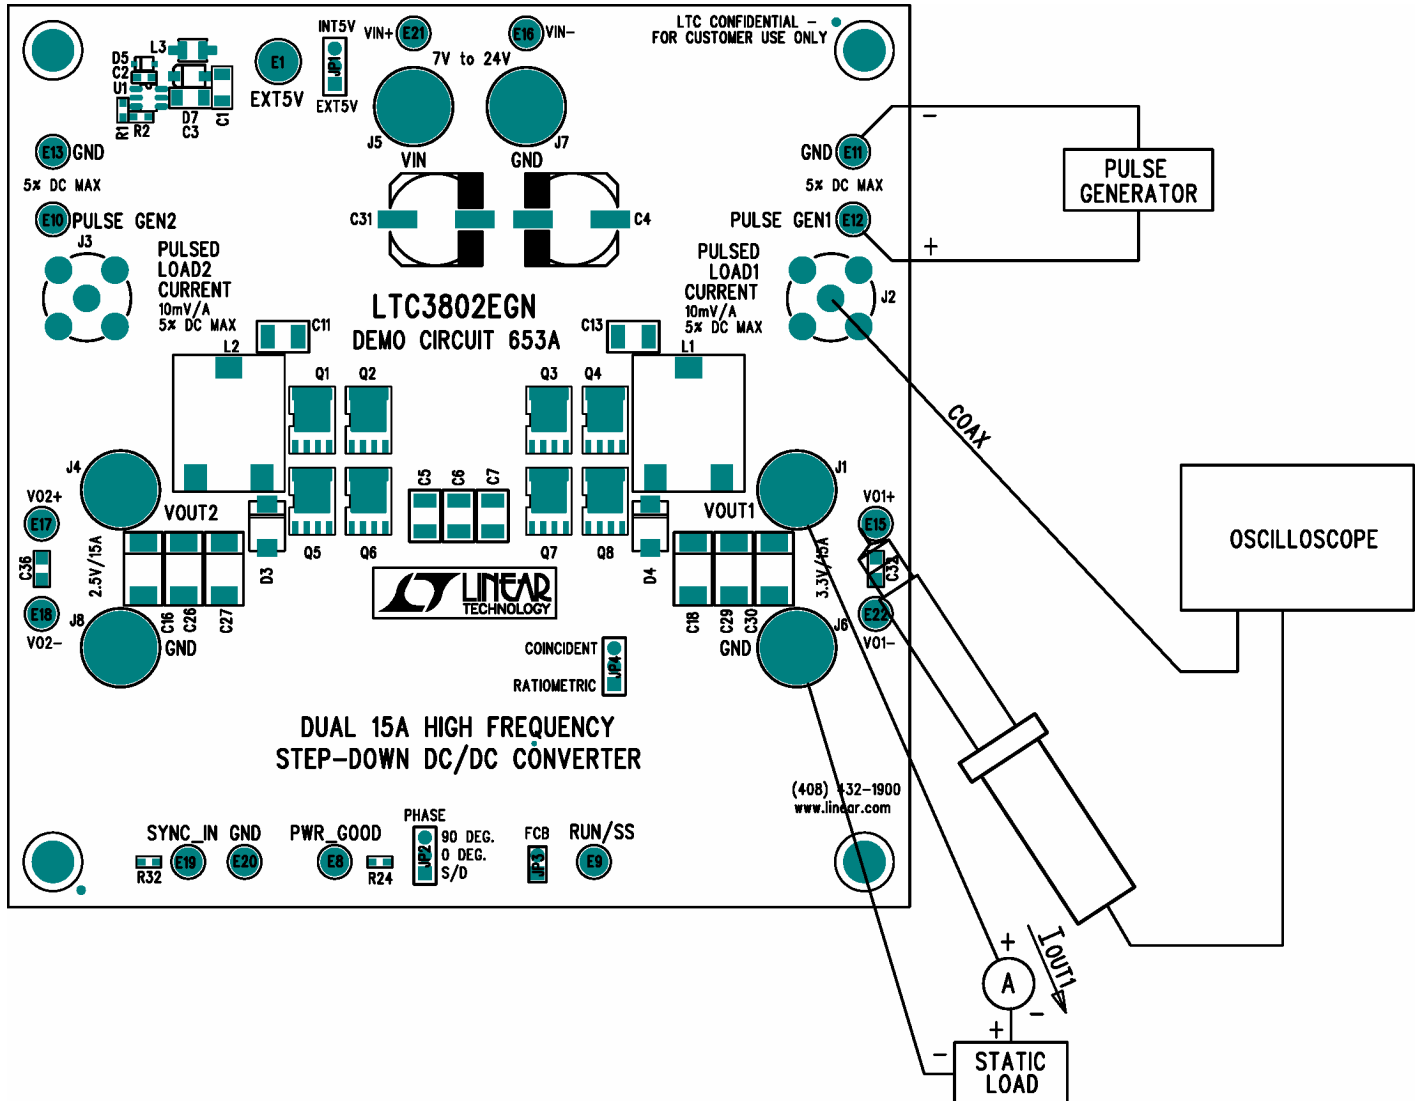


Figure 3. Equipment setup for load step testing.

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 653A

DUAL 15A HIGH FREQUENCY STEP-DOWN DC/DC CONVERTER

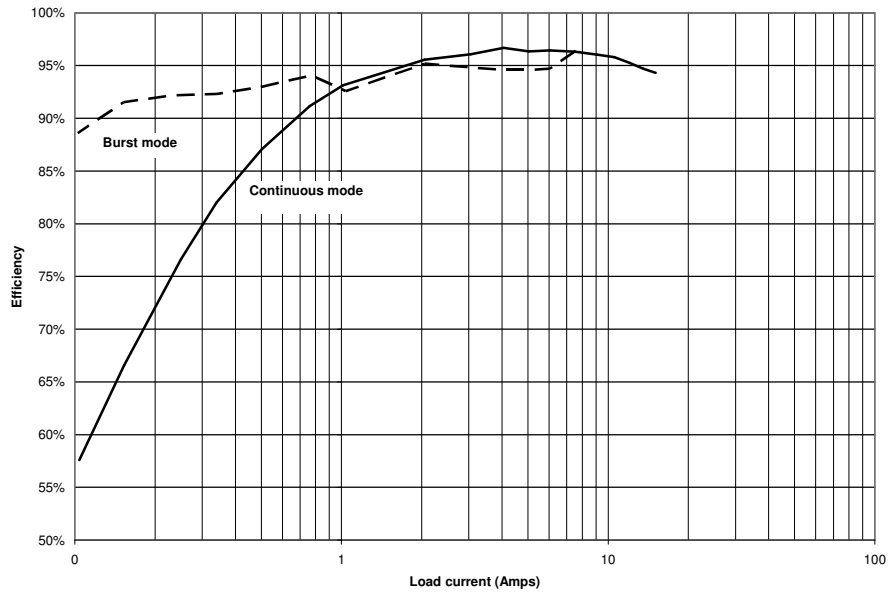


Figure 4. Typical efficiency curve of 3.3V rail at an input voltage of 12V. +5V bias supplied separately and 2.5V rail disabled. $F_{\text{SWITCH}} = 525\text{kHz}$.

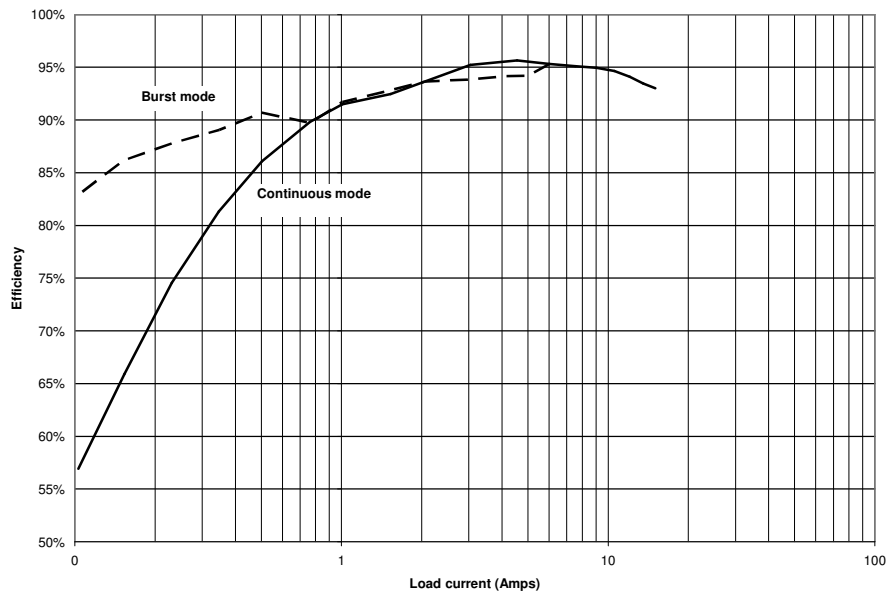


Figure 5. Typical efficiency curve of 2.5V rail at an input voltage of 12V. +5V bias supplied separately and 3.3V rail disabled. $F_{\text{SW}} = 525\text{kHz}$.

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 653A

DUAL 15A HIGH FREQUENCY STEP-DOWN DC/DC CONVERTER

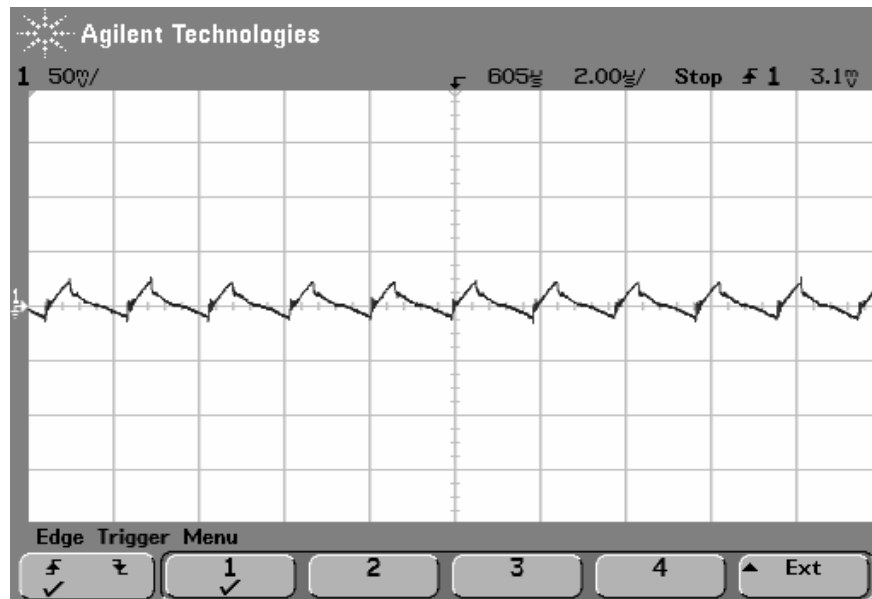


Figure 6. 3.3V output ripple. $V_{IN} = 12.0V$, $I_{OUT} = 15A$, $F_{SW} = 525KhZ$. Measured directly across C_{OUT} .

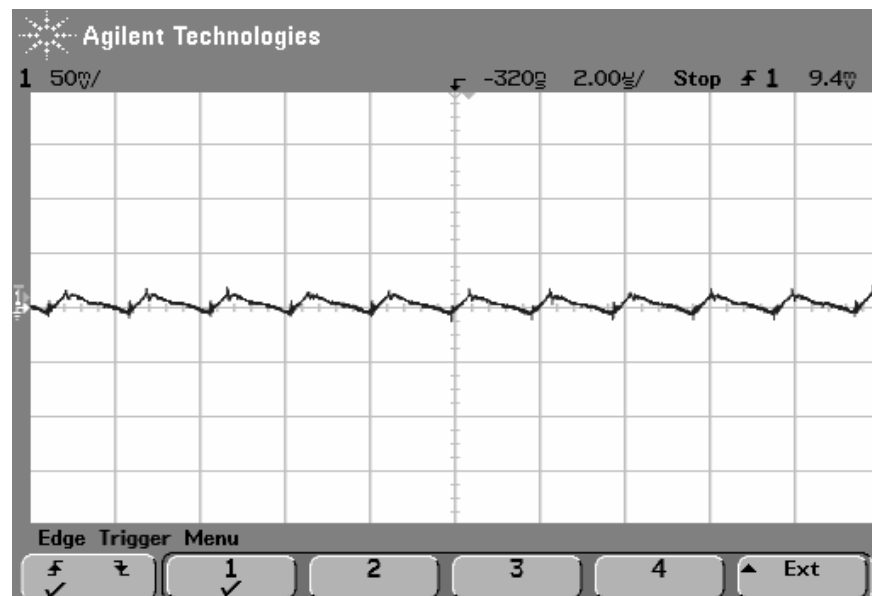


Figure 7. 2.5V output ripple. $V_{IN} = 12.0V$, $I_{OUT} = 15A$, $F_{SW} = 525KhZ$. Measured directly across C_{OUT} .

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 653A DUAL 15A HIGH FREQUENCY STEP-DOWN DC/DC CONVERTER

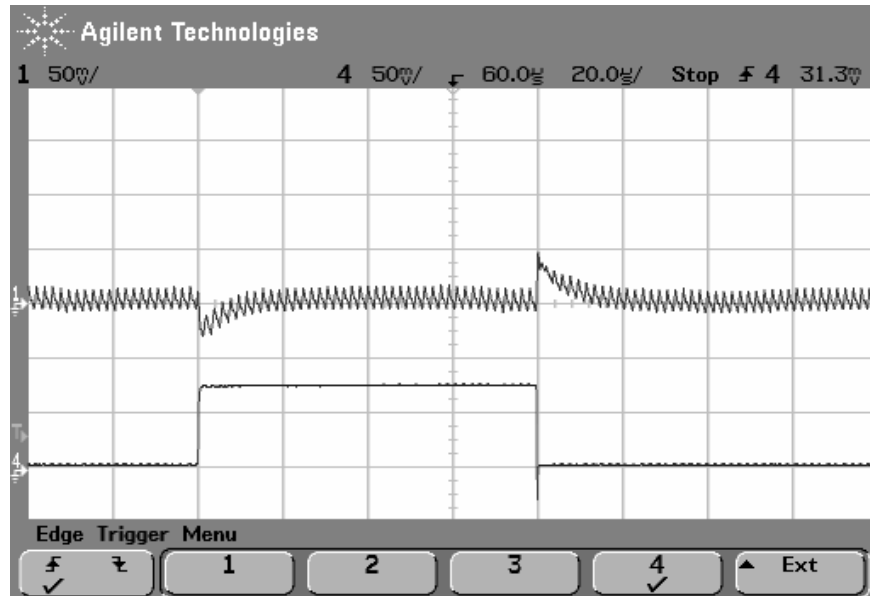


Figure 8. 3.3V load step response, 7.5A to 15A. $V_{IN} = 12.0V$, $F_{SW} = 525KHz$. Measured directly across C_{OUT} .

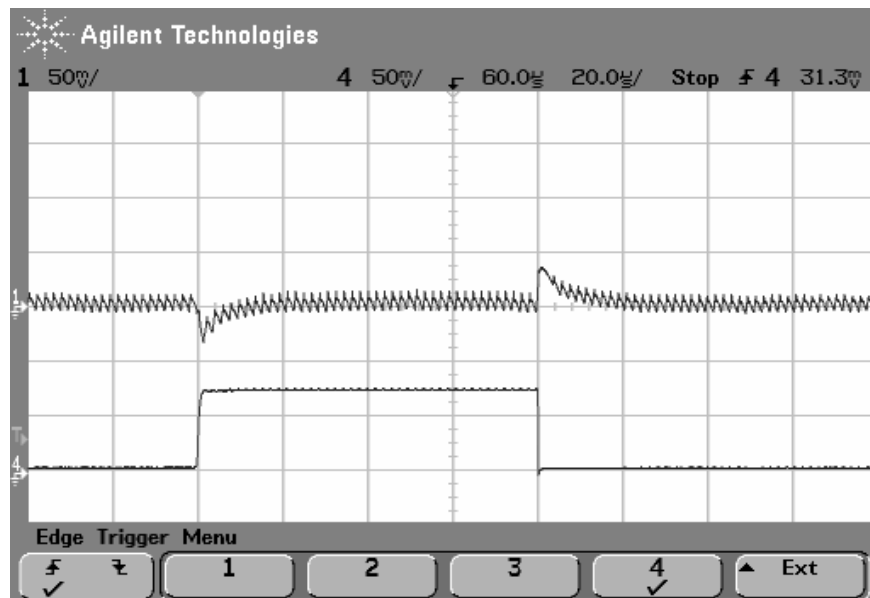


Figure 9. 2.5V load step response, 7.5A to 15A. $V_{IN} = 12.0V$, $F_{SW} = 525KHz$. Measured directly across C_{OUT} .

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 653A

DUAL 15A HIGH FREQUENCY STEP-DOWN DC/DC CONVERTER

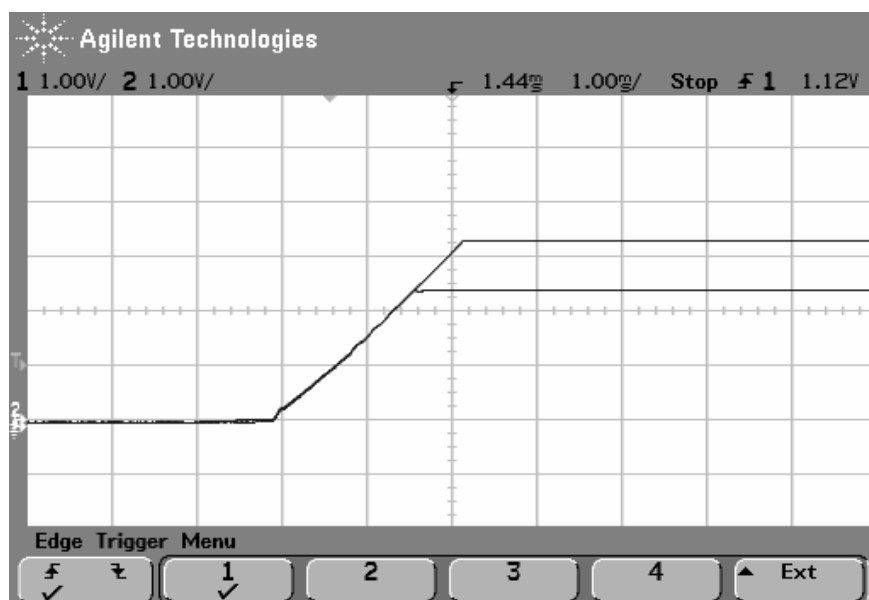


Figure 10. Coincident ramp-up tracking. $I_{OUT1,2} = 15A$. $V_{IN} = 12.0V$. PHASE pin released from ground.

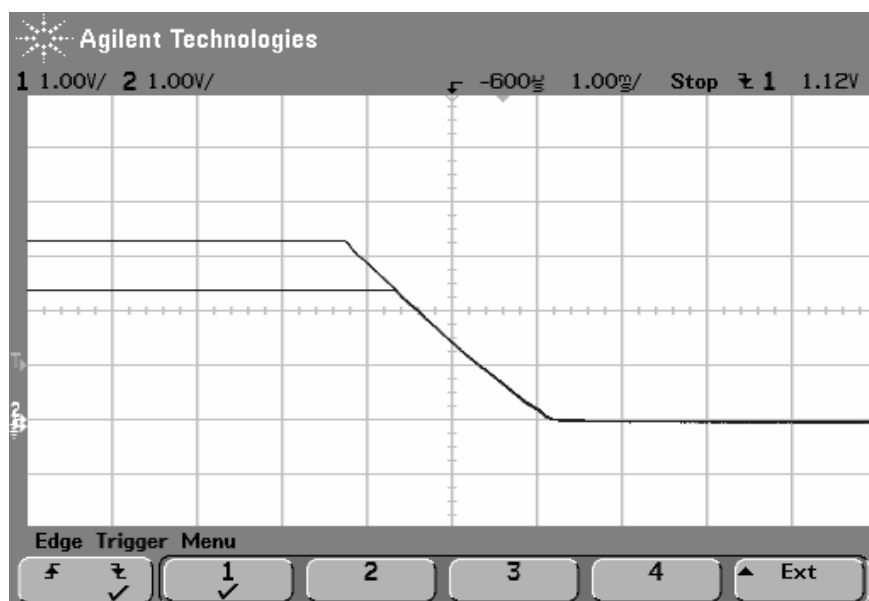


Figure 11. Coincident ramp-down tracking. $I_{OUT1,2} = 15A$. $V_{IN} = 12.0V$. PHASE pin shorted to ground.

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 653A DUAL 15A HIGH FREQUENCY STEP-DOWN DC/DC CONVERTER

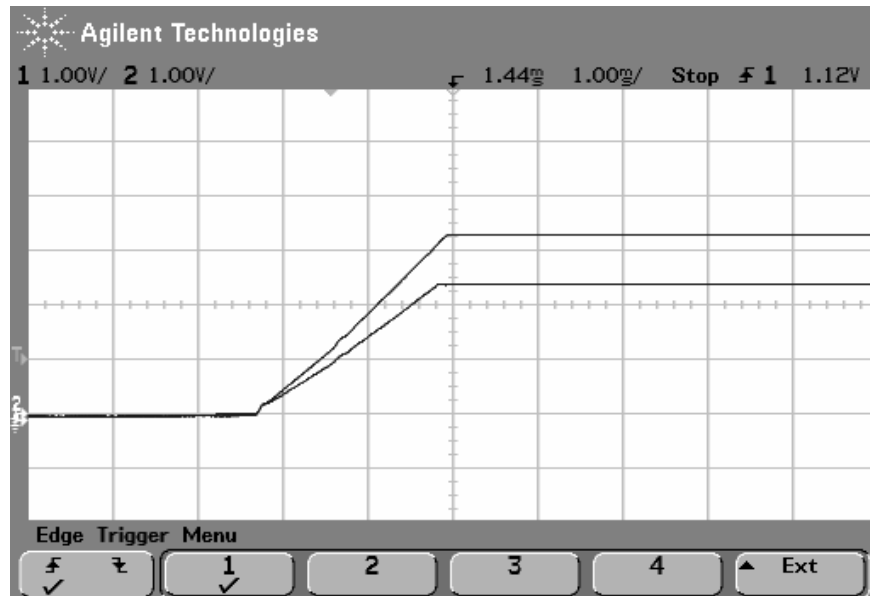


Figure 12. Ratiometric ramp-up tracking. $I_{OUT1,2} = 15A$. $V_{IN} = 12.0V$. PHASE pin released from ground.


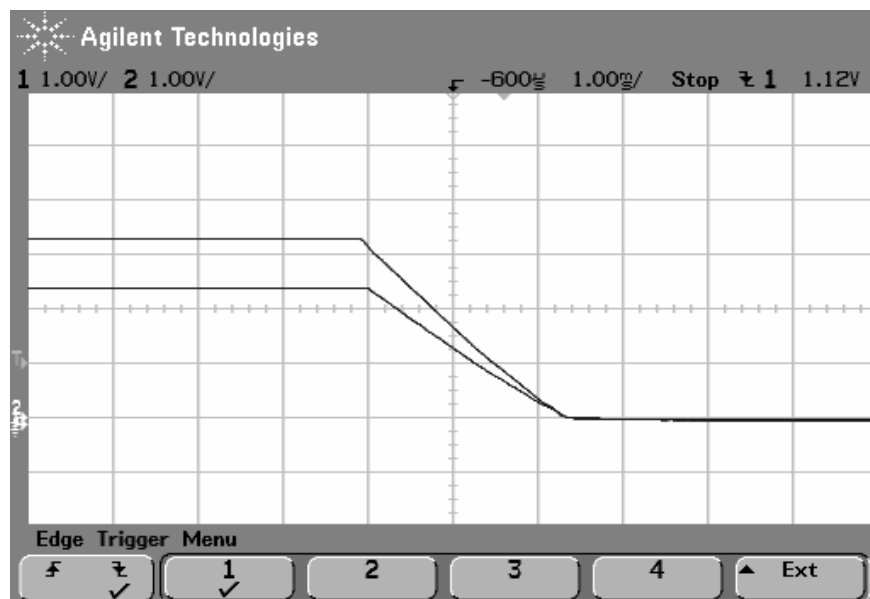


Figure 13. Ratiometric ramp-down tracking. $I_{OUT1,2} = 15A$. $V_{IN} = 12.0V$. PHASE pin shorted to ground.

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 653A

DUAL 15A HIGH FREQUENCY STEP-DOWN DC/DC CONVERTER

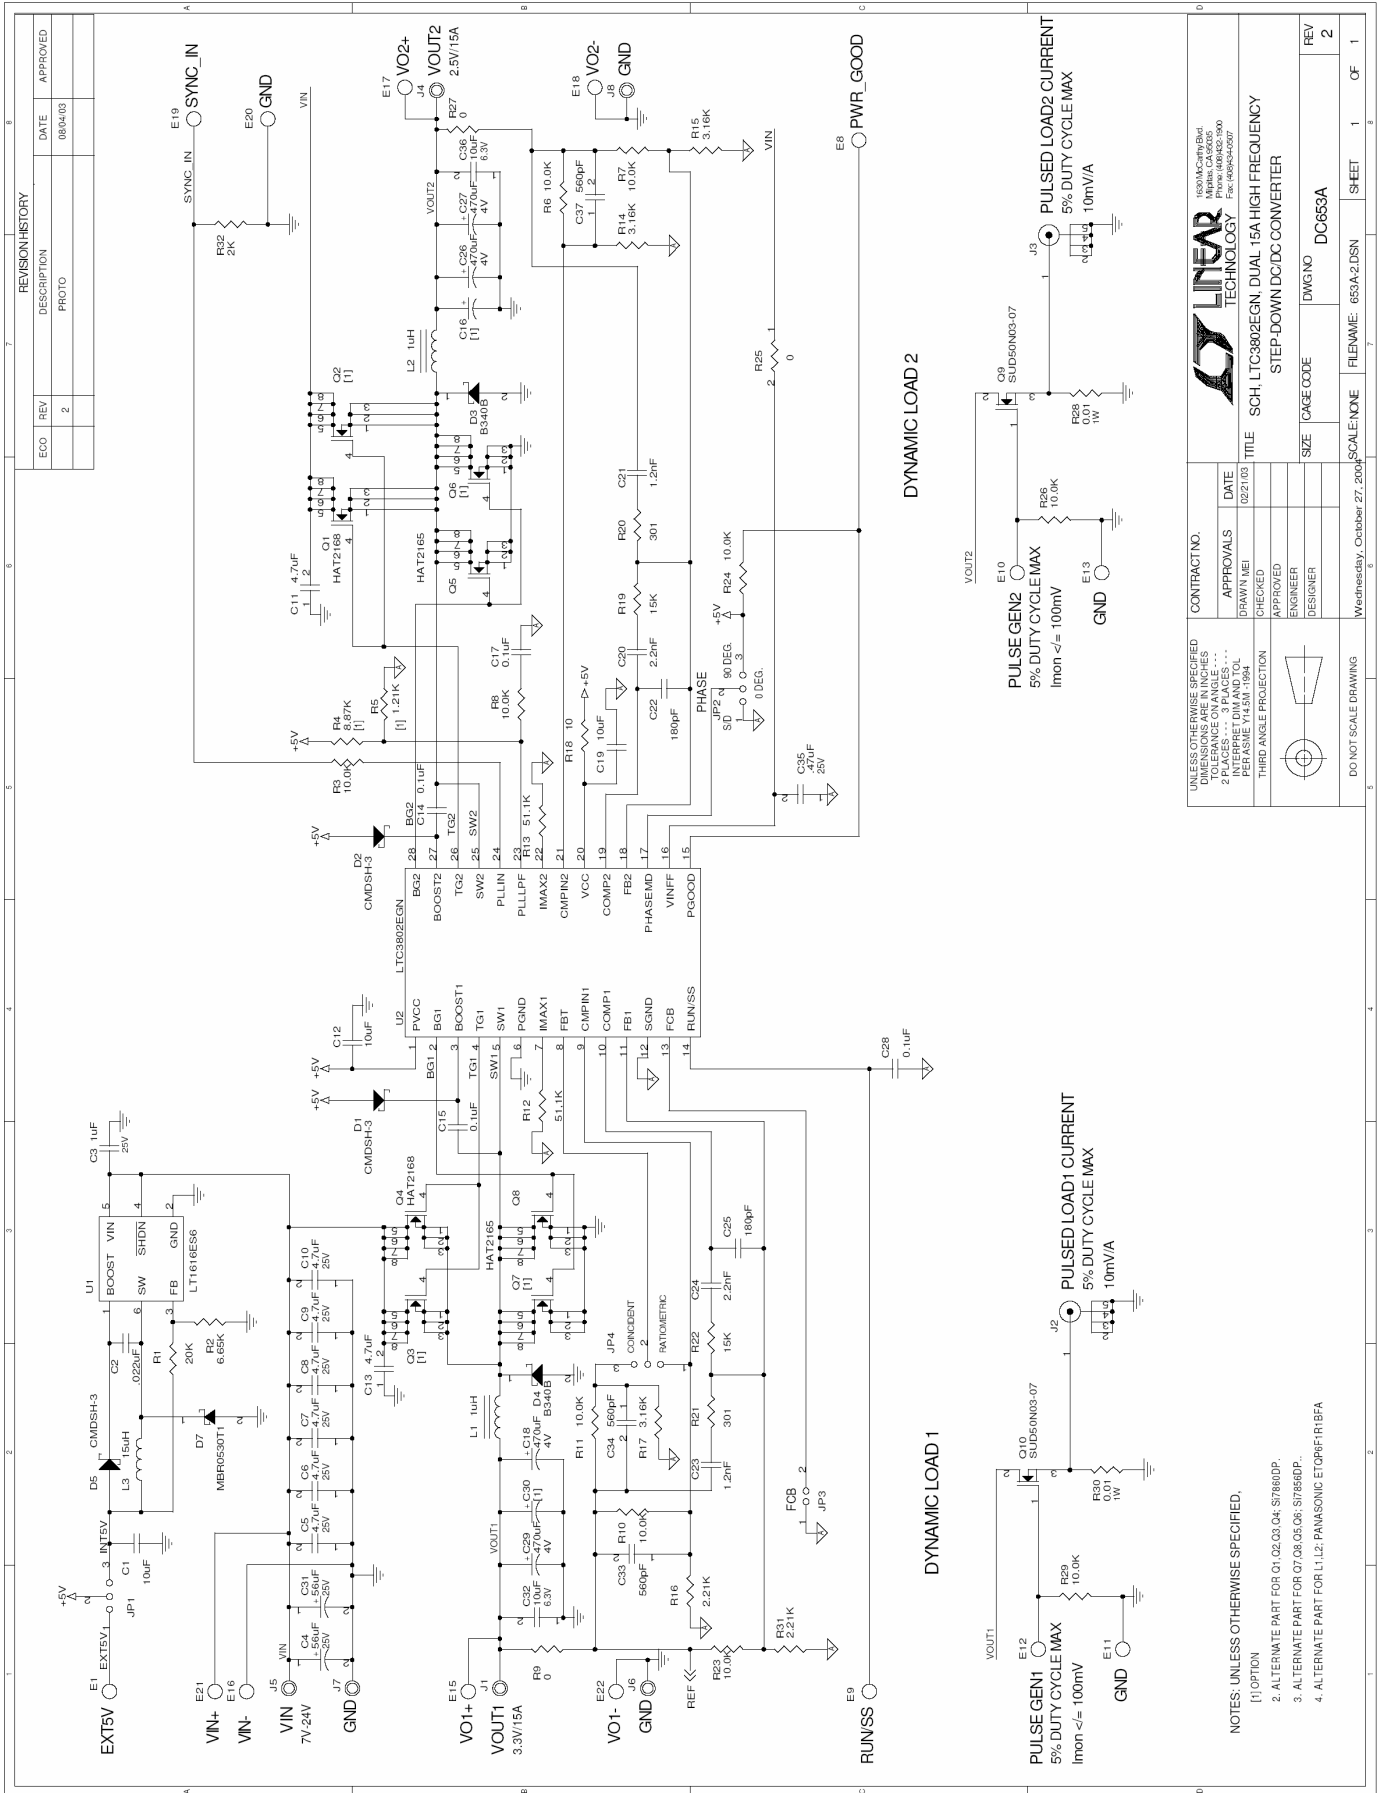

REVISION HISTORY		
ECO	REV	DESCRIPTION
	2	PROTO
		DATE
		APPROVED

CONTRACT NO. 1650MCM04Bnd Alpha CA24025 Alpha CA24026 Alpha CA24027 Alpha CA24028 Alpha CA24029 Alpha CA24030 Alpha CA24031 Alpha CA24032 Alpha CA24033 Alpha CA24034 Alpha CA24035 Alpha CA24036 Alpha CA24037 Alpha CA24038 Alpha CA24039 Alpha CA24040 Alpha CA24041 Alpha CA24042 Alpha CA24043 Alpha CA24044 Alpha CA24045 Alpha CA24046 Alpha CA24047 Alpha CA24048 Alpha CA24049 Alpha CA24050	
UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS TOLERANCES UNLESS OTHERWISE SPECIFIED: 2 PLACES... 3 PLACES... 0.50 0.25 0.10 0.05 0.025 PER ASME Y14.5M-1994 THIRD ANGLE PROJECTION	DATE 08/21/03 DRAWN MEI CHECKED APPROVED ENGINEER DESIGNER
TITLE SCH_LTC3802EGN_DUAL_15A_HIGH_FREQUENCY_STEP-DOWN_DC/DC_CONVERTER	SIZE A4 DWG NO DC653A REV 2
DO NOT SCALE DRAWING	FILENAME: 653A-2.DSN SHEET 1 OF 1

NOTES: UNLESS OTHERWISE SPECIFIED,
 [1] OPTION
 2. ALTERNATE PART FOR 01, 02, 03, 04: S7860DP.
 3. ALTERNATE PART FOR 07, 08, 05, 06: S7865DP.
 4. ALTERNATE PART FOR L1, L2: PANASONIC ETU0PF1R1BFA

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А