# Compact Photoelectric Sensor with Built-in Amplifier

# E3Z

CSM_E3Z_DS_E_14_1

## The Standard for Photoelectric Sensors with a Secure Track Record of One Million Sold Yearly.

- Long sensing distance of 30 m for Through-beam Models, 4 m for Retro-reflective Models, and 1 m for Diffuse-reflective Models.
- Mechanical axis and optical axis offset of less than ±2.5° simplifies optical axis adjustment.
- High stability with unique algorithm that prevents interference of external light.

CE

Be sure to read *Safety Precautions* on page 15.

## Features

### Industry's Top-level Sensing Distance with Built-in Amplifier

A separately sold filter is available to prevent mutual interference for Through-beam Models with red lights sources and a sensing distance of 10 m. Reflective Models include functionality to prevent mutual interference.

Long-distance, Through-beam Sensors with a detection distance of 30 m (response time: 2 ms) are also available.




### Low-temperature Operation for Applications in Cold-storage Warehouses

A wider ambient operating range from –40 to 55°C (main models with connectors). We also provide Sensor I/O Connectors with PUR Cables for high resistance to cold environments.

### Improved Matching of Optical Axis and Mechanical Axis for Through-beam Models and Retro-reflective Models

The offset between the optical axis and the mechanical axis is kept within ±2.5°, so the optical axis can be accurately set simply by mounting the Sensor according to the mechanical axis.

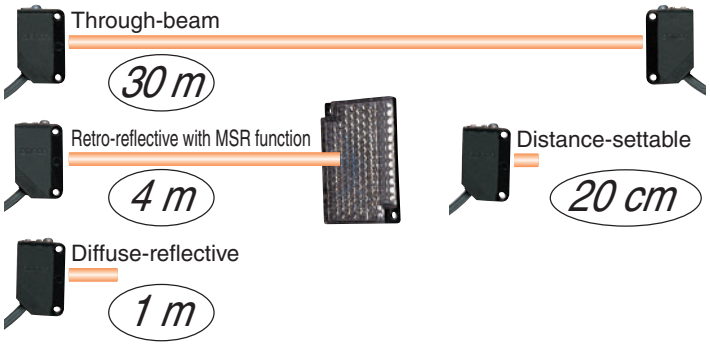


The receiver will always be in the range of light diffusion.

### Sensor Protection against Incorrect Wiring

The Sensor includes output reverse polarity protection.
(A diode to protect against reverse polarity is added to the output line.)

Through-beam Model receivers and Reflective Models (except the E3Z-LS)

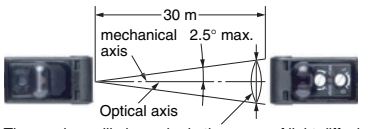


Protection for NPN output models

### Complete Compliance with the EU's RoHS Directive

Lead, mercury, cadmium hexachrome, polybrominated biphenyl (PBB), and polybrominated diphenyl ether (PBDE) have all been eliminated. Also, burnable polyethylene packaging has been used.

Ro

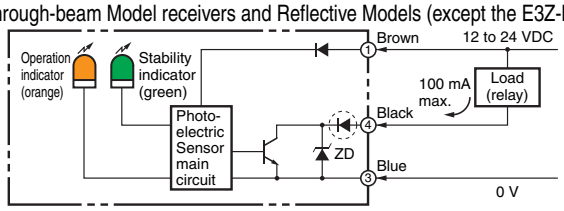

## Ordering Information

### Sensors [Refer to *Dimensions on page* 16.]

Red light  Infrared light

| Sensing method | Appearance | Connection method | Sensing distance | Model: NPN output | Model: PNP output |
|---|---|---|---|---|---|
| Through-beam (Emitter + Receiver) *3 |  | Pre-wired (2 m) | 15 m | **E3Z-T61 2M**<br>Emitter E3Z-T61-L 2M<br>Receiver E3Z-T61-D 2M | **E3Z-T81 2M**<br>Emitter E3Z-T81-L 2M<br>Receiver E3Z-T81-D 2M |
| | | Standard M8 connector | | **E3Z-T66**<br>Emitter E3Z-T66-L<br>Receiver E3Z-T66-D | **E3Z-T86**<br>Emitter E3Z-T86-L<br>Receiver E3Z-T86-D |
| | | Pre-wired (2 m) | 10 m | **E3Z-T61A 2M**<br>Emitter E3Z-T61-A-L 2M<br>Receiver E3Z-T61-A-D 2M | **E3Z-T81A 2M**<br>Emitter E3Z-T81-A-L 2M<br>Receiver E3Z-T81-A-D 2M |
| | | Standard M8 connector | | **E3Z-T66A**<br>Emitter E3Z-T66-A-L<br>Receiver E3Z-T66-A-D | **E3Z-T86A**<br>Emitter E3Z-T86-A-L<br>Receiver E3Z-T86-A-D |
| | | Pre-wired (2 m) | 30m | **E3Z-T62 2M**<br>Emitter E3Z-T62-L 2M<br>Receiver E3Z-T62-D 2M | **E3Z-T82 2M**<br>Emitter E3Z-T82-L 2M<br>Receiver E3Z-T82-D 2M |
| | | Standard M8 connector | | **E3Z-T67**<br>Emitter E3Z-T67-L<br>Receiver E3Z-T67-D | **E3Z-T87**<br>Emitter E3Z-T87-L<br>Receiver E3Z-T87-D |
| Emission stop function | | Pre-wired (2 m) | | **E3Z-T62-G0 2M** *4<br>Emitter E3Z-T62-G0-L 2M<br>Receiver E3Z-T62-G0-D 2M | **E3Z-T82-G0 2M** *4<br>Emitter E3Z-T82-G0-L 2M<br>Receiver E3Z-T82-G0-D 2M |
| | | Standard M8 connector | | **E3Z-T67-G0** *4<br>Emitter E3Z-T67-G0-L<br>Receiver E3Z-T67-G0-D | **E3Z-T87-G0** *4<br>Emitter E3Z-T87-G0-L<br>Receiver E3Z-T87-G0-D |
| Retro-reflective with MSR function |  *1 | Pre-wired (2 m) | 4 m *2 (100 mm) | **E3Z-R61 2M** | **E3Z-R81 2M** |
| | | Standard M8 connector | | **E3Z-R66** | **E3Z-R86** |
| Diffuse-reflective | | Pre-wired (2 m) | 5 to 100 mm (wide view) | **E3Z-D61 2M** | **E3Z-D81 2M** |
| | | Standard M8 connector | | **E3Z-D66** | **E3Z-D86** |
| | | Pre-wired (2 m) | 1 m | **E3Z-D62 2M** | **E3Z-D82 2M** |
| | | Standard M8 connector | | **E3Z-D67** | **E3Z-D87** |
| | | Pre-wired (2 m) | 90±30 mm (narrow beam) | **E3Z-L61 2M** | **E3Z-L81 2M** |
| | | Standard M8 connector | | **E3Z-L66** | **E3Z-L86** |
| Distance-settable Refer to **E3Z-LS**. | | Pre-wired (2 m) | 20 to 40 mm (BGS min setting)<br>20 to 200 mm (BGS max setting) | **E3Z-LS61 2M** | **E3Z-LS81 2M** |
| | | Standard M8 Connector | 40 min. Incident threshold (FGS min setting)<br>200 min. Incident threshold (FGS max setting) | **E3Z-LS66** | **E3Z-LS86** |
| | | Pre-wired (2 m) | 2 to 20 mm (BGS min setting) | **E3Z-LS63 2M** | **E3Z-LS83 2M** |
| | | Standard M8 connector | 2 to 80 mm (BGS max setting) | **E3Z-LS68** | **E3Z-LS88** |
| Slit-type Through-beam Refer to **E3Z-G**. | 1 axis | Pre-wired (2 m) | 25 mm | **E3Z-G61 2M** | **E3Z-G81 2M** |
| | 2 axes | | | **E3Z-G62 2M** | **E3Z-G82 2M** |
| | 1 axis | Pre-wired M8 connector | | **E3Z-G61-M3J** | **E3Z-G81-M3J** |
| | 2 axes | | | **E3Z-G62-M3J** | **E3Z-G82-M3J** |
| Limited-reflective for transparent glasses | | Pre-wired (2 m) | 30±20 mm | **E3Z-L63 2M** | **E3Z-L83 2M** |
| | | Standard M8 connector | | **E3Z-L68** | **E3Z-J88** |
| Retro-reflective without MSR function for clear, plastic bottles |  *1 | Pre-wired (2 m) | 500 mm (80 mm) *2 | **E3Z-B61 2M** | **E3Z-B81 2M** |
| | | Standard M8 connector | | **E3Z-B66** | **E3Z-B86** |
| | | Pre-wired (2 m) | 2 m (500 mm) *2 | **E3Z-B62 2M** | **E3Z-B82 2M** |
| | | Standard M8 connector | | **E3Z-B67** | **E3Z-B87** |

*1. The Reflector is sold separately. Select the Reflector model most suited to the application.
*2. The sensing distance specified is possible when the E39-R1S is used. Values in parentheses indicate the minimum required distance between the Sensor and Reflector.
*3. Through-beam Sensors are normally sold in sets that include both the Emitter and Receiver.
Orders for individual Emitters and Receivers are accepted. (Modifications are required for some models. Ask your OMRON representative for details.)
*4. Models with emission stop function. Refer to page 8, *Photoelectric Sensors Technical Guide* for details.

## Variety of Connection Specifications

The models with the connection specifications marked with a black circle in the table are available.
The model number indication is a combination of the basic model and the connection specification.

Example: E3Z-T61-M1TJ 0.3M
Basic model number / Connection specification

### NPN Output

| Model | | | Model number example | E3Z-T61 -M1TJ 0.3M | E3Z-T61 0.5M | E3Z-T61 5M | E3Z-T61 -M1J 0.3M | E3Z-T61 -M3J 0.3M | E3Z-T61 -ECON 0.3M E3Z-T61 -ECON 0.5M | E3Z-T61 -ECON 2M |
|---|---|---|---|---|---|---|---|---|---|---|
| Sensing method | Sensing distance | Main features | Connection specification | M12 pre-wired Smartclick connector (cable length: 0.3 m) | Pre-wired (cable length: 0.5 m) | Pre-wired (cable length: 5 m) | M12 pre-wired standard connector (cable length: 0.3 m) | M8, 4-pin pre-wired connector (cable length: 0.3 m) | e-CON pre-wired connector (cable length: 0.3 m/ 0.5 m) | e-CON pre-wired connector (cable length: 2 m) |
| | | | Basic model number | -M1TJ 0.3M | 0.5M | 5M | -M1J 0.3M | -M3J 0.3M | -ECON 0.3M -ECON 0.5M | -ECON 2M |
| Through-beam | 15 m | Infrared light | E3Z-T61 | ● | ● | ● | ● | ● | ● | ● |
| | 10 m | Red light | E3Z-T61A | --- | ● | ● | ● | --- | ● | ● |
| | 30 m | 2-ms response | E3Z-T62 | --- | ● | --- | --- | --- | --- | --- |
| Retro-reflective | 4 m | MSR function | E3Z-R61 | ● | ● | ● | ● | ● | ● | ● |
| Diffuse-reflective (narrow-beam reflective) | 100 mm | Wide view | E3Z-D61 | --- | ● | ● | ● | ● | ● | ● |
| | 1 m | Long distance | E3Z-D62 | ● | ● | ● | ● | ● | ● | ● |
| | 90 mm | Narrow beam | E3Z-L61 | ● | ● | ● | ● | --- | ● | ● |
| Distance-settable | 200 mm | FGS function | E3Z-LS61 | --- | ● | ● | ● | ● | ● | ● |
| | 80 mm | Small spot | E3Z-LS63 | --- | ● | --- | --- | --- | --- | --- |
| Slit-type | 25 mm | 1 optical axis | E3Z-G61 | ● | ● | ● | ● | ● | ● | ● |
| | | 2 optical axes | E3Z-G62 | --- | ● | ● | ● | ● | ● | ● |
| Retro-reflective for clear, plastic bottles | 500 mm | No MSR function | E3Z-B61 | --- | ● | ● | --- | --- | ● | ● |
| | 2 m | | E3Z-B62 | --- | ● | ● | ● | --- | ● | ● |

Clamp-type e-CON pre-wired connectors are also available for models shaded in .
Add "-ECON-C 2M" after the basic model number to specify the connectors.

## PNP Output

| Model | | | Model number example | E3Z-T81 -M1TJ 0.3M | E3Z-T81 0.5M | E3Z-T81 5M | E3Z-T81 -M1J 0.3M | E3Z-T81 -M3J 0.3M |
|---|---|---|---|---|---|---|---|---|
| Sensing method | Sensing distance | Main features | Connection specification | M12 pre-wired Smartclick connector (cable length: 0.3 m) | Pre-wired (cable length: 0.5 m) | Pre-wired (cable length: 5 m) | M12 pre-wired standard connector (cable length: 0.3 m) | M8, 4-pin pre-wired connector (cable length: 0.3 m) |
| | | | Basic model number | -M1TJ 0.3M | 0.5M | 5M | -M1J 0.3M | -M3J 0.3M |
| Through-beam | 15 m | Infrared light | E3Z-T81 | ● | ● | ● | ● | ● |
| | 10 m | Red light | E3Z-T81A | --- | --- | --- | ● | --- |
| | 30 m | 2-ms response | E3Z-T82 | --- | ● | --- | --- | --- |
| Retro-reflective | 4 m | MSR function | E3Z-R81 | ● | ● | ● | ● | ● |
| Diffuse-reflective (narrow-beam reflective) | 100 mm | Wide view | E3Z-D81 | ● | ● | ● | ● | ● |
| | 1 m | Long distance | E3Z-D82 | ● | ● | ● | ● | ● |
| | 90 mm | Narrow beam | E3Z-L81 | ● | ● | ● | ● | --- |
| Distance-settable | 200 mm | FGS function | E3Z-LS81 | --- | ● | ● | ● | ● |
| | 80 mm | Small spot | E3Z-LS83 | --- | ● | --- | --- | --- |
| Slit-type | 25 mm | 1 optical axis | E3Z-G81 | ● | ● | --- | ● | ● |
| | | 2 optical axes | E3Z-G82 | --- | ● | --- | ● | ● |
| Retro-reflective for clear, plastic bottles | 500 mm | No MSR function | E3Z-B81 | --- | ● | --- | ● | --- |
| | 2 m | | E3Z-B82 | --- | ● | ● | ● | --- |

## Oil-resistive Sensors [Refer to *Dimensions on page* 16.]

Red light  Infrared light

| Sensing method | Appearance | Connection method | Sensing distance | Model NPN output | Model PNP output |
|---|---|---|---|---|---|
| Through-beam (Emitter + Receiver) *3 |  | Pre-wired (2 m) | 15 m | **E3Z-T61K 2M**<br>Emitter E3Z-T61K-L 2M<br>Receiver E3Z-T61K-D 2M | **E3Z-T81K 2M**<br>Emitter E3Z-T81K-L 2M<br>Receiver E3Z-T81K-D 2M |
| | | Pre-wired M8 connector | | **E3Z-T61K-M3J 0.3M**<br>Emitter E3Z-T61K-L-M3J 2M<br>Receiver E3Z-T61K-D-M3J 2M | **E3Z-T81K-M3J 0.3M**<br>Emitter E3Z-T81K-L-M3J 2M<br>Receiver E3Z-T81K-D-M3J 2M |
| Retro-reflective with MSR function |  *1 | Pre-wired (2 m) | *2<br>3 m (150 mm) | **E3Z-R61K 2M** | **E3Z-R81K 2M** |
| | | Pre-wired M8 connector | | **E3Z-R61K-M3J 0.3M** | **E3Z-R81K-M3J 0.3M** |
| Diffuse-reflective | | Pre-wired (2 m) | 5 to 100 mm (wide view) | **E3Z-D61K 2M** | **E3Z-D81K 2M** |
| | | Pre-wired M8 connector | | **E3Z-D61K-M3J 0.3M** | **E3Z-D81K-M3J 0.3M** |
| | | Pre-wired (2 m) | 1 m | **E3Z-D62K 2M** | **E3Z-D82K 2M** |
| | | Pre-wired M8 connector | | **E3Z-D62K-M3J 0.3M** | **E3Z-D82K-M3J 0.3M** |

*1. The Reflector is sold separately. Select the Reflector model most suited to the application.
*2. The sensing distance specified is possible when the E39-R1S is used. Values in parentheses indicate the minimum required distance between the Sensor and Reflector.
*3. Through-beam Sensors are normally sold in sets that include both the Emitter and Receiver.
Orders for individual Emitters and Receivers are accepted. (Modifications are required for some models. Ask your OMRON representative for details.)

## Accessories (Order Separately)

**Slit (A Slit is not provided with Through-beam Sensors) Order a Slit separately if required. [Refer to *Dimensions* on page 18.]**

| Slit width | Sensing distance E3Z-T□□ | Sensing distance E3Z-T□□A | Minimum detectable object (typical) | Model | Contents |
|---|---|---|---|---|---|
| 0.5-mm dia. | 50 mm | 35 mm | 0.2-mm dia. | **E39-S65A** | One set (contains Slits for both the Emitter and Receiver) |
| 1-mm dia. | 200 mm | 150 mm | 0.4-mm dia. | **E39-S65B** | |
| 2-mm dia. | 800 mm | 550 mm | 0.7-mm dia. | **E39-S65C** | |
| 0.5 × 10 mm | 1 m | 700 mm | 0.2-mm dia. | **E39-S65D** | |
| 1 × 10 mm | 2.2 m | 1.5 m | 0.5-mm dia. | **E39-S65E** | |
| 2 × 10 mm | 5 m | 3.5 m | 0.8-mm dia. | **E39-S65F** | |

**Reflectors (Reflector required for Retroreflective Sensors) A Reflector is not provided with the Sensor. Be sure to order a Reflector separately. [Refer to *Dimensions* on *E39-L/F39-L/E39-S/E39-R*]**

| Name | Sensing distance (typical)* E3Z-R | E3Z-R□K | E3Z-B□1/-B□6 | E3Z-B□2/-B□7 | Model | Quantity | Remarks |
|---|---|---|---|---|---|---|---|
| Reflector | 3 m (100 mm) (rated value) | 2 m (100 mm) (rated value) | --- | --- | **E39-R1** | 1 | • Retro-reflective models are not provided with Reflectors.<br>• The MSR function is enabled. |
| | 4 m (100 mm) (rated value) | 3 m (150 mm) (rated value) | 500 mm (80 mm) (rated value) | 2 m (500 mm) (rated value) | **E39-R1S** | 1 | |
| | 5 m (100 mm) | --- | --- | --- | **E39-R2** | 1 | |
| | 2.5 m (100 mm) | --- | --- | --- | **E39-R9** | 1 | |
| | 3.5 m (100 mm) | --- | --- | --- | **E39-R10** | 1 | |
| Fog Preventive Coating | 3 m (100 mm) | --- | 500 mm (80 mm) (rated value) | 2 m (500 mm) (rated value) | **E39-R1K** | 1 | |
| Small Reflector | 1.5 m (50 mm) | --- | --- | --- | **E39-R3** | 1 | |
| Tape Reflector | 700 mm (150 mm) | --- | --- | --- | **E39-RS1** | 1 | |
| | 1.1 m (150 mm) | --- | --- | --- | **E39-RS2** | 1 | |
| | 1.4 m (150 mm) | --- | --- | --- | **E39-RS3** | 1 | |

Note: The actual sensing distance may be reduced to approximately 70% of the typical sensing distance when using a Reflector other than E39-R1 or E39-R1S.
*1. Refer to *Reflectors* on *E39-L/F39-L/E39-S/E39-R* for details.
*2. Values in parentheses indicates the minimum required distance between the Sensor and Reflector.

**Mutual Interference Protection Filter A Filter is not provided with the Sensor (for the through-beam E3Z-T□□A). Order a Filter separately if required.**

| Sensing distance | Appearance/Dimensions | Model | Quantity | Remarks |
|---|---|---|---|---|
| 3 m |  | **E39-E11** | Two sets each for the Emitter and Receiver (total of four pieces) | Can be used with the E3Z-T□□A Through-beam models. The arrow indicates the direction of polarized light. Mutual interference can be prevented by altering the direction of polarized light from or to adjacent Emitters and Receivers. |

## Mounting Brackets

**A Mounting Bracket is not enclosed with the Sensor. Order a Mounting Bracket separately if required.**

**[Refer to *Dimensions* on *E39-L/F39-L/E39-S/E39-R*]**

| Appearance | Model (material) | Quantity | Remarks | Appearance | Model (material) | Quantity | Remarks |
|---|---|---|---|---|---|---|---|
| | **E39-L153 (SUS304)** *1 | 1 | Mounting Brackets | | **E39-L98 (SUS304)** *2 | 1 | Metal Protective Cover Bracket |
| | **E39-L104 (SUS304)** *1 | 1 | | | **E39-L150 (SUS304)** | 1 | (Sensor adjuster) |
| | **E39-L43 (SUS304)** *2 | 1 | Horizontal Mounting Brackets | | **E39-L151 (SUS304)** | 1 | Easily mounted to the aluminum frame rails of conveyors and easily adjusted.<br>For left to right adjustment |
| | **E39-L142 (SUS304)** *2 | 1 | Horizontal Protective Cover Bracket | | | | |
| | **E39-L44 (SUS304)** | 1 | Rear Mounting Bracket | | **E39-L144 (SUS304)** *2 | 1 | Compact Protective Cover Bracket (For E3Z only) |

Note: 1. When using Through-beam models, order one bracket for the Receiver and one for the Emitter.
2. Refer to *Mounting Brackets* on *E39-L/F39-L/E39-S/E39-R* for details.

*1. Cannot be used for Standard Connector models with mounting surface on the bottom. In that case, use Pre-wired Connector models.
*2. Cannot be used for Standard Connector models.

## Sensor I/O Connectors

**(Models for Connectors and Pre-wired Connectors: A Connector is not provided with the Sensor. Be sure to order a Connector separately.)**

**[Refer to *Dimensions* for *XS3, XS2, XS5*. For *e-CON*, inquire.]**

| Size | Cable | Appearance | Cable type | | Model |
|---|---|---|---|---|---|
| M8 *1 | Standard | Straight *3 | 2 m | 4-wire | **XS3F-M421-402-A** |
| | | | 5 m | | **XS3F-M421-405-A** |
| | | L-shaped *3 *4 | 2 m | | **XS3F-M422-402-A** |
| | | | 5 m | | **XS3F-M422-405-A** |
| M12 *1 (For -M1J models) | | Straight *3 | 2 m | 3-wire | **XS2F-D421-DC0-A** |
| | | | 5 m | | **XS2F-D421-GC0-A** |
| | | L-shaped *3 | 2 m | | **XS2F-D422-DC0-A** |
| | | | 5 m | | **XS2F-D422-GC0-A** |
| M12 (For -M1TJ models) | | Straight | 2 m | 4-wire | **XS5F-D421-D80-A** |
| | | | 5 m | | **XS5F-D421-G80-A** |
| e-CON | | Single-end connector | 2 m | 4-wire | **E39-ECON2M** |
| | | | 5 m | | **E39-ECON5M** |
| | | Double-end connectors | 0.5 to 1 m | | **E39-ECONW□M** □ indicates cable length (in units of m). Specify with 0.1-increments. |
| | | | 1.1 to 1.5 m | | |
| | | | 1.6 to 2 m | | |
| M8 | PUR (Polyurethane) cable *2 | Straight *3 | 2 m | 4-wire | **XS3F-M421-402-L** |
| | | | 5 m | | **XS3F-M421-405-L** |
| | | L-shaped *3 *4 | 2 m | | **XS3F-M422-402-L** |
| | | | 5 m | | **XS3F-M422-405-L** |

Note: When using Through-beam models, order one connector for the Receiver and one for the Emitter.

*1. Refer to *Introduction to Sensor I/O Connectors* for details.
*2. The Sensor can be used in low-temperature environments (–25°C to –40°C). Do not use the Sensor in locations that are subject to oil.
*3. The connector will not rotate after connecting.
*4. The cable is fixed at an angle of 180° from the sensor emitter/receiver surface.

## Ratings and Specifications

| Item | | Sensing method | Through-beam | | | Retro-reflective with MSR function | Diffuse-reflective | | (Narrow-beam Models) |
|---|---|---|---|---|---|---|---|---|---|
| Model | NPN output | Pre-wired | E3Z-T61 | E3Z-T62 | E3Z-T61A | E3Z-R61 | E3Z-D61 | E3Z-D62 | E3Z-L61 |
| | | Connector (M8) | E3Z-T66 | E3Z-T67 | E3Z-T66A | E3Z-R66 | E3Z-D66 | E3Z-D67 | E3Z-L66 |
| | PNP output | Pre-wired | E3Z-T81 | E3Z-T82 | E3Z-T81A | E3Z-R81 | E3Z-D81 | E3Z-D82 | E3Z-L81 |
| | | Connector (M8) | E3Z-T86 | E3Z-T87 | E3Z-T86A | E3Z-R86 | E3Z-D86 | E3Z-D87 | E3Z-L86 |
| Sensing distance | | | 15 m | 30 m | 10 m | 4 m (100 mm) *1 (when using E39-R1S)<br>3 m (100 mm) *1 (when using E39-R1) | 100 mm (white paper: 100 × 100 mm) | 1 m (white paper: 300 × 300 mm) | 90 + 30 mm (white paper, 100 x 100 mm) |
| Spot diameter (typical) | | | --- | | | | | | (2.5 dia. and sensing distance of 90 mm) |
| Standard sensing object | | | Opaque: 12-mm dia. min. | | | Opaque: 75-mm dia. min. | --- | | |
| Minimum detectable object (typical) | | | --- | | | | | | 0.1 mm (copper wire) |
| Differential travel | | | --- | | | | 20% max. of setting distance | | Refer to *Engineering data* on page 10. |
| Directional angle | | | Both emitter and receiver: 3 to 15° | | | 2 to 10° | --- | | |
| Light source (wavelength) | | | Infrared LED (870 nm) | | Red LED (660 nm) | Red LED (660 nm) | Infrared LED (860 nm) | | Red LED (650 nm) |
| Current consumption | | | 35 mA max. (Emitter: 15 mA max., Receiver: 20 mA max.) | | | 30 mA max. | | | |
| Protection circuits | | | Reversed power supply polarity protection, Output short-circuit protection, and Reversed output polarity protection | | | Reversed power supply polarity protection, Output short-circuit protection, Mutual interference prevention, and Reversed output polarity protection | | | |
| Response time | | | Operate or reset: 1 ms max. | Operate or reset: 2 ms max. | Operate or reset: 1 ms max. | | | | |
| Degree of protection | | | IEC, IP67 | | | | | | |
| Connection method | | | Pre-wired cable (standard length: 2 m and 0.5 m), Connector (M8) | | | | | | |
| Weight (packedstate) | Pre-wired cable (2 m) | | Approx. 120 g | | | Approx. 65 g | | | |
| | Connector | | Approx. 30 g | | | Approx. 20 g | | | |
| Material | Case | | PBT (polybutylene terephthalate) | | | | | | |
| | Lens | | Modified polyarylate | | | Methacrylic resin | Modified polyarylate | | |

| Item | Model | Sensing method | Retro-reflective for clear, plastic bottles (without MSR function) | | | |
|---|---|---|---|---|---|---|
| | | NPN output | E3Z-B61 | E3Z-B66 | E3Z-B62 | E3Z-B67 |
| | | PNP output | E3Z-B81 | E3Z-B86 | E3Z-B82 | E3Z-B87 |
| Sensing distance | | | 500 mm (80 mm) *1 (using E39-R1S) | | 2 m (500 mm) *1 *2 (using E39-R1S) | |
| Standard sensing object | | | 500-ml (65-mm dia.) transparent round plastic bottles | | | |
| Light source (wavelength) | | | Red LED (660 nm) | | | |
| Current consumption | | | 30 mA max. | | | |
| Protection circuits | | | Reversed power supply polarity protection, Output short-circuit protection, Mutual interference prevention, and Reversed output polarity protection | | | |
| Response time | | | Operate or reset: 1 ms max. | | | |
| Degree of protection | | | IEC, IP67 | | | |
| Connection method | | | Pre-wired cable (standard length: 2 m and 0.5 m) | Connector (M8, 4 pins) | Pre-wired cable (standard length: 2 m and 0.5 m) | Connector (M8, 4 pins) |
| Weight (packed state) | Pre-wired cable (2 m) | | Approx. 65 g | | | |
| | Standard Connector | | Approx. 20 g | | | |
| Material | Case | | PBT (polybutylene terephthalate) | | | |
| | Lens | | Modified polyarylate | | | |

*1. Values in parentheses indicate the minimum required distances between the Sensors and Reflectors.
*2. Plastic bottles must pass with the minimum clearance of 500 mm.

The E3Z-T□2-G0 is equipped with an emission stop function. Ratings and specifications of this function are given in the following table.

| Item | Sensing method / Output and Modes | |
|---|---|---|
| | Sensing method / Output and Modes | Through-beam models, NPN output: E3Z-T62/T67-G0, PNP output: E3Z-T82/T87-G0 |
| Emission stop function | Input | <NPN models> Emission OFF: Short-circuit to 0 V or 1.5 V max. (Outflow current 1 mA max.), Emission ON: Disconnected (Leakage current 0.1 mA max.)<br><PNP models> Emission OFF: Short-circuit to +DC (Power supply plus side) or +DC-1.5 V max. (Inlet current 3 mA max.), Emission ON: Disconnected (Leakage current 0.1 mA max.) |
| | Response time | Operate or reset: 0.5 ms max. |

Visible spot models are available for through-beam NPN output models. The different items from E3Z-T62 are listed below.

| | |
|---|---|
| **Model** | E3Z-T62-SOSDW-P2 |
| **Light source (wavelength)** | Orange LED (615 nm) |
| **Response time** | Operate or reset: 1 ms max. |
| **Connection method** | Pre-wired lable (Standard length: 2 m) |

| Item / Model | | | |
|---|---|---|---|
| | Sensing method | Transparent glass Limited-reflective (for transparent object detection ) | |
| | NPN output | E3Z-L63 | E3Z-L68 |
| | PNP output | E3Z-L83 | E3Z-L88 |
| Sensing distance | | 30±20 mm (transparent glasses 100 × 100 mm) | |
| Spot diameter | | 2-mm dia. min. (at sensing distance of 30 mm) | |
| Minimum detectable object (typical) | | 0.1 mm dia. (copper wire) | |
| Light source (wavelength) | | Red LED (660 nm) | |
| Current consumption | | 30 mA max. | |
| Protection circuits | | Power supply reverse polarity protection, Output short-circuit protection, Mutual interference prevention, Reverse output polarity protection | |
| Response time | | Operate or reset: 1 ms max. | |
| Degree of protection | | IEC, IP67 | |
| Connection method | | Pre-wired (standard length: 2 m) | M8 connector |
| Weight (packed state) | Pre-wired cable (2 m) | Approx. 65 g | |
| | Standard Connector | Approx. 20 g | |
| Material | Case | PBT (polybutylene terephthalate) | |
| | Lens | Modified polyarylate | |

## Oil-resistant

| Item | Model | | Sensing method | Through-beam | Retro-reflective | Diffuse-reflective | |
|---|---|---|---|---|---|---|---|
| | NPN output | | Pre-wired Models | E3Z-T61K | E3Z-R61K | E3Z-D61K | E3Z-D62K |
| | | | M8 Pre-wired connector | E3Z-T61K-M3J | E3Z-R61K-M3J | E3Z-D61K-M3J | E3Z-D62K-M3J |
| | PNP output | | Pre-wired Models | E3Z-T81K | E3Z-R81K | E3Z-D81K | E3Z-D82K |
| | | | M8 Pre-wired connector | E3Z-T81K-M3J | E3Z-R81K-M3J | E3Z-D81K-M3J | E3Z-D82K-M3J |
| **Sensing distance** | | | | 15 m | 3 m (150 mm) * (when using E39-R1S)<br>2 m (100 mm) * (when using E39-R1) | 100 mm (white paper: 100 × 100 mm) | 1 m (white paper: 300 × 300 mm) |
| **Standard sensing object** | | | | Opaque: 12-mm dia. min. | Opaque: 75-mm dia. min. | --- | |
| **Differential travel** | | | | --- | | 20% max. of setting distance | |
| **Directional angle** | | | | Both emitter and receiver: 3 to 15° | 2 to 10° | --- | |
| **Light source (wavelength)** | | | | Infrared LED (870 nm) | Red LED (660 nm) | Infrared LED (860 nm) | |
| **Current consumption** | | | | 35 mA max. (Emitter: 15 mA max., Receiver: 20 mA max.) | 30 mA max. | | |
| **Protection circuits** | | | | Reversed power supply polarity protection, Output short-circuit protection, and Reversed output polarity protection | Reversed power supply polarity protection, Output short-circuit protection, Mutual interference prevention, and Reversed output polarity protection | | |
| **Response time** | | | | Operate or reset: 1 ms max. | | | |
| **Degree of protection** | | | | IP67 (IEC), Oil resistant models: IP67 (IEC) (in-house standards: oilproof), excluding cables and connectors | | | |
| **Connection method** | | | | Pre-wired cable (standard length: 2 m), M8 Pre-wired Connector | | | |
| **Weight (packed state)** | **Pre-wired cable (2 m)** | | | Approx. 120 g | Approx. 65 g | | |
| | **Connector (M8, 4 pins)** | | | Approx. 50 g | Approx. 30 g | | |
| **Material** | **Case** | | | PBT (polybutylene terephthalate) | | | |
| | **Lens** | | | Modified polyarylate | Methacrylic resin | Modified polyarylate | |

* Values in parentheses indicate the minimum required distance between the Sensor and Reflector.

## Common

| | |
|---|---|
| **Power supply voltage** | 12 to 24 VDC±10%, ripple (p-p): 10% max. |
| **Control output** | Load power supply voltage: 26.4 VDC max., Load current: 100 mA max.<br>Residual voltage: Load current of less than 10 mA: 1 V max.<br>Load current of 10 to 100 mA: 2 V max.<br>Open collector output (NPN/PNP depending on model)<br>Light-ON/Dark-ON selectable |
| **Sensitivity adjustment** | One-turn adjuster |
| **Ambient illumination (Receiver side)** | Incandescent lamp: 3,000 lx max.<br>Sunlight: 10,000 lx max. |
| **Ambient temperature range** | Operating: –25 to 55°C, Some connector models: –40°C to 55°C * (with no icing or condensation)<br>Storage: –40 to 70°C (with no icing or condensation) |
| **Ambient humidity range** | Operating: 35% to 85%, Storage: 35% to 95% (with no condensation) |
| **Insulation resistance** | 20 MΩ min. at 500 VDC |
| **Dielectric strength** | 1,000 VAC, 50/60 Hz for 1 min |
| **Vibration resistance** | Destruction: 10 to 55 Hz, 1.5 mm double amplitude for 2 hours each in X, Y, and Z directions |
| **Shock resistance** | Destruction: 500 m/s$^2$ 3 times each in X, Y, and Z directions |
| **Indicator** | Operation indicator (orange)<br>Stability indicator (green)<br>Through-beam Emitter has power indicator (orange) only. |
| **Accessories** | Instruction manual (Neither Reflectors nor Mounting Brackets are provided with any of the above models.) |

* The ambient temperature range during operation for connector models depends on the model. For the E3Z-T66/T86/R66/R86, the range is –40°C to 55°C. For the E3Z-D66/D86/D67/D87, the range is –30°C to 55°C. For other connector models, the range is –25°C to –55°C.
The sensing distance for Retro-reflective Models (E3Z-R66/R86) between –40°C to –25°C, however, will be as follows (not the values in the table):
With E39-R1S: 3 m (100 mm), With E39-R1: 2 m (100 mm).
Also, use the XS3F-M42□-4□□-L Sensor I/O Connector (PUR cable) for applications between –25°C to –40°C. (Refer to page 6.)

# Engineering Data (Typical)

## Parallel Operating Range

### Through-beam Models
**E3Z-T□1(T□6)**




### Through-beam Models
**E3Z-T□A**




### Through-beam Models
**E3Z-T□2(T□7)**

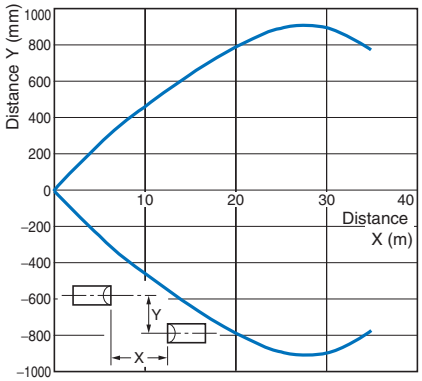


### Through-beam Models
**E3Z-T□1(T□6) and Slit**
**(A Slit is mounted to the Emitter and Receiver.)**

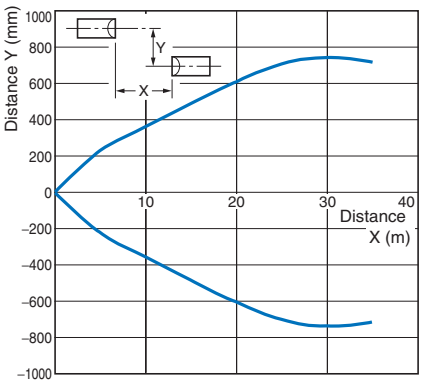


### Through-beam Models
**E3Z-T□A and Slit**
**(A Slit is mounted to the Emitter and Receiver.)**

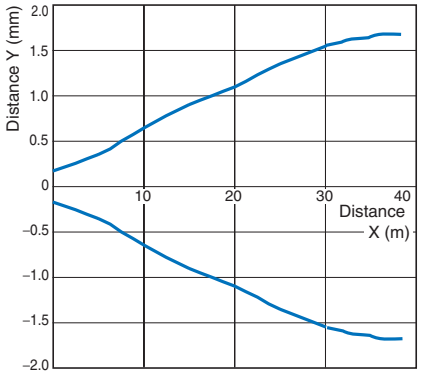


### Retro-reflective Models
**E3Z-R□1(R□6) and Reflector**

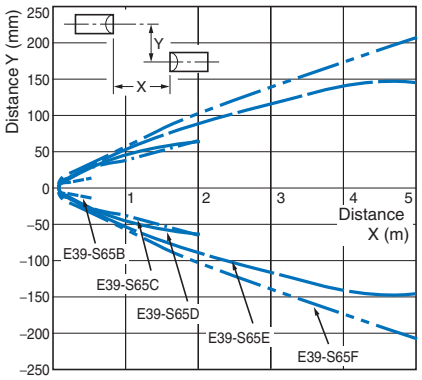


### E3Z-B□1/B□6 + E39-R1S Reflector (Order Separately)

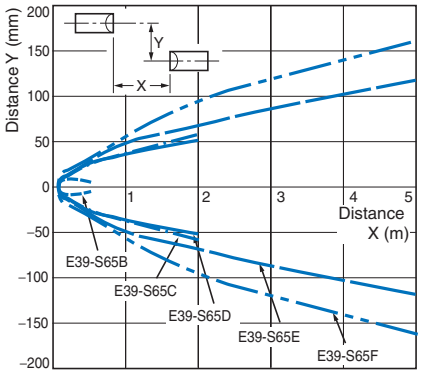


### E3Z-B□2/B□7 + E39-R1S Reflector (Order Separately)



## Operating Range
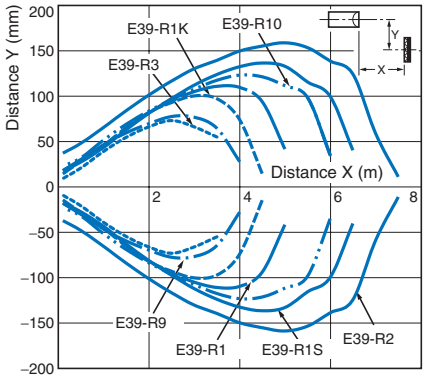
### Diffuse-reflective Models
### E3Z-D□1(D□6)

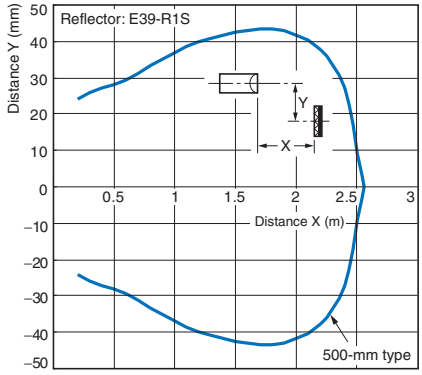


### Diffuse-reflective Models
### E3Z-D□2(D□7)

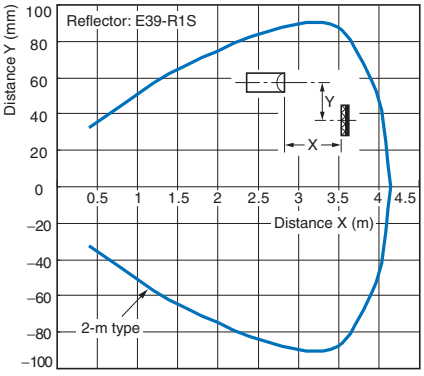


### Narrow-beam Reflective Models
### E3Z-L□1(L□6)

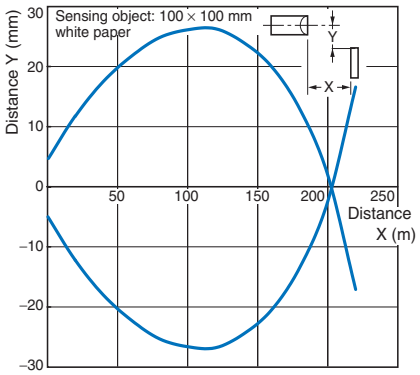


## Excess Gain vs. Set Distance

### Through-beam Models
### E3Z-T□1(T□6)/-T□A/-T□2(T□7)

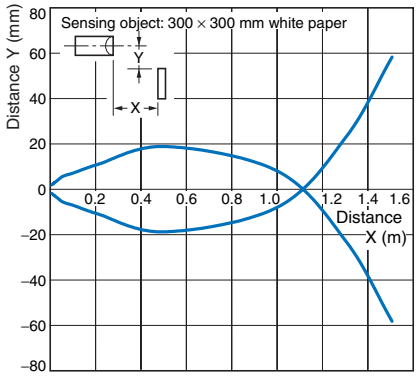


### Retro-reflective Models
### E3Z-R□1(R□6) and Reflector

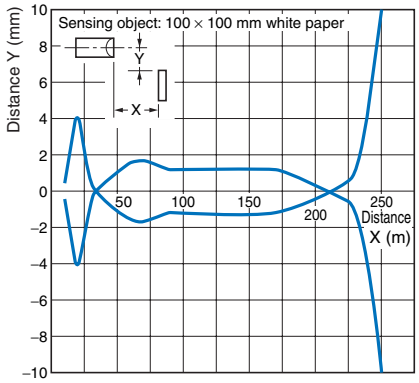


### Diffuse-reflective Models
### E3Z-D□1(D□6)

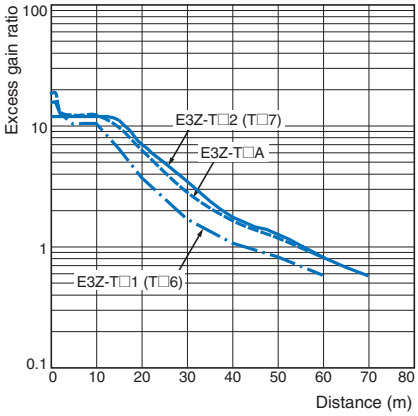


### Diffuse-reflective Models
### E3Z-D□2(D□7)

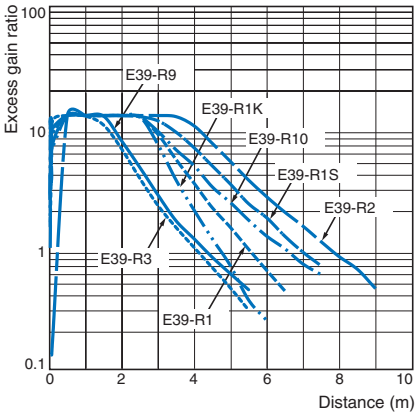


### Narrow-beam Reflective Models
### E3Z-L□1(L□6)

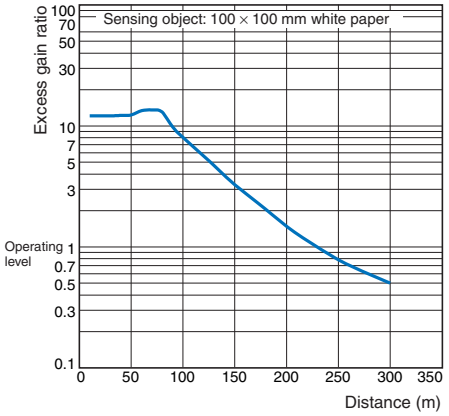


### Limited reflective Models
### E3Z-L□3(L□8)



## Excess Gain vs. Set Distance
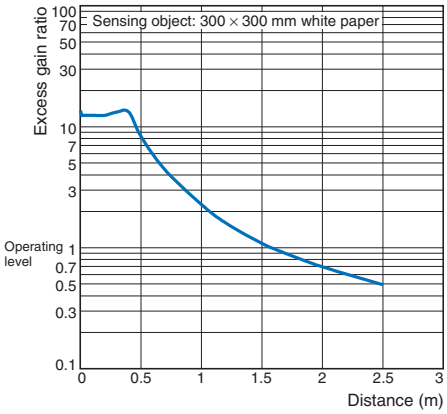
### E3Z-B□1/B□6 + E39-R1S Reflector (Order Separately)

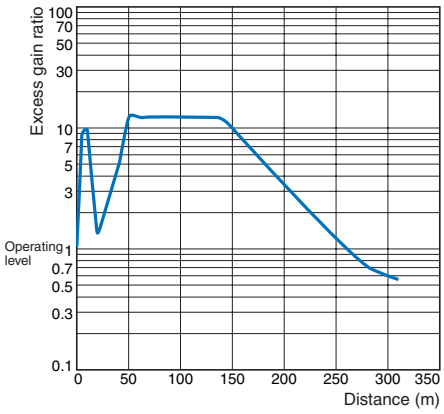


### E3Z-B□2/B□7 + E39-R1S Reflector (Order Separately)

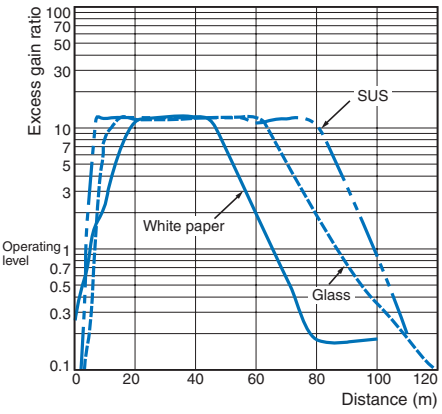


## Sensing Object Size vs. Sensing Distance

### Diffuse-reflective Models E3Z-D□1(D□6)

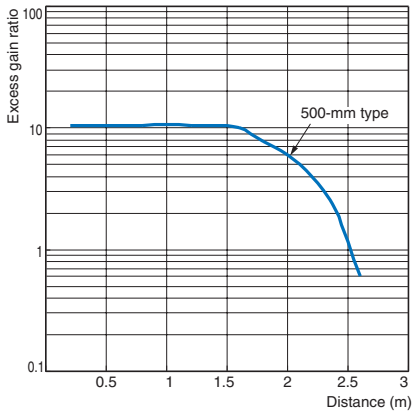


### Diffuse-reflective Models E3Z-D□2(D□7)

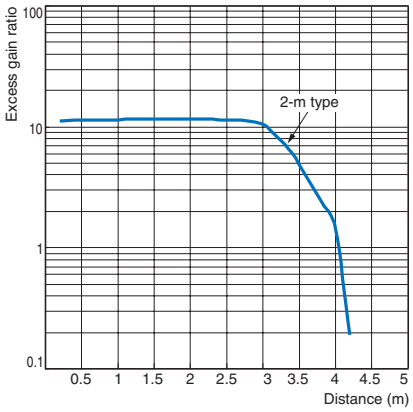


### Narrow-beam Reflective Models E3Z-L□1(L□6)

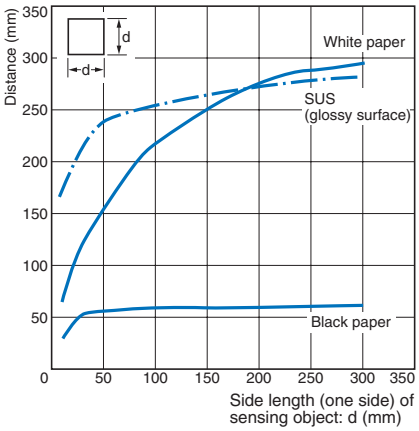


## Spot Diameter vs. Sensing Distance

### Narrow-beam Reflective Models E3Z-L□1(L□6)

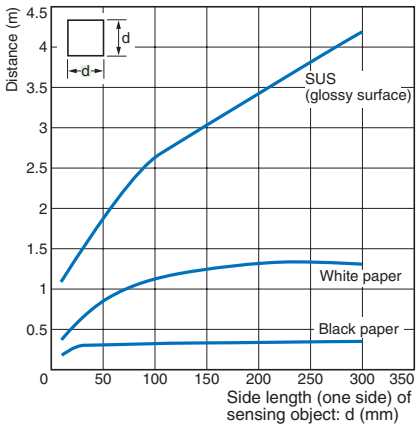


## Differential Travel vs. Sensing Distance
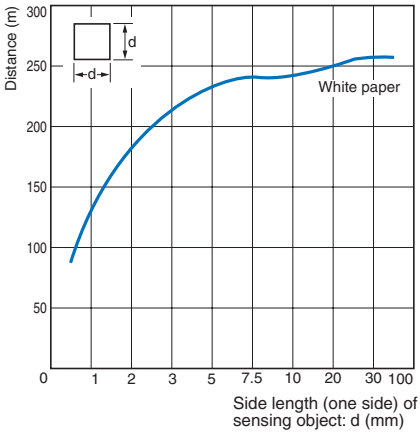
### Narrow-beam Reflective Models E3Z-L□1(L□6)



# I/O Circuit Diagrams

## NPN Output
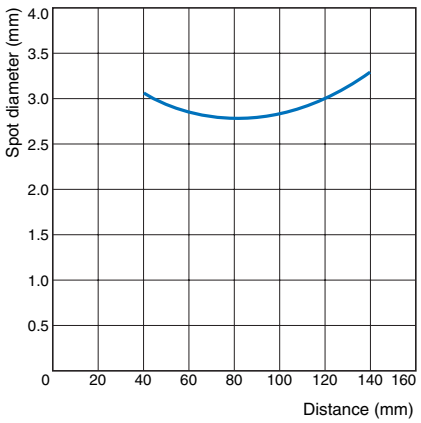
| Model* | Operation mode | Timing charts | Operation selector | Output circuit |
|---|---|---|---|---|
| E3Z-T61(K)<br>E3Z-T66<br>E3Z-T62<br>E3Z-T67<br>E3Z-T61A<br>E3Z-T66A<br>E3Z-R61(K)<br>E3Z-R66<br>E3Z-D61(K)<br>E3Z-D66<br>E3Z-D62(K)<br>E3Z-D67<br>E3Z-L61<br>E3Z-L66<br>E3Z-B61<br>E3Z-B66<br>E3Z-B62<br>E3Z-B67<br>E3Z-L63<br>E3Z-L68 | Light-ON |  | L side (LIGHT ON) | Through-beam Receivers, Retro-reflective Models, Diffuse-reflective Models, Limited reflective Models.<br> 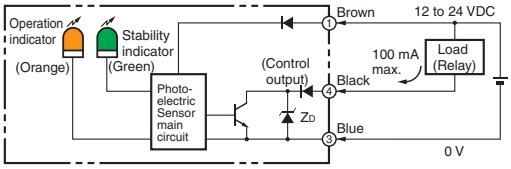 <br>Connector Pin Arrangement<br> <br>Pin 2 is not used.<br>e-CON Connector Pin Arrangement<br>  |
| | Dark-ON |  | D side (DARK ON) | |
| | Through-beam Emitter | 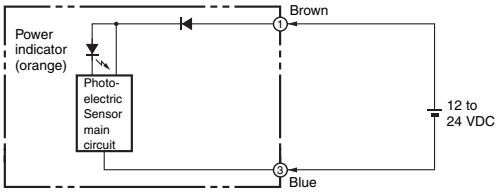 <br>Connector Pin Arrangement<br> <br>Pins 2 and 4 are not used.<br>e-CON Connector Pin Arrangement<br>  | | |
| E3Z-T62-G0<br>E3Z-T67-G0 | --- |  | --- | Through-beam Emitter<br>  <br>Connector Pin Arrangement<br>  <br>Pin 4 is not used. |

## PNP Output

| Model* | Operation mode | Timing charts | Operation selector | Output circuit |
|---|---|---|---|---|
| E3Z-T81(K)<br>E3Z-T86<br>E3Z-T82<br>E3Z-T87<br>E3Z-T81A<br>E3Z-T86A<br>E3Z-R81(K)<br>E3Z-R86<br>E3Z-D81(K)<br>E3Z-D86<br>E3Z-D82(K)<br>E3Z-D87<br>E3Z-L81<br>E3Z-L86<br>E3Z-B81<br>E3Z-B86<br>E3Z-B82<br>E3Z-B87<br>E3Z-L83<br>E3Z-L88 | Light-ON |  | L side (LIGHT ON) | Through-beam Receivers, Retro-reflective Models, Diffuse-reflective Models, Limited reflective Models.<br> 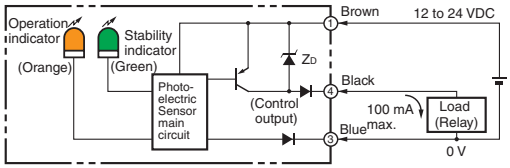 <br>Connector Pin Arrangement<br> <br>Pin 2 is not used. |
| | Dark-ON |  | D side (DARK ON) | |
| | Through-beam Emitter | 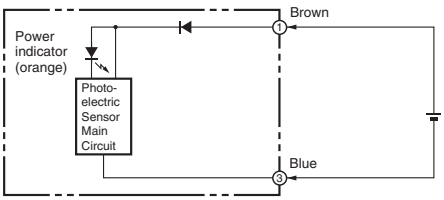 <br>Connector Pin Arrangement<br> <br>Pins 2 and 4 are not used. | | |
| E3Z-T82-G0<br>E3Z-T87-G0 | --- |  | --- | Through-beam Emitter<br>  <br>Connector Pin Arrangement<br> <br>Pin 4 is not used. |

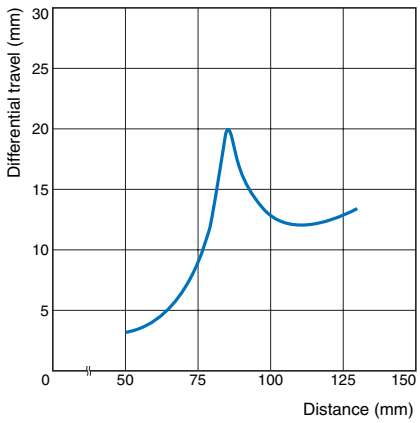* Models numbers for Through-beam Sensors (E3Z-T□□) are for sets that include both the Emitter and Receiver. The model number of the Emitter is expressed by adding "-L" to the set model number (example: E3Z-T61-L 2M), the model number of the Receiver, by adding "-D" (example: E3Z-T61-D 2M.) Refer to *Ordering Information* to confirm model numbers for Emitter and Receivers.

## Plugs (Sensor I/O Connectors)

### M8 connector




XS3F-M421-402-A
XS3F-M421-405-A
XS3F-M422-402-A
XS3F-M422-405-A

### e-CON connector




E39-ECON□M

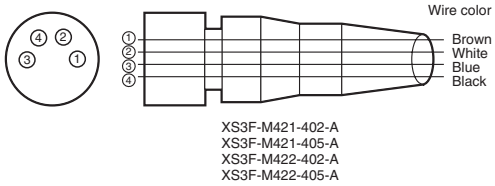E39-ECONW□M

### Pin arrangement

| Classification | Wire color | Connector pin No. | Application |
|---|---|---|---|
| DC | Brown | 1 | Power supply (+V) |
| | White | 2 | (Emission stop input) |
| | Blue | 3 | Power supply (0 V) |
| | Black | 4 | Output |

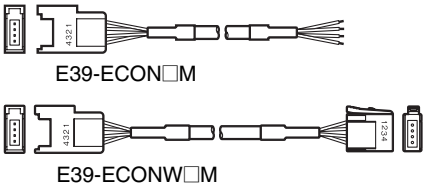Note: Pin 2 is not used.

## Nomenclature

### Through-beam Models
**E3Z-T□□ (Emitter)**
**E3Z-T□□A (Receiver)**

### Retro-reflective Models
**E3Z-R□□**
**E3Z-B□□**

### Diffuse-reflective Models
**E3Z-D□□**

### Narrow-beam Reflective Models
**E3Z-L□□**

### Limited reflective Models
**E3Z-L□□**



# Safety Precautions

**Refer to *Warranty and Limitations of Liability*.**

**⚠ WARNING**

**This product is not designed or rated for ensuring safety of persons either directly or indirectly. Do not use it for such purposes.**

## Precautions for Correct Use

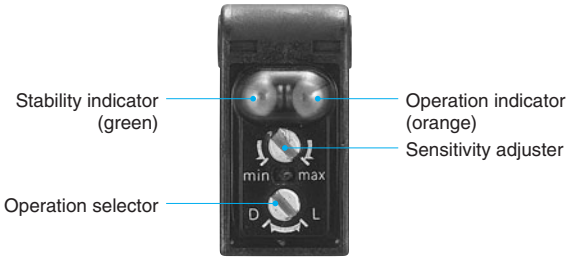Do not use the product in atmospheres or environments that exceed product ratings.

### ● Wiring

#### M8 Metal Connector

- Be sure to connect or disconnect the metal connector after turning OFF the Sensor.
- Hold the connector cover to connect or disconnect the metal connector.
- Secure the connector cover by hand. Do not use any pliers, otherwise the connector may be damaged.
- The proper tightening torque range is between 0.3 and 0.4 N·m. Be sure to tighten the connector securely, otherwise the specified degree of protection may not be maintained or the connector may be disconnected due to vibration.

### ● Mounting

#### Sensor Mounting

Use M3 screws to mount the sensor and tighten each screw to a maximum torque of 0.53 N·m.




### ● Oil-resistant Models

#### Oil Resistance

- Although the E3Z-□□□K Sensors have oil-resistant specifications, performance may be affected by certain types of oil. Refer to the following table.
- E3Z-□□□K Sensors are tested for resistance to the oils given in the following table. Refer to the information in the table when deciding which type of oil to use.

| Test oil classification | Product name | Kinematic viscosity ($mm^2/s$) at 40°C | pH |
|---|---|---|---|
| Lubricant | Velocity No.3 | 2.02 | --- |
| Water insoluble machining oil | Yushiron Oil No.2 ac | Less than 10 | |
| Water soluble machining oil | Yushiroken EC50T-3 | --- | 7 to 9.5 |
| | Yushiron Lubic HWC68 | | 7 to 9.9 |
| | Gryton 1700D | | 7 to 9.2 |
| | Yushironken S50N | | 7 to 9.8 |

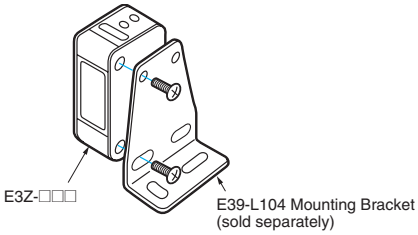Note: 1. The E3Z maintained a minimum insulation resistance of 100 MΩ after it was dipped in all the above oils for 240 hours.
2. When using the Sensors in environments subject to oils other than those listed above, use the figures for kinematic viscosity and pH from the table as general guidelines. Additives and other substances contained in oils may affect the E3Z. Be sure to consider this before use.

# Dimensions

(Unit: mm)
Tolerance class IT16 applies to dimensions in this data sheet unless otherwise specified.

## Sensors

### Through-beam*
**Pre-wired Models**
**E3Z-T61(K)**
**E3Z-T81(K)**
**E3Z-T61A**
**E3Z-T81A**
**E3Z-T62(-G0)**
**E3Z-T82(-G0)**




(Excluding -G0)

| Terminal No. | Specifications |
|---|---|
| 1 | +V |
| 2 | --- |
| 3 | 0V |
| 4 | --- |

Pins 2 and 4 are not used.

(-G0)
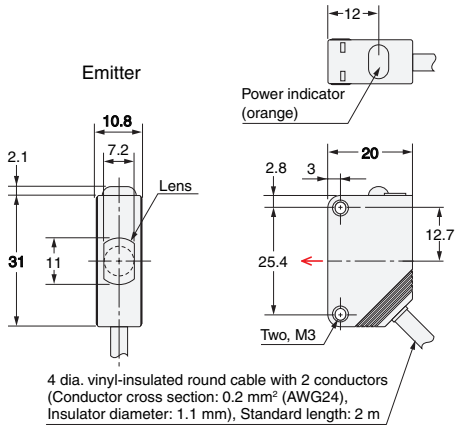
| Terminal No. | Specifications |
|---|---|
| 1 | +V |
| 2 | Input |
| 3 | 0V |
| 4 | --- |

Pin 4 is not used.




| Terminal No. | Specifications |
|---|---|
| 1 | +V |
| 2 | --- |
| 3 | 0V |
| 4 | Output |

Pin 2 is not used.

**M12 Pre-wired Connector (E3Z-T□□-M1J)**

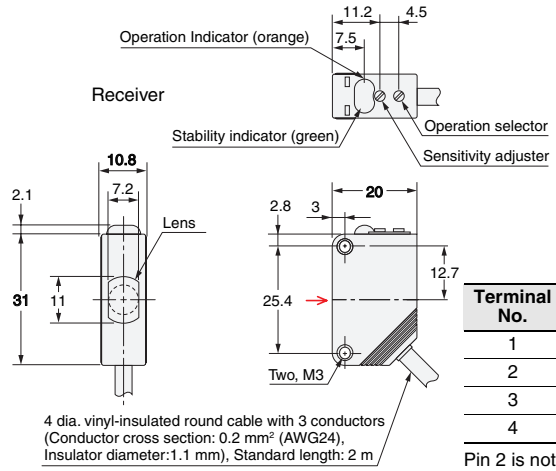


**M8 Pre-wired Connector (E3Z-T□□K-M3J)**




**Press-fit e-CON Pre-wired Connector**

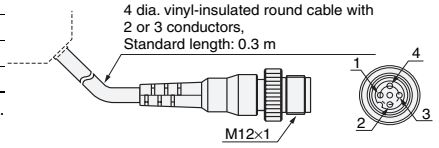


**Clamp-type e-CON Pre-wired Connector (E3Z-T61-ECON-C)**

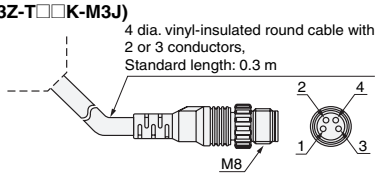


* The Emitter cable has two conductors and the Receiver cable has three conductors.

### Through-beam*
**Connector Models**
**E3Z-T66**
**E3Z-T86**
**E3Z-T66A**
**E3Z-T86A**
**E3Z-T67(-G0)**
**E3Z-T87(-G0)**




(Excluding -G0)

| Terminal No. | Specifications |
|---|---|
| 1 | +V |
| 2 | --- |
| 3 | 0V |
| 4 | --- |

Pins 2 and 4 are not used.

(-G0)
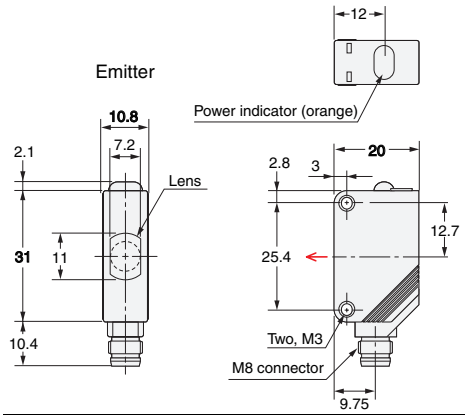
| Terminal No. | Specifications |
|---|---|
| 1 | +V |
| 2 | Input |
| 3 | 0V |
| 4 | --- |

Pin 4 is not used.




| Terminal No. | Specifications |
|---|---|
| 1 | +V |
| 2 | --- |
| 3 | 0V |
| 4 | Output |

Pin 2 is not used.

* Models numbers for Through-beam Sensors (E3Z-T□□) are for sets that include both the Emitter and Receiver.
The model number of the Emitter is expressed by adding "-L" to the set model number (example: E3Z-T61-L 2M), the model number of the Receiver, by adding "-D" (example: E3Z-T61-D 2M.) Refer to *Ordering Information* to confirm model numbers for Emitter and Receivers.

## Retro-reflective Models
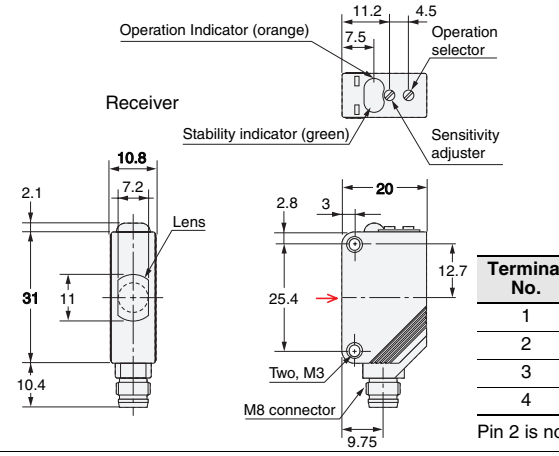
### Pre-wired Models

**E3Z-R61(K)** **E3Z-B61**
**E3Z-R81(K)** **E3Z-B81**
**E3Z-D61(K)** **E3Z-B62**
**E3Z-D81(K)** **E3Z-B82**
**E3Z-D62(K)** **E3Z-L63**
**E3Z-D82(K)** **E3Z-L83**
**E3Z-L61**
**E3Z-L81**




| Terminal No. | Specifications |
|---|---|
| 1 | +V |
| 2 | --- |
| 3 | 0V |
| 4 | Output |

**M12 Pre-wired Connector (E3Z-□□□-M1J)**




**M8 Pre-wired Connector (E3Z-T□□K-M3J)**

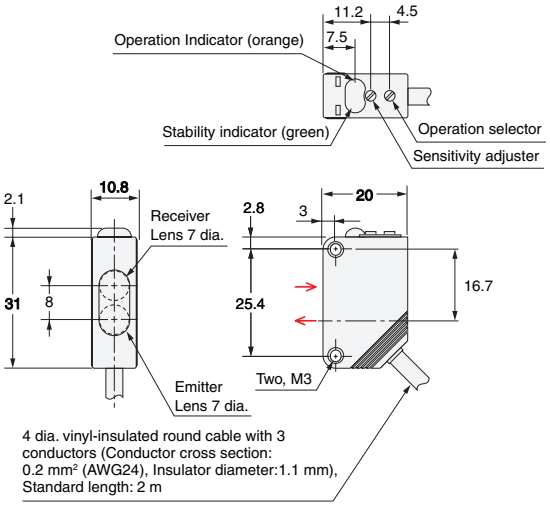


**Press-fit e-CON Pre-wired Connector**

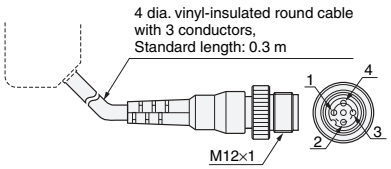


**Clamp-type e-CON pre-wired connectors (E3Z-□6□-ECON-C)**

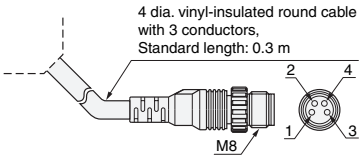


## Retro-reflective Models

### Connector Models

**E3Z-R66** **E3Z-B66**
**E3Z-R86** **E3Z-B86**
**E3Z-D66** **E3Z-B67**
**E3Z-D86** **E3Z-B87**
**E3Z-D67** **E3Z-L68**
**E3Z-D87** **E3Z-L88**
**E3Z-L66**
**E3Z-L86**




| Terminal No. | Specifications |
|---|---|
| 1 | +V |
| 2 | --- |
| 3 | 0V |
| 4 | Output |

Note: The lens for the E3Z-D□1/D□6/L□□/B□□ is red. The lens for the E3Z-D□2/D□7 is black.

## e-CON Connector Configurations

| Wiring method | Sensor connectors |
|---|---|
| **Press-fit** | 37104-3122-000FL (made by Sumitomo 3M) |
| **Clamp** | XN2A-1430 (made by OMRON) |
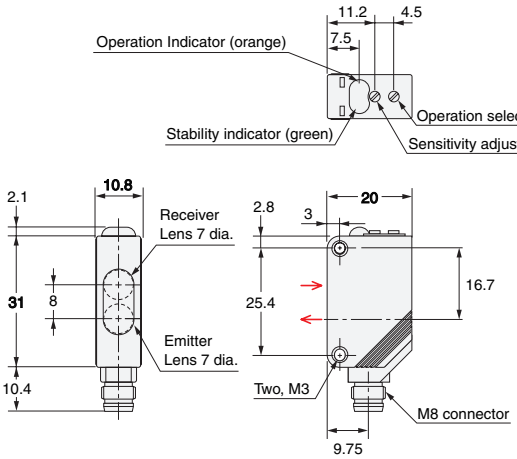
## Accessories (Order Separately)

### Slits
**E39-S65A**
**E39-S65B**
**E39-S65C**




| Model | Size A | Material |
|---|---|---|
| **E39-S65A** | 0.5 dia. | SUS301 stainless steel |
| **E39-S65B** | 1.0 dia. | |
| **E39-S65C** | 2.0 dia. | |

### Slits
**E39-S65D**
**E39-S65E**
**E39-S65F**




| Model | Size A | Material |
|---|---|---|
| **E39-S65D** | 0.5 | SUS301 stainless steel |
| **E39-S65E** | 1.0 | |
| **E39-S65F** | 2.0 | |

### Slits
**E39-L44**

(Mounting dimensions)

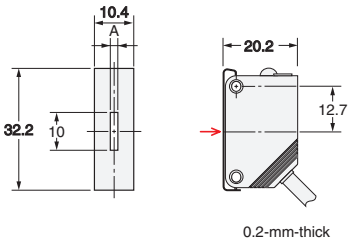


### Slits
**E39-L104**

(Mounting dimensions)




## Mounting Brackets

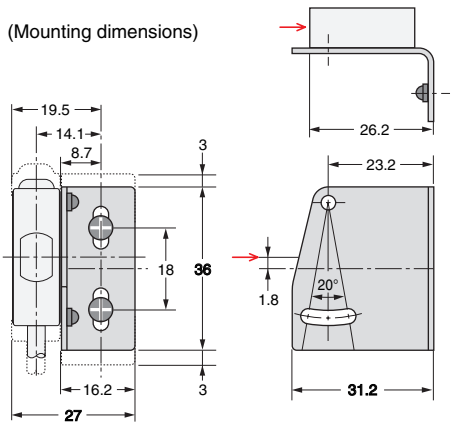Refer to *E39-R* for details.

## Sensor I/O Connectors

Refer to *XS2□* and *XS3□* for details.
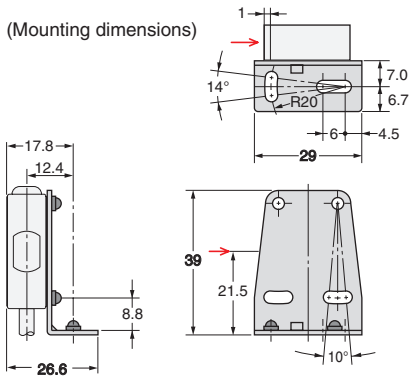
## Read and Understand This Catalog

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

## Warranty and Limitations of Liability

### WARRANTY

OMRON's exclusive warranty is that the products are free from defects in materials and workmanship for a period of one year (or other period if specified) from date of sale by OMRON.

OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, REGARDING NON-INFRINGEMENT, MERCHANTABILITY, OR FITNESS FOR PARTICULAR PURPOSE OF THE PRODUCTS. ANY BUYER OR USER ACKNOWLEDGES THAT THE BUYER OR USER ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. OMRON DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED.

### LIMITATIONS OF LIABILITY

OMRON SHALL NOT BE RESPONSIBLE FOR SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED ON CONTRACT, WARRANTY, NEGLIGENCE, OR STRICT LIABILITY.

In no event shall the responsibility of OMRON for any act exceed the individual price of the product on which liability is asserted.

IN NO EVENT SHALL OMRON BE RESPONSIBLE FOR WARRANTY, REPAIR, OR OTHER CLAIMS REGARDING THE PRODUCTS UNLESS OMRON'S ANALYSIS CONFIRMS THAT THE PRODUCTS WERE PROPERLY HANDLED, STORED, INSTALLED, AND MAINTAINED AND NOT SUBJECT TO CONTAMINATION, ABUSE, MISUSE, OR INAPPROPRIATE MODIFICATION OR REPAIR.

## Application Considerations

### SUITABILITY FOR USE

OMRON shall not be responsible for conformity with any standards, codes, or regulations that apply to the combination of products in the customer's application or use of the products.

At the customer's request, OMRON will provide applicable third party certification documents identifying ratings and limitations of use that apply to the products. This information by itself is not sufficient for a complete determination of the suitability of the products in combination with the end product, machine, system, or other application or use.

The following are some examples of applications for which particular attention must be given. This is not intended to be an exhaustive list of all possible uses of the products, nor is it intended to imply that the uses listed may be suitable for the products:

- Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this catalog.
- Nuclear energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
- Systems, machines, and equipment that could present a risk to life or property.

Please know and observe all prohibitions of use applicable to the products.

NEVER USE THE PRODUCTS FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCTS ARE PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

### PROGRAMMABLE PRODUCTS

OMRON shall not be responsible for the user's programming of a programmable product, or any consequence thereof.

## Disclaimers

### CHANGE IN SPECIFICATIONS

Product specifications and accessories may be changed at any time based on improvements and other reasons.

It is our practice to change model numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the products may be changed without any notice. When in doubt, special model numbers may be assigned to fix or establish key specifications for your application on your request. Please consult with your OMRON representative at any time to confirm actual specifications of purchased products.

### DIMENSIONS AND WEIGHTS

Dimensions and weights are nominal and are not to be used for manufacturing purposes, even when tolerances are shown.

### PERFORMANCE DATA

Performance data given in this catalog is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of OMRON's test conditions, and the users must correlate it to actual application requirements. Actual performance is subject to the OMRON Warranty and Limitations of Liability.

### ERRORS AND OMISSIONS

The information in this document has been carefully checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical, or proofreading errors, or omissions.

2011.8

**In the interest of product improvement, specifications are subject to change without notice.**

**OMRON Corporation**
**Industrial Automation Company**

**http://www.ia.omron.com/**

(c)Copyright OMRON Corporation 2011 All Right Reserved.

# OCEAN CHIPS
## Океан Электроники
## Поставка электронных компонентов

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «**JONHON**», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «**FORSTAR**».

AVIC JONHON

**«JONHON»** (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

**«FORSTAR»** (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).

FORSTAR®

Телефон: 8 (812) 309-75-97 (многоканальный)
Факс: 8 (812) 320-03-32
Электронная почта: ocean@oceanchips.ru
Web: http://oceanchips.ru/
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А