

TOSHIBA Field-Effect Transistor Silicon P-Channel MOS Type (U-MOSVI)

# SSM3J332R

○Power Management Switch Applications

- 1.8-V drive
- Low ON-resistance:  $R_{DS(ON)} = 144\text{ m}\Omega$  (max) (@ $V_{GS} = -1.8\text{ V}$ )  
 $R_{DS(ON)} = 72.0\text{ m}\Omega$  (max) (@ $V_{GS} = -2.5\text{ V}$ )  
 $R_{DS(ON)} = 50.0\text{ m}\Omega$  (max) (@ $V_{GS} = -4.5\text{ V}$ )  
 $R_{DS(ON)} = 42.0\text{ m}\Omega$  (max) (@ $V_{GS} = -10\text{ V}$ )

**Absolute Maximum Ratings (Ta = 25°C)**

Characteristic	Symbol	Rating	Unit
Drain-Source voltage	$V_{DSS}$	-30	V
Gate-Source voltage	$V_{GSS}$	$\pm 12$	V
Drain current	DC	$I_D$ (Note 1)	-6.0
	Pulse	$I_{DP}$ (Note 1,2)	-24.0
Power dissipation	$P_D$ (Note 3)	$t < 10\text{ s}$	1
			2
Channel temperature	$T_{ch}$	150	°C
Storage temperature range	$T_{stg}$	-55 to 150	°C

Note: Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings.

Please design the appropriate reliability upon reviewing the Toshiba Semiconductor Reliability Handbook (“Handling Precautions”/“Derating Concept and Methods”) and individual reliability data (i.e. reliability test report and estimated failure rate, etc).


Note 1: The channel temperature should not exceed 150°C during use.

Note 2:  $PW \leq 1\text{ ms}$ , Duty  $\leq 1\%$

Note 3: Mounted on FR4 board.


(25.4 mm × 25.4 mm × 1.6 mm, Cu Pad: 645 mm<sup>2</sup>)

Unit: mm

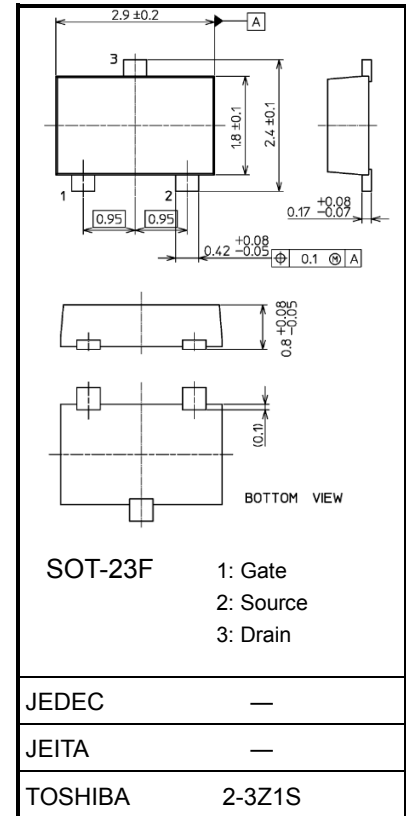


Weight: 11 mg (typ.)

**Marking**



**Equivalent Circuit (Top View)**



Start of commercial production  
2010-08

## Electrical Characteristics (Ta = 25°C)


Characteristic	Symbol	Test Conditions	Min	Typ.	Max	Unit	
Drain-Source breakdown voltage	V (BR) DSS	I <sub>D</sub> = -10 mA, V <sub>GS</sub> = 0 V	-30	—	—	V	
	V (BR) DSX	I <sub>D</sub> = -10 mA, V <sub>GS</sub> = 8 V (Note 5)	-22	—	—	V	
Drain cut-off current	I <sub>DSS</sub>	V <sub>DS</sub> = -30 V, V <sub>GS</sub> = 0 V	—	—	-1	μA	
Gate leakage current	I <sub>GSS</sub>	V <sub>GS</sub> = ±10 V, V <sub>DS</sub> = 0 V	—	—	±1	μA	
Gate threshold voltage	V <sub>th</sub>	V <sub>DS</sub> = -3 V, I <sub>D</sub> = -1 mA	-0.5	—	-1.2	V	
Forward transfer admittance	Y <sub>fs</sub>	V <sub>DS</sub> = -3 V, I <sub>D</sub> = -2.5 A (Note 4)	5.7	11.3	—	S	
Drain-source ON-resistance	R <sub>DS (ON)</sub>	I <sub>D</sub> = -5.0 A, V <sub>GS</sub> = -10 V (Note 4)	—	36.0	42.0	mΩ	
		I <sub>D</sub> = -4.0 A, V <sub>GS</sub> = -4.5 V (Note 4)	—	42.5	50.0		
		I <sub>D</sub> = -2.5 A, V <sub>GS</sub> = -2.5 V (Note 4)	—	57.5	72.0		
		I <sub>D</sub> = -0.5 A, V <sub>GS</sub> = -1.8 V (Note 4)	—	76.5	144		
Input capacitance	C <sub>iss</sub>	V <sub>DS</sub> = -15 V, V <sub>GS</sub> = 0 V f = 1 MHz	—	560	—	pF	
Output capacitance	C <sub>oss</sub>		—	80	—		
Reverse transfer capacitance	C <sub>rss</sub>		—	65	—		
Switching time	Turn-on time	t <sub>on</sub>	V <sub>DD</sub> = -15 V, I <sub>D</sub> = -2.0 A V <sub>GS</sub> = 0 to -4.5 V, R <sub>G</sub> = 10 Ω	—	15	—	ns
	Turn-off time	t <sub>off</sub>		—	75	—	
Total Gate Charge	Q <sub>g</sub>	V <sub>DD</sub> = -15 V, I <sub>D</sub> = -6.0 A, V <sub>GS</sub> = -4.5 V	—	8.2	—	nC	
Gate-Source Charge	Q <sub>gs1</sub>		—	1.1	—		
Gate-Drain Charge	Q <sub>gd</sub>		—	2.2	—		
Drain-Source forward voltage	V <sub>DSSF</sub>	I <sub>D</sub> = 6.0 A, V <sub>GS</sub> = 0 V (Note 4)	—	0.90	1.2	V	

Note4: Pulse test

Note5: If a forward bias is applied between gate and source, this device enters V(BR)DSX mode. Note that the drain-source breakdown voltage is lowered in this mode.


## Switching Time Test Circuit

### (a) Test Circuit

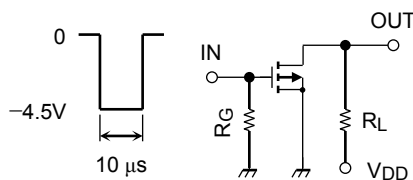


V<sub>DD</sub> = -15 V  
R<sub>G</sub> = 10 Ω  
Duty ≤ 1%  
V<sub>IN</sub>: t<sub>r</sub>, t<sub>f</sub> < 5 ns  
Common Source  
T<sub>a</sub> = 25°C

### (b) V<sub>IN</sub>

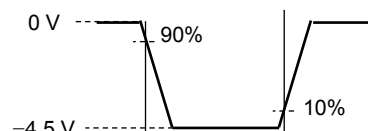

### (c) V<sub>OUT</sub>

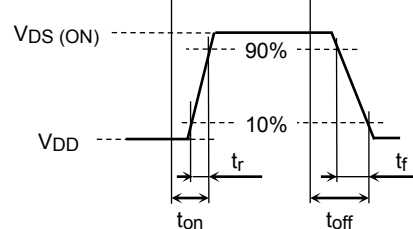

## Notice on Usage







Let V<sub>th</sub> be the voltage applied between gate and source that causes the drain current (I<sub>D</sub>) to be low (-1 mA for the SSM3J332R). Then, for normal switching operation, V<sub>GS(on)</sub> must be higher than V<sub>th</sub>, and V<sub>GS(off)</sub> must be lower than V<sub>th</sub>. This relationship can be expressed as: V<sub>GS(off)</sub> < V<sub>th</sub> < V<sub>GS(on)</sub>.







Take this into consideration when using the device.




## Handling Precaution

When handling individual devices that are not yet mounted on a circuit board, make sure that the environment is protected against electrostatic discharge. Operators should wear antistatic clothing, and containers and other objects that come into direct contact with devices should be made of antistatic materials.

Thermal resistance R<sub>th</sub> (ch-a) and power dissipation PD vary depending on board material, board area, board thickness and pad area. When using this device, please take heat dissipation into consideration

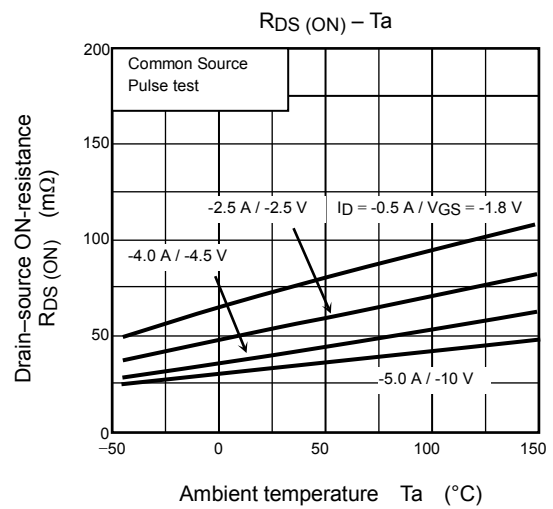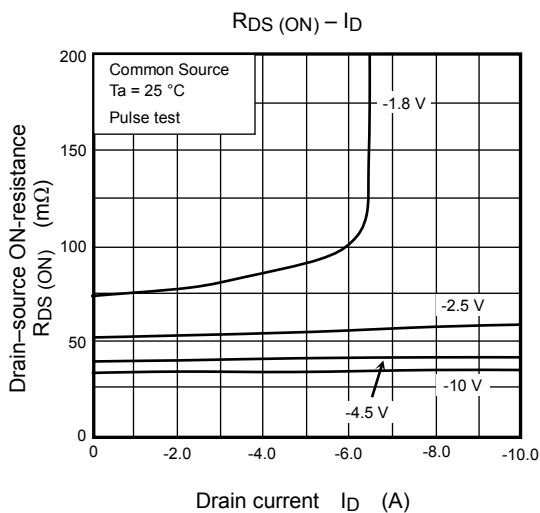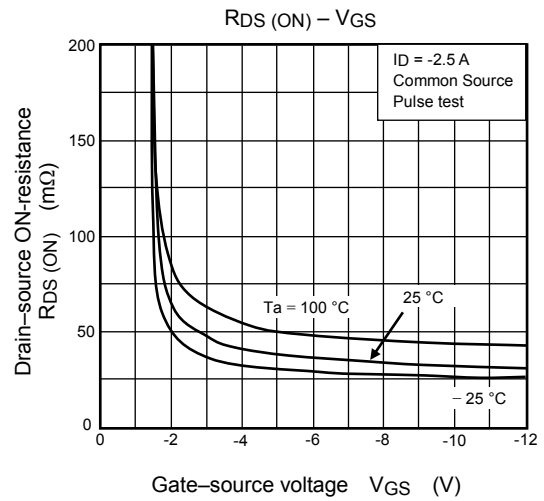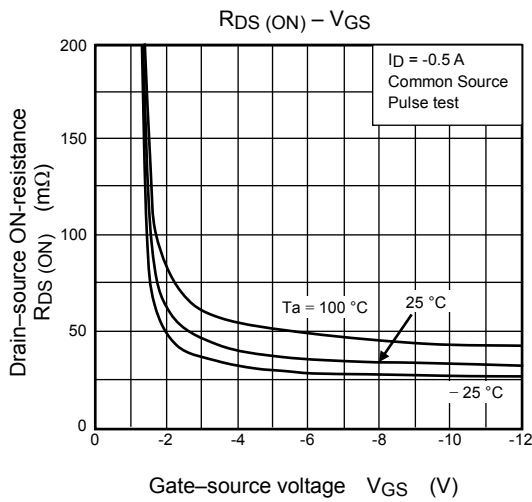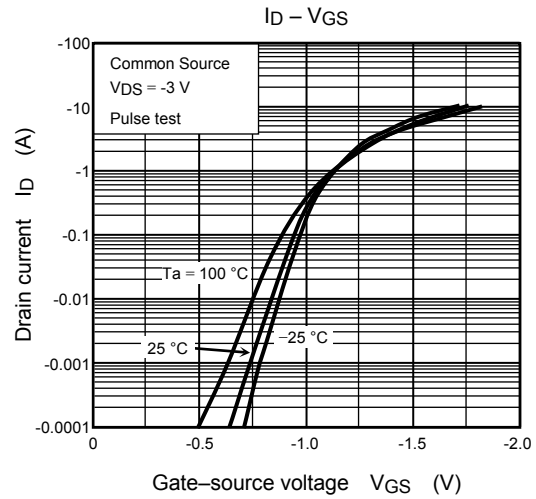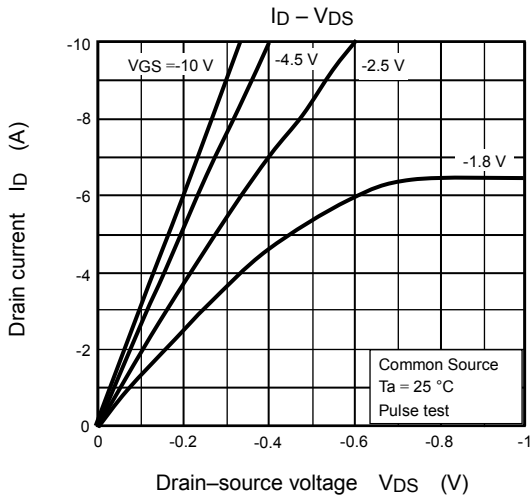

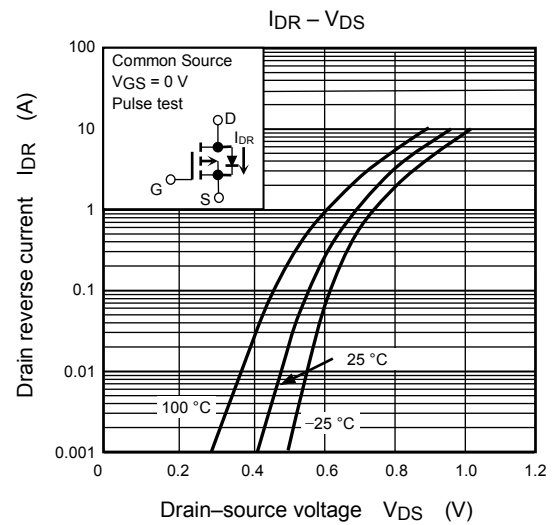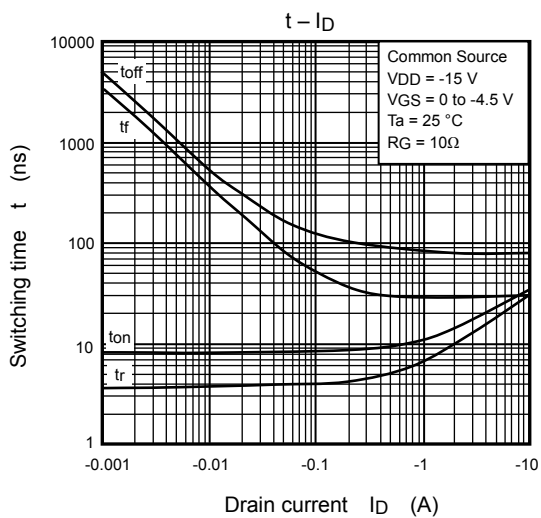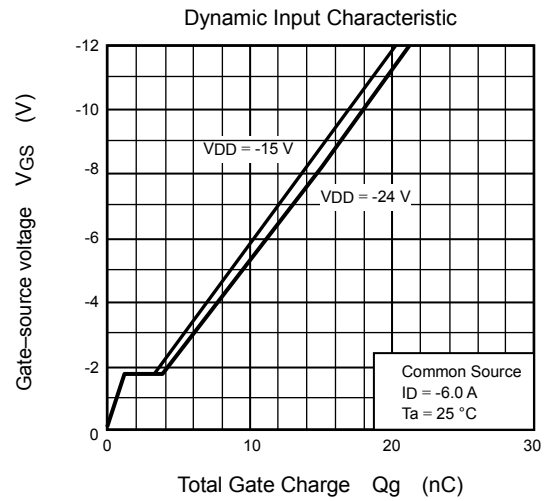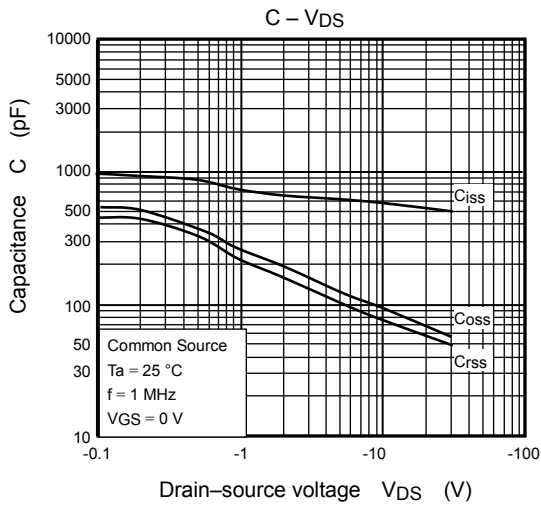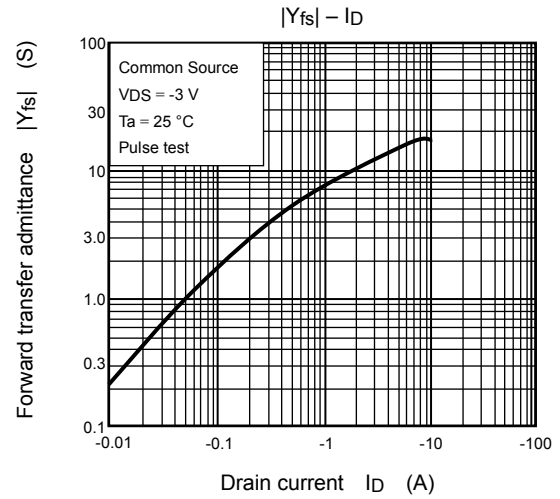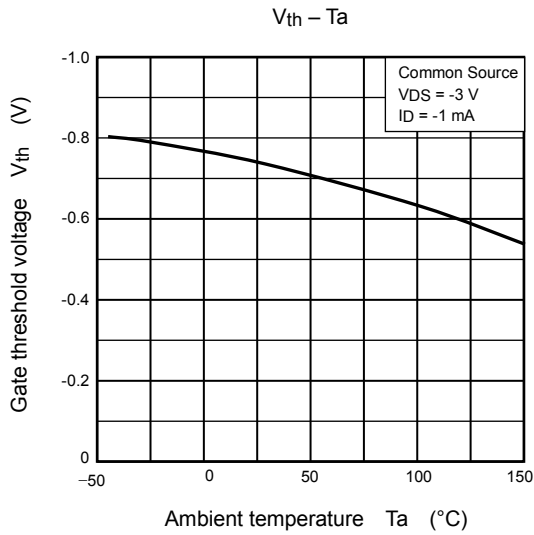

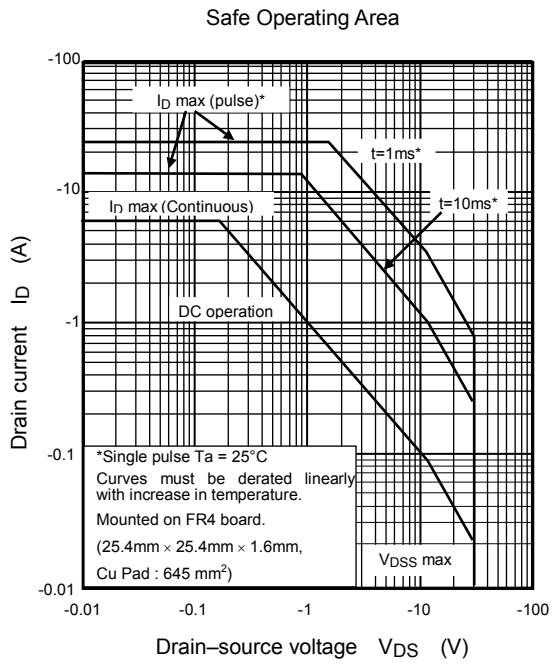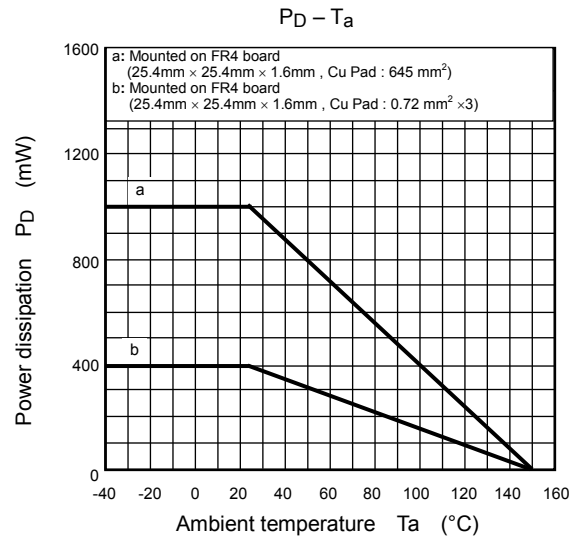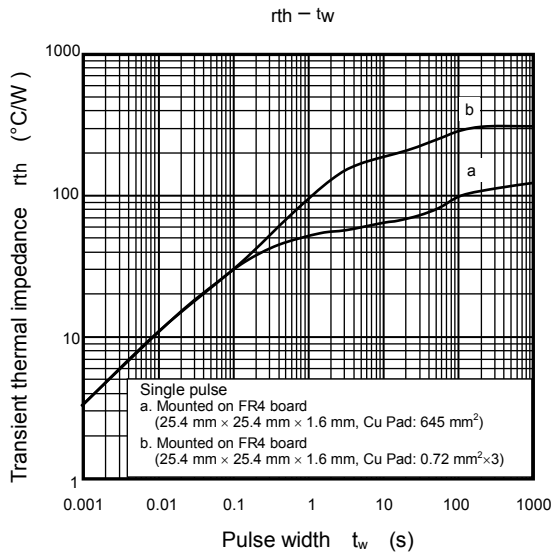

## RESTRICTIONS ON PRODUCT USE

Toshiba Corporation and its subsidiaries and affiliates are collectively referred to as "TOSHIBA". Hardware, software and systems described in this document are collectively referred to as "Product".

- TOSHIBA reserves the right to make changes to the information in this document and related Product without notice.
- This document and any information herein may not be reproduced without prior written permission from TOSHIBA. Even with TOSHIBA's written permission, reproduction is permissible only if reproduction is without alteration/omission.
- Though TOSHIBA works continually to improve Product's quality and reliability, Product can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. Before customers use the Product, create designs including the Product, or incorporate the Product into their own applications, customers must also refer to and comply with (a) the latest versions of all relevant TOSHIBA information, including without limitation, this document, the specifications, the data sheets and application notes for Product and the precautions and conditions set forth in the "TOSHIBA Semiconductor Reliability Handbook" and (b) the instructions for the application with which the Product will be used with or for. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this Product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, algorithms, sample application circuits, or any other referenced documents; and (c) validating all operating parameters for such designs and applications. **TOSHIBA ASSUMES NO LIABILITY FOR CUSTOMERS' PRODUCT DESIGN OR APPLICATIONS.**
- **PRODUCT IS NEITHER INTENDED NOR WARRANTED FOR USE IN EQUIPMENTS OR SYSTEMS THAT REQUIRE EXTRAORDINARILY HIGH LEVELS OF QUALITY AND/OR RELIABILITY, AND/OR A MALFUNCTION OR FAILURE OF WHICH MAY CAUSE LOSS OF HUMAN LIFE, BODILY INJURY, SERIOUS PROPERTY DAMAGE AND/OR SERIOUS PUBLIC IMPACT ("UNINTENDED USE").** Except for specific applications as expressly stated in this document, Unintended Use includes, without limitation, equipment used in nuclear facilities, equipment used in the aerospace industry, lifesaving and/or life supporting medical equipment, equipment used for automobiles, trains, ships and other transportation, traffic signaling equipment, equipment used to control combustions or explosions, safety devices, elevators and escalators, and devices related to power plant. **IF YOU USE PRODUCT FOR UNINTENDED USE, TOSHIBA ASSUMES NO LIABILITY FOR PRODUCT.** For details, please contact your TOSHIBA sales representative or contact us via our website.
- Do not disassemble, analyze, reverse-engineer, alter, modify, translate or copy Product, whether in whole or in part.
- Product shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable laws or regulations.
- The information contained herein is presented only as guidance for Product use. No responsibility is assumed by TOSHIBA for any infringement of patents or any other intellectual property rights of third parties that may result from the use of Product. No license to any intellectual property right is granted by this document, whether express or implied, by estoppel or otherwise.
- **ABSENT A WRITTEN SIGNED AGREEMENT, EXCEPT AS PROVIDED IN THE RELEVANT TERMS AND CONDITIONS OF SALE FOR PRODUCT, AND TO THE MAXIMUM EXTENT ALLOWABLE BY LAW, TOSHIBA (1) ASSUMES NO LIABILITY WHATSOEVER, INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION AND LOSS OF DATA, AND (2) DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO SALE, USE OF PRODUCT, OR INFORMATION, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY OF INFORMATION, OR NONINFRINGEMENT.**
- Do not use or otherwise make available Product or related software or technology for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). Product and related software and technology may be controlled under the applicable export laws and regulations including, without limitation, the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and regulations.
- Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. Please use Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. **TOSHIBA ASSUMES NO LIABILITY FOR DAMAGES OR LOSSES OCCURRING AS A RESULT OF NONCOMPLIANCE WITH APPLICABLE LAWS AND REGULATIONS.**

---

**TOSHIBA ELECTRONIC DEVICES & STORAGE CORPORATION**

<https://toshiba.semicon-storage.com/>

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Toshiba:](#)

[SSM3J332R,LF](#)

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А