



### Features

- Six and eight channels of EMI filtering with integrated ESD protection
- 0.4mm pitch, 15-bump, 2.360mm x 1.053mm footprint Chip Scale Package (CM1442-06)
- 0.4mm pitch, 20-bump, 3.160mm x 1.053mm footprint Chip Scale Package (CM1442-08)
- Pi-style EMI filters in a capacitor-resistor-capacitor (C-R-C) network
- $\pm 15$ kV ESD protection on each channel (IEC 61000-4-2 Level 4, contact discharge)
- $\pm 30$ kV ESD protection on each channel (HBM)
- Greater than 30dB attenuation (typical) at 1 GHz
- Chip Scale Package features extremely low lead inductance for optimum filter and ESD performance
- *OptiGuard*<sup>™</sup> coated for improved reliability at assembly
- Lead-free version available

### Applications

- LCD and Camera data lines in mobile handsets
- I/O port protection for mobile handsets, notebook computers, PDAs etc.
- EMI filtering for data ports in cell phones, PDAs or notebook computers.
- Wireless handsets
- Handheld PCs/PDAs
- LCD and camera modules


### Product Description

The CM1442 is a family of pi-style EMI filter arrays with ESD protection, which integrates six and eight filters (C-R-C) in Chip Scale Package form factor with 0.40mm pitch. The CM1442 has component values of 15pF-100 $\Omega$ -15pF per channel. The CM1442 has a cut-off frequency of 120MHz and can be used in applications where the data rates are as high as 48Mbps. The parts include avalanche-type ESD diodes on every pin, which provide a very high level of protection for sensitive electronic components that may be subjected to electrostatic discharge (ESD). The ESD protection diodes safely dissipate ESD strikes of  $\pm 15$ kV, well beyond the maximum requirement of the IEC61000-4-2 international standard. Using the MIL-STD-883 (Method 3015) specification for Human Body Model (HBM) ESD, the pins are protected for contact discharges at greater than  $\pm 30$ kV.

This device is particularly well suited for portable electronics (e.g. wireless handsets, PDAs, notebook computers) because of its small package format and easy-to-use pin assignments. In particular, the CM1442 is ideal for EMI filtering and protecting data and control lines for the I/O data ports, LCD display and camera interface in mobile handsets.

The CM1442 incorporates *OptiGuard*<sup>™</sup> which results in improved reliability at assembly. The CM1442 is available in a space-saving, low-profile Chip Scale Package with optional lead-free finishing. It is manufactured with a 0.40mm pitch and 0.25mm CSP solder ball to provide up to 28% board space saving versus competing CSP devices with 0.50mm pitch and 0.30mm CSP solder ball.

**Electrical Schematic**

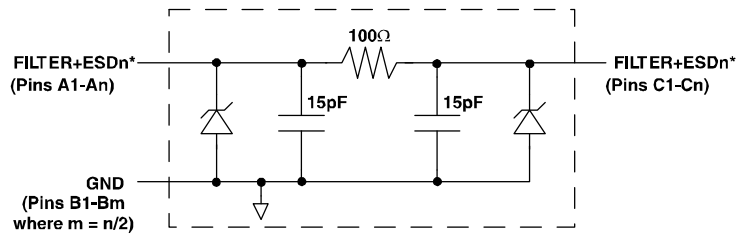


\* See P package/Pinout Diagram for expanded pin information.

**1 of 6 or 8 EMI/RFI + ESD Channels**

**PACKAGE / PINOUT DIAGRAMS**


**TOP VIEW**  
(Bumps Down View)

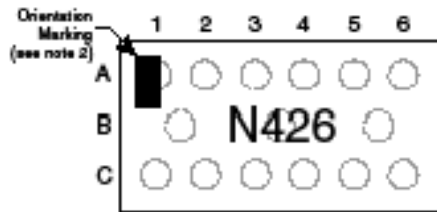

**BOTTOM VIEW**  
(Bumps Up View)



CM1442-06CS/CP  
15 Bump CSP Package

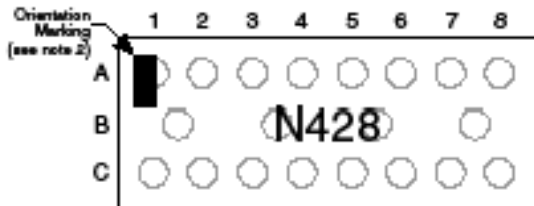

CM1442-08CS/CP  
20 Bump CSP Package

Notes:

- 1) These drawings are not to scale.
- 2) Lead-free devices are specified by using a "+" character for the top side orientation mark.

**PIN DESCRIPTIONS**

PIN(s)	NAME	DESCRIPTION	PIN(s)	NAME	DESCRIPTION
A1	FILTER1	Filter + ESD Channel 1	C1	FILTER1	Filter + ESD Channel 1
A2	FILTER2	Filter + ESD Channel 2	C2	FILTER2	Filter + ESD Channel 2
A3	FILTER3	Filter + ESD Channel 3	C3	FILTER3	Filter + ESD Channel 3
A4	FILTER4	Filter + ESD Channel 4	C4	FILTER4	Filter + ESD Channel 4
A5	FILTER5	Filter + ESD Channel 5	C5	FILTER5	Filter + ESD Channel 5
A6	FILTER6	Filter + ESD Channel 6	C6	FILTER6	Filter + ESD Channel 6
A7	FILTER7	Filter + ESD Channel 7	C7	FILTER7	Filter + ESD Channel 7
A8	FILTER8	Filter + ESD Channel 8	C8	FILTER8	Filter + ESD Channel 8
B1-B4	GND	Device Ground			

**Ordering Information**

**PART NUMBERING INFORMATION**

Bumps	Package	Standard Finish		Lead-free Finish <sup>2</sup>	
		Ordering Part Number <sup>1</sup>	Part Marking	Ordering Part Number <sup>1</sup>	Part Marking
15	CSP	CM1442-06CS	N426	CM1442-06CP	N426
20	CSP	CM1442-08CS	N428	CM1442-08CP	N428

Note 1: Parts are shipped in Tape & Reel form unless otherwise specified.

Note 2: Lead-free devices are specified by using a "+" character for the top side orientation mark.

## Specifications

### ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNITS
Storage Temperature Range	-65 to +150	°C
DC Power per Resistor	100	mW
DC Package Power Rating	500	mW

### STANDARD OPERATING CONDITIONS

PARAMETER	RATING	UNITS
Operating Temperature Range	-40 to +85	°C

### ELECTRICAL OPERATING CHARACTERISTICS (SEE NOTE1)

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
R	Resistance		80	100	120	Ω
C <sub>TOTAL</sub>	Total Channel Capacitance	At 2.5VDC Reverse Bias, 1MHz, 30mVAC	24	30	36	pF
C	Capacitance C1	At 2.5VDC Reverse Bias, 1MHz, 30mVAC	12	15	18	pF
V <sub>DIODE</sub>	Standoff Voltage	I <sub>DIODE</sub> =10μA		6.0		V
I <sub>LEAK</sub>	Diode Leakage Current (reverse bias)	V <sub>DIODE</sub> = 3.3V		0.1	1	μA
V <sub>SIG</sub>	Signal Clamp Voltage Positive Clamp Negative Clamp	I <sub>LOAD</sub> = 10mA I <sub>LOAD</sub> = -10mA	5.6 -1.5	6.8 -0.8	9.0 -0.4	V V
V <sub>ESD</sub>	In-system ESD Withstand Voltage a) Human Body Model, MIL-STD-883, Method 3015 b) Contact Discharge per IEC 61000-4-2 Level 4	Notes 2 and 3	±30 ±15			kV kV
R <sub>DYN</sub>	Dynamic Resistance Positive Negative			2.3 0.9		Ω Ω
f <sub>C</sub>	Cut-off Frequency Z <sub>SOURCE</sub> =50Ω, Z <sub>LOAD</sub> =50Ω	R=100Ω, C=15pF		115		MHz

Note 1: T<sub>A</sub>=25°C unless otherwise specified.

Note 2: ESD applied to input and output pins with respect to GND, one at a time.

Note 3: Unused pins are left open.

## Performance Information

Typical Filter Performance ( $T_A=25^\circ\text{C}$ , DC Bias=0V, 50 Ohm Environment)

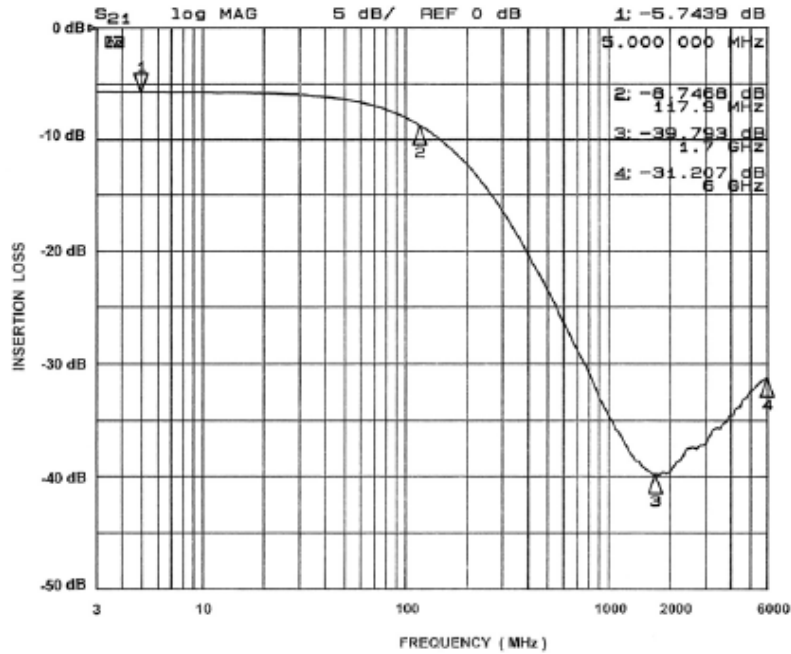


Figure 1. Insertion Loss vs. Frequency (A1-C1 to GND B1)

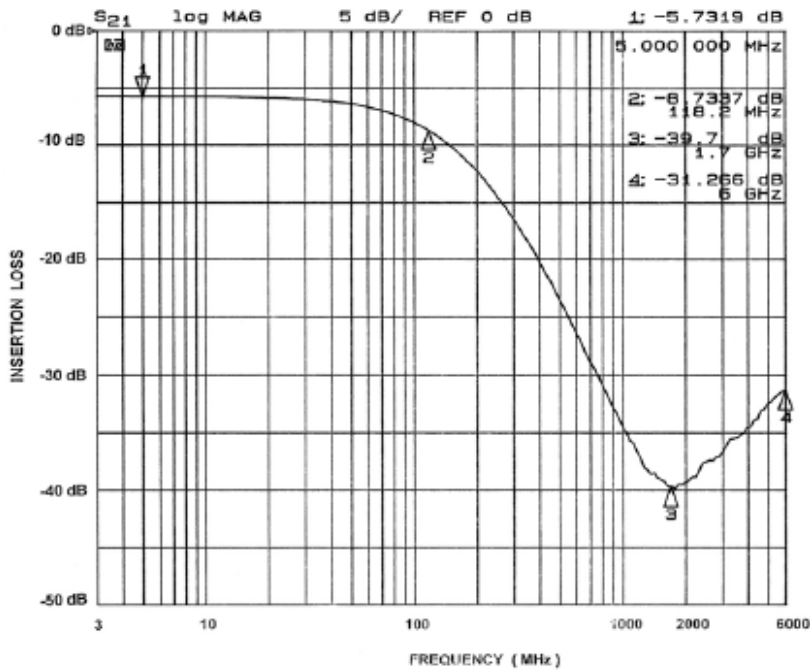


Figure 2. Insertion Loss vs. Frequency (A2-C2 to GND B1)

## Performance Information (cont'd)

Typical Filter Performance ( $T_A=25^\circ\text{C}$ , DC Bias=0V, 50 Ohm Environment)

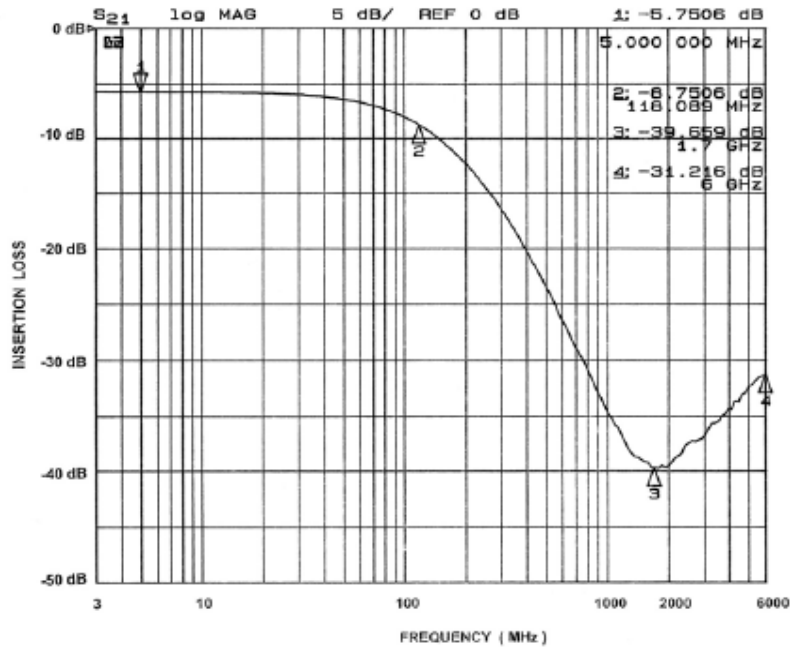


Figure 3. Insertion Loss vs. Frequency (A3-C3 to GND B2)

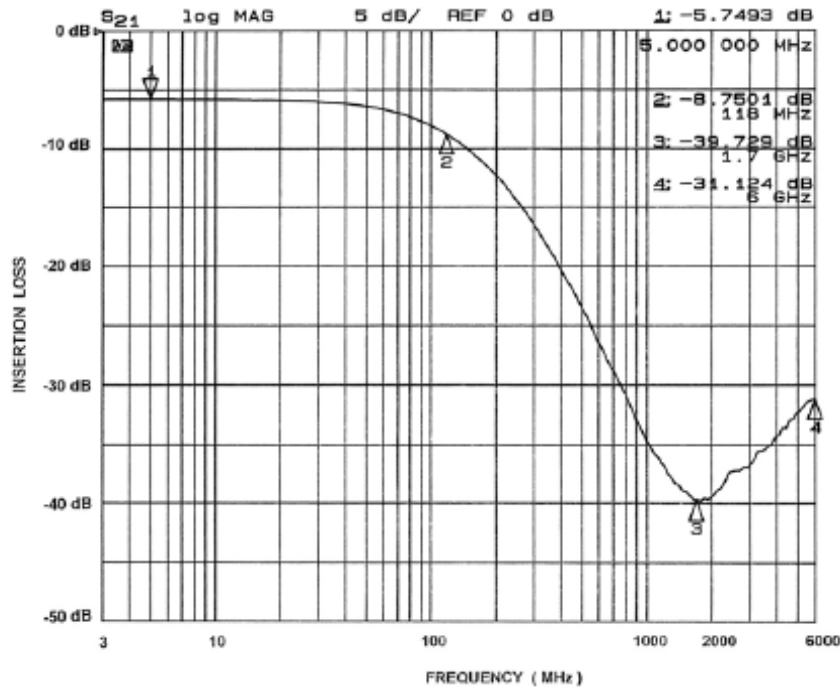


Figure 4. Insertion Loss vs. Frequency (A4-C4 to GND B2)

### Performance Information (cont'd)

Typical Filter Performance ( $T_A=25^\circ\text{C}$ , DC Bias=0V, 50 Ohm Environment)

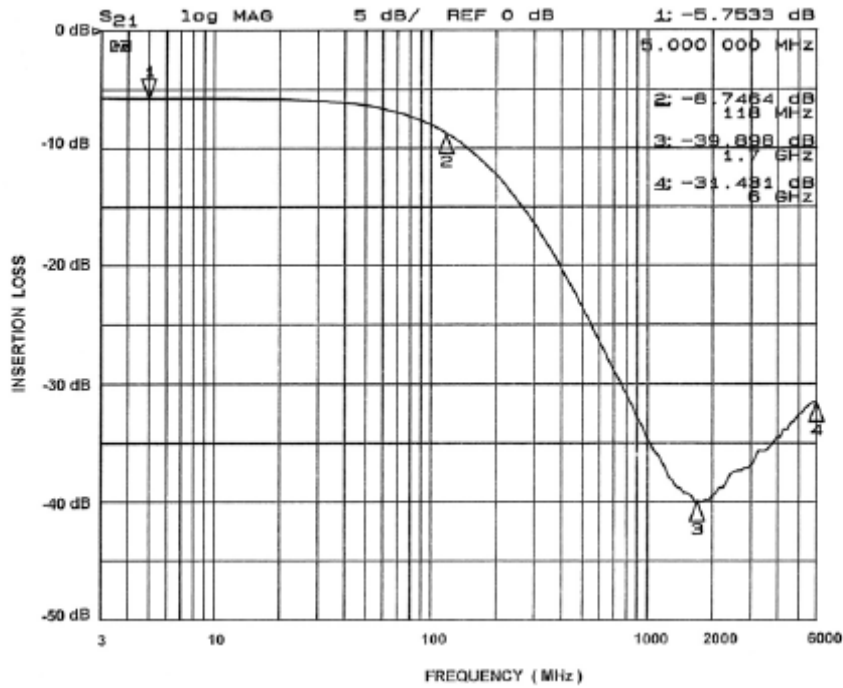


Figure 5. Insertion Loss vs. Frequency (A5-C5 to GND B3)

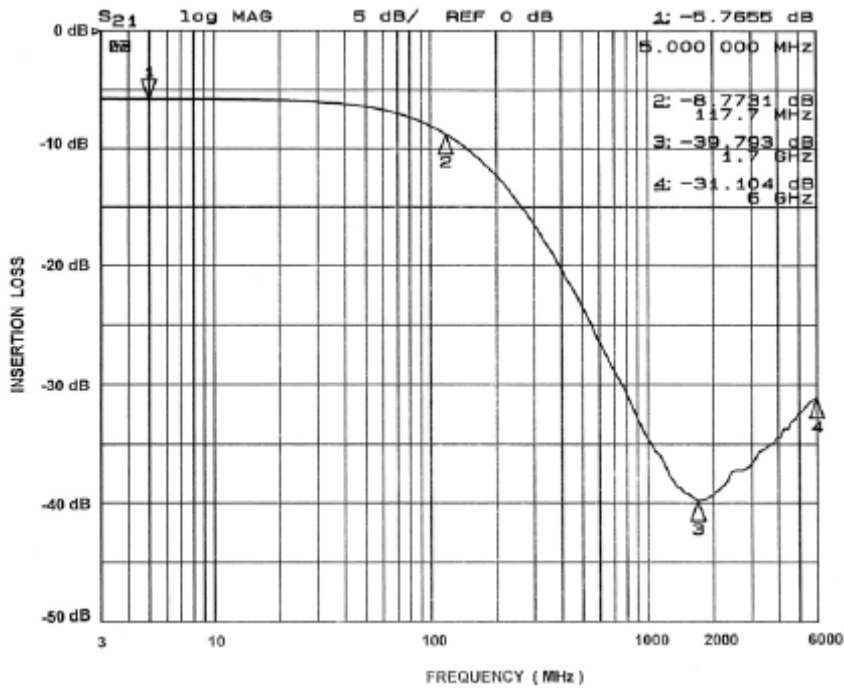


Figure 6. Insertion Loss vs. Frequency (A6-C6 to GND B3)

## Performance Information (cont'd)

Typical Filter Performance ( $T_A=25^\circ\text{C}$ , DC Bias=0V, 50 Ohm Environment)

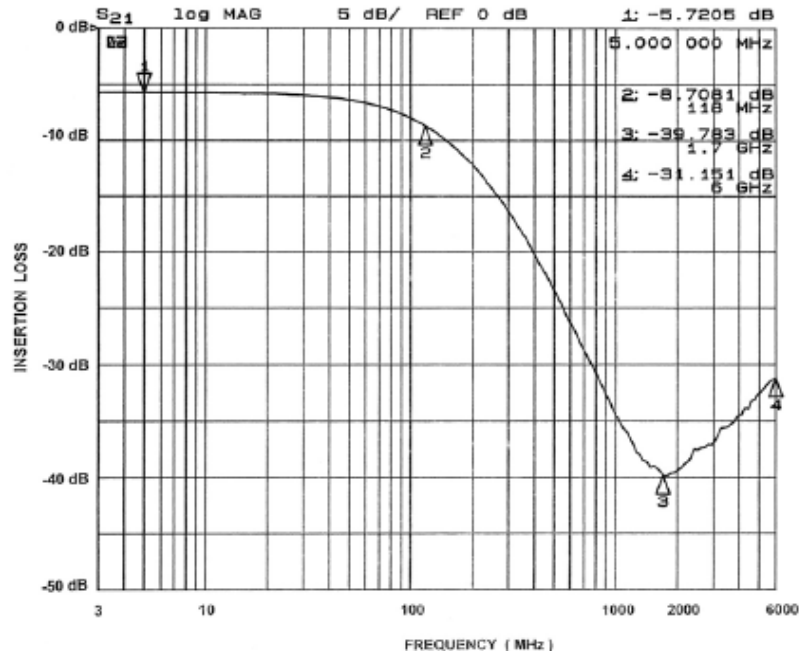


Figure 7. Insertion Loss vs. Frequency (A7-C7 to GND B4, CM1442-08CS/CP Only)


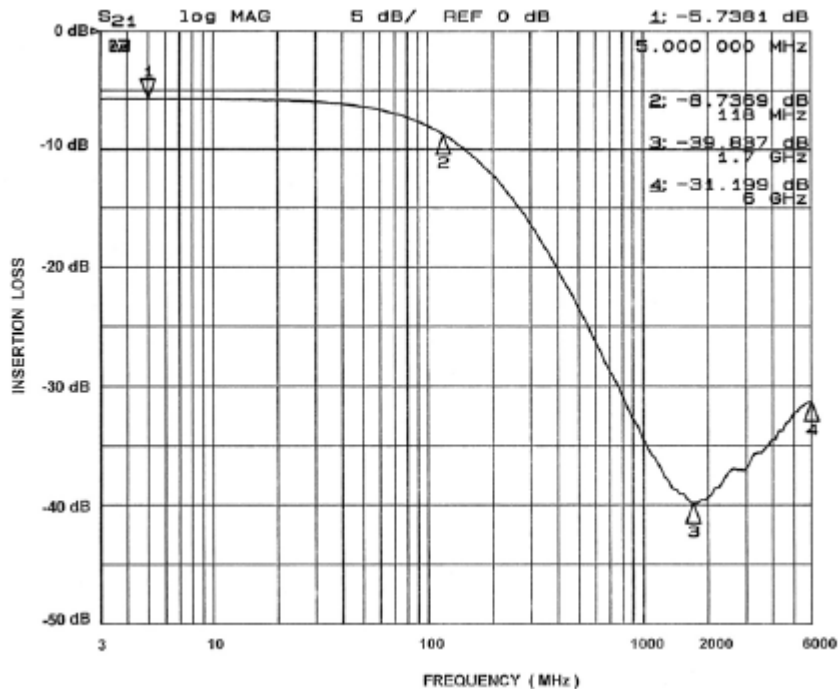


Figure 8. Insertion Loss vs. Frequency (A8-C8 to GND B4, CM1442-08CS/CP Only)



## Performance Information (cont'd)

### Typical Diode Capacitance vs. Input Voltage

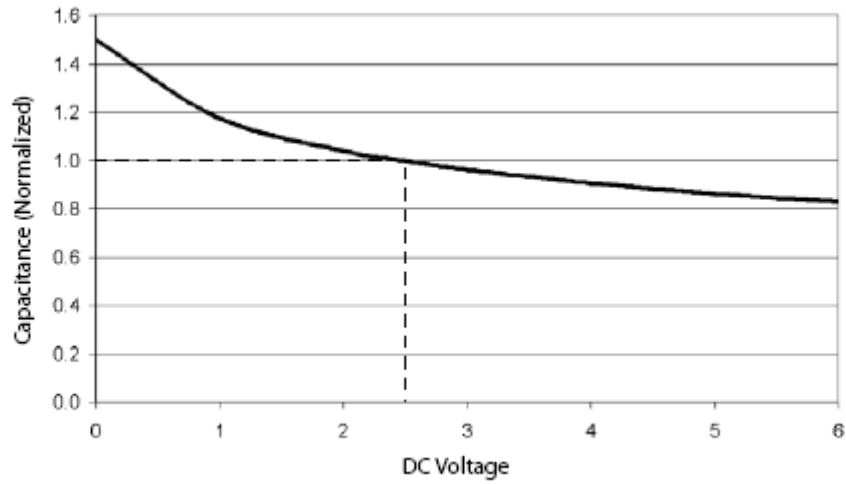

**Figure 7. Filter Capacitance vs. Input Voltage (normalized to capacitance at 2.5VDC and 25°C)**

## Application Information

PARAMETER	VALUE
Pad Size on PCB	0.240mm
Pad Shape	Round
Pad Definition	Non-Solder Mask defined pads
Solder Mask Opening	0.290mm Round
Solder Stencil Thickness	0.125mm - 0.150mm
Solder Stencil Aperture Opening (laser cut, 5% tapered walls)	0.300mm Round
Solder Flux Ratio	50/50 by volume
Solder Paste Type	No Clean
Pad Protective Finish	OSP (Entek Cu Plus 106A)
Tolerance — Edge To Corner Ball	$\pm 50\mu\text{m}$
Solder Ball Side Coplanarity	$\pm 20\mu\text{m}$
Maximum Dwell Time Above Liquidous	60 seconds
Maximum Soldering Temperature for Lead-free Devices using a Lead-free Solder Paste	260°C

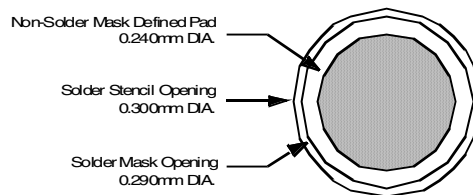


Figure 5. Recommended Non-Solder Mask Defined Pad Illustration

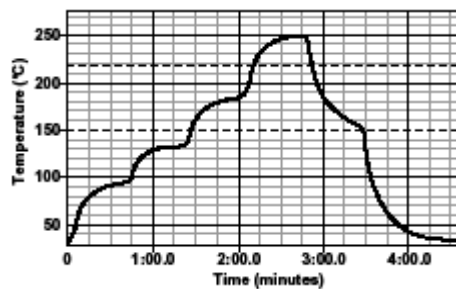


Figure 6. Lead-free (SnAgCu) Solder Ball Reflow Profile

# CM1442

## Mechanical Details


### CSP Mechanical Specifications

CM1442 devices are supplied in custom Chip Scale Packages (CSP). Dimensions are presented below. For complete information on CSP packaging, see the California Micro Devices CSP Package Information document.

### CM1442-06 Mechanical Specifications

The package dimensions for the CM1442-06 are presented below.


PACKAGE DIMENSIONS						
Package	Custom CSP					
Bumps	15					
Dim	Millimeters			Inches		
	Min	Nom	Max	Min	Nom	Max
A1	2.315	2.360	2.405	0.911	0.0929	0.0947
A2	1.008	1.053	1.098	0.0397	0.0415	0.0432
B1	0.395	0.4000	0.405	0.0156	0.0157	0.0159
B2	0.195	0.2000	0.205	0.0076	0.0078	0.0080
B3	0.3415	0.3465	0.3515	0.0134	0.0136	0.0138
B4	0.3415	0.3465	0.3515	0.0134	0.0136	0.0138
C1	0.130	0.1800	0.230	0.0051	0.0071	0.0091
C2	0.130	0.1800	0.230	0.0051	0.0071	0.0091
D1	0.575	0.644	0.714	0.0226	0.0254	0.0281
D2	0.368	0.419	0.470	0.0145	0.0165	0.0185
# per tape and reel	3500 pieces					
Controlling dimension: millimeters						

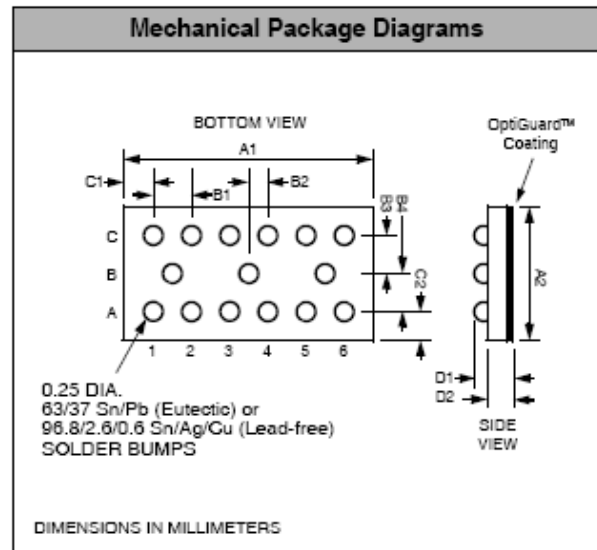

**Package Dimensions for  
CM1442-06 Chip Scale Package**

**CSP Tape and Reel Specifications**

PART NUMBER	CHIP SIZE (mm)	POCKET SIZE (mm) $B_0 \times A_0 \times K_0$	TAPE WIDTH W	REEL DIAMETER	QTY PER REEL	$P_0$	$P_1$
CM1442-06	2.36 X 1.053 X 0.644	2.62 X 1.12 X 0.76	8mm	178mm (7")	3500	4mm	4mm

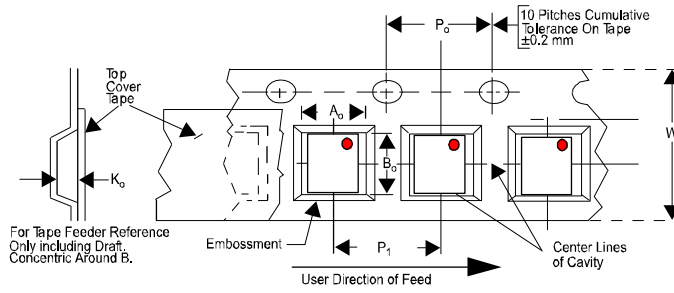

**Figure 13. Tape and Reel Mechanical Data**


# CM1442

## Mechanical Details (cont'd)

### CM1442-08 Mechanical Specifications

The package dimensions for the CM1442-08 are presented below.


PACKAGE DIMENSIONS						
Package	Custom CSP					
Bumps	15					
Dim	Millimeters			Inches		
	Min	Nom	Max	Min	Nom	Max
A1	3.115	3.160	3.205	0.1226	0.1244	0.1262
A2	1.008	1.053	1.098	0.0397	0.0415	0.0432
B1	0.395	0.4000	0.405	0.0156	0.0157	0.0159
B2	0.195	0.2000	0.205	0.0076	0.0078	0.0080
B3	0.3415	0.3465	0.3515	0.0134	0.0136	0.0138
B4	0.3415	0.3465	0.3515	0.0134	0.0136	0.0138
C1	0.130	0.1800	0.230	0.0051	0.0071	0.0091
C2	0.130	0.1800	0.230	0.0051	0.0071	0.0091
D1	0.575	0.644	0.714	0.0226	0.0254	0.0281
D2	0.368	0.419	0.470	0.0145	0.0165	0.0185
# per tape and reel	3500 pieces					
Controlling dimension: millimeters						

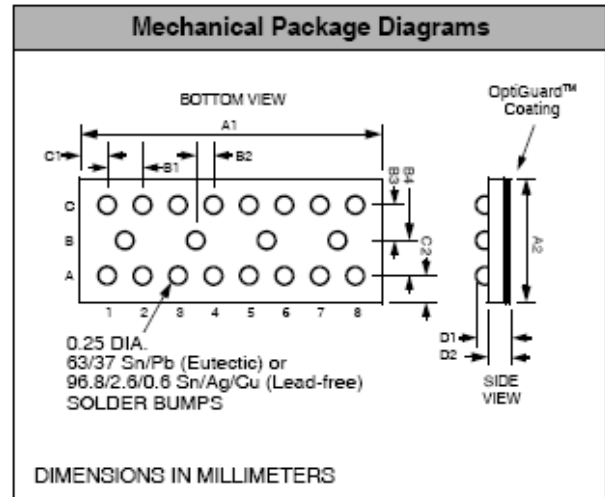


**Package Dimensions for  
CM1442-08 Chip Scale Package**

**CSP Tape and Reel Specifications**

PART NUMBER	CHIP SIZE (mm)	POCKET SIZE (mm) $B_0 \times A_0 \times K_0$	TAPE WIDTH W	REEL DIAMETER	QTY PER REEL	$P_0$	$P_1$
CM1442-08	3.16 X 1.053 X 0.644	3.28 X 1.32 X 0.81	8mm	178mm (7")	3500	4mm	4mm

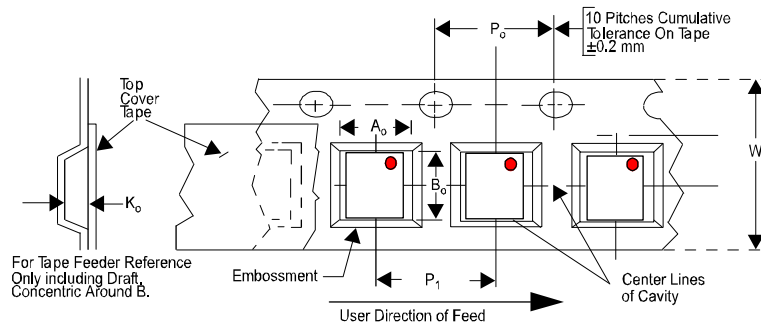

**Figure 14. Tape and Reel Mechanical Data**

ON Semiconductor and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855  
Toll Free USA/Canada  
**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910  
**Japan Customer Focus Center**  
Phone: 81-3-5773-3850

ON Semiconductor Website: [www.onsemi.com](http://www.onsemi.com)  
Order Literature: <http://www.onsemi.com/orderlit>  
For additional information, please contact your local Sales Representative

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А