


## Specification

- Part No.** : **GWLA.05**
- Description** : GPS L1 & Bluetooth / 2.4GHz Wi-Fi  
Embedded 2in1 Ceramic Loop Antenna
- Features** : 10 \* 3.2 \* 1.5mm  
GPS L1 and Wi-Fi 2.4GHz Applications  
Simplifies GPS/2.4GHz Circuits  
Two Separate Feeds on one Chip Antenna  
Low Profile, Small Footprint Antenna  
SMD Surface-mount  
**RoHS & REACH Compliant**

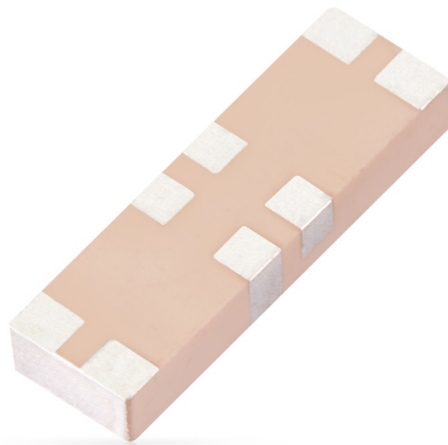

## 1. Introduction

The Taoglas GWLA.05, GPS L1 /2.4GHz embedded loop antenna is a high efficiency, miniature SMD, edge mounted ceramic antenna for GPS and 2.4GHz Wi-Fi, WLAN, Zigbee, Bluetooth, and 802.11 applications. Customers can use this antenna for GPS and 2.4GHz (Wi-Fi or Bluetooth) modules, rather than using two separate antennas. The GWLA.05 has two separate antenna feeds, making it the ideal choice for applications where there is limited PCB space. The GWLA.05 uses the main PCB as its ground plane, thereby maintaining good efficiency despite its small size. It can be tuned for different PCB sizes/environments by simply changing the values of the matching circuit. It is ideally mounted on the center edge of a ground-plane.

At 10\*3.2\*1.5mm, the GWLA.05 is one of the smallest combination embedded antennas available worldwide. This antenna is delivered on tape and reel.


Typical Applications – where both GPS and 2.4GHz are required:

- Navigation or Position Tracking Systems
- Tablet PCs
- Gateways and Routers
- UAV Communication Systems
- Handheld Devices
- OBD Devices
- Mobile Cameras

Many module manufacturers specify peak gain limits for any antennas that are to be connected to that module. Those peak gain limits are based on free-space conditions. In practice, the peak gain of an antenna tested in free-space can degrade by at least 1 or 2 dBi when put inside a device. So ideally you should go for a slightly higher peak gain antenna than mentioned on the module specification to compensate for this effect, giving you better performance.

Upon testing of any of our antennas with your device and a selection of appropriate layout, integration technique, or cable, Taoglas can make sure any of our antennas' peak gain will be below the peak gain limits. Taoglas can then issue a specification and/or report for the selected antenna in your device that will clearly show it complying with the peak gain limits, so you can be assured you are meeting regulatory requirements for that module.

For example, a module manufacturer may state that the antenna must have less than 2 dBi peak gain, but you don't need to select an embedded antenna that has a peak gain of less than 2 dBi in free-space. This will give you a less optimized solution. It is better to go for a slightly higher free-space peak gain of 3 dBi or more if available. Once that antenna gets integrated into your device, performance will degrade below this 2 dBi peak gain due to the effects of GND plane, surrounding components, and device housing. If you want to be absolutely sure, contact Taoglas and we will test. Choosing a Taoglas antenna with a higher peak gain than what is specified by the module manufacturer and enlisting our help will ensure you are getting the best performance possible without exceeding the peak gain limits.

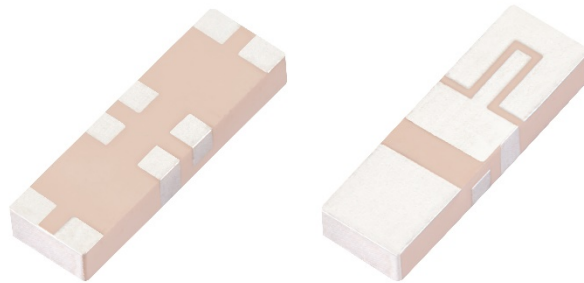


## 2. Specification


ELECTRICAL				
Application Bands	GPS L1		Wi-Fi /Bluetooth	
Frequency (MHz)	1575.42		2400-2500	
Bandwidth (MHz)	20 (RL<-10dB)		100 (RL<-5dB)	
Ground plane size (mm)	80 x 40	30 x 15	80 x 40	30 x 15
Peak Gain (dBi)	0.28	-2.17	-0.82	0.24
Efficiency (%)	45.37	27	44.16	52
Return Loss (dB)	< -10		< -5	
Isolation (dB)	< -20		< -6	
Impedance ( $\Omega$ )	50			
Polarization	Linear			
Input Power	10W			
MECHANICAL				
Dimensions (mm)	10 x 3.2 x 1.5			
Ground plane (mm)	80 x 40 or 30 x 15			
Weight (g)	0.19			
ENVIRONMENTAL				
Operating Temperature	-40°C to 85°C			
Storage Temperature	-25°C to 85°C			
Relative Humidity	20% to 70%			

### 3. Antenna Characteristics

#### 3.1 GPS Band 3.1.1 Return Loss

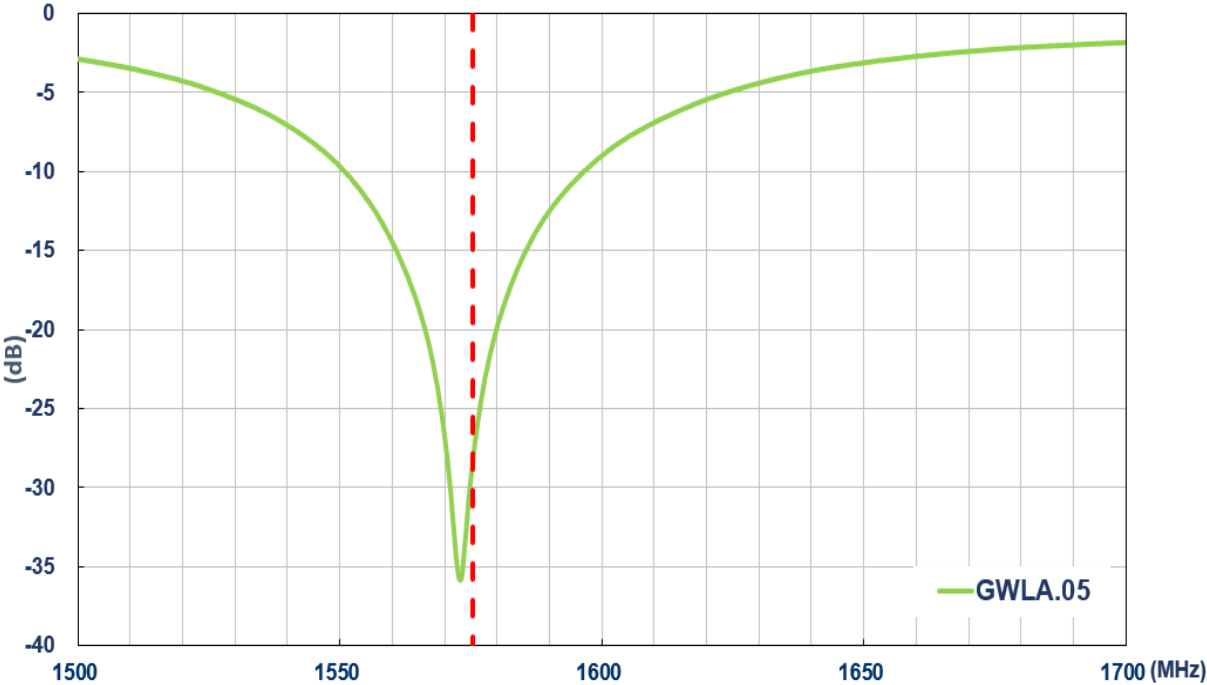


**Figure 1** GPS Return Loss(dB) on 80x40mm ground plane

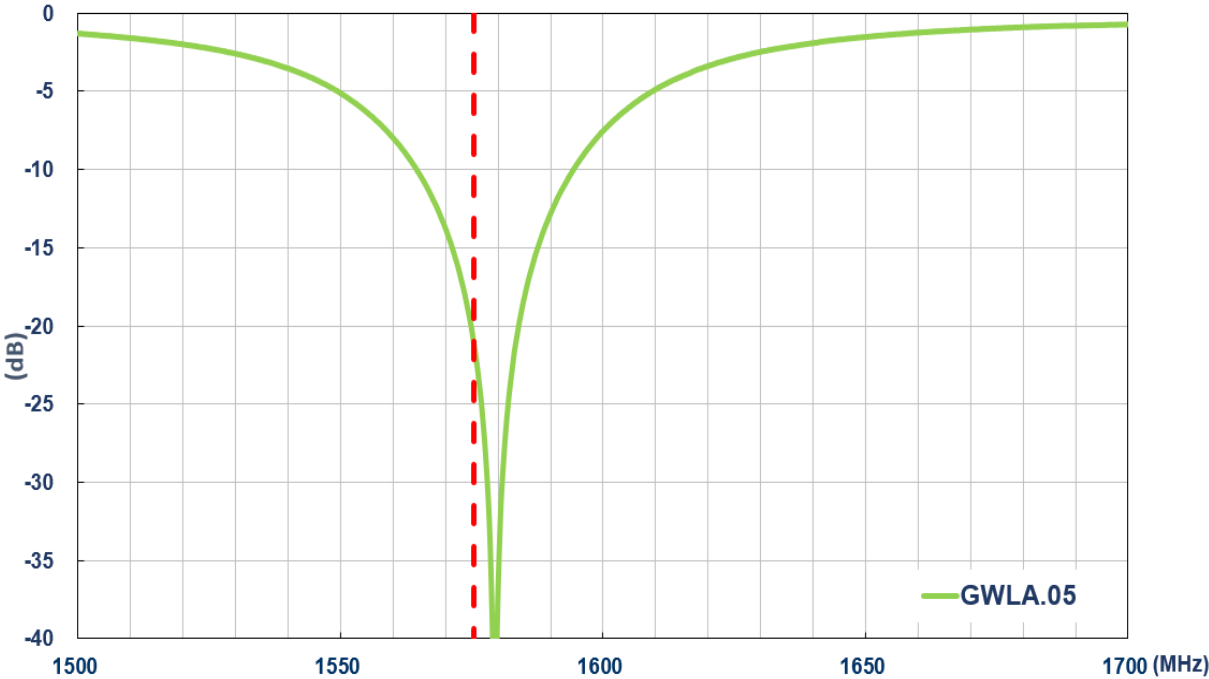


**Figure 2** GPS Return Loss(dB) on 30x15mm ground plane



## 3.1.2 Efficiency

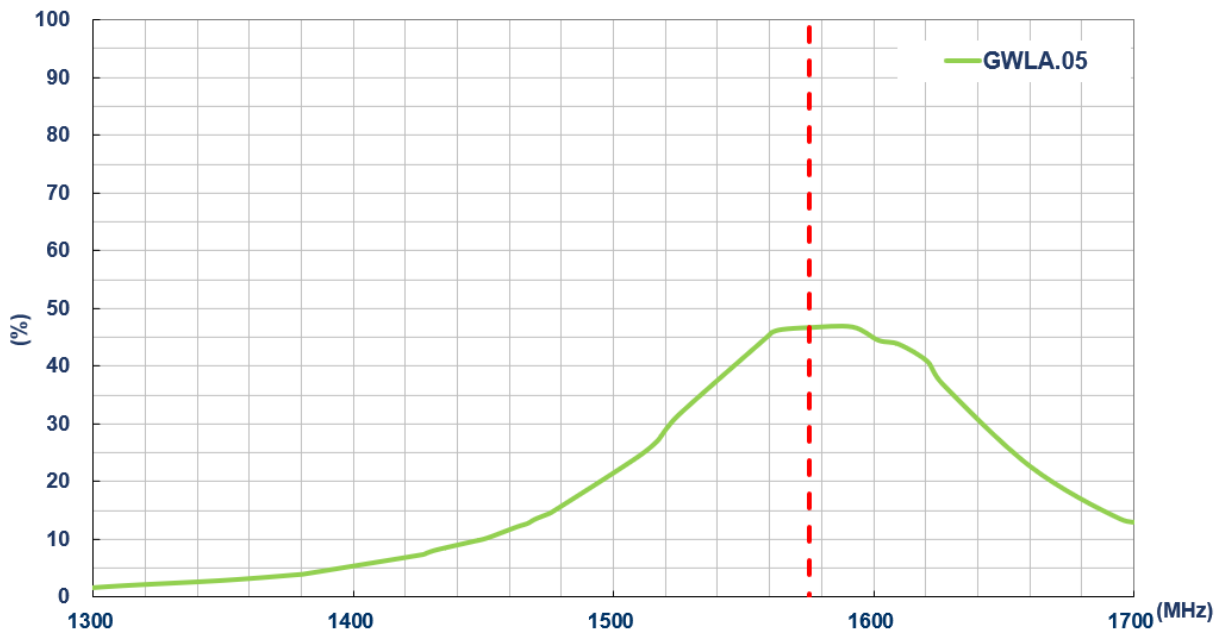


**Figure 3** GPS Efficiency(%) on 80x40mm ground plane

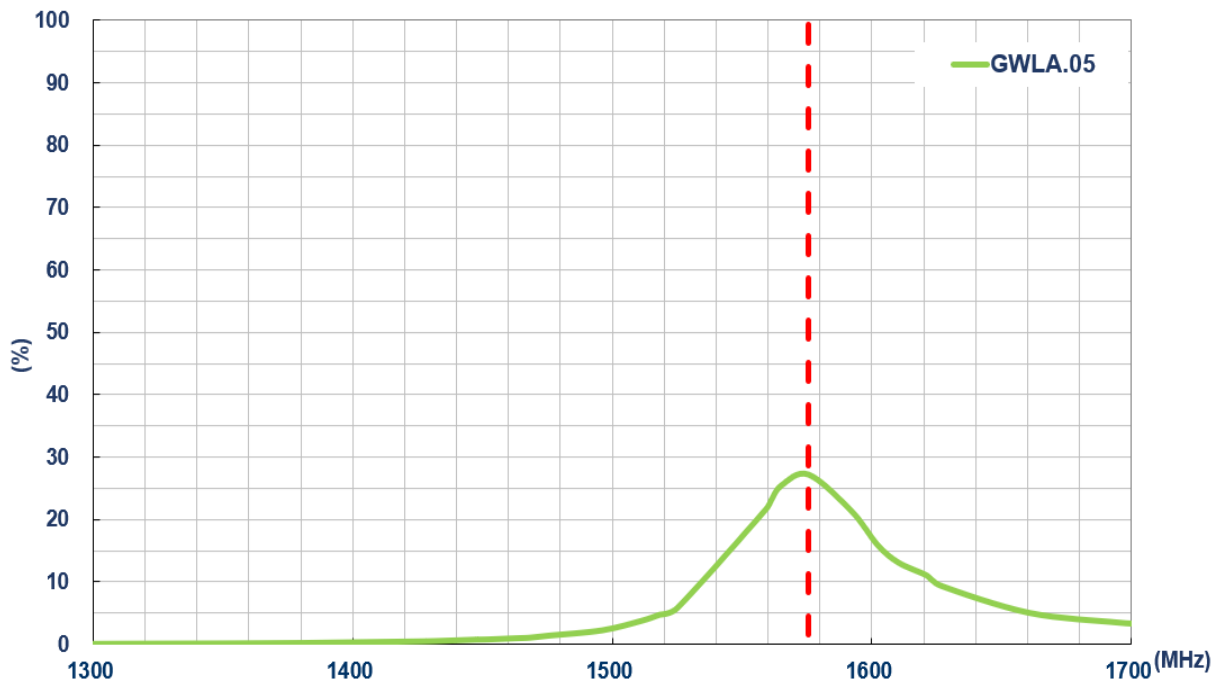


**Figure 4** GPS Efficiency(%) on 30x15mm ground plane



### 3.1.3 Average Gain

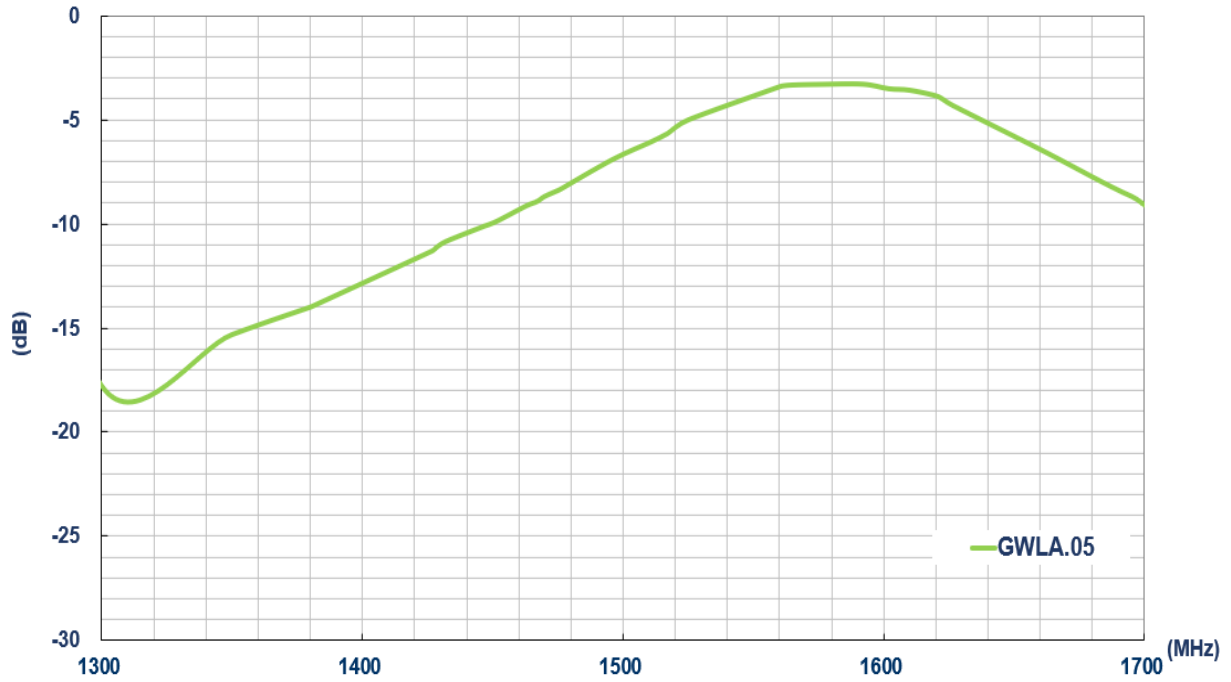


**Figure 5** GPS Average Gain(dB) on 80x40mm ground plane

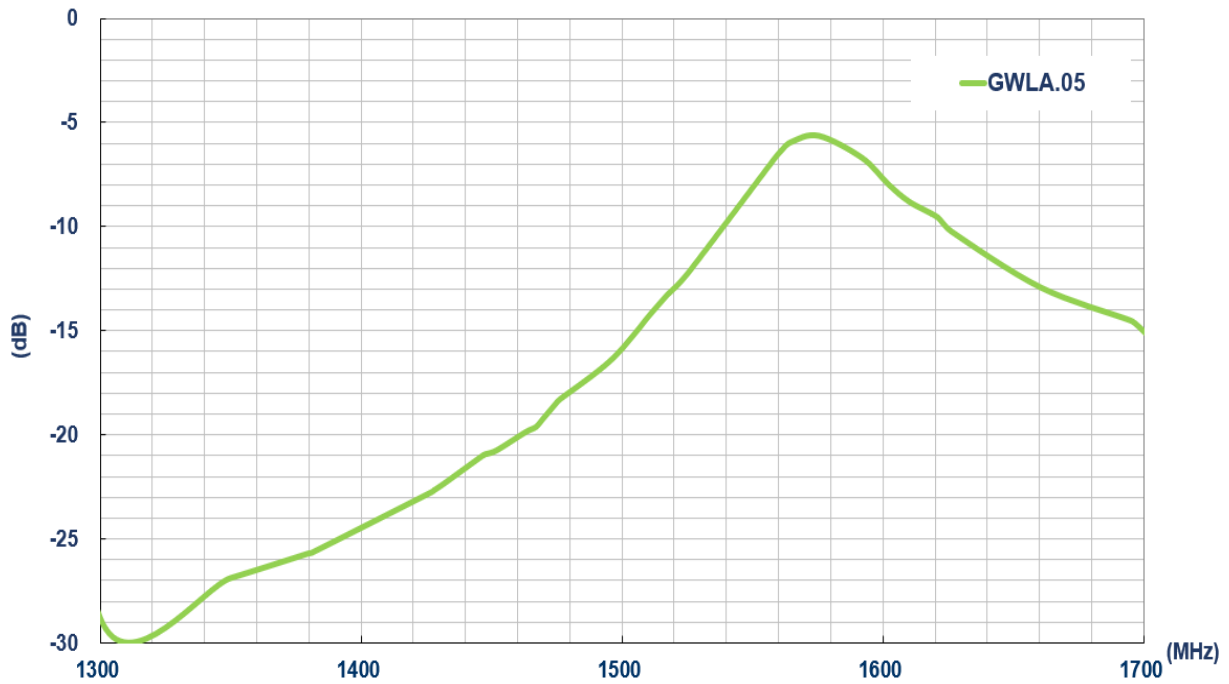


**Figure 6** GPS Average Gain(dB) on 30x15mm ground plane



### 3.1.4 Peak Gain

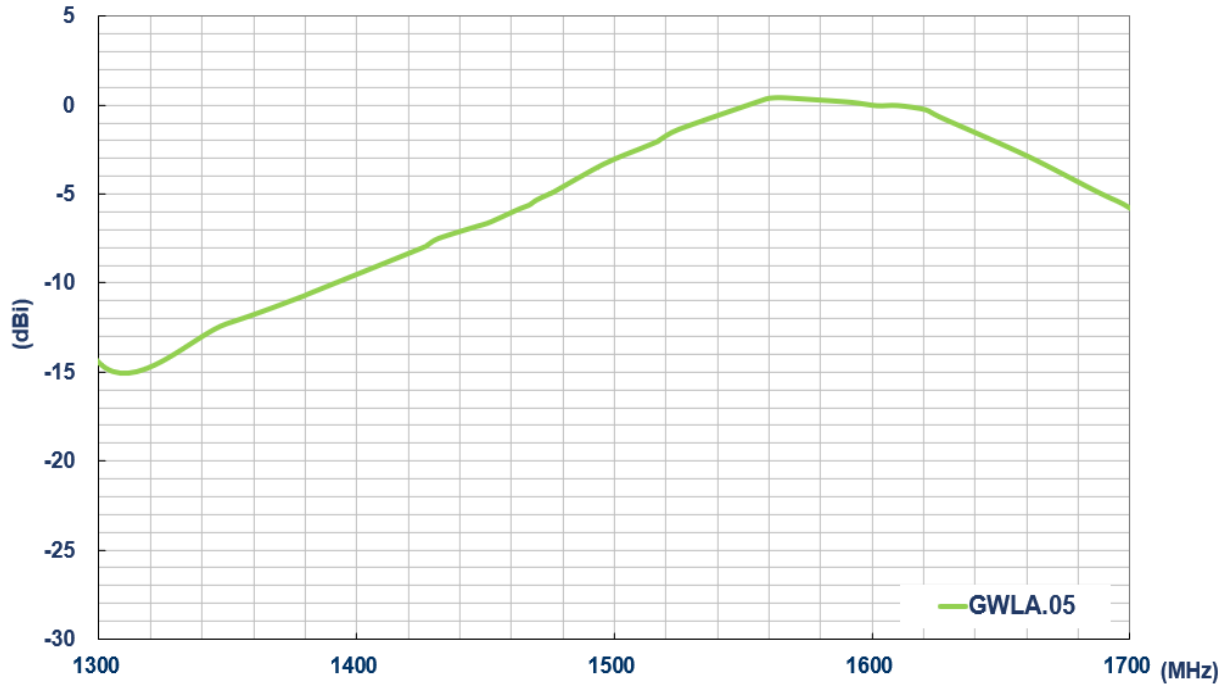

**Figure 7** GPS Peak Gain(dBi) on 80x40mm ground plane

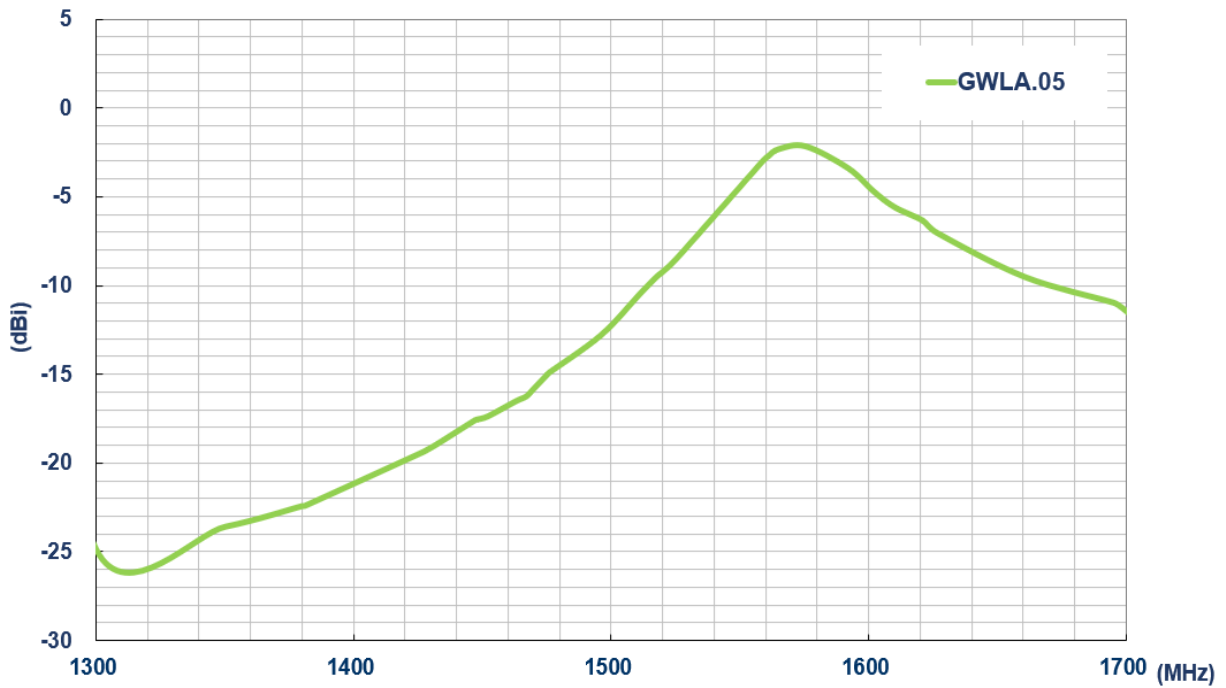


**Figure 8** GPS Peak Gain(dBi) on 30x15mm ground plane






### 3.2 Wi-Fi 2.4GHz

#### 3.2.1 Return Loss

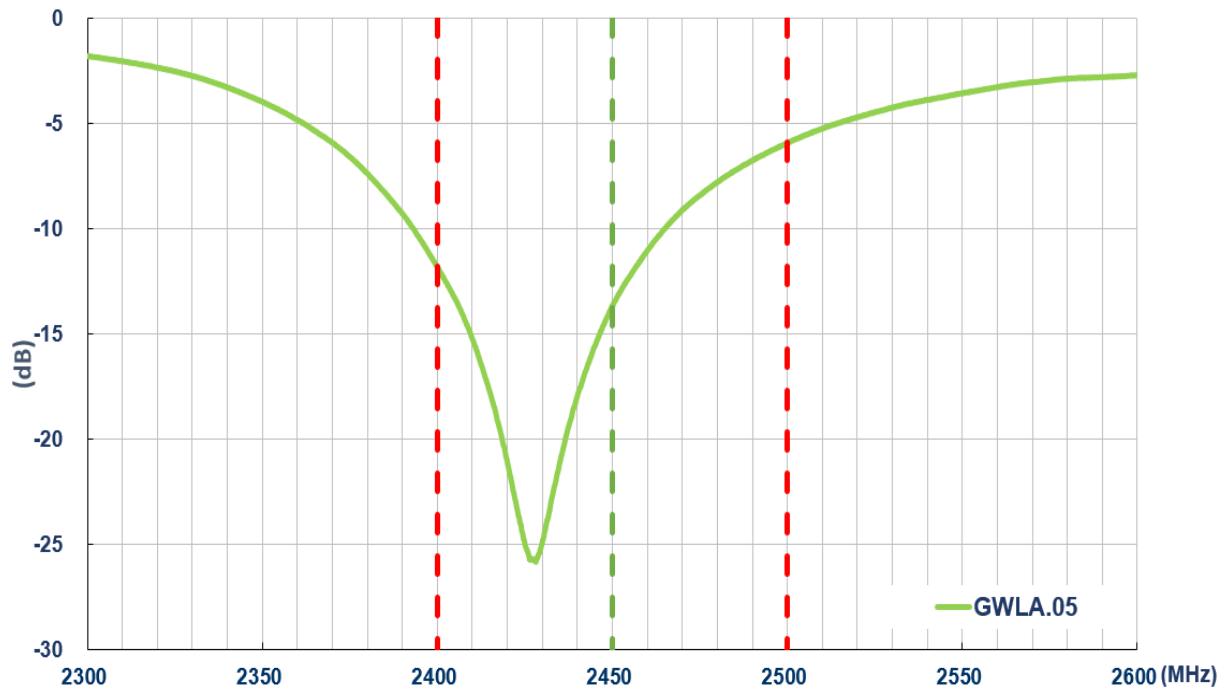


**Figure 9** Wi-Fi Return Loss on 80x40mm ground plane

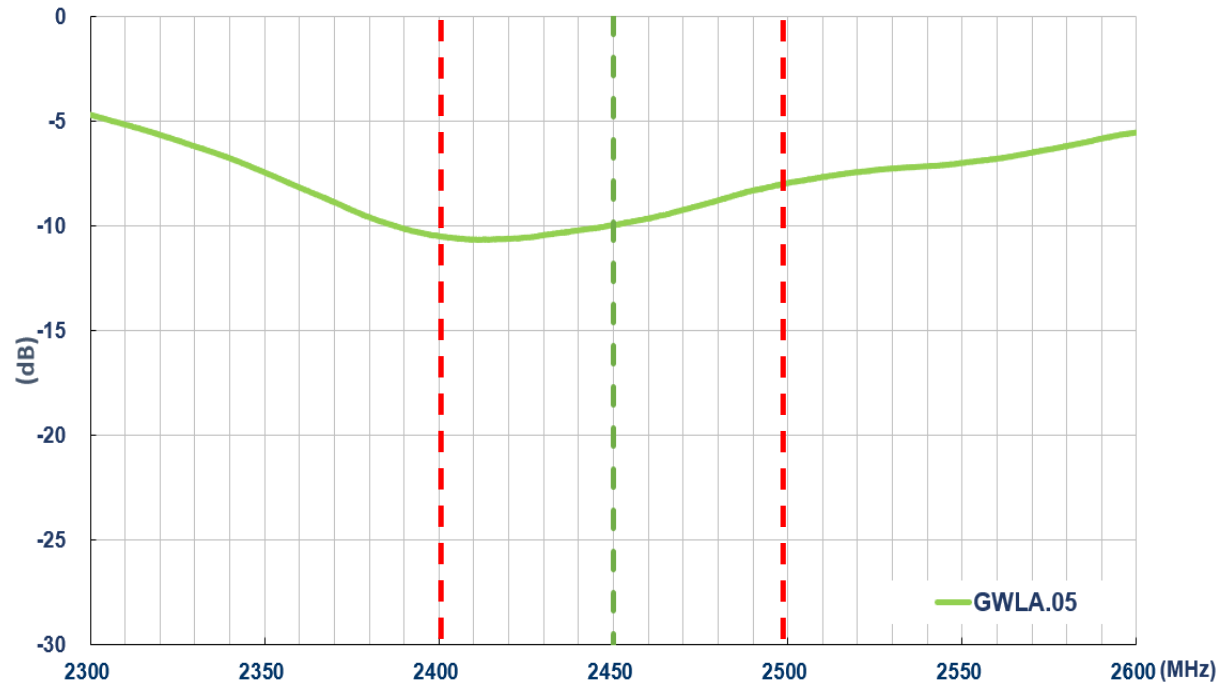


**Figure 10** Wi-Fi Return Loss(dB) on 30x15mm ground plane

### 3.2.2 Efficiency

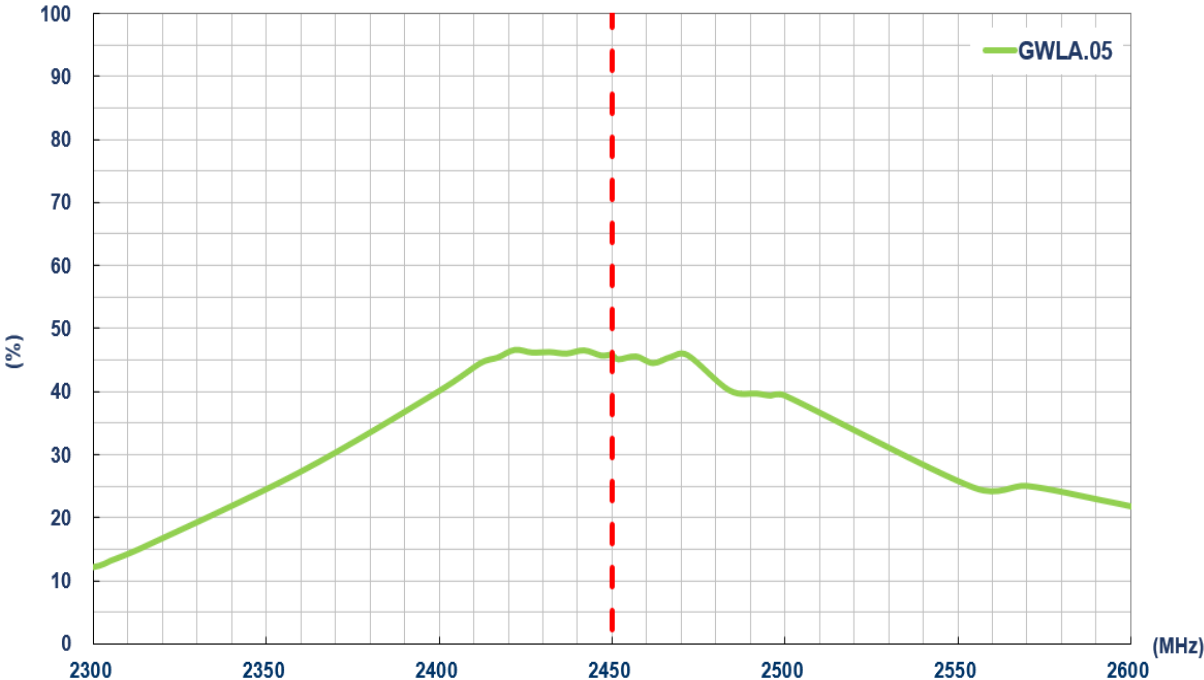

**Figure 11** Wi-Fi Efficiency(%) on 80x40mm ground plane

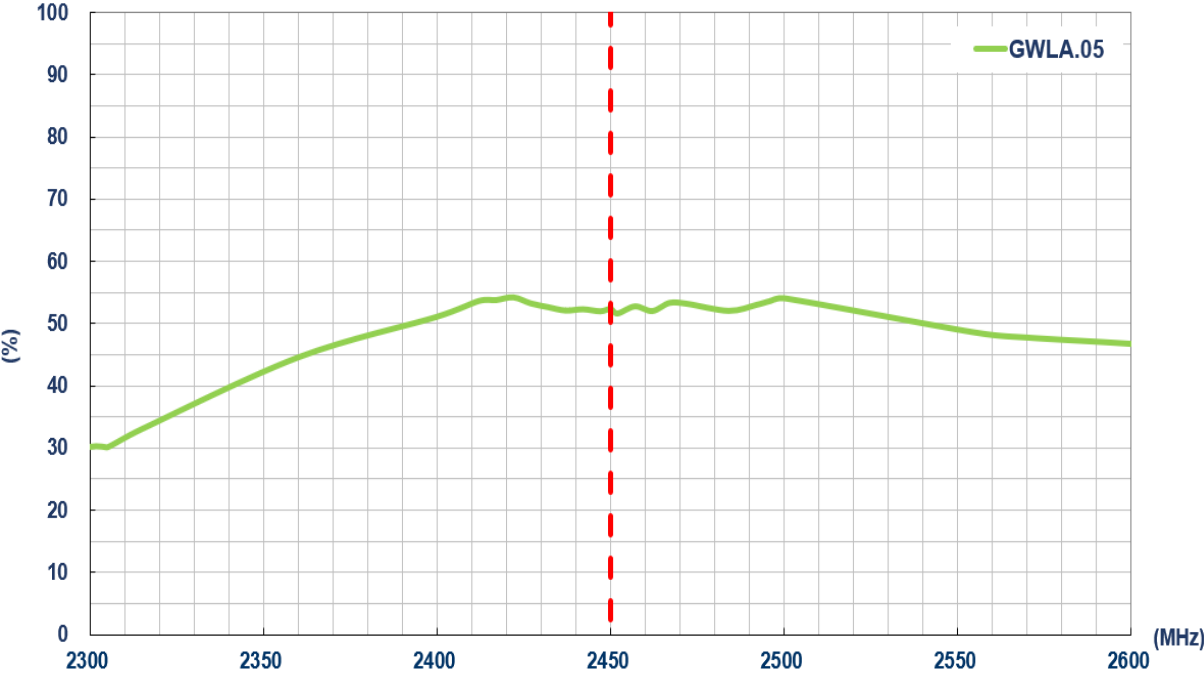

**Figure 12** Wi-Fi Efficiency(%) on 30x15mm ground plane



## 3.2.3 Average Gain

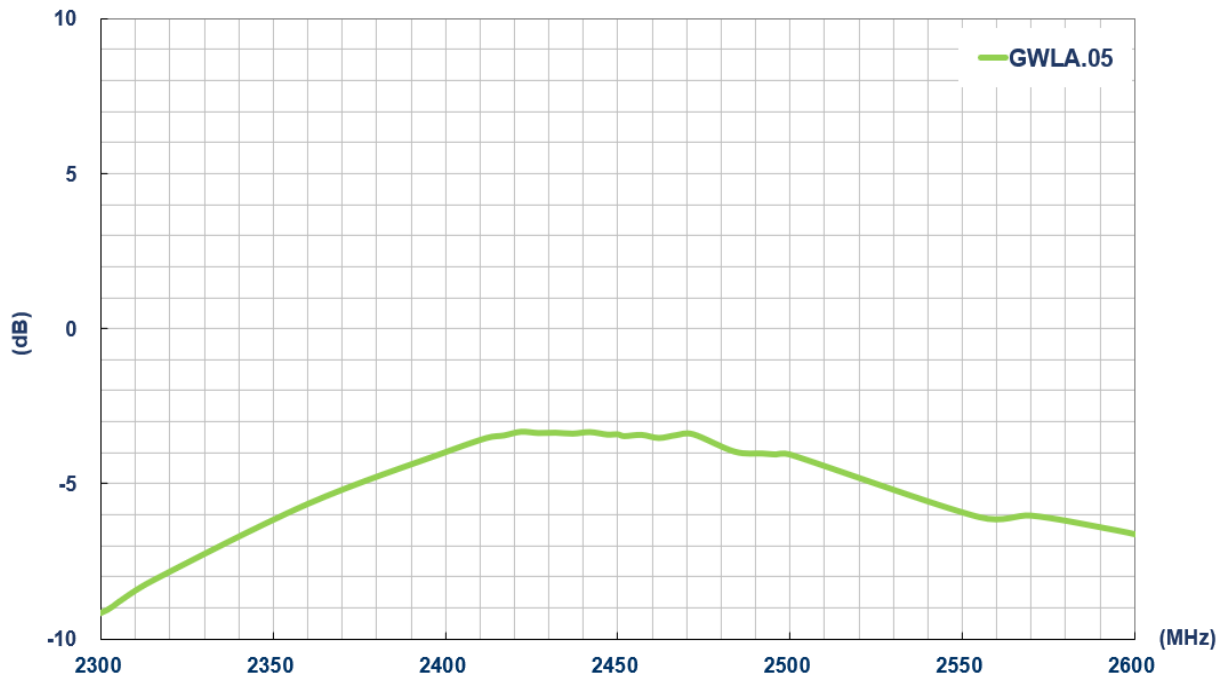


Figure 13 Wi-Fi Average Gain(dB) on 80x40mm ground plane



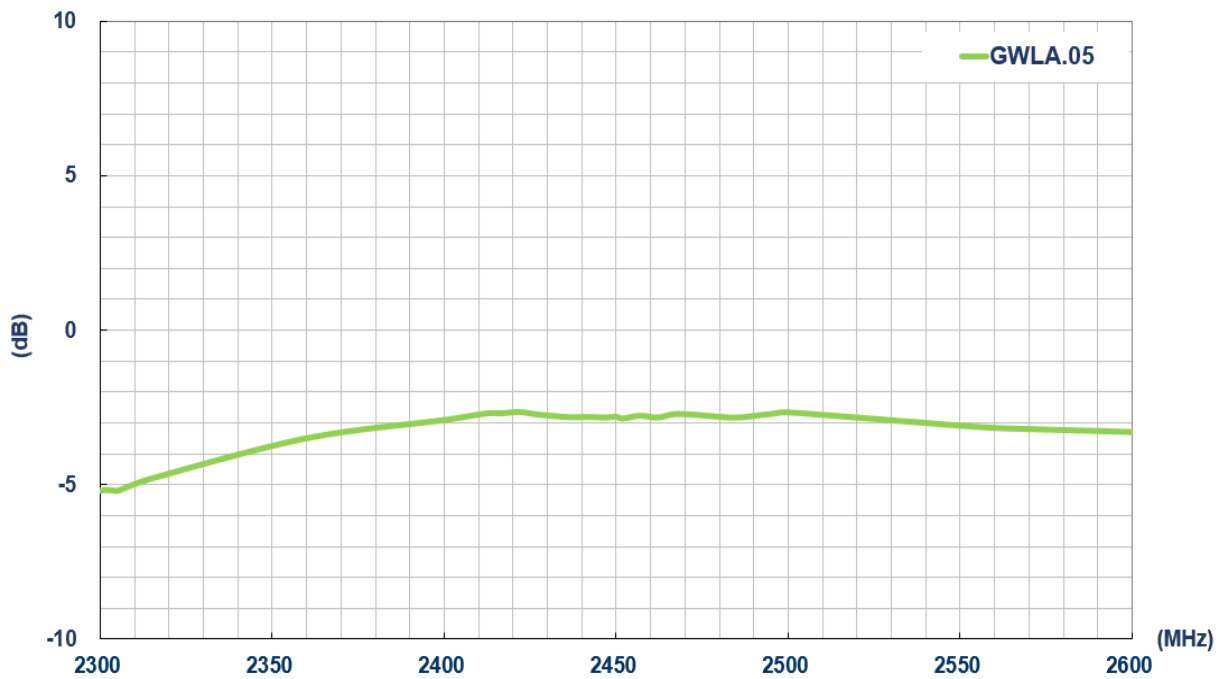


Figure 14 Wi-Fi Average Gain(dB) on 30x15mm ground plane

**3.2.4 Peak Gain**

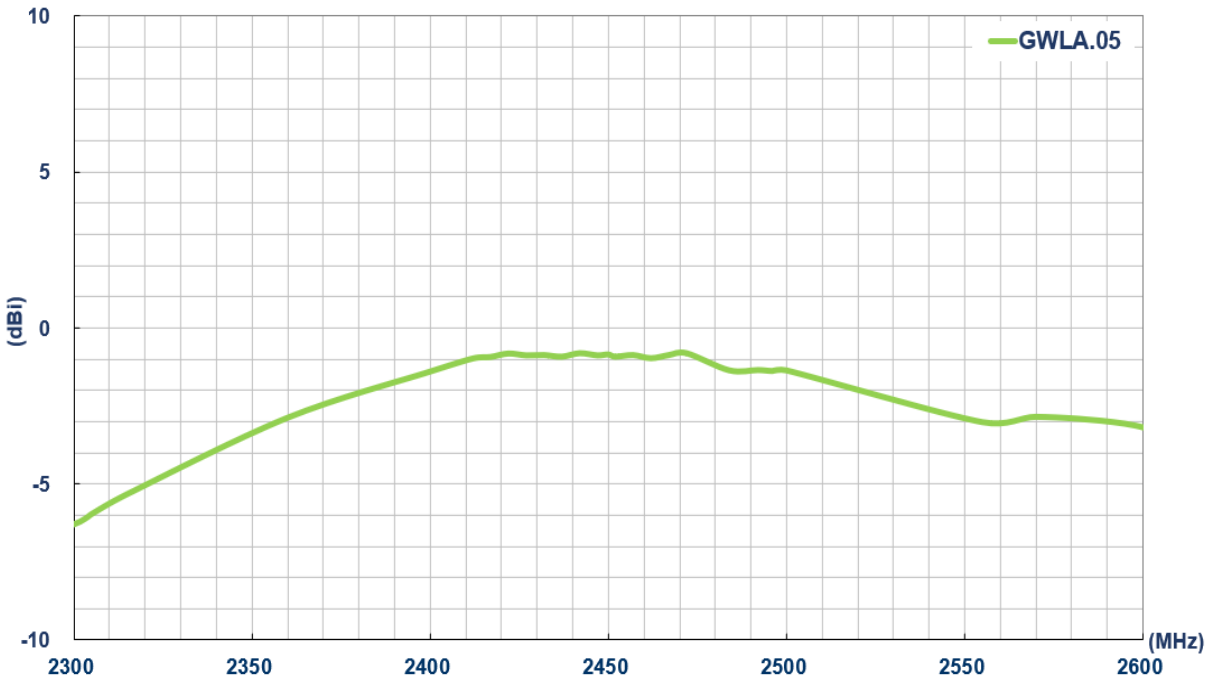

**Figure 15** Wi-Fi Peak Gain on 80x40mm ground plane

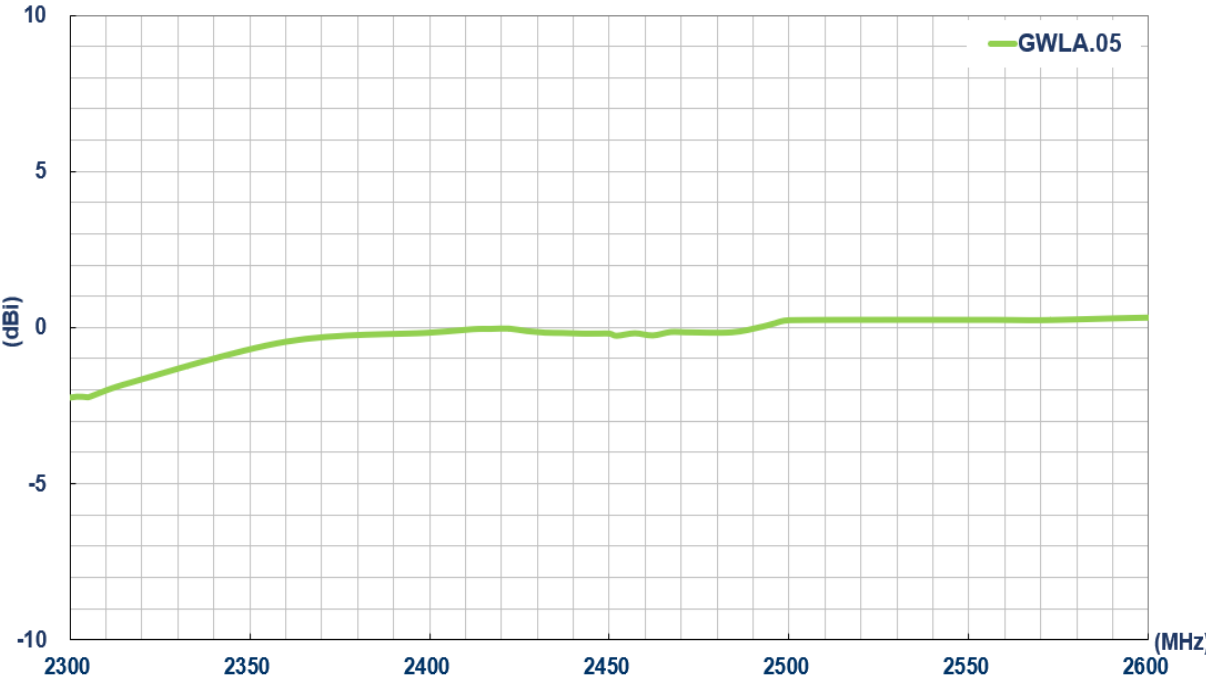

**Figure 16** Wi-Fi Peak Gain(dBi) on 30x15mm ground plane



### 3.3 Isolation between Wi-Fi and GPS Antennas


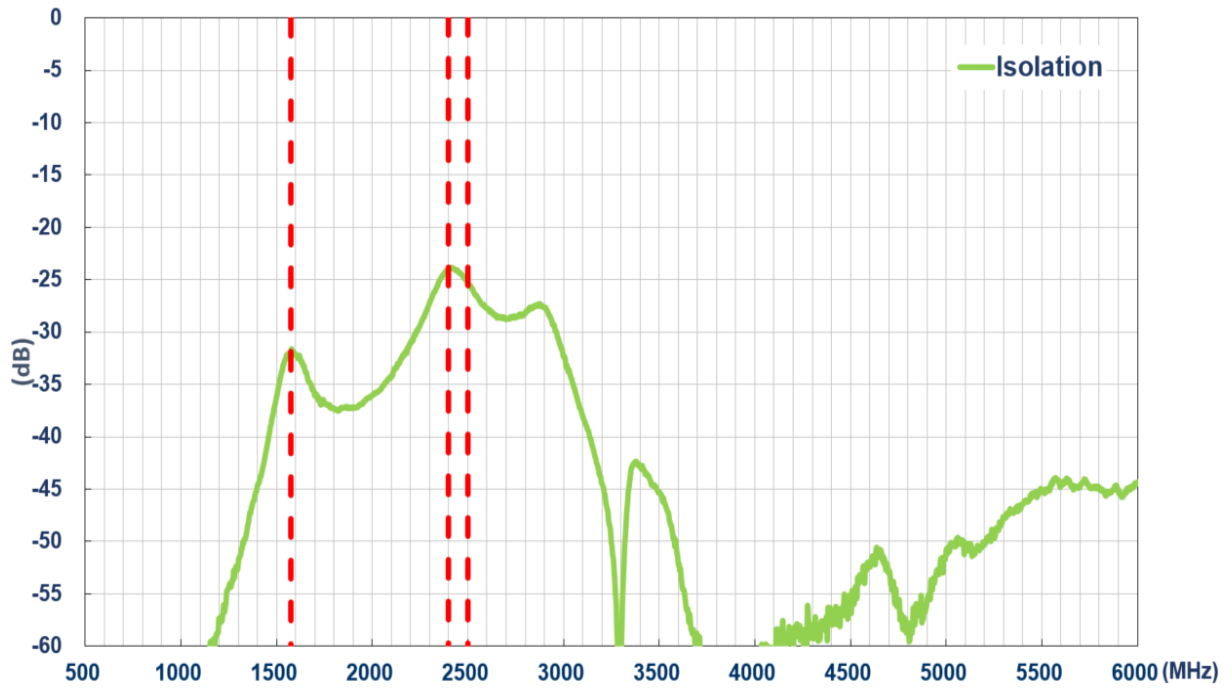


Figure 17 Isolation(dB) between GPS and Wi-Fi



## 4. Antenna Radiation Pattern

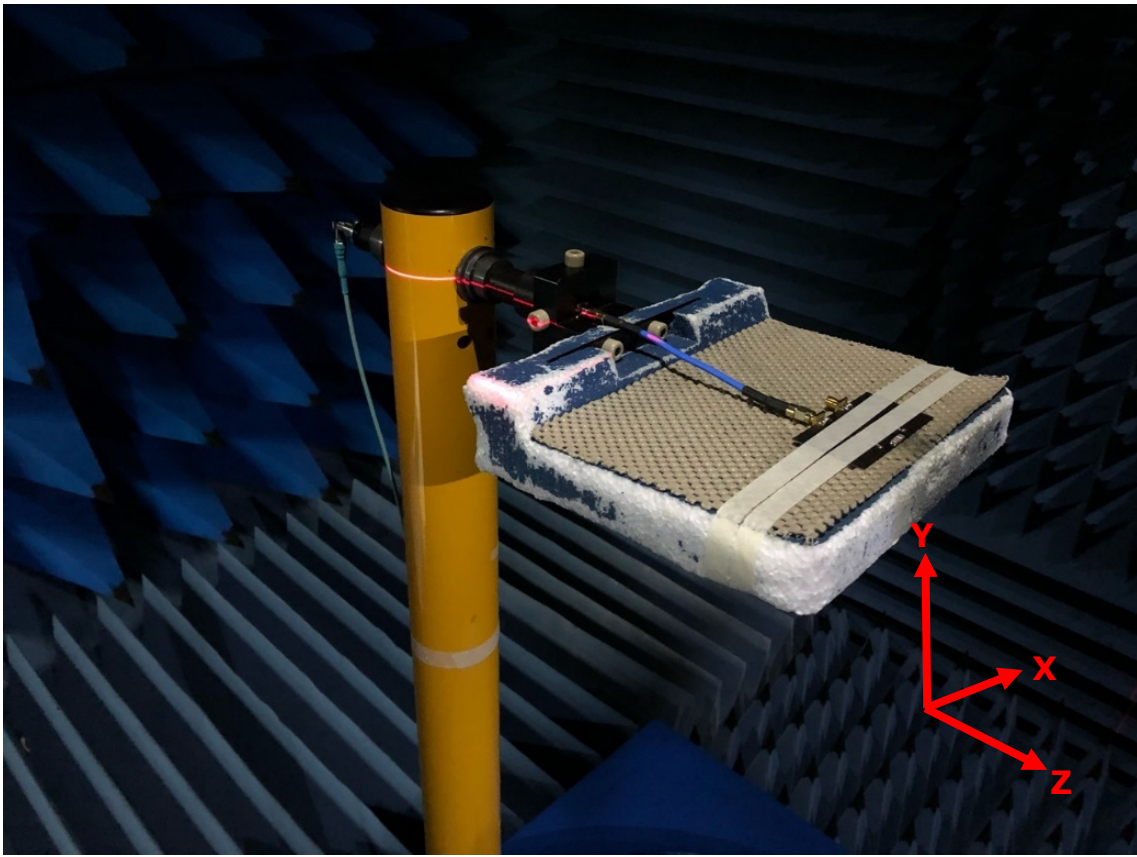


**Figure 18** Anechoic Test set up



## 4.1 2D Radiation Pattern


### 4.1.1 GPS

#### XY Plane

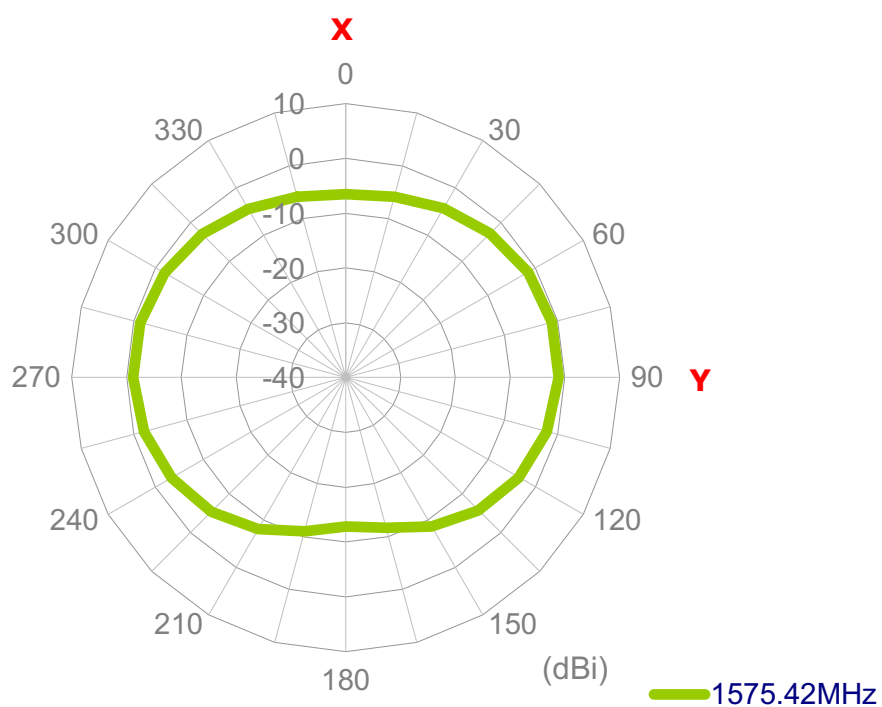

**Figure 19** X-Y polar plot of GPS on 80x40mm ground plane


#### XZ Plane

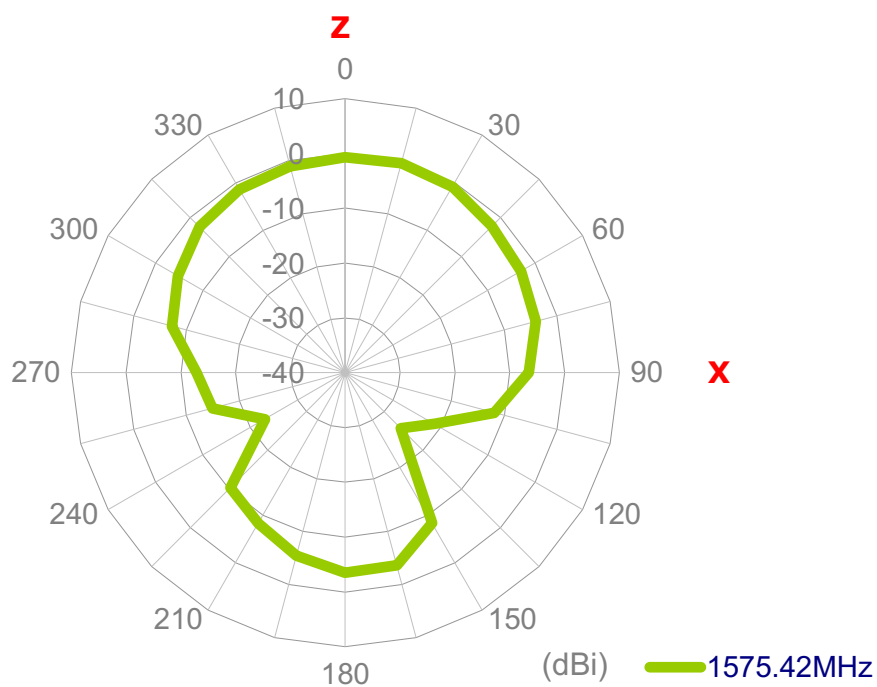

**Figure 20** X-Z polar plot of GPS on 80x40mm ground plane




### YZ Plane

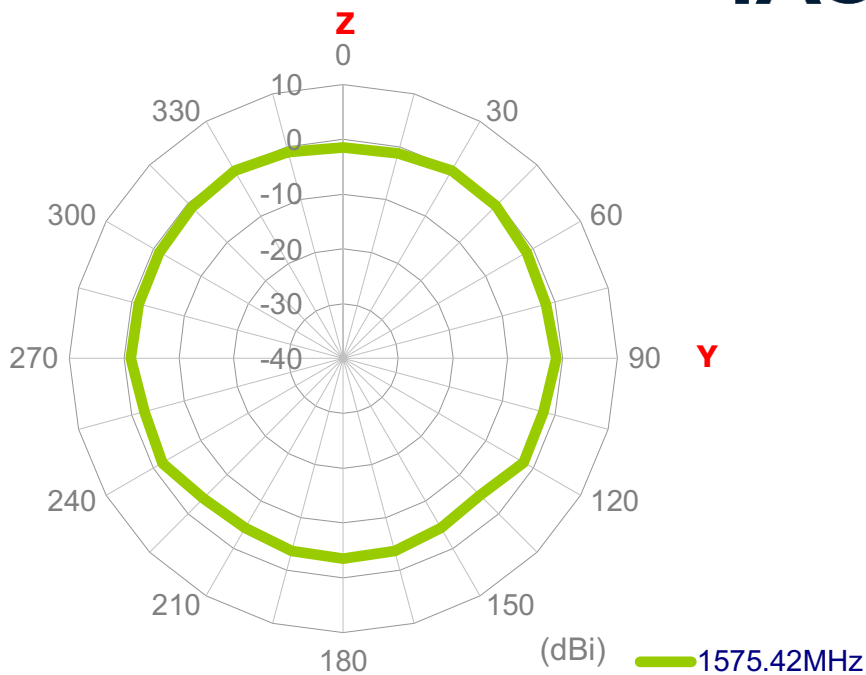

**Figure 21** Y-Z polar plot of GPS on 80x40mm ground plane

### XY Plane

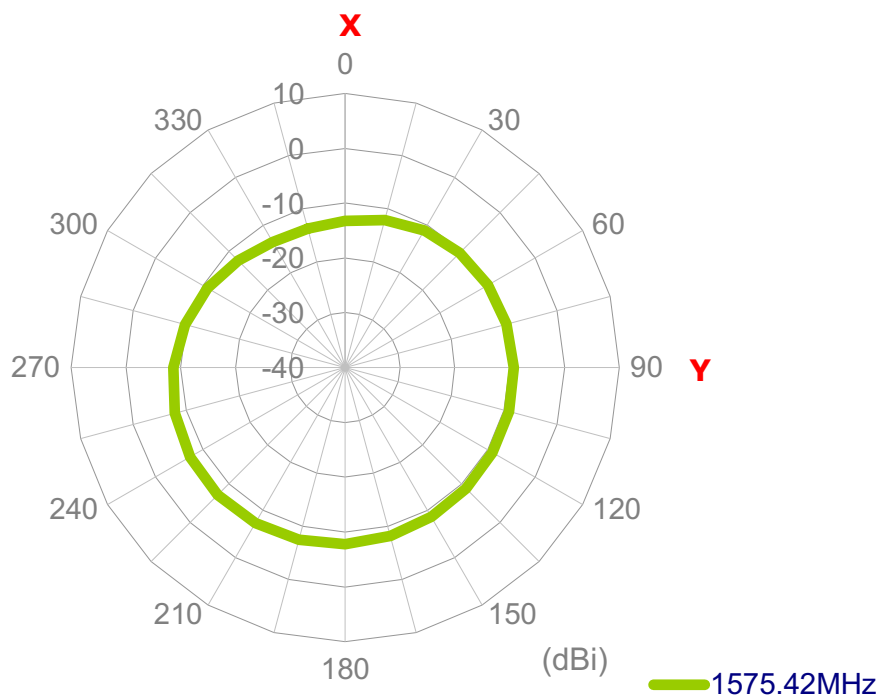


**Figure 22** X-Y polar plot of GPS on 30x15mm ground plane






### XZ Plane

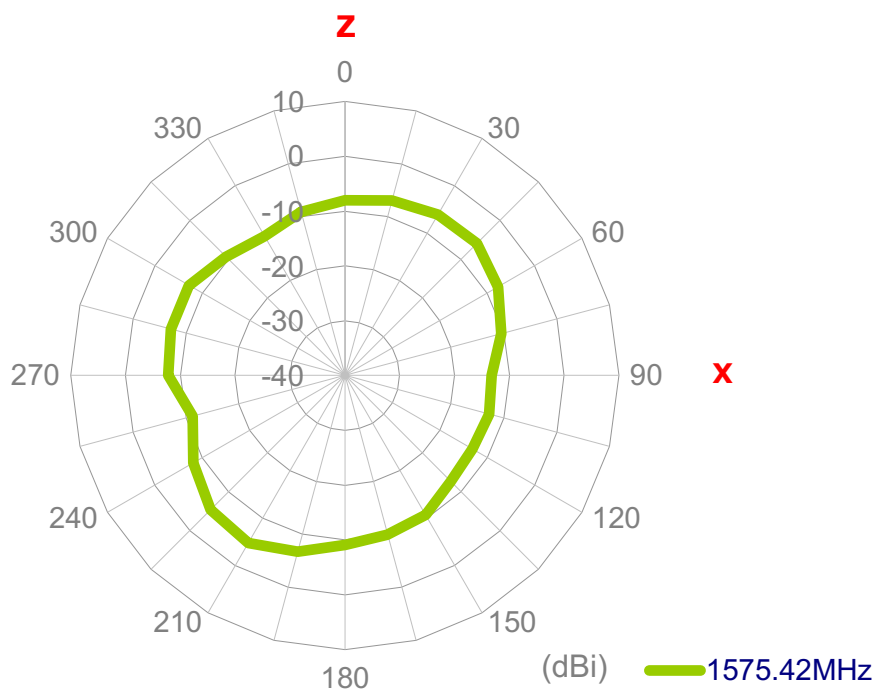

**Figure 23** X-Z polar plot of GPS on 30x15mm ground plane

### YZ Plane

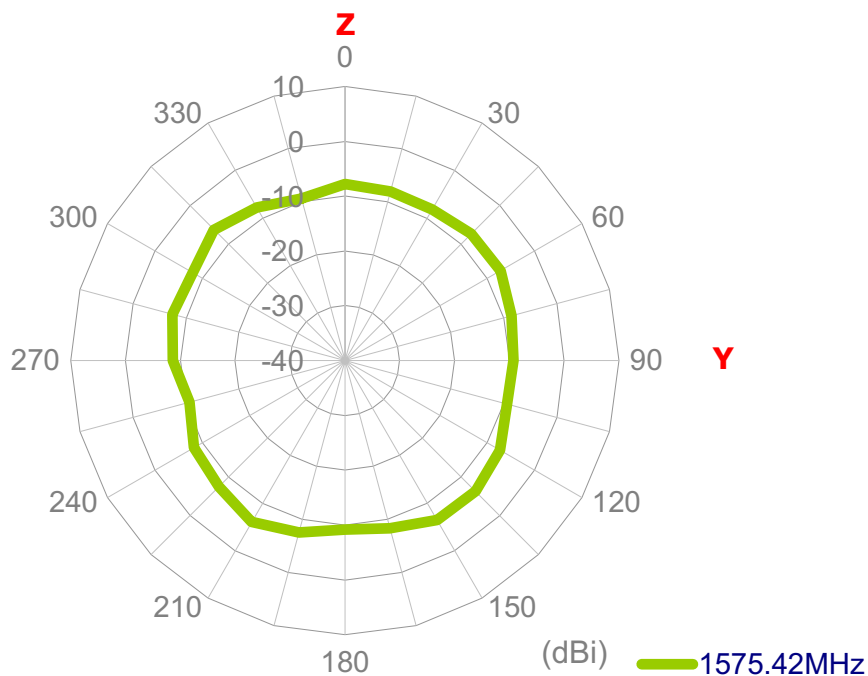

**Figure 24** Y-Z polar plot of GPS on 30x15mm ground plane



### 4.1.2 Wi-Fi 2.4G/ Bluetooth

#### XY Plane

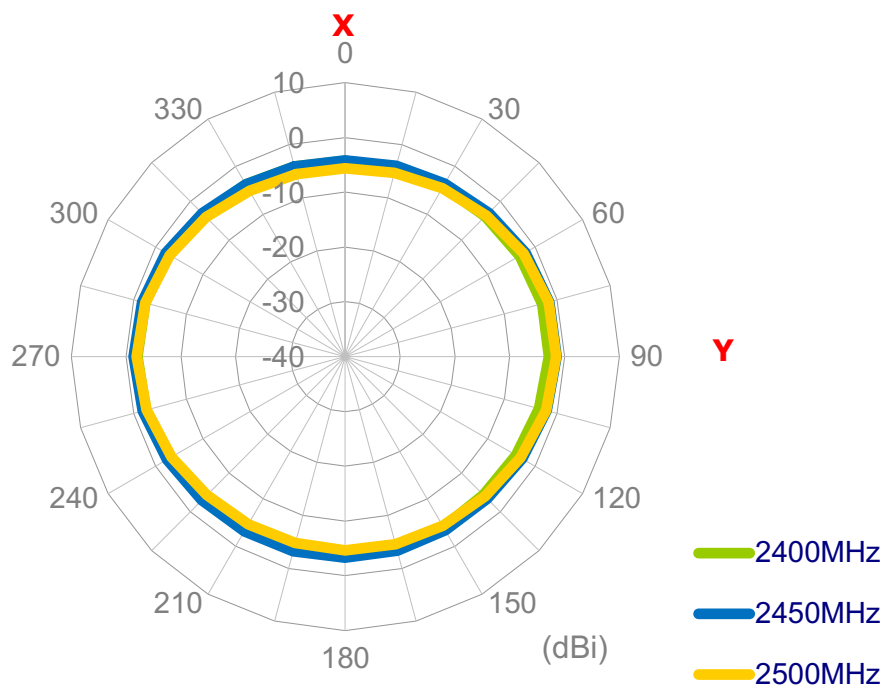


Figure 25 X-Y polar plot of Wi-Fi on 80x40mm ground plane

#### XZ Plane

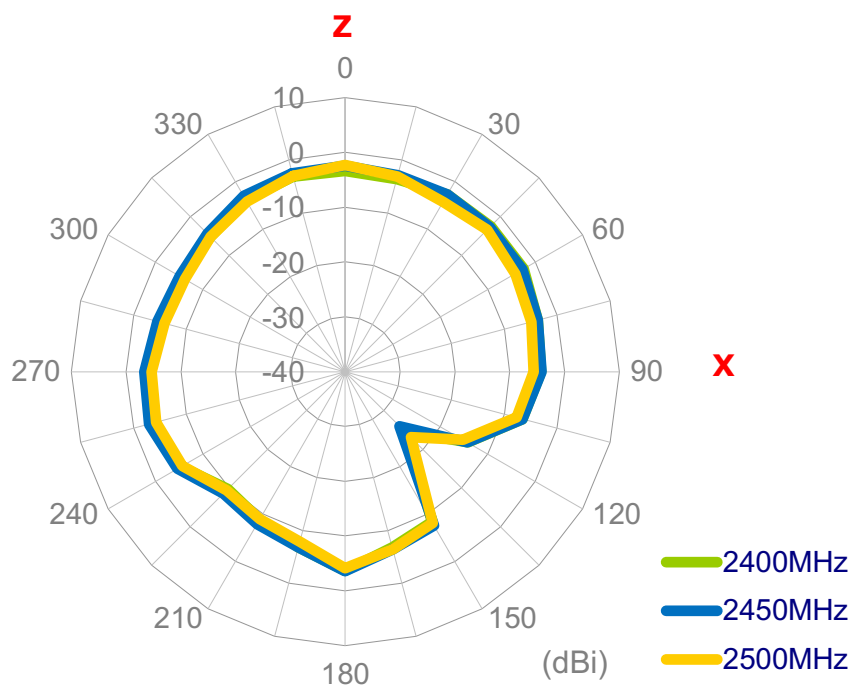


Figure 26 X-Z polar plot of Wi-Fi on 80x40mm ground plane



### YZ Plane

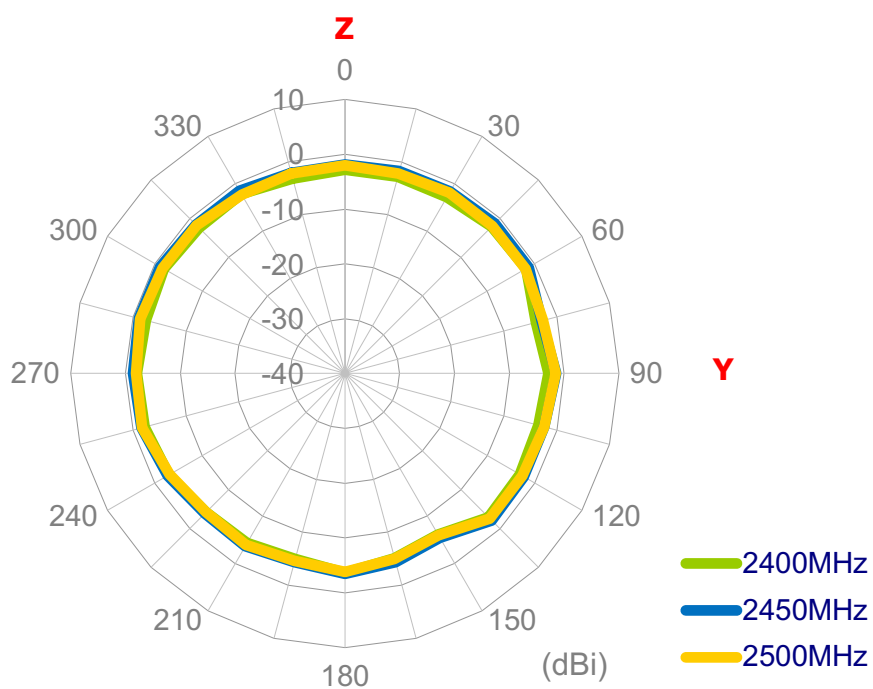


Figure 27 Y-Z polar plot of Wi-Fi on 80x40mm ground plane

### XY Plane

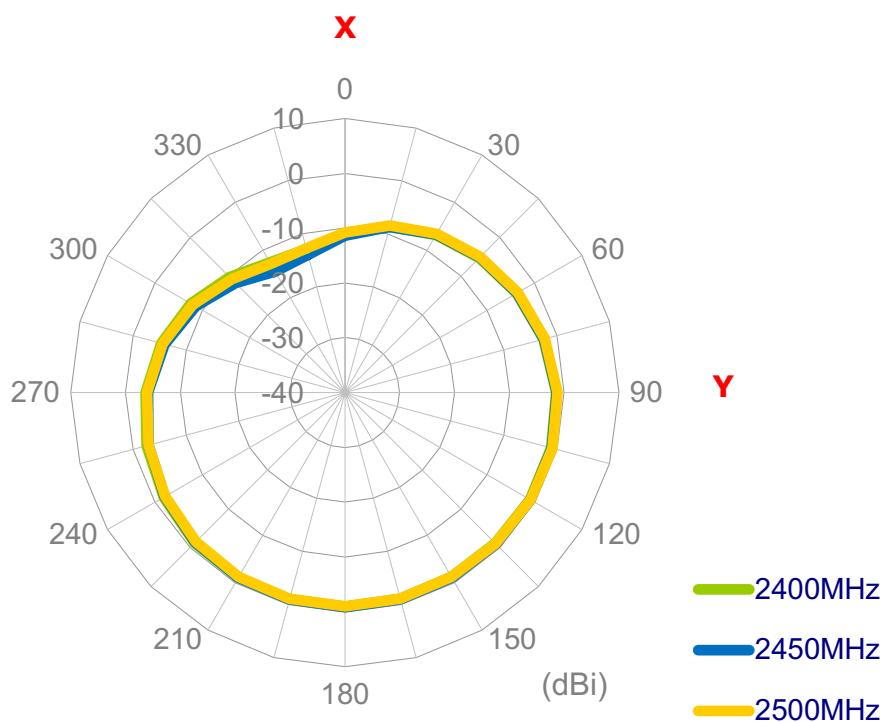


Figure 28 X-Y polar plot of Wi-Fi on 30x15mm ground plane



### XZ Plane

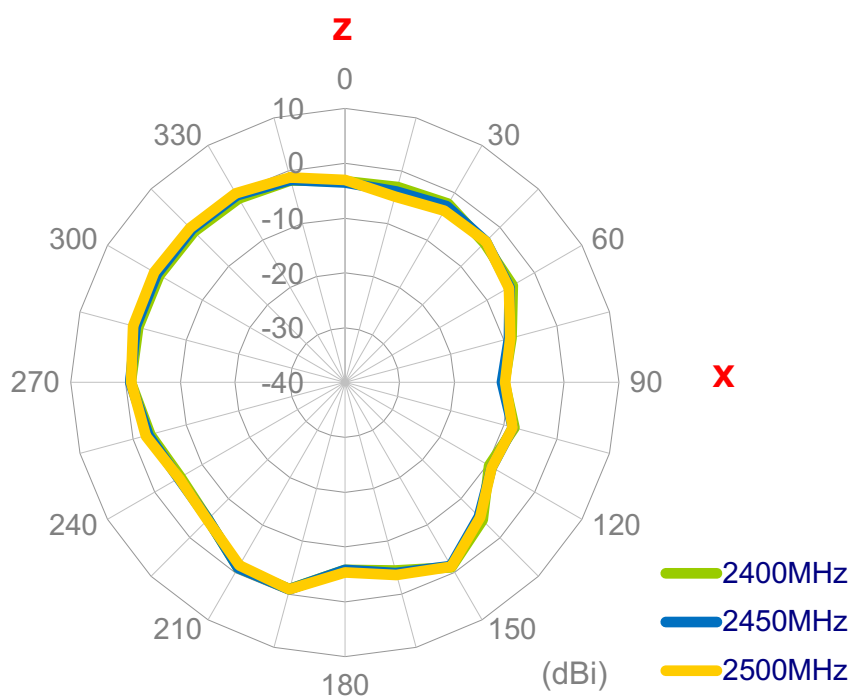


Figure 29 X-Z polar plot of Wi-Fi on 30x15mm ground plane

### YZ Plane


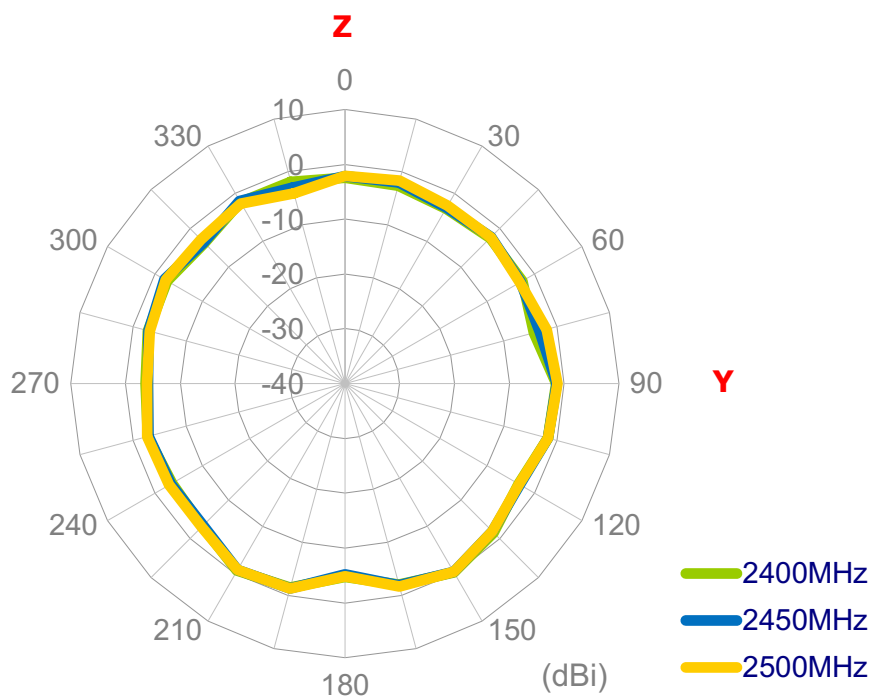


Figure 30 Y-Z polar plot of Wi-Fi on 30x15mm ground plane




## 4.2 3D Radiation Patterns

### 4.1.3 GPS

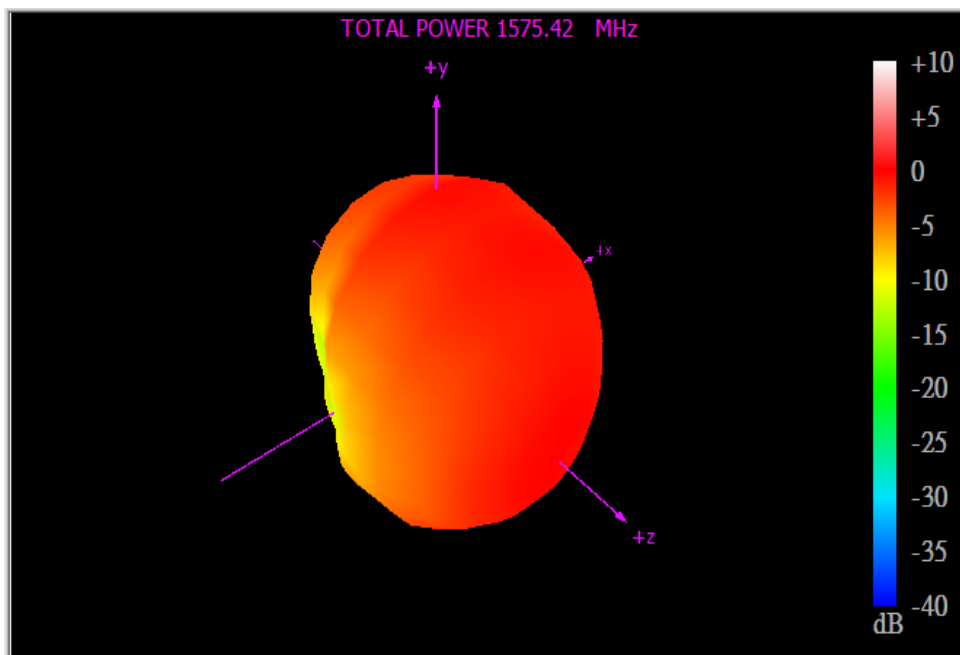

**Figure 31** GPS 3D radiation pattern on 80x40mm ground plane

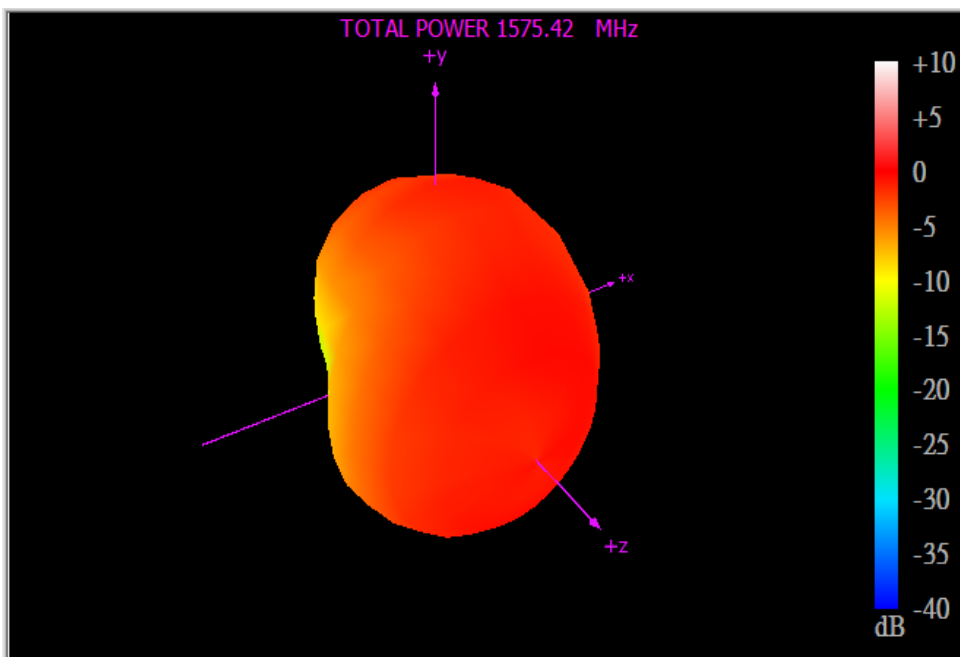

**Figure 32** GPS 3D radiation pattern on 80x40mm ground plane



### 4.1.4 Wi-Fi and Bluetooth

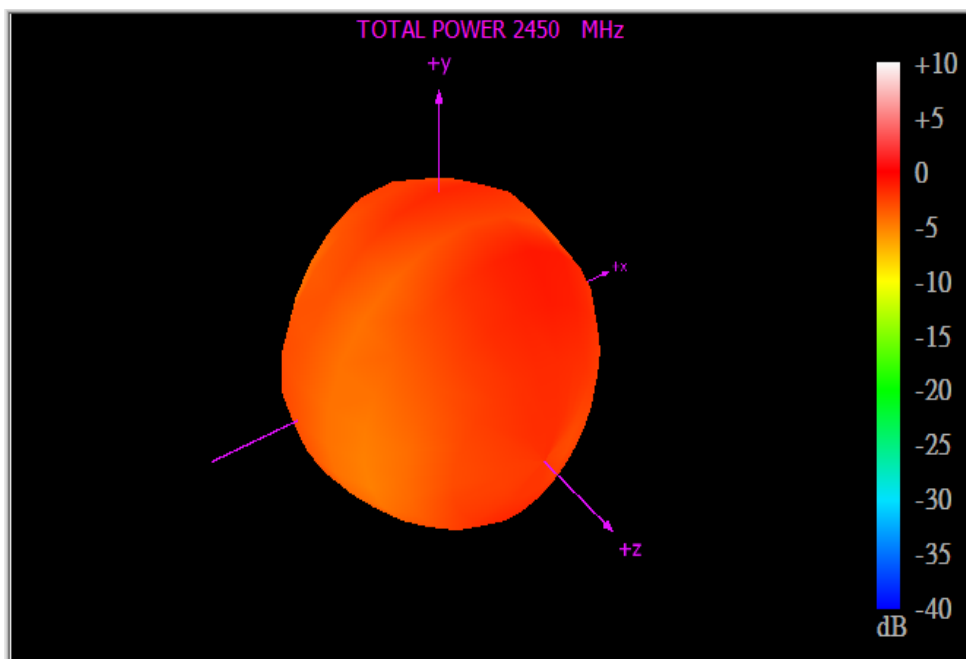


Figure 33 Wi-Fi 3D radiation pattern 80x40mm ground plane


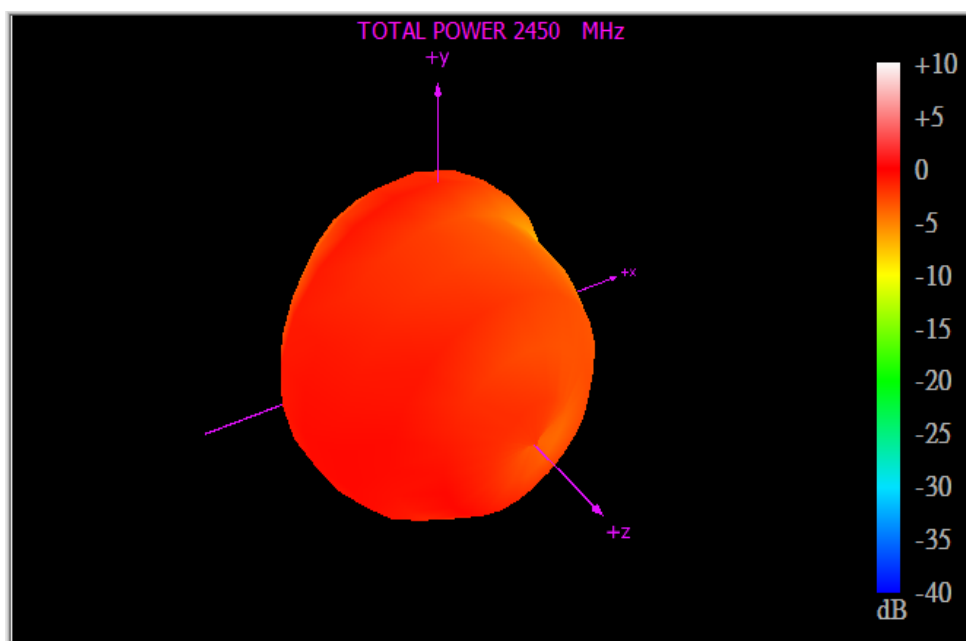


Figure 34 Wi-Fi 3D radiation pattern 30x15mm ground plane



# 5. Mechanical Drawing


## GWLAD.05.A ( 80 x 40mm ground plane )

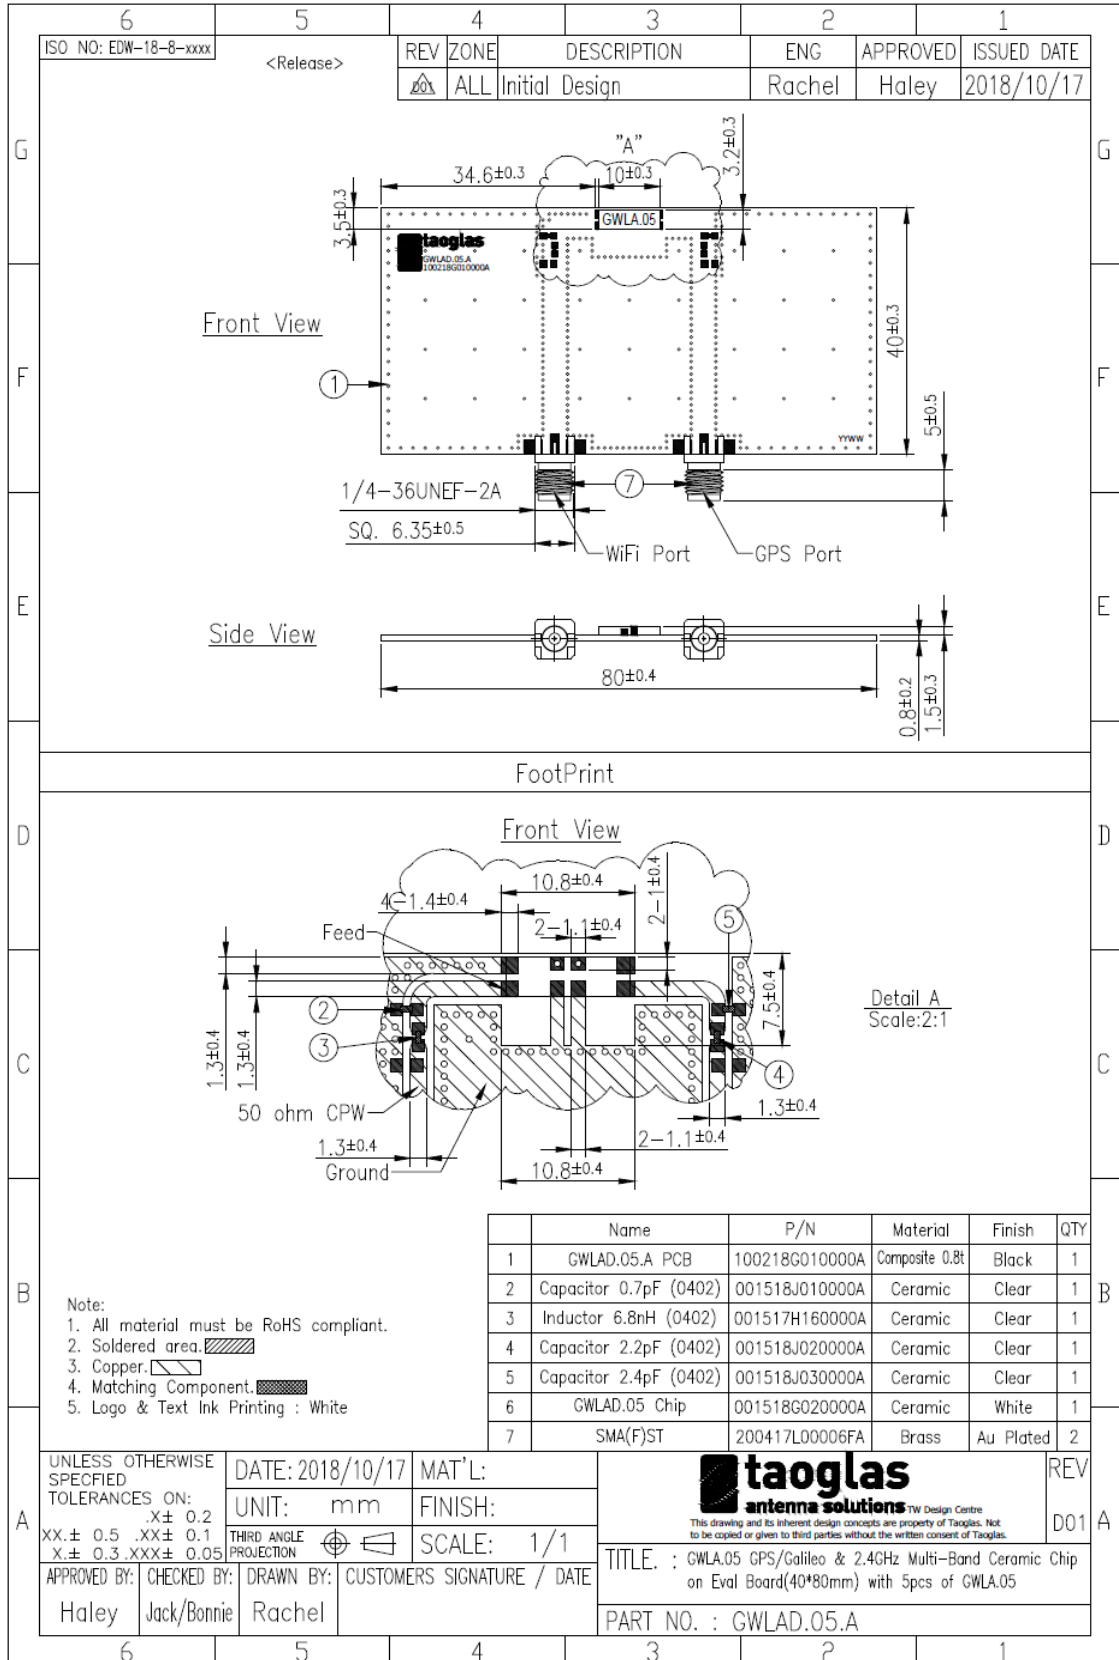



# GWLAD.05.B ( 30 x 15mm ground plane )

# TAOGLAS®

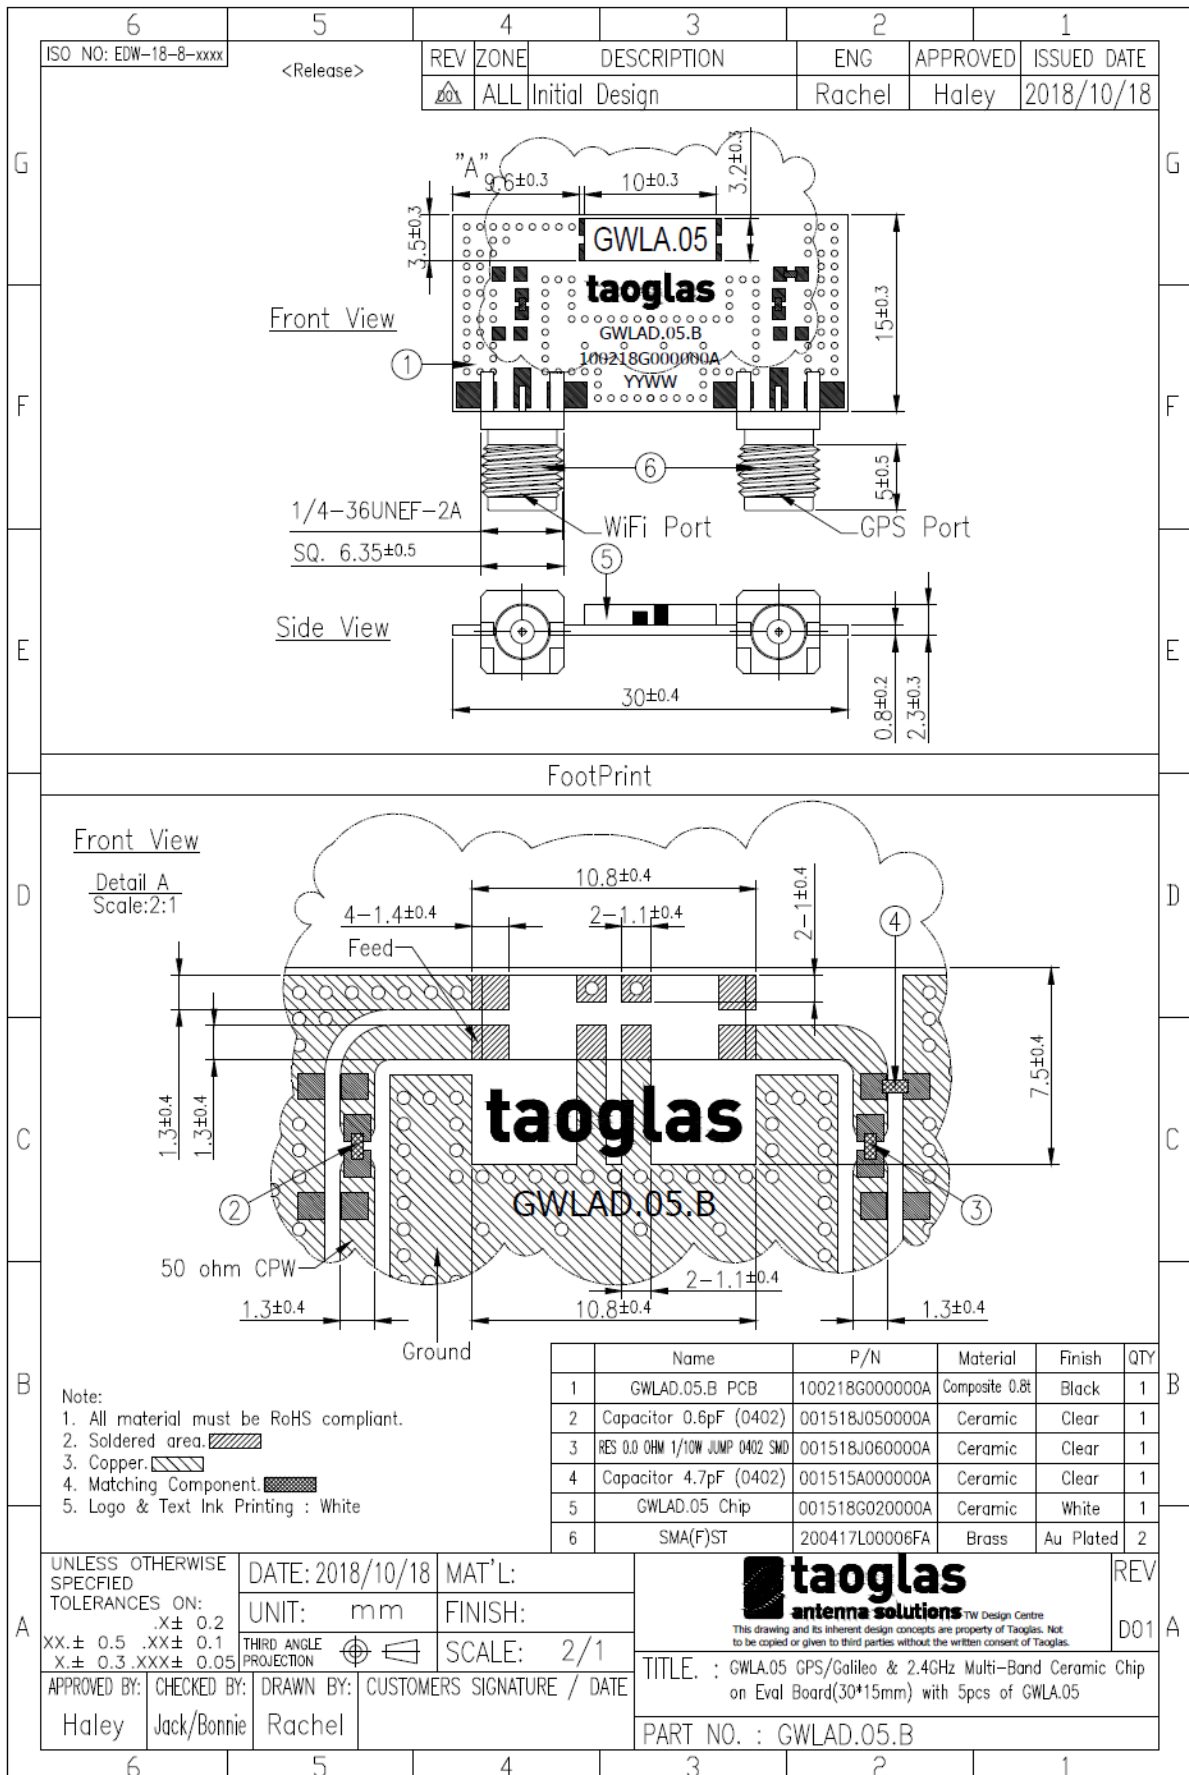





# 6. Layout Guide

## 6.1 Footprint


	6	5	4	3	2	1																
	ISO NO: EDW-18-8-xxxx	<Release>	REV ZONE DESCRIPTION ENG APPROVED ISSUED DATE																			
			001 ALL Initial Design Cedric Wing 2018/07/20																			
			002 ALL Modify printing Rachel Haley 2018/10/19																			
G	<p>Top View</p>						G															
F	<p>Rear View Left Side View Front View Right Side View Bottom View</p>						F															
E	Foot Print						E															
D	<p style="text-align: center;">Top Copper</p> <p>Pads 1, 4, 5 and 8 are the same size, Pads 2 and 3 are the same size, Pads 6 and 7 are the same size. Pad 5 and 8 should be connected to a 50 ohm transmission line.</p> <p>Connected to GND Connected to 50 ohm transmission line.</p>			<p style="text-align: center;">Top Solder Paste</p> <p>Pads 1, 4, 5 and 8 are the same size, Pads 2 and 3 are the same size, Pads 6 and 7 are the same size.</p>			D															
C	<p style="text-align: center;">Top Solder Mask</p> <p>This drawing is a negative of solder mask. Black regions are anti-mask.</p>			<p style="text-align: center;">Composite Diagram</p>			C															
B	<p>NOTE:</p> <table border="0"> <tr> <td>1. Tin Plated area</td> <td></td> <td>6. Ground keepout should extend through any inner PCB layers and any side around the antenna to minimize coupling from RF feed to ground, except the side facing system ground.</td> </tr> <tr> <td>2. Solder Mask area</td> <td></td> <td>7. Any vias in pads should be either filled or tented to prevent solder from wicking away from the pad during reflow.</td> </tr> <tr> <td>3. Copper area</td> <td></td> <td>8. The dimension tolerances should follow standard PCB manufacturing guidelines</td> </tr> <tr> <td>4. Paste area</td> <td></td> <td></td> </tr> <tr> <td>5. Keepout Region</td> <td></td> <td></td> </tr> </table>						1. Tin Plated area		6. Ground keepout should extend through any inner PCB layers and any side around the antenna to minimize coupling from RF feed to ground, except the side facing system ground.	2. Solder Mask area		7. Any vias in pads should be either filled or tented to prevent solder from wicking away from the pad during reflow.	3. Copper area		8. The dimension tolerances should follow standard PCB manufacturing guidelines	4. Paste area			5. Keepout Region			B
1. Tin Plated area		6. Ground keepout should extend through any inner PCB layers and any side around the antenna to minimize coupling from RF feed to ground, except the side facing system ground.																				
2. Solder Mask area		7. Any vias in pads should be either filled or tented to prevent solder from wicking away from the pad during reflow.																				
3. Copper area		8. The dimension tolerances should follow standard PCB manufacturing guidelines																				
4. Paste area																						
5. Keepout Region																						
A	UNLESS OTHERWISE SPECIFIED TOLERANCES ON: .X± 0.2 XX± 0.5 .XX± 0.1 X.X± 0.3 .XXX± 0.05		DATE: 2018/07/20 UNIT: mm THIRD ANGLE PROJECTION	MAT'L: Ceramic FINISH: White SCALE: 2/1	<p>taoglas antenna solutions TW Design Centre  <small>This drawing and its inherent design concepts are property of Taoglas. Not to be copied or given to third parties without the written consent of Taoglas.</small></p>		REV D02															
	APPROVED BY: Wing	CHECKED BY: Jack/Paul	DRAWN BY: Rachel	CUSTOMERS SIGNATURE / DATE	TITLE: : GPS/Galileo & 2.4GHz Multi-Band Ceramic Chip Antenna/10*3*1.5(mm) PART NO. : GWLA.05																	
	6	5	4	3	2	1																

\* Footprint drawings in .dwg format will be provided upon request.




## 6.2 Matching Circuit

Like all antennas, surrounding components, enclosures, and changes to the GND plane dimensions can alter performance. A pi-matching network like the one shown below is required in case adjustments need to be made. The antenna EVB has a similar matching network. The components on the EVB are a good starting point for a new design, but will need to be adjusted upon integration for best performance. The zero ohm resistor is needed for the ability to solder down a coax pigtail to make measurements with a vector network analyzer.

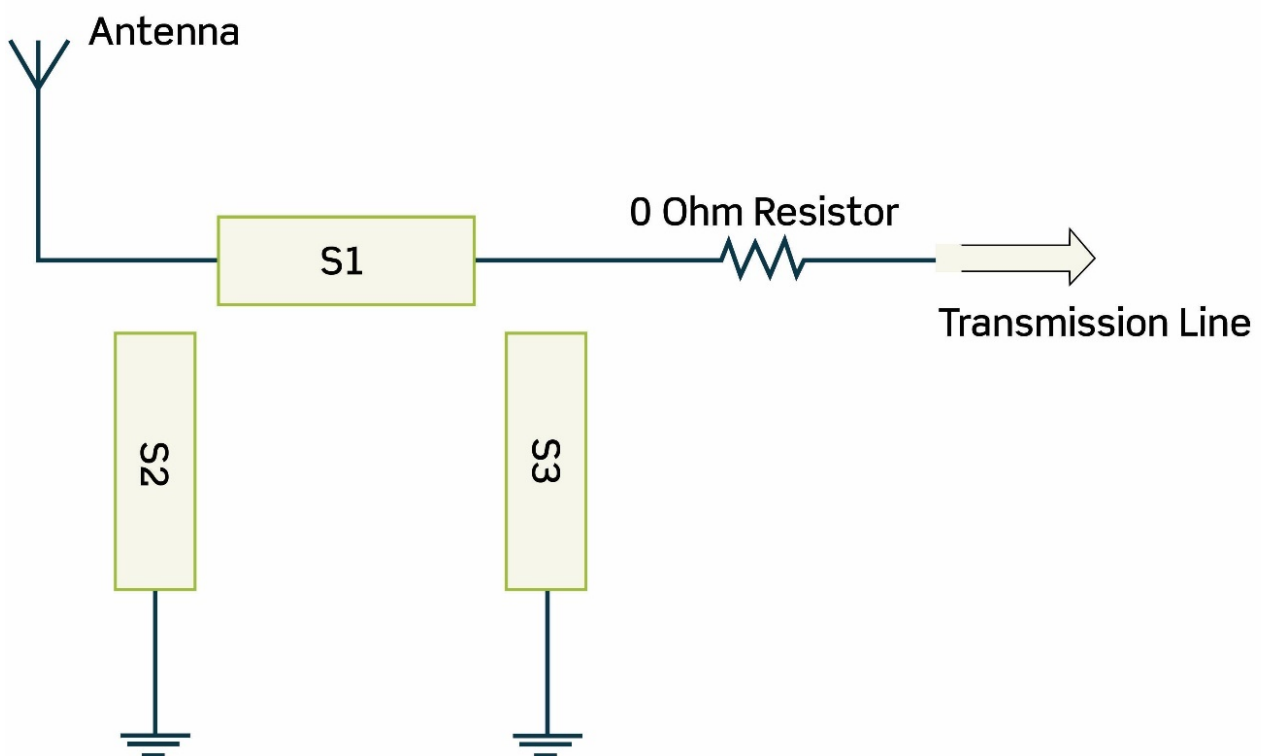

# 7. Solder Reflow Profile

Typical Soldering Profile for Lead-free Process:

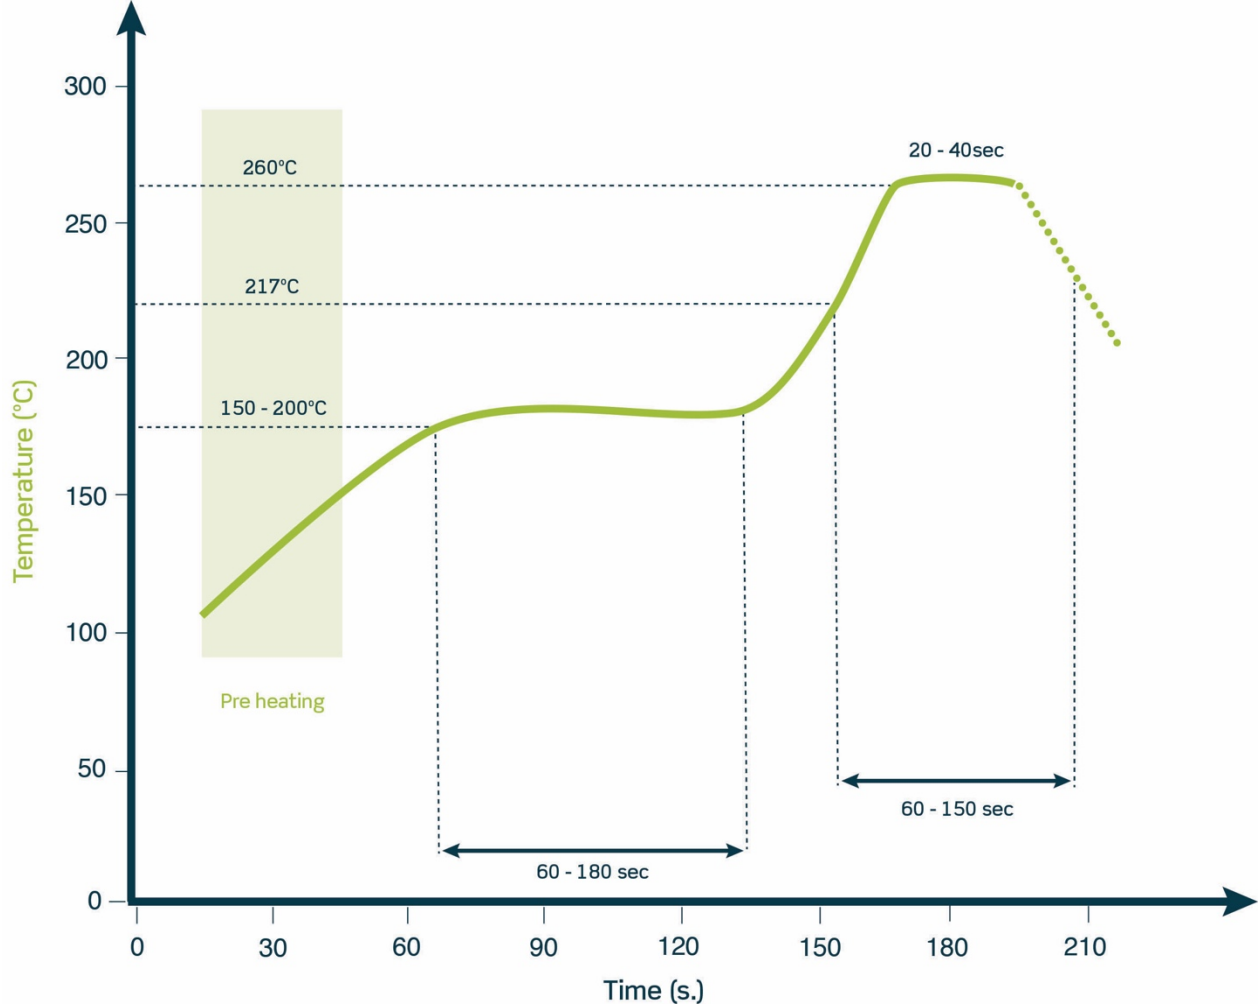





**TAOGLAS®**

## 8. Packaging


1000pcs GWLA.05 per Tape & Reel  
Dimensions -  $\varnothing 330 \times 28.4 \text{mm}$   
Weight - 0.6Kg

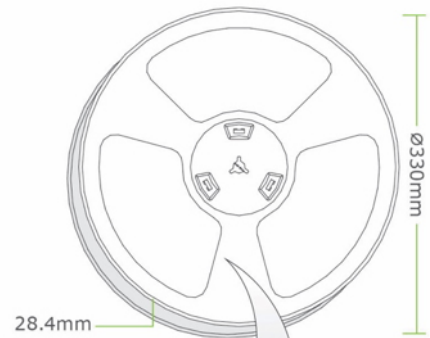

1000pcs GWLA.05 per carton  
Dimensions - 350\*340\*47mm  
Weight - 0.9Kg

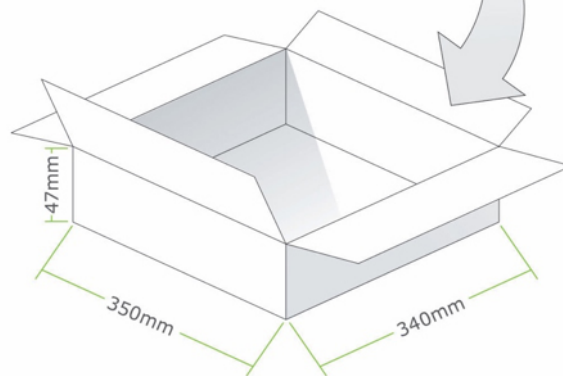

5000pcs GWLA.05 per carton  
Dimensions - 360\*370\*275mm  
Weight - 5.0Kg

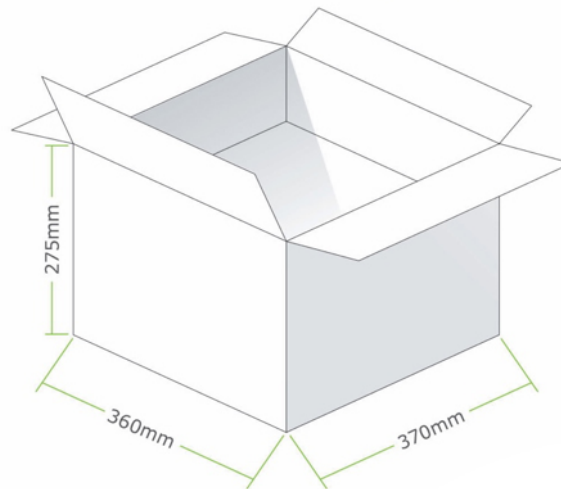

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas Ltd.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А