

## DESCRIPTION

Designed to support DDR1, DDR2 and DDR3 SDRAM memory power requirements, the VCN60/70 Series offers high efficiency and no isolation. These very high current density and flexibility devices are available in a variety of applications such as automotive, medical equipment, telecommunications hardware, industrial automation and test equipment.

**OBSOLETE PRODUCT**  
Last time buy: 04 January 2013  
These high efficiency 80W modules feature a wide output range which is suitable for powering ASICs, FPGAs, DSPs and other types of ICs. The use of integrated drivers and switching devices allows the VCN60/70 Series to switch at high frequency, providing high bandwidth and high current density (50A/in<sup>2</sup>) in a 1U form factor without sacrificing efficiency.

## SELECTION GUIDE

Order Code	Nominal Input Voltage (V)	Output Current (A)	Output Voltage	Mounting Type	Form Factor
<b>VCN60BADJTU-1C</b>	12	60	Adjustable	Thru-hole	1U
<b>VCN70BADJTU-1C</b>	12	70	Adjustable	Thru-hole	1U

## FEATURES

- Supports Double Data Rate SDRAM specifications DDR1, 2, 3 and similar requirements
- Programmable output voltage
- Soft start circuit
- Over-voltage protection
- Over-current protection
- Over-temperature protection
- Differential remote sense
- Power good signal
- Output enable
- High efficiency
- "1U" height
- Pre-bias turn on
- Fused input

## INPUT CHARACTERISTICS

Parameter	Conditions	MIN.	TYP.	MAX.	Units
<b>Input voltage operating range</b>		10.2	12	13.2	
<b>Turn ON threshold</b>	V <sub>IN</sub> rising		9.7		Vdc
<b>Turn OFF threshold</b>	V <sub>IN</sub> falling		8.7		
<b>Maximum input current</b>	1.80V <sub>OUT</sub> @ 70A/12V <sub>IN</sub>		12		A
<b>No-load input current</b>	1.80V <sub>OUT</sub>			330	mA
<b>Disabled input current</b>			50		
<b>Input reflected ripple current</b>	1.80V <sub>OUT</sub> @ 70A/13.2V <sub>IN</sub>		100		mA RMS
<b>Recommended External Input Capacitance<sup>1</sup></b>	OSCON type or equivalent	270			µF

## OUTPUT CHARACTERISTICS

Parameter	Conditions	MIN.	TYP.	MAX.	Units
<b>Voltage set point</b>	Programmable	0.6		3.5	V
<b>Line regulation</b>	1.2V <sub>OUT</sub>			+/- 0.1	
<b>Load regulation</b>	1.2V <sub>OUT</sub>			+/- 0.2	%
<b>Initial setpoint accuracy</b>	0.1% trim resistor @ 1.2V		0.5	+/- 1.0	
<b>Ripple &amp; noise</b>	20MHz bandwidth		25		mV p-p
<b>Current operating range</b>	140W max output	0		70	A
<b>Efficiency @ 60Amp Load</b>	100% load 12V <sub>IN</sub> , 1.8V <sub>OUT</sub>		88		%
<b>Turn-on time</b>				10	µs
<b>Remote sense compensation</b>				10	%V <sub>o</sub> nom
<b>Required External Output Capacitance<sup>2</sup></b>	Setpoint dependent	560			µF
<b>Transient Response<sup>3</sup></b>	1A / µs			+/- 3	%
	0.5A / µs			+/- 2	

1. No capacitor needed for Input Ripple Current capability. The voltage rating on the external caps should be twice the expected maximum working voltage.
2. Characterized with low ESR output capacitors, such as United Chemi-Con 4PS560MH11, Fujitsu FP-4R0RE561M-S1R, Sanyo OSCON 4SP560M. Setpoints of 1V and lower require three capacitors, with a maximum of 4000µF. Setpoints of 1.2V and 1.5V require two capacitors, with a maximum of 4000µF. Setpoints of 1.8V and higher require one capacitor, with the maximum allowed capacitance of 4000µF up to 2V and 2300µF maximum at above 2V. The voltage rating on the external caps should be twice the expected maximum working voltage.
3. Load steps from 30-60A for 1.8V and lower set points. 20-40A for 2.5V and 3.3V setpoints.



For full details go to  
[www.murata-ps.com/rohs](http://www.murata-ps.com/rohs)

GENERAL CHARACTERISTICS					
Parameter	Conditions	MIN.	TYP.	MAX.	Units
Enable input	LOW = disable			0.8	Vdc
	HIGH = enable	1.7		6.0	
Power good input	LOW = fault (Imax = 4mA)			0.4	Vdc
	HIGH = good (open drain with ESD clamp)			5.3	
Storage temperature		-40		70	°C
Operating temperature		0		70	
Material flammability	UL 94V-0				
MTBF	Calculated (RAC PRISM <sup>4</sup> @ 40°C 1.8V @ 50A)		4.3		x10 <sup>6</sup> Hrs
Switching frequency	Per phase	450			KHz
Dimensions <sup>5</sup>	VCN60 2.4" L x 0.375" W x 1.25" H (60.96 mm x 9.525 mm x 31.75 mm)				
	VCN70 2.4" L x 0.660" W x 1.25" H (60.96 mm x 16.764 mm x 31.75 mm)				

<sup>4</sup> PRISM is a standard for MTBF prediction and system reliability analysis, originally developed by the Reliability Analysis Center (RAC).

<sup>5</sup> Width is a maximum dimension.

PROTECTION CHARACTERISTICS					
Parameter	Conditions	MIN.	TYP.	MAX.	Units
Output current limit	Hiccup mode		95		A
Oversupply shutdown	Latching		116		%V <sub>NOM</sub>
Input fusing			20		A

#### NOTES

V<sub>IN</sub> = 12Vdc, T<sub>A</sub> = 25°C, Airflow = 400LFM unless otherwise noted. Specifications subject to change without notice.


#### OUTPUT VOLTAGE SETPOINT ADJUSTMENT

The following relationship establishes the calculation of external resistors:






$$R_{ADJ} (k\Omega) = \frac{1.2}{(V_{OUT} - 0.6)}$$

For V<sub>OUT</sub> setting an external resistor is connected between the R<sub>TRIM</sub> pin and – Sense pin.

Typical Efficiency Curve (12V<sub>IN</sub>, 25°C)

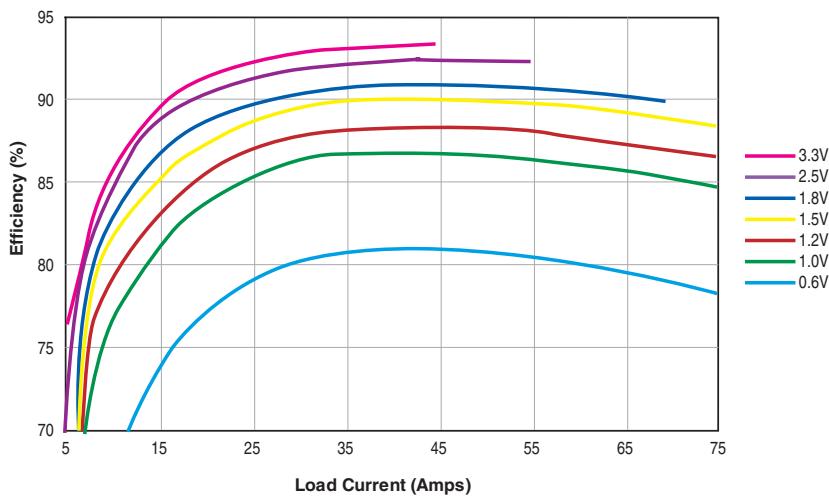

**Thermal Derating Curves for the 60 Amp rated VCN60BADJTU-1C**

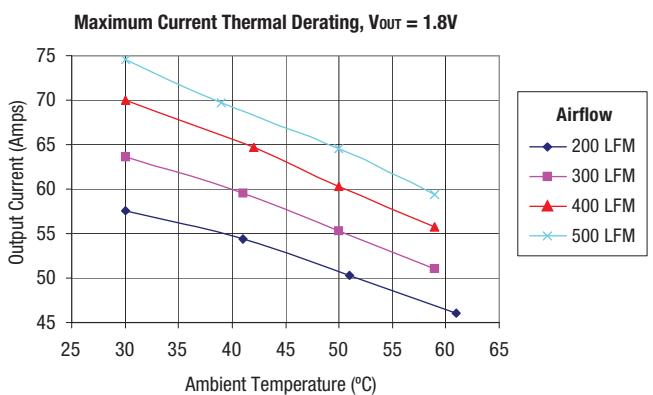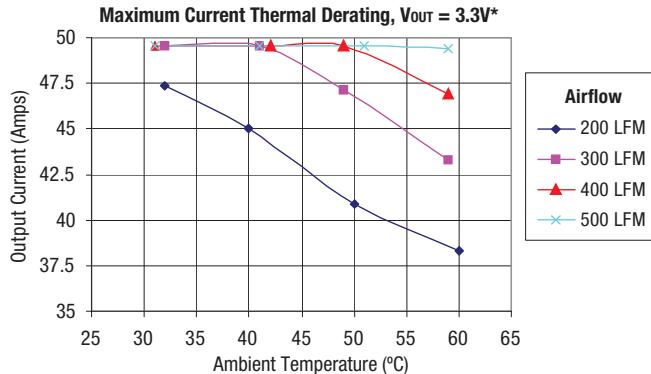
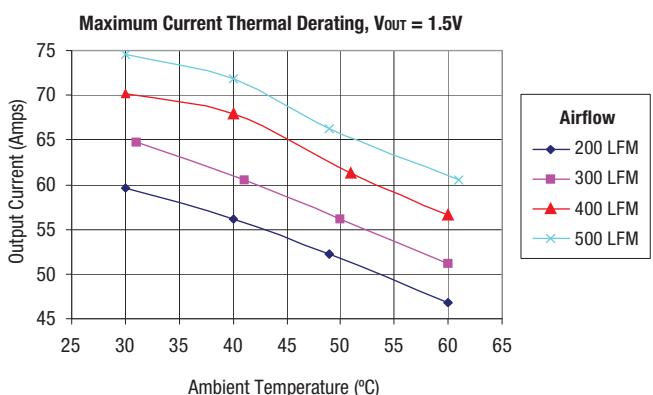
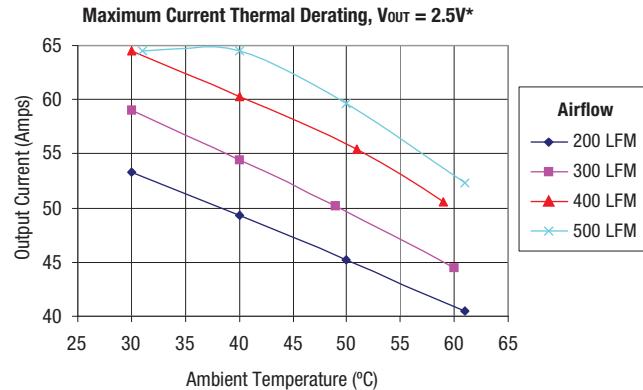
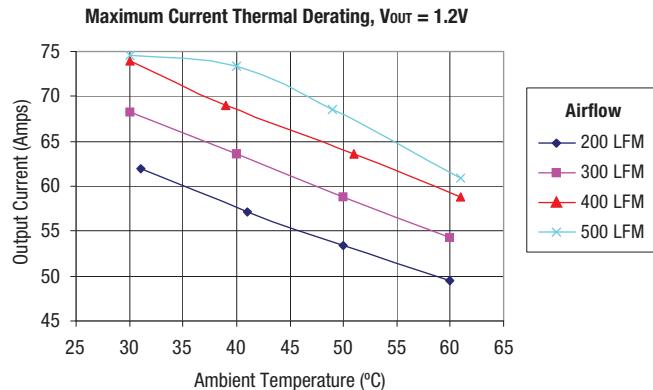


The table shows the appropriate derated output current for running the unit at 70°C ambient temperature and respective airflows.

VCN60BADJTU-1C DERATED OUTPUT CURRENT (AMPS) AT 70°C AMBIENT					
	1.2V	1.5V	1.8V	2.5V*	3.3V*
300LFM	49.6	47.3	46.0	40.5	37.5
400LFM	52.0	50.3	49.0	43.5	40.5
500LFM	55.0	53.0	51.3	47.0	43.3


\* IOutput loads in excess of ~140W are possible at higher V<sub>OUT</sub> settings (>2V), if proper Thermal Derating is maintained, and if V<sub>IN</sub> is high enough to limit input current to below 15A in the 20A rated on board input fuse.

## Thermal Derating Curves for the 70 Amp rated VCN70BADJTU-1C

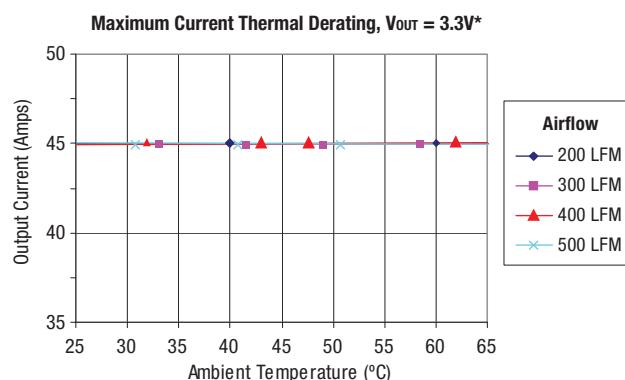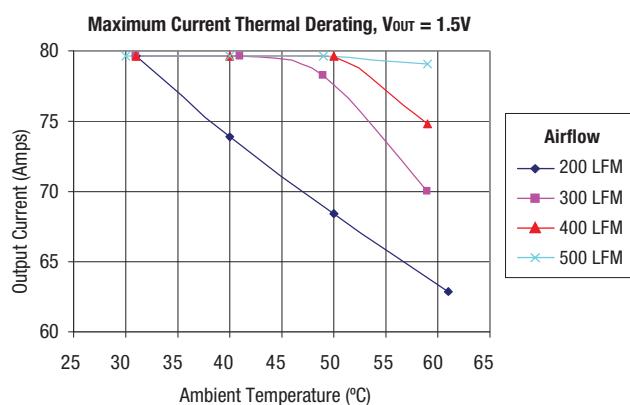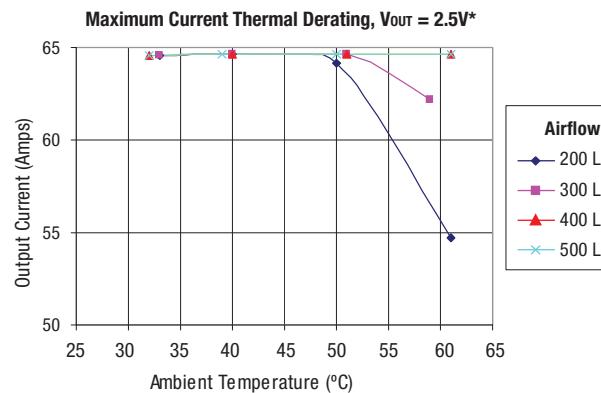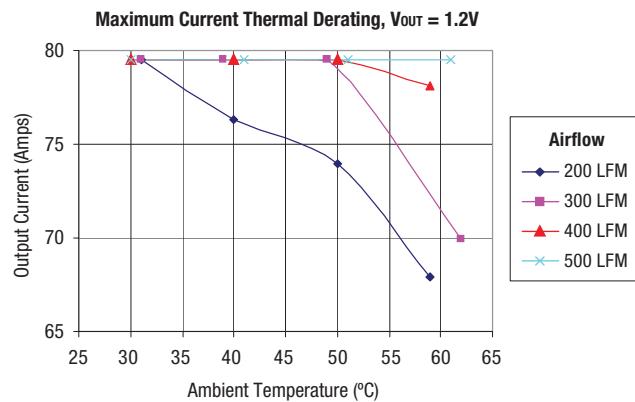

**Note:**

For the 3.3V model, the maximum output current at 3.3V is 45A due to input current limitations.

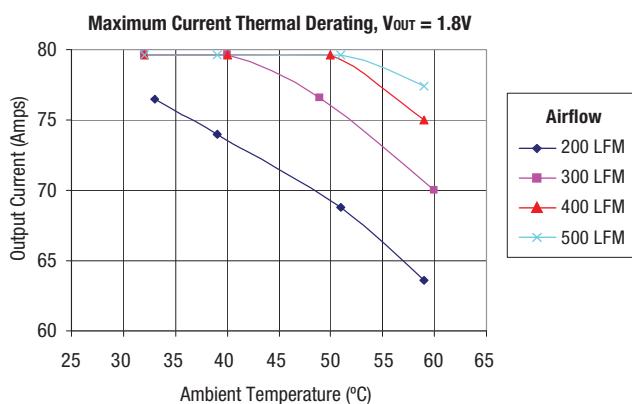


The table shows the appropriate derated output current for running the unit at 70°C ambient temperature and respective airflows.

**VCN70BADJTU-1C DERATED OUTPUT CURRENT (AMPS) AT 70°C AMBIENT**

	1.2V	1.5V	1.8V	2.5V*	3.3V*
<b>300LFM</b>	59.6	57.6	57.0	53.6	45.0
<b>400LFM</b>	63.6	62.1	61.1	57.6	45.0
<b>500LFM</b>	67.9	65.6	64.6	61.6	45.0


\* IOutput loads in excess of ~140W are possible at higher  $V_{OUT}$  settings (>2V), if proper Thermal Derating is maintained, and if  $V_{IN}$  is high enough to limit input current to below 15A in the 20A rated on board input fuse.

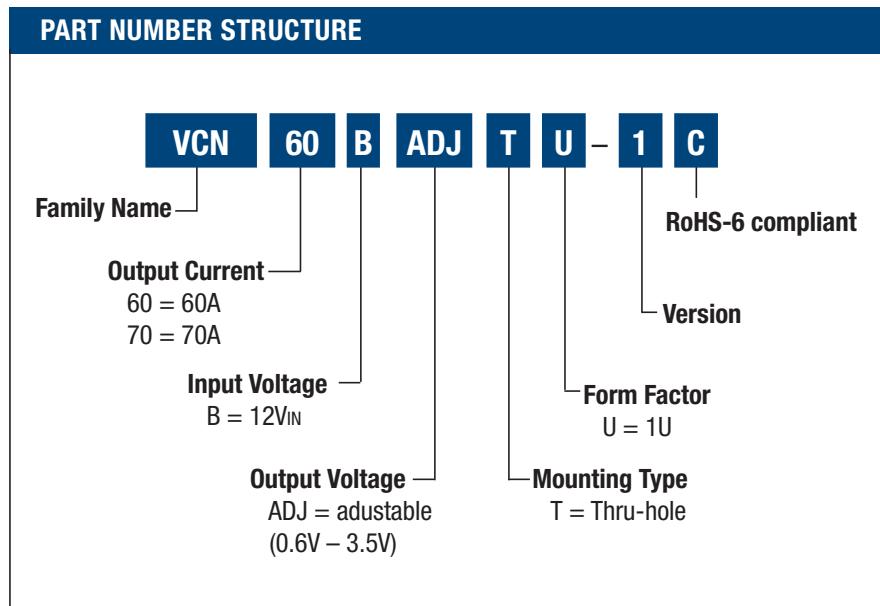

PIN ASSIGNMENT*			
Pin	Function	Pin	Function
1	Trim	13	12V input
2	KEY	14	12V input
3	VSS	15	VOUT
4	PWRGD	16	VOUT
5	Reserved	17	Vss
6	Reserved	18	Vout
7	Vss	19	Vss
8	Vss	20	VOUT
9	OUTEN	21	Vss
10	-SENSE	22	VOUT
11	+SENSE	23	Vss
12	12V input	24	VOUT

\* Because of the high currents, connect all identical signals in parallel with adequate PC board etch. Connect the +Sense pin to the VOUT connection at the load. Connect the -Sense pin to the Vss pin at the load. If the Sense pins are not used, connect them to their respective +VOUT and Vss pins at the converter.

**MECHANICAL SPECIFICATIONS FOR THE VCN60BADJTU-1C**

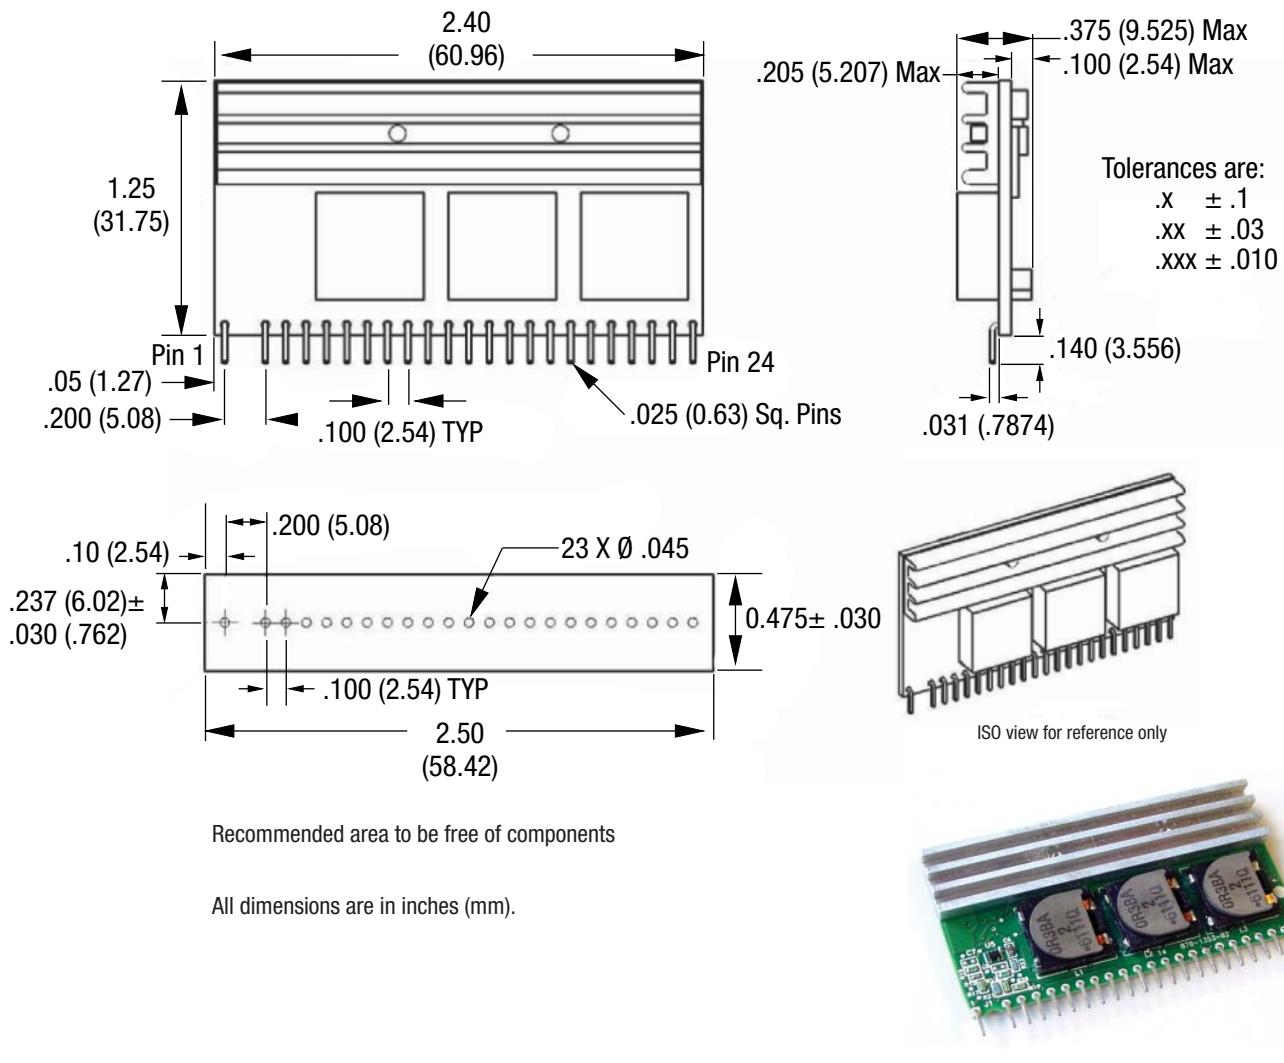

**RoHS COMPLIANCE**


The VCN60BADJTU-1C and VCN70BADJTU-1C are in compliance with the European Union Directive 2002/95/EC (RoHS) with respect to the following substances:

- lead (Pb)
- hexavalent chromium
- cadmium (Cd)
- polybrominated biphenyls (PBB)
- mercury (Hg)
- polybrominated diphenyl ethers (PBDE)

**RoHS PROCESS NOTE**

These products are not intended to go through a reflow solder process. Use wave solder, selective solder or hand solder process with a peak temperature of 260°C for 10 seconds.

**MECHANICAL SPECIFICATIONS FOR THE VCN70BADJTU-1C**

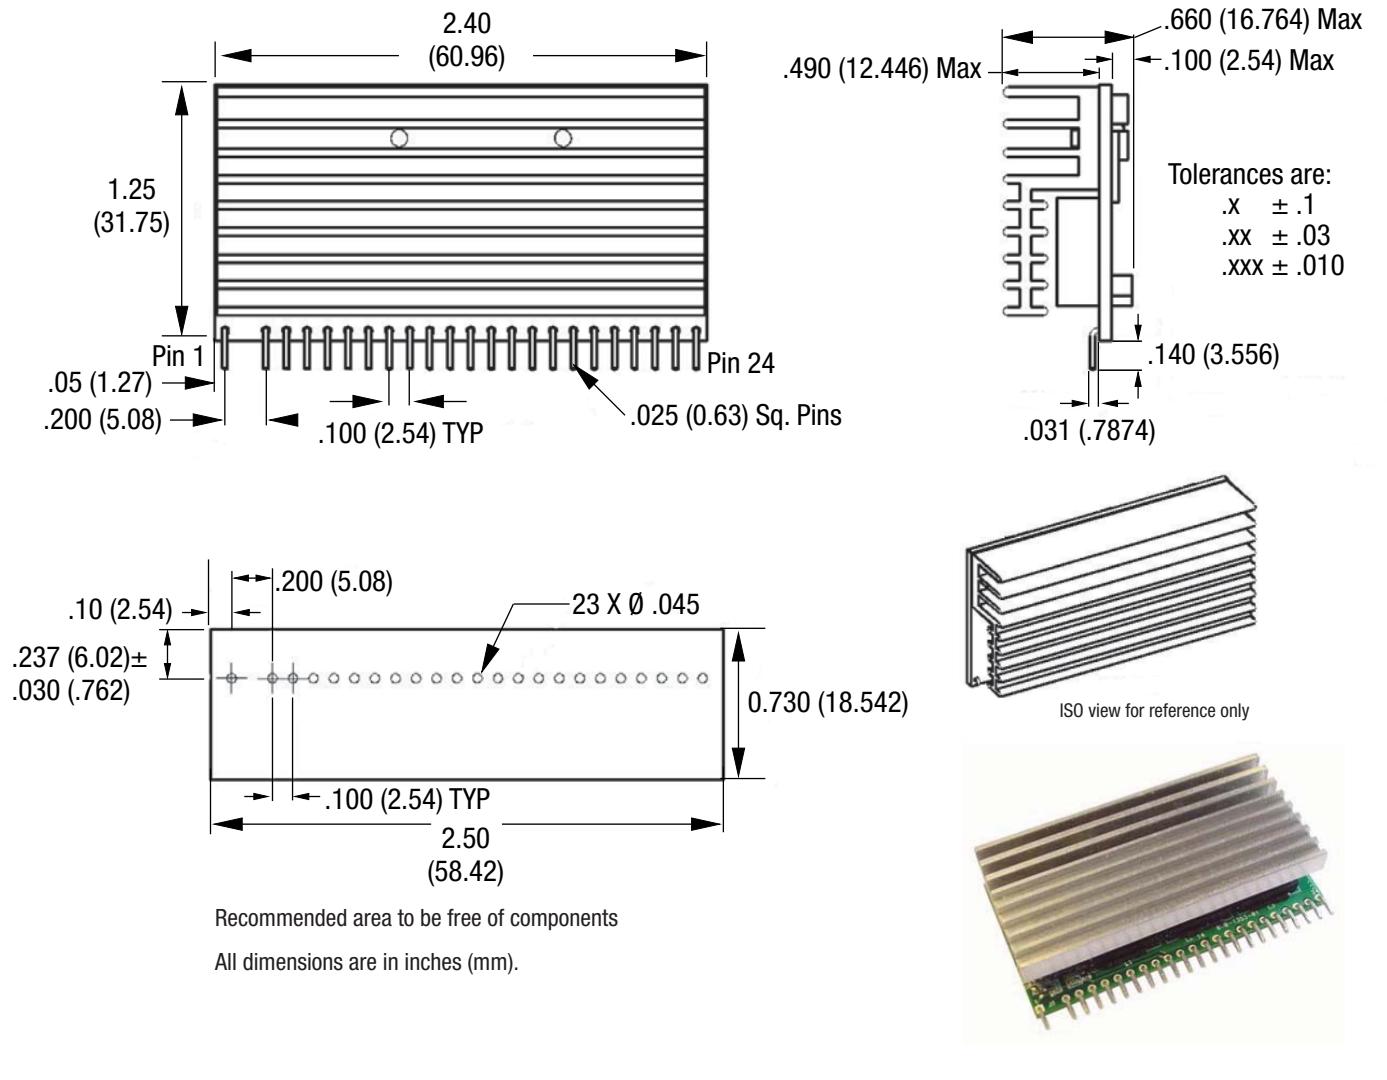



# OCEAN CHIPS

## Океан Электроники

### Поставка электронных компонентов

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

#### Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибутором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибутором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А