


Band Pass Filter for Spectrum Analyzer Display

■ GENERAL DESCRIPTION

The **NJM2760** is a band pass filter for spectrum analyzer display. It includes 4-band BPF amplifier, 4-band detector and recording level indicator output.

It is suitable for mini-components, CD radio cassette and other audio components.

■ PACKAGE OUTLINE




NJM2760V

■ FEATURES


- Operating Voltage +2.7V to +9V
- 4 Band Pass Filters & Detector
- Recording Level Indicator Output
- Low Offset Voltage 5mV typ.
- Adjustable Input Sensitivity
- Bipolar Technology
- Package Outline SSOP20

■ PIN CONFIGURATION



1. IN1	20. BUF2OUT
2. IN2	19. BPF1IN2
3. BUF1OUT	18. BPF1IN1
4. BPF2IN1	17. RECOUT
5. BPF2IN2	16. BPF1OUT
6. BPF3IN1	15. BPF2OUT
7. BPF3IN2	14. BPF3OUT
8. BPF4IN1	13. BPF4OUT
9. BPF4IN2	12. N.C.
10. GND	11. V+

■ BLOCK DIAGRAM

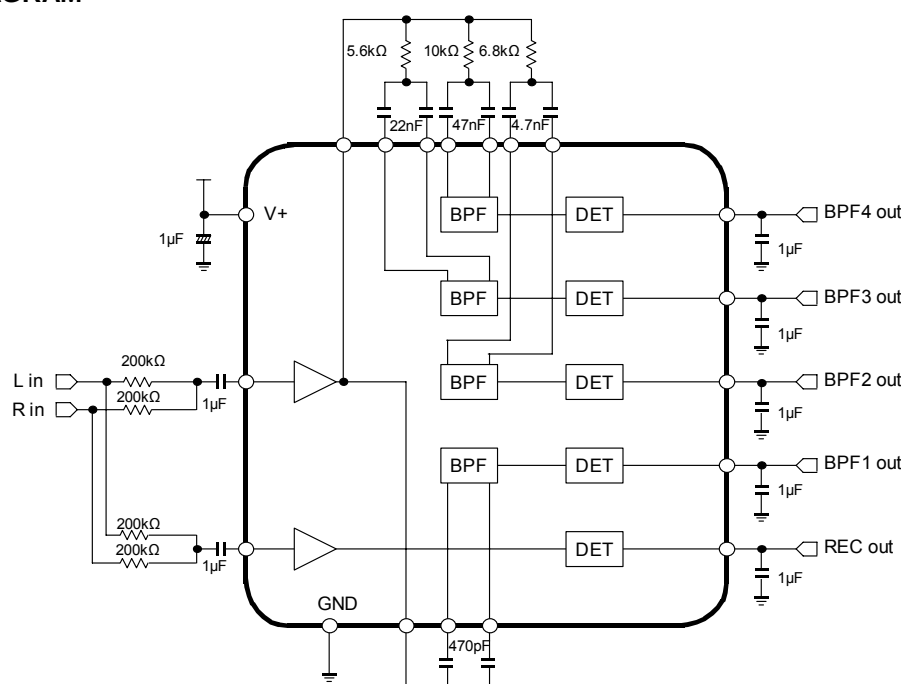


■ ABSOLUTE MAXIMUM RATING (Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V ⁺	14	V
Power Dissipation	P _D	300	mW
Operating Temperature Range	Topr	-20 to +75	°C
Storage Temperature Range	Tstg	-40 to +125	°C

■ ELECTRICAL CHARACTERISTICS (Ta=25°C, V⁺=3.3V, V_{IN}=1V_{PEAK} unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
◆ Power Supply						
Operating Voltage	V ⁺	-	2.7	3.3	9.0	V
Operating Current	I _{CC}	No Signal	-	1.4	3.0	mA
◆ AC CHARACTERISTICS						
Typical Output Voltage	V _{OT}	V _{IN} =1V _{peak} , f=Center Frequency of BPF	0.7	1.0	1.42	V
Maximum Output Voltage	V _{OM}	V _{IN} =3V _{peak} , f=Center Frequency of BPF	2.1	3.0	-	V
BPF1 Center Frequency Level	G _{VBPF1}	f=8kHz	-3	0	+3	dB
BPF2 Center Frequency Level	G _{VBPF2}	f=1.2kHz	-3	0	+3	dB
BPF3 Center Frequency Level	G _{VBPF3}	f=300Hz	-3	0	+3	dB
BPF4 Center Frequency Level	G _{VBPF4}	f=80Hz	-3	0	+3	dB
DC Offset Voltage	V _{OS}	No Signal	-	5	30	mV


◆ TEST CIRCUIT

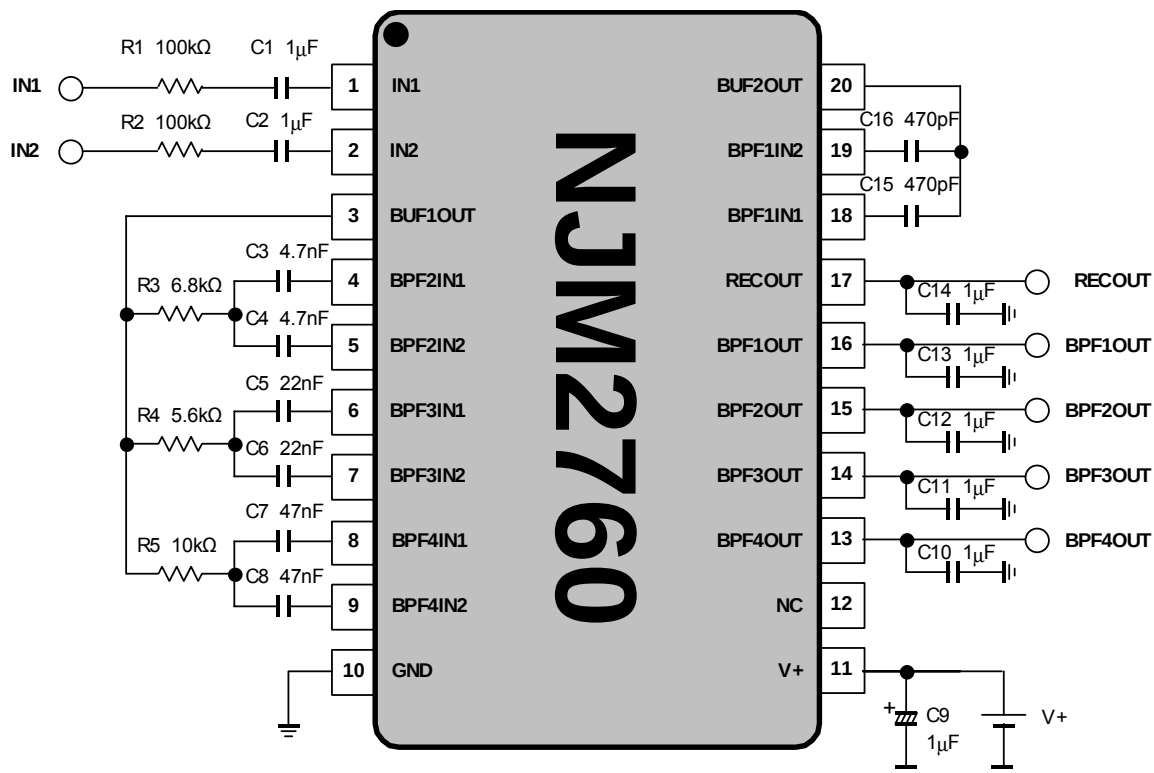

■ TERMINAL DESCRIPTION

No.	SYMBOL	FUNCTION	EQUIVALENT CIRCUIT	VOLTAGE
1 2 5 7 9 19	IN1 IN2 BPF2IN2 BPF3IN2 BPF4IN2 BPF1IN2	Input for BPF1-4 Input for recording level detector Capacitor terminal for BPF2 Capacitor terminal for BPF3 Capacitor terminal for BPF4 Capacitor terminal for BPF1		1.4V
3 20	BUF1OUT BUF2OUT	Buffer output Buffer output		1.4V
4 6 8 18	BPF2IN1 BPF3IN1 BPF4IN1 BPF1IN1	Capacitor terminal for BPF2 Capacitor terminal for BPF3 Capacitor terminal for BPF4 Capacitor terminal for BPF1		1.4V
13 14 15 16 17	BPF4OUT BPF3OUT BPF2OUT BPF1OUT RECOUT	BPF4 output BPF3 output BPF2 output BPF1 output Recording level detector output		0V
10	GND	Ground terminal	—	-
11	V+	Power supply terminal	—	-

APPLICATION CIRCUIT

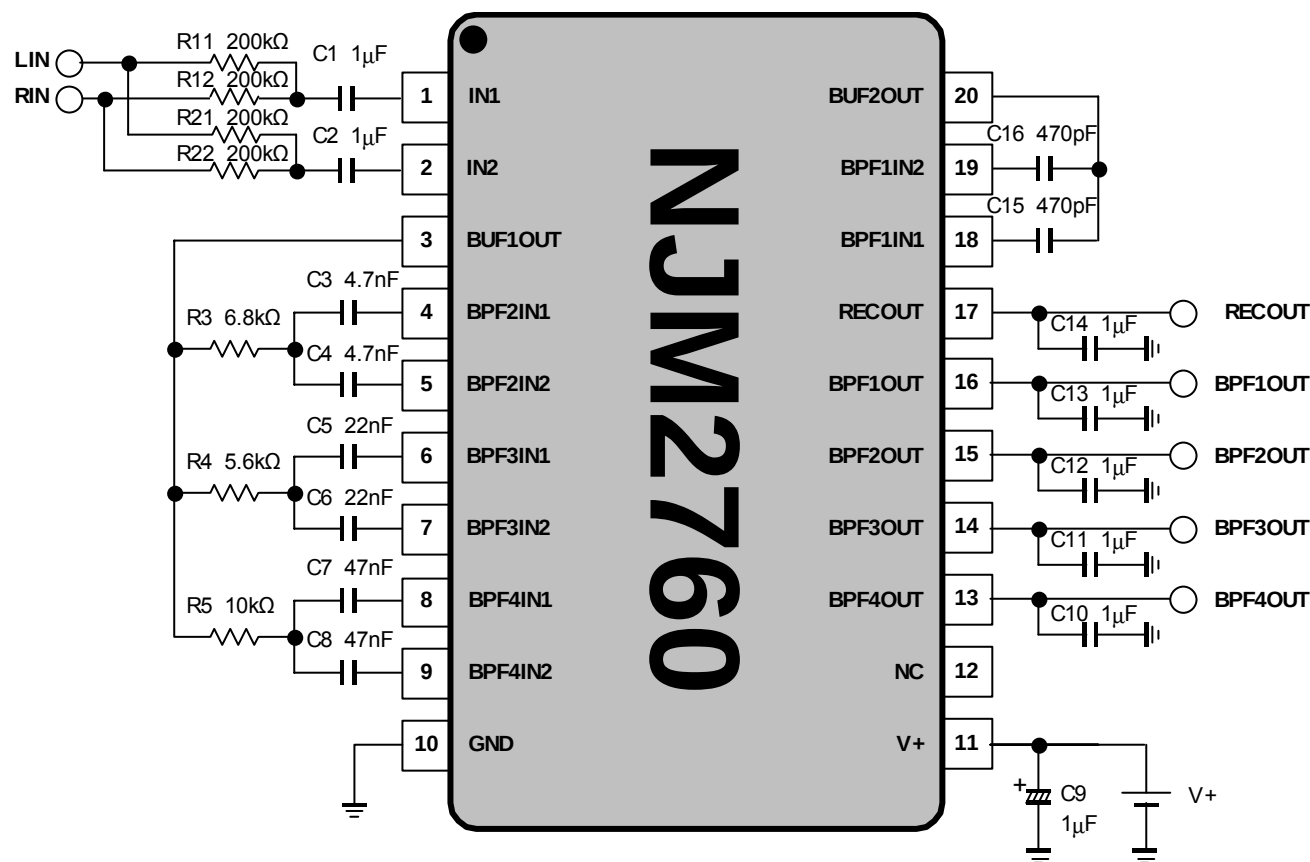

APPLICATION NOTE

1. Center Frequency Setting for Band Pass Filters

Band pass filters equivalent circuits as follows.

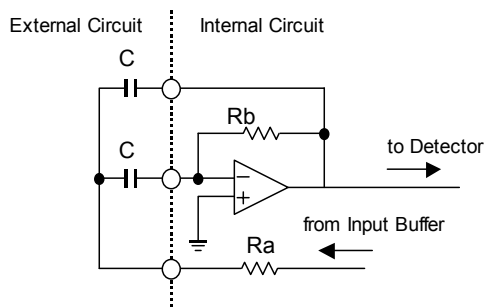


Fig.1-a. BPF1's Equivalent Circuit

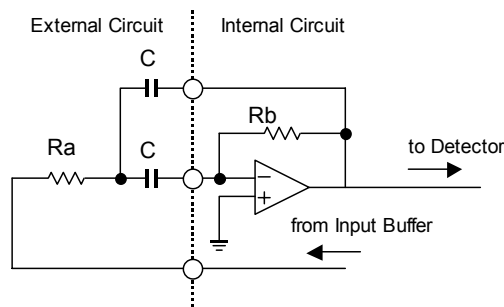


Fig.1-b. BPF2-4's Equivalent Circuit

Center Frequency (f_0) can be formulated as follows.

$$f_0 = \frac{2Q}{2\pi C R_b} \quad [\text{Hz}], \quad Q=2$$

Table 1. Center frequency setting example

	Ra	Rb	C
BPF1 (8kHz)	10 kΩ ^{*)}	169 kΩ ^{*)}	470pF
BPF2 (1.2kHz)	6.8 kΩ	113 kΩ ^{*)}	4.7nF
BPF3 (300Hz)	5.6 kΩ	96.5 kΩ ^{*)}	22nF
BPF4 (80Hz)	10 kΩ	169 kΩ ^{*)}	47nF

*) As regards the BPF1, the values of Ra and Rb are fixed. Also as regards the BPF2-4, the values of Rb is fixed.

2. Output Gain Setting for RECut.


Output Voltage of RECut is adjustable by external resistor: R2

Voltage Gain (G_v) is defined as follows.


$$\frac{V_{out}[\text{Vdc}]}{V_{in}[\text{Vpeak}]} = G_v = \frac{R_2[\text{k}\Omega]}{100[\text{k}\Omega]}$$

■ TYPICAL CHARACTERISTICS


Supply Current vs. Supply Voltage
Ta=-40, 25, 75°C

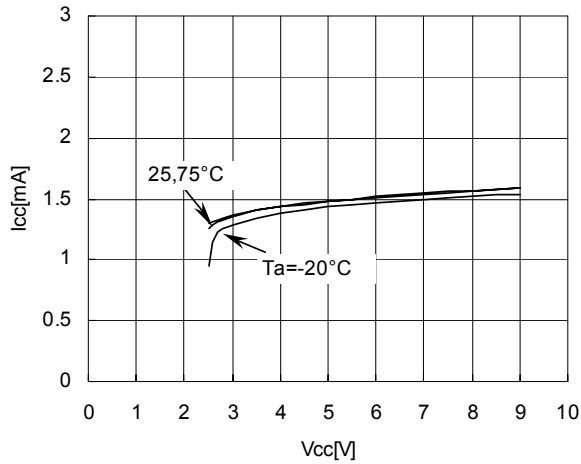


Supply Current vs. Temperature
V+=3.3V

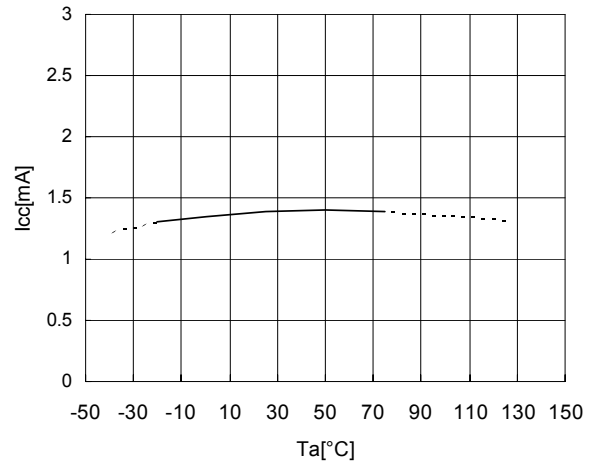


INPUT vs. OUTPUT
Vcc=3.3V, Ta=25°C, f=8kHz, R2=R21/ /R22

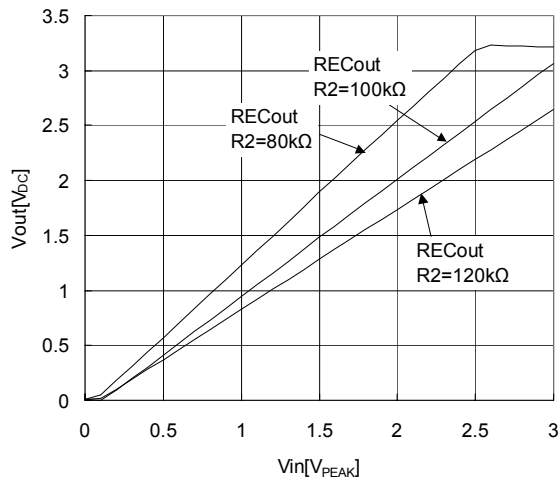

DC Offset Voltage vs. Temperature
V+=3.3V

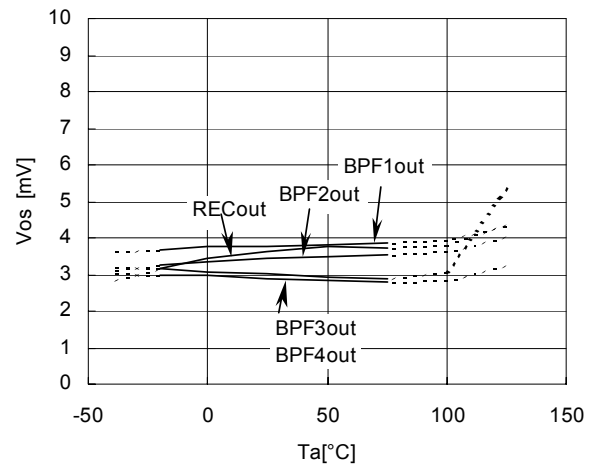


Output vs. Frequency
V+=3.3V, $V_{in}=1V_{PEAK}$

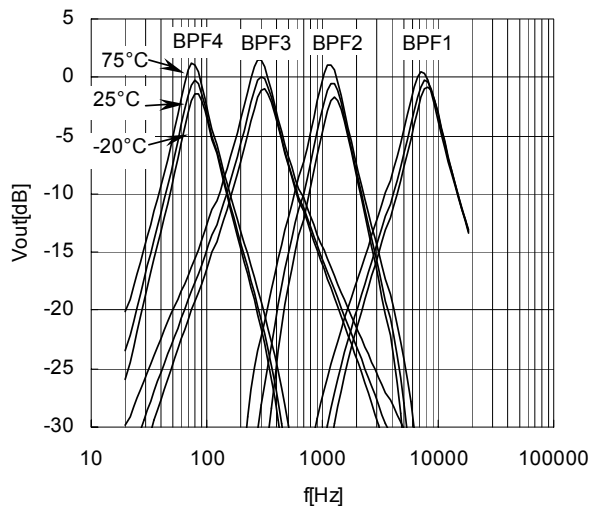


■ TYPICAL CHARACTERISTICS


Input vs. Output Level
 $V_+ = 3.3\text{V}$, $V_{\text{out}} = \text{BPFout1}$, $f_o = 8\text{kHz}$

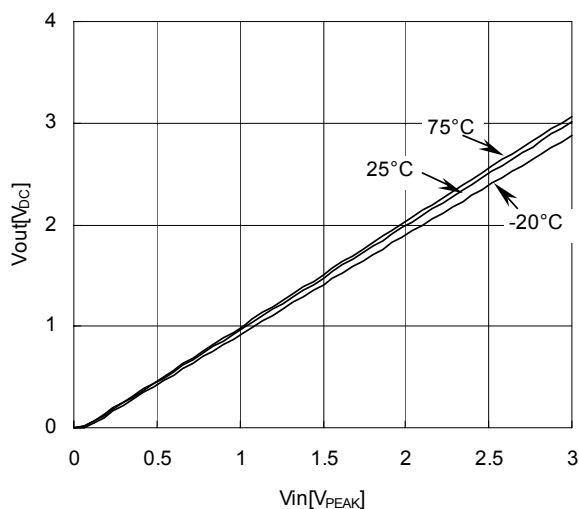


Input vs. Output Level
 $V_+ = 3.3\text{V}$, $V_{\text{out}} = \text{BPFout2}$, $f_o = 1.2\text{kHz}$

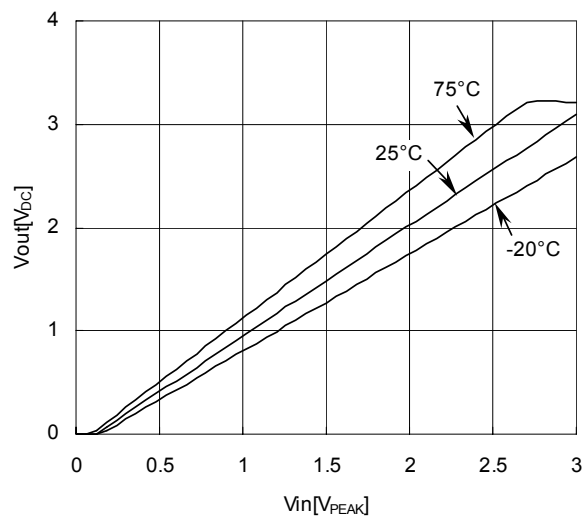


Input vs. Output Level
 $V_+ = 3.3\text{V}$, $V_{\text{out}} = \text{BPF3out}$, $f_o = 300\text{Hz}$

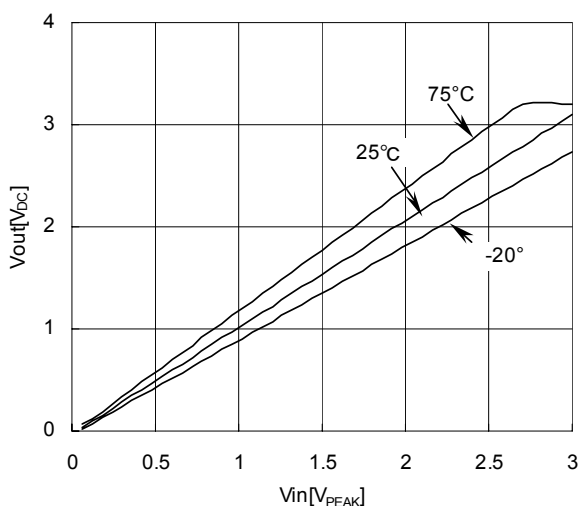

Input vs. Output Level
 $V_+ = 3.3\text{V}$, $V_{\text{out}} = \text{BPF4out}$, $f_o = 80\text{Hz}$

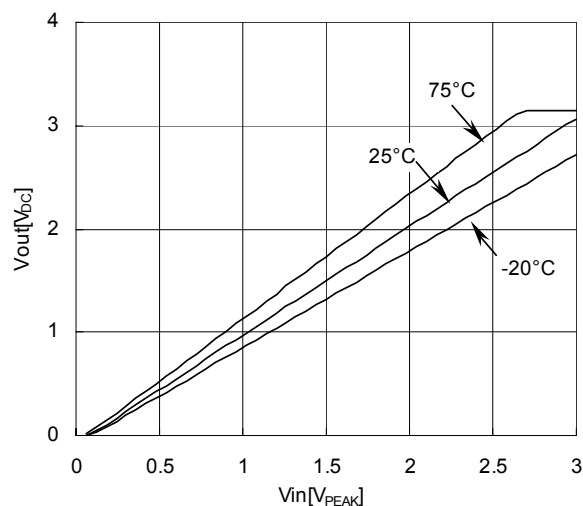

Input vs. Output Level
 $V_+ = 3.3\text{V}$, $V_{\text{out}} = \text{RECout}$, $f_o = 8\text{kHz}$

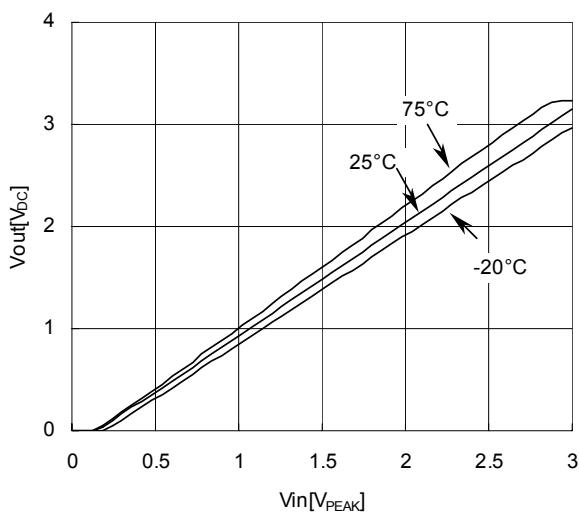

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NJR:](#)

[NJM2760V-TE2](#)

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А