

# Application note

## MLX90380 resolver

### 1. Scope

This application note describes the functionality of the MLX90380 resolver evaluation / demonstration board and software.

The document also explains the front end calibration / signal processing to compensate the non-ideal magnetic field angle components of the application.

The MLX90380 resolver demo board demonstrates an embedded application for the MLX90380 paired with a Micro Controller.

The embedded micro controller performs a resolver to digital conversion on the angle information, the SIN/COS signal, from the MLX90380.



*Figure 1: MLX90380 Resolver Evaluation/Demonstration board*

### 2. Related Documents, Products and Tools

The documentation and information on the products and tools listed below can be found on [www.melexis.com](http://www.melexis.com).

#### 2.1. Related Products

MLX90380 Triaxis® Resolver

#### 2.2. Related Documents

Datasheet MLX90380

Application Note AN\_90363\_FrontEndCalibration

Application Note MLX90316\_AN\_Front-endCalibration

#### 2.3. Related Tools

GUI MLX90380 Demonstration Evaluation Board: Demo\_Board\_MLX90380\_Concept\_UI.xlsm

# Application note

## MLX90380 resolver

### 3. Contents

1. Scope.....	1
2. Related Documents, Products and Tools .....	1
2.1. Related Products.....	1
2.2. Related Documents .....	1
2.3. Related Tools.....	1
3. Contents.....	2
4. Glossary of Terms.....	3
5. Demo board hardware .....	3
6. Demo board software.....	5
6.1. Software Package.....	5
6.2. User Interface Demo Board MLX90380.....	6
7. Angle Nonlinearity Theory – Front end description .....	9
7.1. Introduction .....	9
7.2. Description .....	10
7.3. Signal Phase Shift .....	12
7.4. Orthogonality .....	12
7.5. Offset Mismatch .....	13
7.6. Sensitivity Mismatch .....	14
7.7. Signal Nonlinearity .....	16
8. Angle Nonlinearity Correction – Front end calibration.....	17
8.1. Least-Square Linear Fit method .....	17
8.2. Min-Max method .....	19
9. Contact.....	22
10. Disclaimer.....	22

# Application note

## MLX90380 resolver

### 4. Glossary of Terms

Gauss (G)	Units for the magnetic flux density:
Tesla (T)	1 mT = 10 G
NLE	Nonlinearity Error
SMM	Sensitivity Mismatch: Difference in sensitivity between OUT1 and OUT2 signal of the sensor.
OMM	Offset Mismatch: Difference in offset ( $V_{OQ}$ ) of OUT1 and OUT2 vs. 50%VDD offset level.
PHI	Signal phase shift
ORTH	Orthogonality
$V_{OQ}$	Output Quiescent Voltage (%VDD): output level when magnetic flux density = 0mT
S	Sensitivity of the hall element times the gain of the amplifier (%VDD/mT)
SPAN	Peak to peak value of the output signal after one full 360 degree period.
OFFSET	Mean or average value of the output signal after one full 360 degree period $\approx V_{OQ}$
$\mu C$	Micro controller
RPM	Revolutions per minute

### 5. Demo board hardware

The MLX90380 resolver evaluation / demonstration board demonstrates an embedded application for the MLX90380 paired with a Micro Controller.

The embedded micro controller performs the signal processing on the magnetic field angle information, the SIN/COS signal, from the MLX90380.

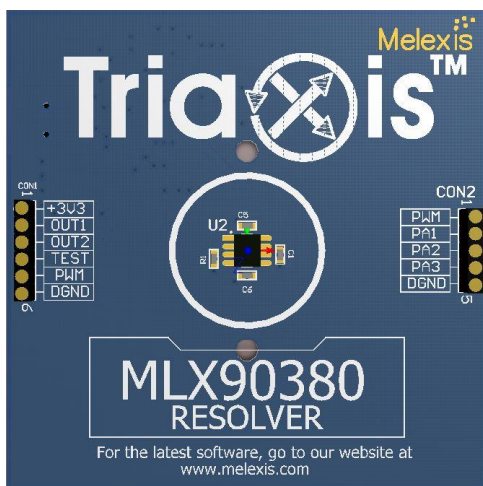


Figure 2: MLX90380 resolver on the top


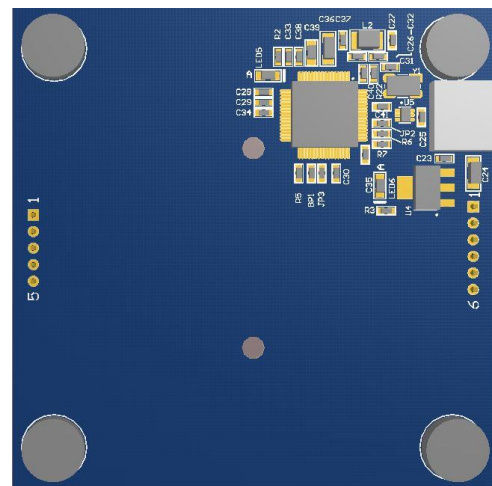


Figure 3:  $\mu C$  for signal processing on the bottom.

# Application note

## MLX90380 resolver

The signal processing of the  $\mu\text{C}$  consists in the acquisition of the SIN/COS information, the signal corrections for sensitivity mismatch and offset to compensate the non-ideal magnetic field angle components of the application, the angular position calculation (arctangent interpolation) and the translation to a digital output signal (in this case a 2kHz PWM signal). The signals can be measured on CON1 of the demo board.

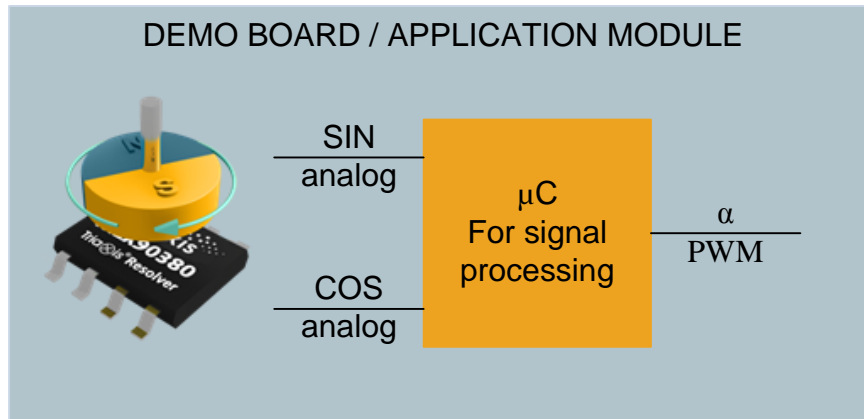

*Figure 4: Application mode*

When the board is powered up via the USB, the  $\mu\text{C}$  will start the acquisition of the SIN/COS signal from the MLX90380, compute the angular position and translate it to a PWM signal.

The signal correction parameters to compensate the mismatch in the magnetic field angle components are calculated on the fly / dynamically. After the first full 360 degree turn of the magnet, the necessary data is acquired for the angle correction.

The technique that is applied is explained later on in the chapter Angle Nonlinearity Correction – Front end calibration

## 6. Demo board software

The MLX90380 resolver evaluation / demonstration board is equipped with a USB interface to a PC. This allows us to collect data from the OUT1 and OUT2 of the MLX90380 sensor to demonstrate the functionality of the SMM and OMM angle nonlinearity corrections.

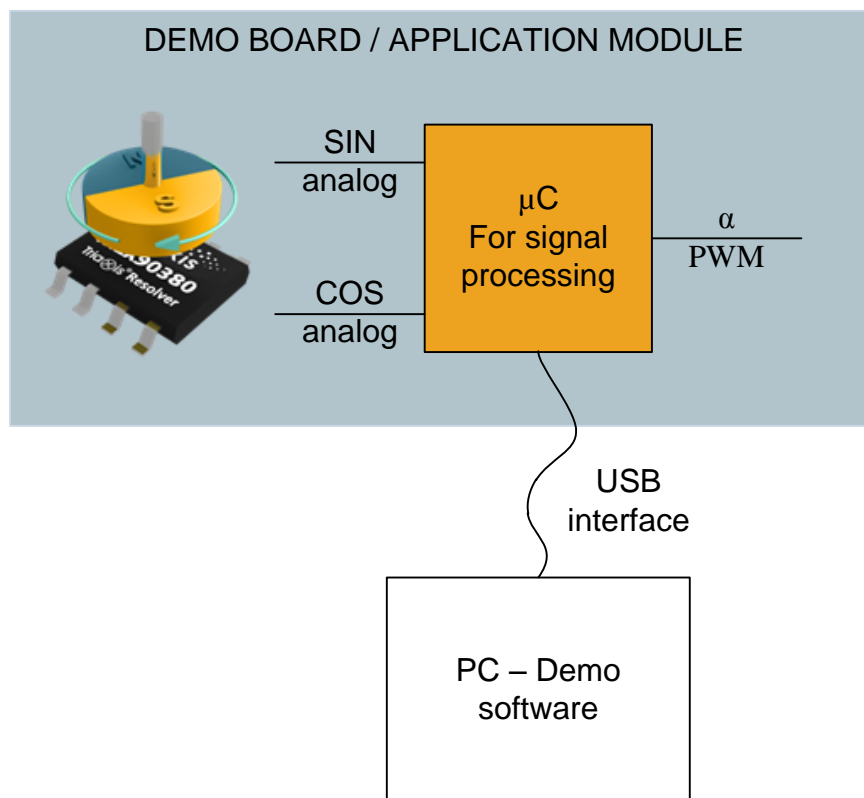


Figure 5: Interface mode

### 6.1. Software Package

MLX90380 user interface  
EVB Product Specific Functions library (dll)

Demo\_Board\_MLX90380\_Concept\_UI.xlsm  
PSF00TEVBAAMLX.exe

#### 6.1.1.1. To install the software package

Run the installation of the PSF (double click on PSF00TEVBAAMLX.exe). Please follow the instructions to complete the installation.

### 6.1.1.2. When starting the software for the first time

Please follow the instructions:

- Connect the MLX90380 Resolver Demo Board if still not connected. If you are using the board for the first time, Windows will take some time to install the USB drivers.
- Open the Demo\_Board\_MLX90380\_Concept\_UI.xlsm excel sheet.

Go to the Connect to Demo Board and click on the connect button. When the connection is established you will get a message that the MLX90380 Resolver Demo Board has been found.

The software is now ready for work.

*Note: The PSF library (dll) is a 32bit type library. This will run on a 32 bit or 64 bit operating system. But for the excel sheet to work you the 32bit Microsoft Office package installation on your PC. The 64bit excel version cannot connect with 32bit libraries.*

## 6.2. User Interface Demo Board MLX90380

The excel UI has 5 sheets:

- MLX90380 Angle nonlinearity Theory

In this sheet you will find an example on the different components of which the angle nonlinearity is build up and the technique to correct the angle nonlinearity. The chapter Angle Nonlinearity Theory – Front end description describes in more detail the different components of which the angle nonlinearity is build up.

- Connect to Demo Board

This sheet is only used to establish a connection between the PC (excel sheet) and the MLX90380 Resolver Demo Board.

- DAQ + calculations

In this sheet we demonstrate the simplified nonlinearity corrections technique which is also implemented in the companion Micro Controller of the MLX90380 Resolver Demo Board.

- Plot Results

Plots with the results of the nonlinearity corrections

- DAQ plot

This sheet contains a plot of the Data Acquisition from the MLX90380 Resolver Demo Board.

# Application note

## MLX90380 resolver

### 6.2.1. Connect to Demo Board

To establish a link between the PC and the PTC04:

- Connect the MLX90380 Resolver Demo Board if still not connected. If you are using the board for the first time, Windows will take some time to install the USB drivers.

Open the Demo\_Board\_MLX90380\_Concept\_UI.xlsm excel sheet.

Go to the Connect to Demo Board and click on the connect button. When the connection is established you will get a message that the MLX90380 Resolver Demo Board has been found.

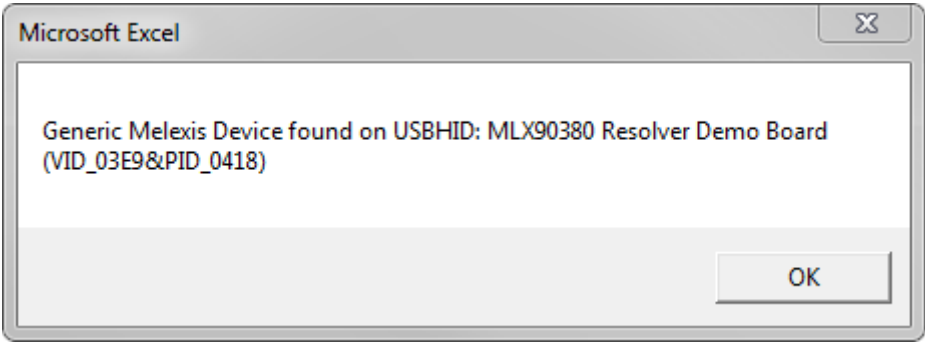


Figure 6: Successful connect to the demo board.

### 6.2.2. DAQ + calculations

On the sheet you will find 4 data block: DAQ raw data, Calculations of SMM and OMM, DAQ normalized data – recalculated w/ SMM and OMM and NLE (nonlinearity error).

Calculation of SMM and OMM				
OMM	1.5	Bit		
SMM	0.655	%		
SMM	1.007	Ratio		
	OUT1	OUT2		
Span	768	763	Bit	
Mean	511	509.5	Bit	
Min	127	128	Bit	Four measurements required for the MIN-MAX method
Max	895	891	Bit	

DAQ RAW DATA				NLE	DAQ NORMALIZED DATA - RECALCULATED w/ SMM and OMM				
Angle	OUT1	OUT2	Radius		Angle	OUT1	OUT2	ATAN	Radius
73.403	619	871	374.606	0.065	73.469	108	364	1.282	379.558
71.420	631	866	373.466	0.090	71.509	120	359	1.248	378.369
69.193	645	862	374.418	0.117	69.310	134	355	1.210	379.270
67.062	658	857	374.621	0.142	67.205	147	350	1.173	379.411
64.807	671	850	373.530	0.168	64.975	160	343	1.134	378.239
62.889	683	846	375.229	0.189	63.078	172	339	1.101	379.875

On the left side you will find 4 buttons:

# Application note

## MLX90380 resolver

### 6.2.2.1. DAQ High Rate:

Is a high speed DAQ to be used for a high speed motor setup. The software captures 5000 raw ADC data samples in one block from the micro controller, processes the data for SMM and OMM in one block and updates the plots.

### 6.2.2.2. DAQ Medium Rate:

Is a medium speed DAQ to be used for a low speed motor setup or with the magnet knob delivered with the demo board. The software sends 500 measurements requests to the micro controller and processes the data for SMM and OMM in one block and updates the plots.

### 6.2.2.3. DAQ Low Rate:

Is low speed DAQ to be used with the magnet knob delivered with the demo board. The software sends 500 measurements requests to the micro controller and processes the data sample by sample for SMM and OMM. With each sample the plots are updated.

### 6.2.2.4. Single measurements:

To be used with the magnet knob delivered with the demo board. The software sends a single measurement requests to the micro controller and processes the data sample with the existing SMM and OMM data.

## 6.2.3. Plots Results

This sheet shows a plot of the raw data, the normalized data for sensitivity mismatch and offset mismatch and the nonlinearity compensation, the difference between raw and normalized data.

For the DAQ medium or low rate the measurements and plots are in volt. For the DAQ high rate the measurements and plots are binary ADC readings.

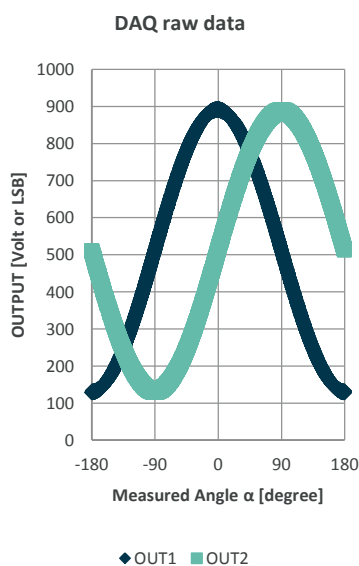


Figure 7: DAQ w/ ADC data

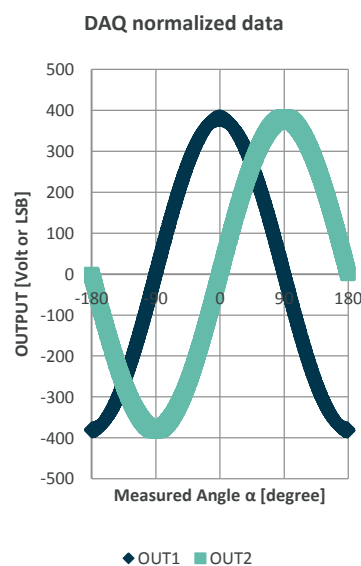


Figure 8: DAQ w/ ADC data

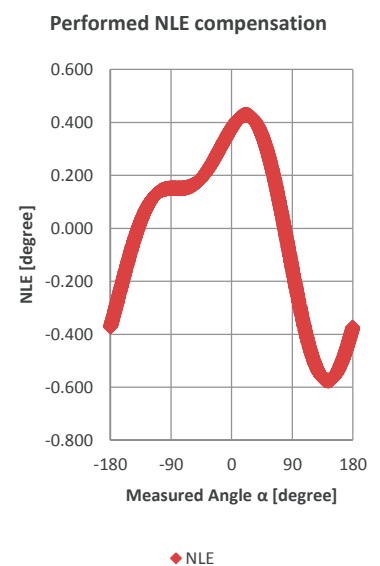


Figure 9: DAQ w/ ADC data



## 7. Angle Nonlinearity Theory – Front end description

### 7.1. Introduction

This section of the application note explains the different components of the angular nonlinearity.

It will help you understand how to calculate the total error budget of your application and the MLX90380, how to recognize the different nonlinearity components and how to correct/compensate the angular nonlinearity.

The MLX90380 is a monolithic sensor IC sensitive to the flux density applied orthogonally and parallel to the IC surface. The MLX90380 can sense the magnetic flux density in 3 directions: X-Y-Z.

The 2 outputs can be assigned to either X, Y or Z making the sensor compatibility with end-of-shaft and through-shaft magnetic configurations.

In this application note we mainly focus on the End of shaft (XY) application as it is demonstrated on the demo board. But the theory on the angular nonlinearity components also counts for the through shaft (XZ or ZY) application.

More information on the axis configuration can be found in the datasheet of the MLX90380.




Figure 10: Intrinsic magnetic axis



Figure 11: Option Code AAA-x0x




Figure 12: Option Code AAA-x1x




Figure 13: Option Code AAA-x2x

## 7.2. Description

As demonstrated above, the embedded micro controller or ECU of the module performs the signal processing on the angle information, the SIN/COS signal from the MLX90380. The angle  $\alpha$  is calculated from the arctangent of SIN over COS:

$$\alpha = \arctan\left(\frac{SIN}{COS}\right) \text{ Or } \alpha = \arctan\left(\frac{OUT_2}{OUT_1}\right)$$

The sensors  $OUT_1$  and  $OUT_2$  output voltages are proportional to the applied magnetic field, the  $B_x$  and  $B_y$  components of the magnetic field angle.

$$OUT_1 = V_{OQ1} + S_1 * B_x \text{ and } OUT_2 = V_{OQ2} + S_2 * B_y.$$

Where:

$V_{OQ}$  is the offset level of the analogue signal.

$S$  is the sensitivity of the hall element times the gain of the amplifier (%VDD/mT).

So:

$$\alpha = \arctan\left(\frac{B_y}{B_x}\right)$$

To have the optimum linearity with respect to a magnet position  $\alpha$ , the signals  $B_x$  and  $B_y$ : should be described as follows:

$$B_x \div \sin(90^\circ - \alpha) \div \cos \alpha$$

$$B_y \div \sin \alpha$$

In reality, they can be described according to the following formulas:

$$B_x = B_{x,0}(T) + A_x(\alpha) \sin(90^\circ - \alpha + \beta)$$

$$B_y = B_{y,0}(T) + A_y(\alpha) \sin(\alpha)$$

Where:

$T$  is the temperature.

$B(T)_{X,0}$  is the component X offset (temperature dependent).

$B(T)_{Y,0}$  is the component Y offset (temperature dependent).

$\beta$  is the orthogonality error or phase error between the 2 components of the field.

$A_x$  is the component X amplitude.

$A_y$  is the component Y amplitude.

The MLX90380 is pre-programmed by Melexis for a certain Magnetic/sensitivity range. So a very important step during final test is the magnetic calibration of the sensor. This calibration is performed at Melexis i.e. the  $S_1$ ,  $S_2$ ,  $Voq_1$  and  $Voq_2$  are calibrated for a minimum SMM and OMM at sensor level.

# Application note

## MLX90380 resolver

At module level remains a residual SMM and OMM of the sensor plus the none ideal behaviour  $B_x$  and  $B_y$  induced by  $B_{x0}$ ,  $B_{y0}$ ,  $A_x$ ,  $A_y$  and  $\beta$ .

Before the arctangent calculation, the ECU needs to perform some signal corrections to compensate the non-ideal behaviour of the sine and cosine signals.


Those non ideal behaviours can be split in four main categories:

Offset ( $B(T) X, 0 \neq 0$ ,  $B(T) Y, 0 \neq 0$ )

Sensitivity Mismatch ( $A_x \neq A_y$ )

Orthogonality Error ( $\beta \neq 0$ )

Signal Non Linearity ( $A_x = A_x(\alpha)$  and  $A_y = A_y(\alpha)$ )

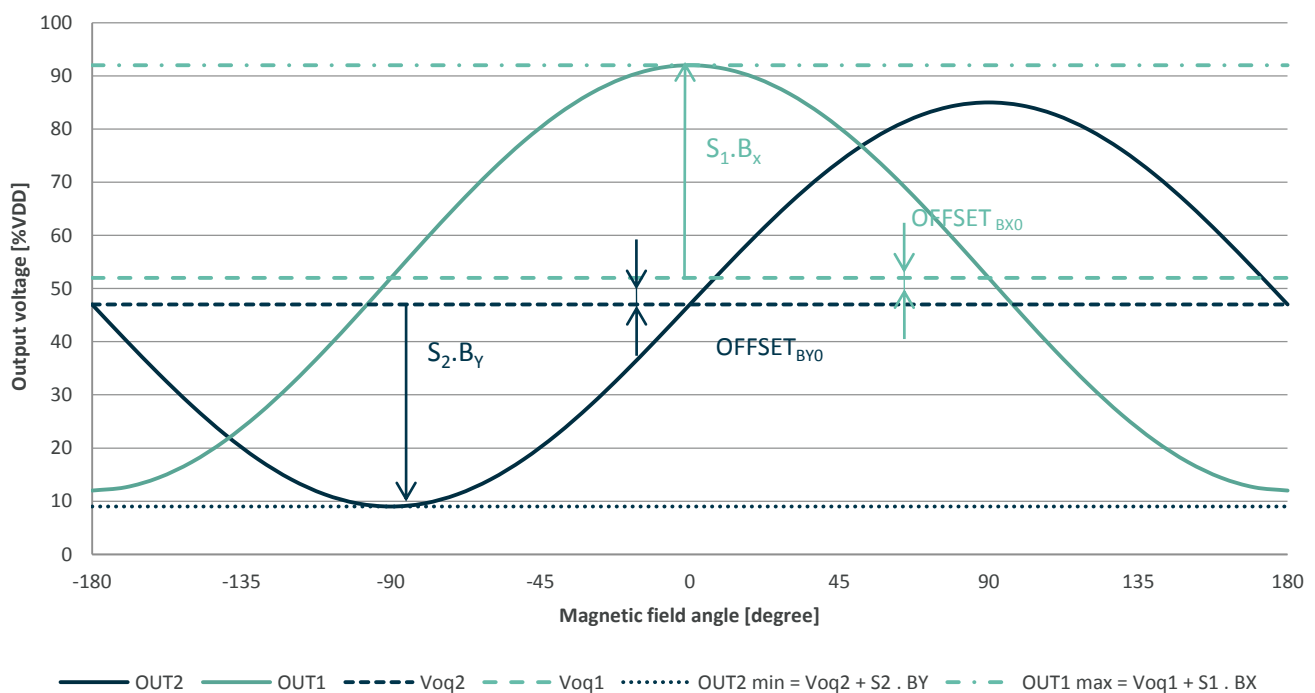

*Figure 14: Non ideal behaviours of the sine and cosine signals*

The non-ideal behaviour of the sine and cosine signals depends on the type of application, magnetic construction of the application and the magnetization of the magnet.

For end of shaft applications the non-ideal behaviours are relatively small as the flux density and the curve of the field lines remain fairly stable at the sensing point of the magnetic field angle while the magnet turns. "The sensor always measures the angle of the same field lines".

For trough shaft applications the non-ideal behaviours are larger as the variation in flux density and the curve of the field lines are larger at the sensing point of the magnetic field angle while the magnet turns. "The sensor crosses different field lines".

The following sections are critical in the use of the MLX90380 sensor, since they represent very useful information to anybody interested in improving the performance in term of angular nonlinearity.

# Application note

## MLX90380 resolver

### 7.3. Signal Phase Shift

The Signal Phase Shift error or PHI is a tracking delay between the  $B_x - B_y$  components of the magnetic field and the analogue output signal,  $OUT_1 - OUT_2$ .

The tracking delay is determined by the Output Update Period and the bandwidth settings of the filter. The tracking delay  $T_{PHI}$  is a constant delay expressed in  $\mu\text{Sec}$ . Please refer to the MLX90380 datasheet for the specifications of the tracking delay.

The signal phase shift error PHI is the absolute angle offset error (Magnet angle vs. Sensors output angle) in function of the magnet rotation speed.

$$a_0 = T_{PHI} * \text{RPM} / 166666.6667$$

Figure 15 shows the phase shift error for 25, 250, 2500 and 25000RPM for high bandwidth.

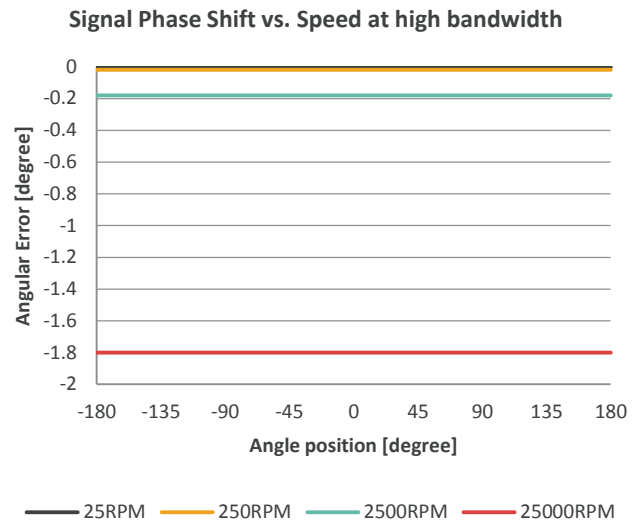


Figure 15: Phase shift vs. rotation speed

### 7.4. Orthogonality

The orthogonality error, also called the quadrature error, is a phase error between the sine and cosine signals,  $OUT_2$  and  $OUT_1$ . This means that the phase separation of these two signals is not exactly 90 degrees.

The figure below shows the effect on the nonlinearity error (the angular error is equal to the phase error). It translates into a double-period signal like the sensitivity mismatch error but in this case it is unipolar, either positive or negative depending on the rotation direction of the magnet (CW or CCW) and the assignment of sine and cosine to  $OUT_2$  and  $OUT_1$  of the MLX90380 sensor.

The phase delay between the  $OUT_2$  and  $OUT_1$  signal  $T_{orth}$  is a constant of  $2\mu\text{S}$ .

$$a_4 = T_{orth} * \text{RPM} / 166666.6667$$

$$a_4 * \cos(\alpha)^2$$

Figure 16 shows the Orthogonality error for 25, 250, 2500 and 25000RPM

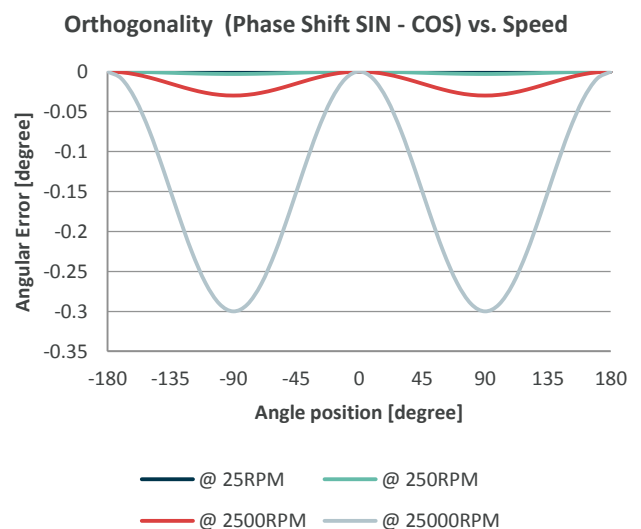


Figure 16: Orthogonality vs. rotation speed

### 7.5. Offset Mismatch

Though the on-chip dynamic offset cancellation mechanism (Hall plate quadrature spinning and chopper stabilized amplifier) and the calibration of the signal offset  $OUT_2$  and  $OUT_1$  ( $V_{OQ1} = V_{OQ2} = 50\%VDD$ ), the analogue signals may show a residual offset and an offset of the magnetic design.

Figure 17 and Figure 18 show the influence of the offset error (OMM vs. 50%VDD) on the angular nonlinearity for various values of OMM= 0.2, 0.5, 1, 1.5 and 2.5 %VDD. The signature of the offset error is one period over 360 degrees, i.e.

$$a_1 * \sin(\alpha) \quad \text{and} \quad a_2 * \cos(\alpha)$$

Figure 19 shows the angle nonlinearity when both  $OUT_1$  and  $OUT_2$  have an offset error.

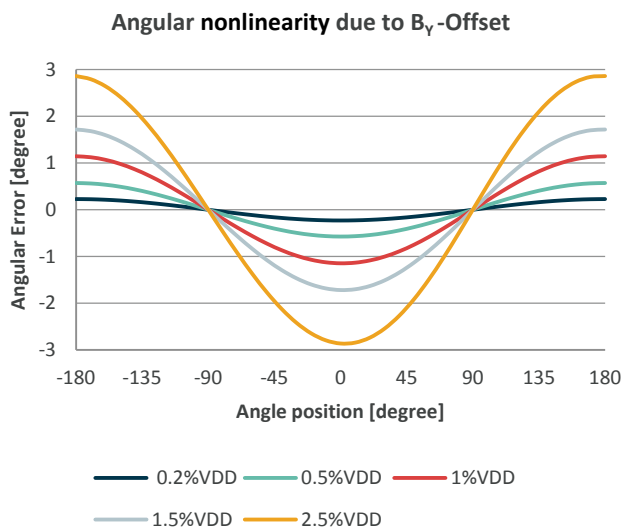


Figure 17: Offset on  $B_Y$

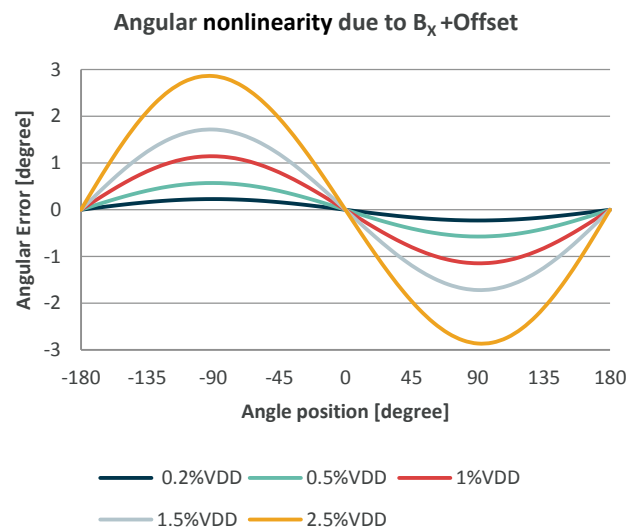


Figure 18: Offset on  $B_X$

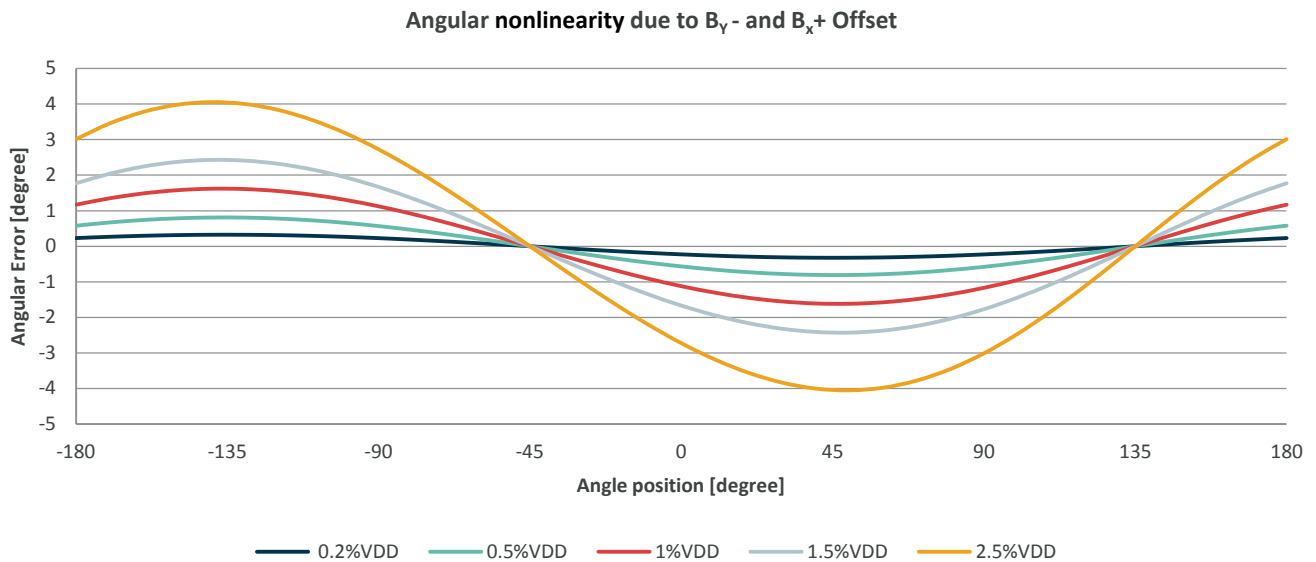


Figure 19: Offset on  $B_x$  and  $B_y$

## 7.6. Sensitivity Mismatch

The sensitivity mismatch depends on the selected magnetic axis configuration (see option code of the sensor) and the type of application. See illustration in Figure 20 and Figure 21.

### 7.6.1. End of shaft applications $B_x$ - $B_y$

(Option code: BAX-x0x)

For end of shaft applications the (sensitivity mismatch) amplitude mismatch of  $B_x$  -  $B_y$  components is relatively small as the flux density and the curve of the field lines remain fairly stable at the sensing point of the magnetic field angle while the magnet turns. “The sensor always measures the angle of the same field lines”.

### 7.6.2. Trough shaft applications $B_x$ or $B_y$ - $B_z$

(Option code: BAX-x1x or BAX-x2x)

For trough shaft applications the (sensitivity mismatch) amplitude mismatch of  $B_x$  -  $B_y$  components is larger as the variation in flux density and the curve of the field lines are larger at the sensing point of the magnetic field angle while the magnet turns. “The sensor crosses different field lines”.

# Application note

## MLX90380 resolver

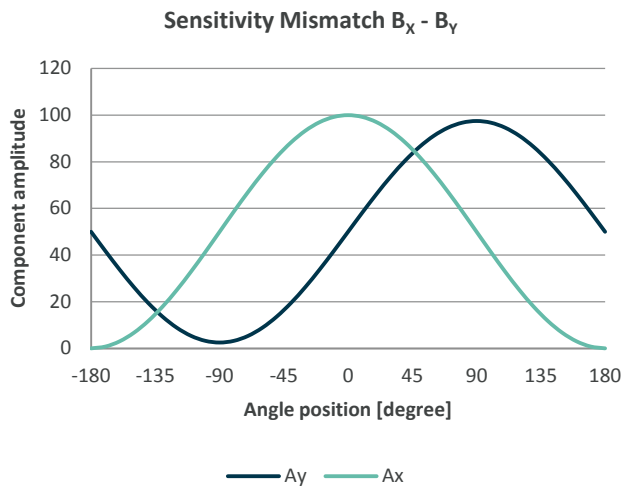


Figure 20: Sensitivity Mismatch AAA-x0x

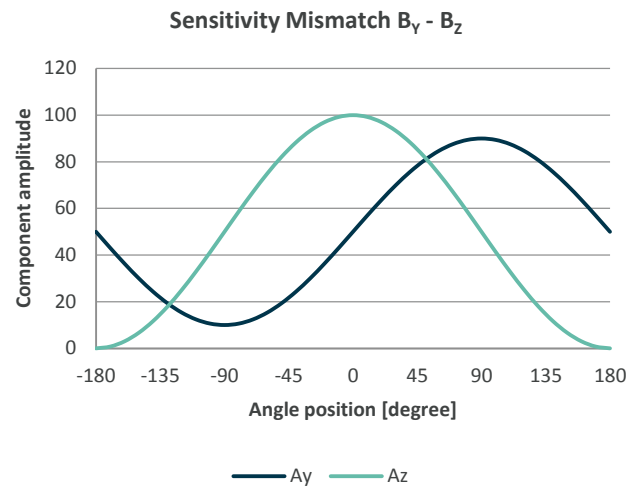


Figure 21: Sensitivity Mismatch AAA-x1x or -x2x

Next to the amplitude mismatch of  $B_x - B_y$  components, there is also a residual sensitivity mismatch of the two output signals of the sensor. Although all Hall signals ( $V_x$ ,  $V_y$  and  $V_z$ ) are generated by matched Hall Plates and amplified through a calibrated amplification chain, the two signals may show a residual difference in amplitude. The three main reasons for this mismatch are the non-perfect alignment of the Integrated Magneto Concentrator (IMC) with respect to the Hall Plates constellation, a difference between the sensitivity of the different Triaxis® Hall Plates and the application dependant absence/presence of the IMG magnetic gain.

An illustration of the amplitudes mismatch impact on angle nonlinearity is shown in Figure 22 and Figure 23. The signature is a double period and bipolar over 360 degrees, i.e. The thermal variation of sensitivity mismatch is negligible.

$$a3 * \sin(2 * \alpha).$$

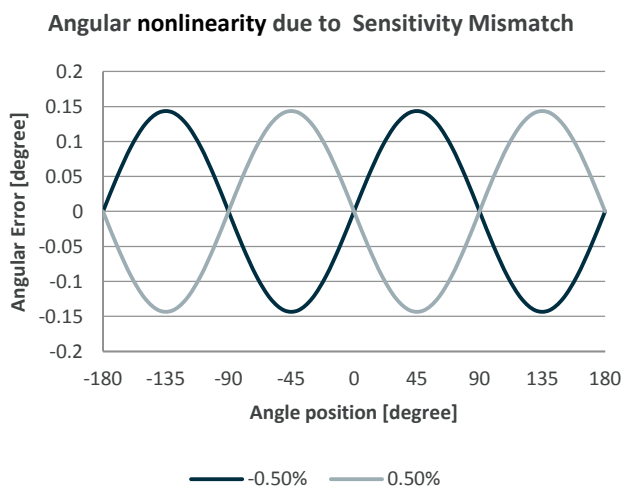


Figure 22: Angle nonlinearity due to sensitivity Mismatch

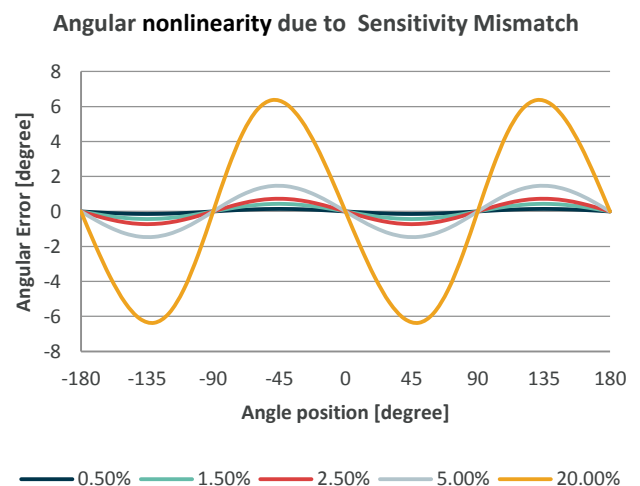


Figure 23: Angle nonlinearity due to sensitivity Mismatch

# Application note

## MLX90380 resolver

### 7.7. Signal Nonlinearity

In normal operation, the signal non linearity is negligible. Its signature is easily recognizable: four periods over 360 degrees, i.e.

$$a_5 * \sin(4 * \alpha)$$

There are three sources of nonlinearity, i.e. the magnetic saturation, the applied field on the IMC location in X or Y direction is greater than 70mT, electrical saturation, the gain of the sensor is set to high for the applied magnetics flux density, and the nonlinearity of the two output amplifiers.

Figure 24 and Figure 25 illustrate an (exaggerated) electrical saturation of the output signals and the resulting angle nonlinearity.

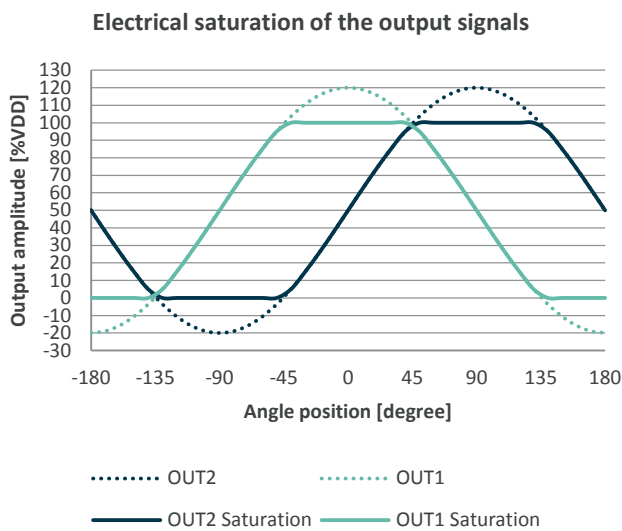


Figure 24: Electrical output signal saturation

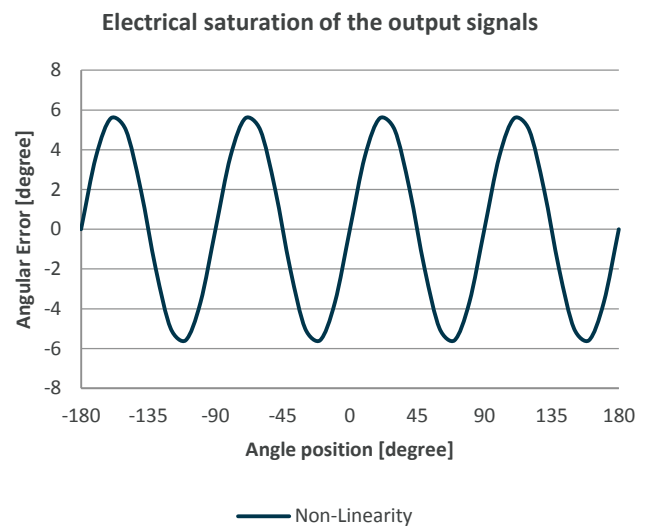


Figure 25: Angle nonlinearity due to signal saturation.



## 8. Angle Nonlinearity Correction – Front end calibration

This chapter explains how to determine the MLX90380 front-end correction parameters such as offset, SMM and orth. There are different methods to find the optimum values for the correction parameters, which are explained in more detail in the next sections.

The calculations are demonstrate in the sheet MLX90380 Angle NLE Theory of the Demo\_Board\_MLX90380\_Concept\_UI.xlsm

### 8.1. Least-Square Linear Fit method

This technique requires a full rotation of the magnet with an absolute angle reference for the least-square linear fit calculation. This method calculates SMM, OMM, ORTH, PHI based on measurements. To analyse the linearity error we first calculate the NLE as  $\alpha_{90380} - \alpha_{\text{magnet}}$  (sensor angle – reference angle).


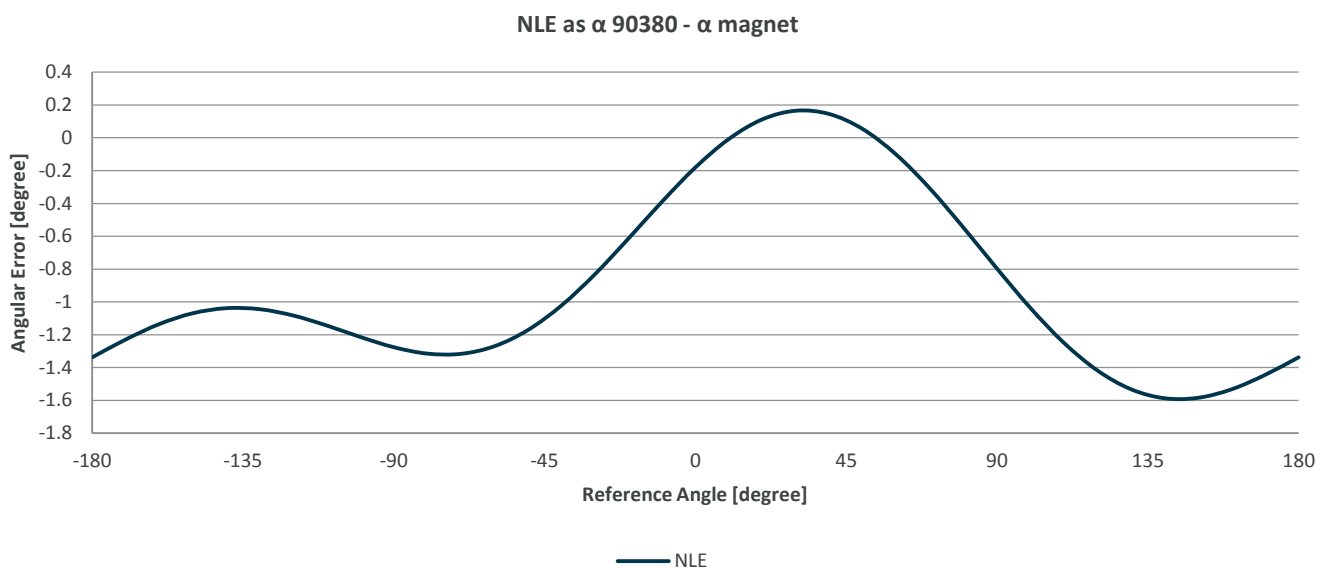


Figure 26: Calculate Nonlinearity Error

Secondly we find the basic components from the nonlinearity error using a general LS Linear Fit, which finds the k-dimension linear curve values and the set of k-dimension linear fit coefficients, which describe the k-dimension linear curve that best represents the input data set using the least-squares solution...

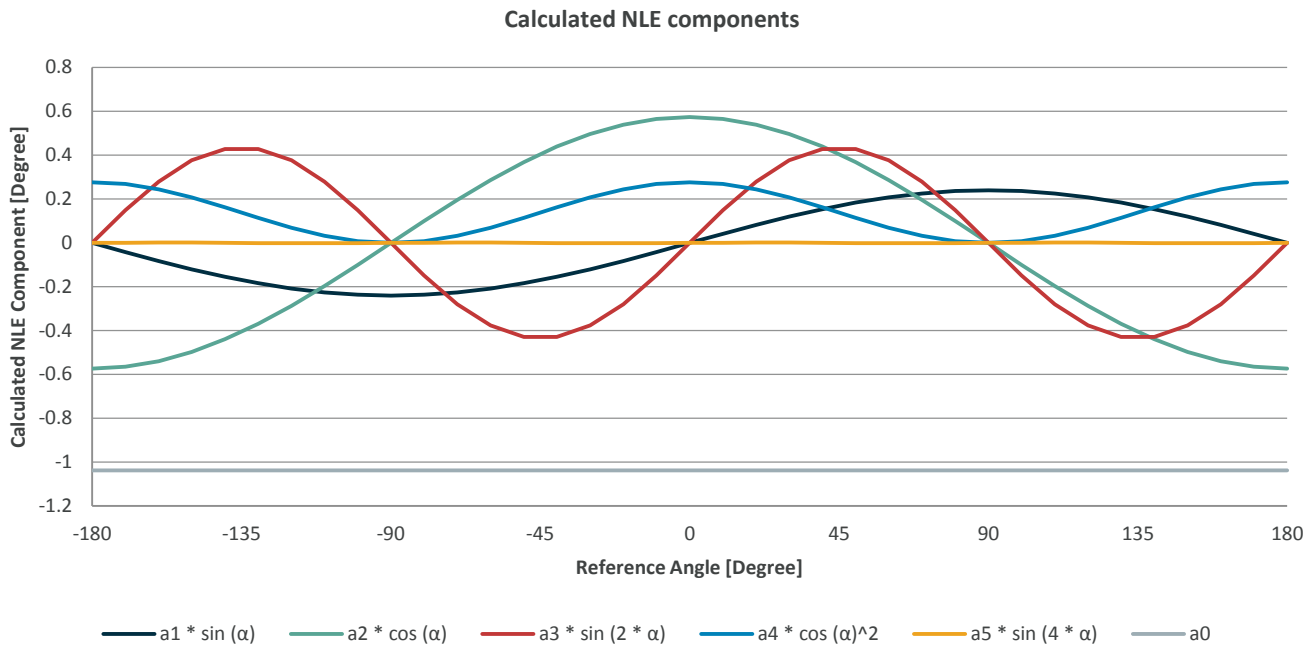

*Figure 27: Calculated Nonlinearity Error components*

The purpose is to find the set of least square coefficients “a” that best represent the set of data points  $(\alpha_m, \text{NLE})$ . The relationship between  $\alpha_m$  and NLE is of the form:

$$\text{NLE} = a_0 + a_1 * \sin(\alpha) + a_2 * \cos(\alpha) + a_3 * \sin(2 * \alpha) + a_4 * \cos(\alpha)^2 + a_5 * \sin(4 * \alpha)$$

Where:

$a_0$  = absolute angle offset error (Phase Shift vs. absolute 0 degree position)

$a_1$  = amplitude of error created by Offset BX

$a_2$  = amplitude of error created by Offset BY

$a_3$  = amplitude of error created by SMM

$a_4$  = amplitude of error created by ORT

$a_5$  = amplitude of error created by signal non linearity

# Application note

## MLX90380 resolver

### 8.2. Min-Max method

The technique requires a full rotation of the magnet with or without an absolute angle reference.

The SMM and OMM are calculated based on measurements. The Phase shift and Orthogonality error are corrected with the theoretical constant from the formulas explained in the front end description above.

This method basically normalizes two signals by matching the SPAN and the OFFSET of the two signals.

The span of the OUT2 is corrected to match the SPAN of OUT1. The OFFSET of each signal is normalized to zero. It is a Simple technique which only requires four measurements.

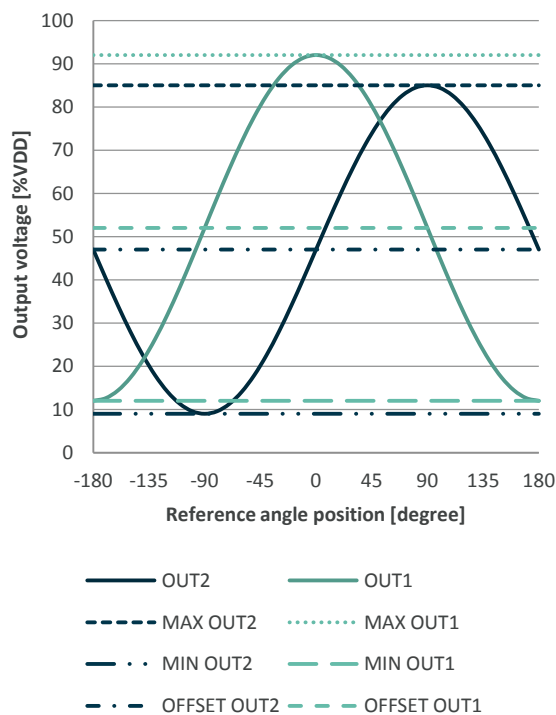


Figure 28: Raw data


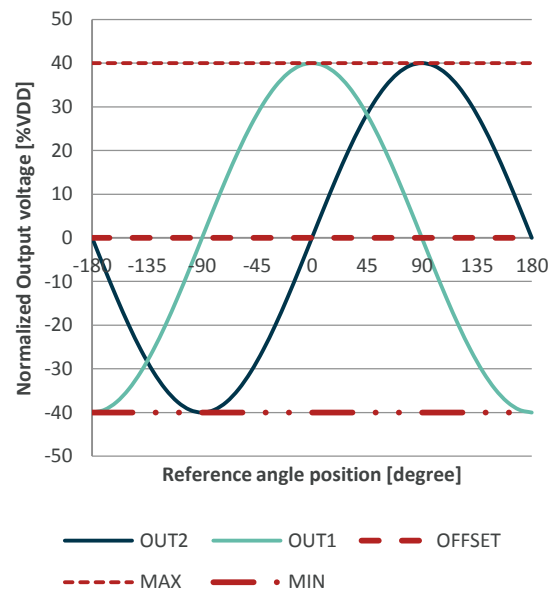


Figure 29: Normalized data

For the calculation of the sensitivity mismatch and the offset mismatch we need to measure the MIN and MAX output level of the two output signals (Marked in orange).

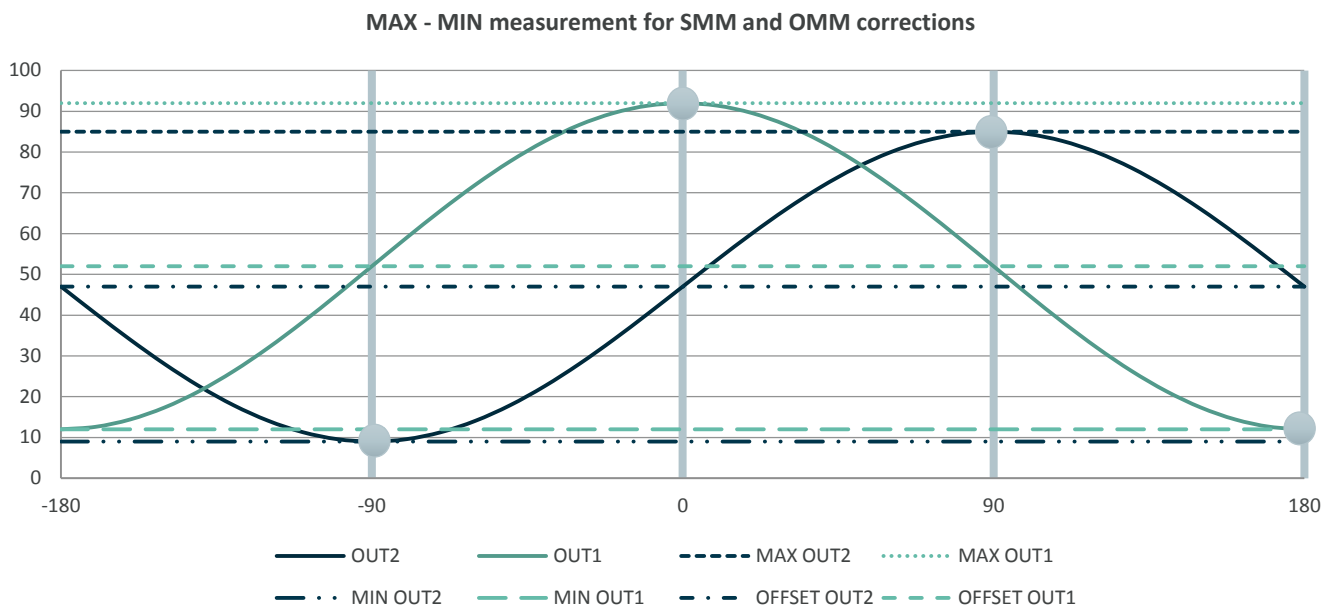

*Figure 30: Only four measurements are required*

There are two techniques to obtain the measurements.

### 8.2.1. Absolute positioning

With an absolute angle reference, four fix angles positioned at 0, 90, 180, 270 (or -90) degree are measured. For the measurement, an accurate reference angle is important to ensure that the actual MIN and MAX level is measured.

### 8.2.2. Min-Max tracking via data acquisition

The DAQ technique searches for the MIN-MAX level of the two output signals.

While the magnet turns the micro controller or DAQ setup keeps track on the SIN/COS signal and extracts the MIN and MAX level of OUT1 and OUT2.

This method can also be performed by the micro controller start-up as demonstrated by the evaluation / demonstration board or on the fly.

At start-up the  $\mu$ C searches the MIN-MAX levels of the two output signals. After one full 360 degree turn of the magnet, all data is collected to start the signal corrections to normalize both output signals. This allows the  $\mu$ C to perform dynamic angle corrections in the application.

### 8.2.3. Calculation

Sensitivity mismatch:

$$SMM = \frac{S_2 * B_Y}{S_1 * B_X} = \frac{SPAN_{OUT2}}{SPAN_{OUT1}}$$

Where:

$$SPAN_{OUT1} = MAX_{OUT1} - MIN_{OUT1}$$

$$SPAN_{OUT2} = MAX_{OUT2} - MIN_{OUT2}$$

Offset mismatch:

$$OFFSET_{OUT1} = \frac{(MAX_{OUT1} + MIN_{OUT1})}{2}$$

$$OFFSET_{OUT2} = \frac{(MAX_{OUT2} + MIN_{OUT2})}{2}$$

The angle  $\alpha$  is calculated from the arctangent of SIN over COS:

$$\alpha = ATAN2\left(\frac{SIN}{COS}\right)$$

Where:

$$SIN = (OUT2 - OFFSET_{OUT2}) * SMM$$

$$COS = OUT1 - OFFSET_{OUT1}$$

If desired the angle  $\alpha$  can be corrected for Phase shift and Orthogonality with the theoretical constant for the nominal speed of the application:

Phase shift:

$$\alpha_0 = a_0 = T_{PHI} * RPM / 166666.6667$$


Orthogonality:

$$a_4 = T_{ORTH} * RPM / 166666.6667$$

$$\alpha_4 = a_4 * \cos(2\alpha)$$

# Application note

## MLX90380 resolver

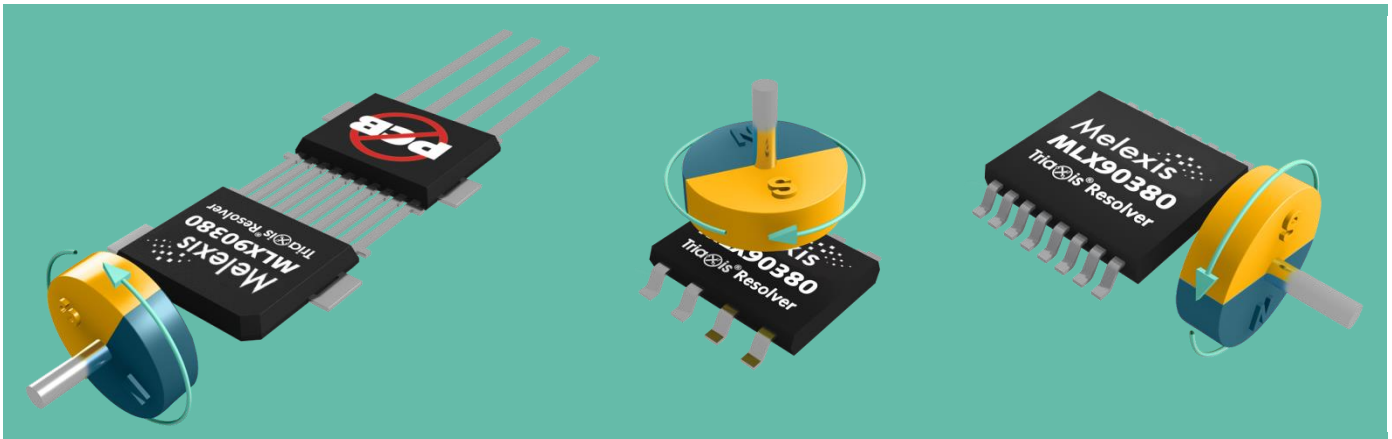

## 9. Contact

For the latest version of this document, go to our website at [www.melexis.com](http://www.melexis.com).

For additional information, please contact our Direct Sales team and get help for your specific needs:

Europe, Africa	Telephone: +32 13 67 04 95
	Email : <a href="mailto:sales_europe@melexis.com">sales_europe@melexis.com</a>
Americas	Telephone: +1 603 223 2362
	Email : <a href="mailto:sales_usa@melexis.com">sales_usa@melexis.com</a>
Asia	Email : <a href="mailto:sales_asia@melexis.com">sales_asia@melexis.com</a>

## 10. Disclaimer

The information furnished by Melexis herein ("Information") is believed to be correct and accurate. Melexis disclaims (i) any and all liability in connection with or arising out of the furnishing, performance or use of the technical data or use of the product(s) as described herein ("Product") (ii) any and all liability, including without limitation, special, consequential or incidental damages, and (iii) any and all warranties, express, statutory, implied, or by description, including warranties of fitness for particular purpose, non-infringement and merchantability. No obligation or liability shall arise or flow out of Melexis' rendering of technical or other services.

The Information is provided "as is" and Melexis reserves the right to change the Information at any time and without notice. Therefore, before placing orders and/or prior to designing the Product into a system, users or any third party should obtain the latest version of the relevant information to verify that the information being relied upon is current. Users or any third party must further determine the suitability of the Product for its application, including the level of reliability required and determine whether it is fit for a particular purpose.

The Information is proprietary and/or confidential information of Melexis and the use thereof or anything described by the Information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights.

This document as well as the Product(s) may be subject to export control regulations. Please be aware that export might require a prior authorization from competent authorities.

The Product(s) are intended for use in normal commercial applications. Unless otherwise agreed upon in writing, the Product(s) are not designed, authorized or warranted to be suitable in applications requiring extended temperature range and/or unusual environmental requirements. High reliability applications, such as medical life-support or life-sustaining equipment are specifically not recommended by Melexis.

The Product(s) may not be used for the following applications subject to export control regulations: the development, production, processing, operation, maintenance, storage, recognition or proliferation of 1) chemical, biological or nuclear weapons, or for the development, production, maintenance or storage of missiles for such weapons; 2) civil firearms, including spare parts or ammunition for such arms; 3) defense related products, or other material for military use or for law enforcement; 4) any applications that, alone or in combination with other goods, substances or organisms could cause serious harm to persons or goods and that can be used as a means of violence in an armed conflict or any similar violent situation.

The Products sold by Melexis are subject to the terms and conditions as specified in the Terms of Sale, which can be found at <https://www.melexis.com/en/legal/terms-and-conditions>.

This document supersedes and replaces all prior information regarding the Product(s) and/or previous versions of this document.

Melexis NV © - No part of this document may be reproduced without the prior written consent of Melexis. (2017)

ISO/TS 16949 and ISO14001 Certified

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А