

"High Frequency Ceramic Solutions"

868 and 915MHz dual (wideband) ISM band SMD chip antenna P/N 0900AT43A0070

Detail Specification: 6/13/2016

Page 1 of 8

General Specifications

Part Number	0900AT43A0070
Frequency (MHz)	858 - 928
Peak Gain (XZ-total)	-0.5 dBi typ.
Average Gain (XZ-total)	-2.5 dBi typ.
Radiated Efficiency	48% ave. ¹
Return Loss	-4 dB min.
impedance	50 Ω
Reel Quantity	1,000
Operating Temperature	-40 to +85°C
Storage Temperature	-40 to +85°C
Power Capacity	2W max. (CW)



Recommended Storage Conditions of unused product on T&R	+5 to +35°C, Humidity 45~75%RH
Storage Period	18 months max.


¹On test board 0900AT43A0070-EB2SMA, Layout# 2, page 5

Part Number Explanation

P/N Suffix	Packing Style			
		Bulk (loose)	Suffix = S	eg. 0900AT43A0070S
		T & R	Suffix = E	eg. 0900AT43A0070E
		100% Tin	Suffix = E or S	eg. 0900AT43A0070(E or S)

Mechanical Dimensions

	In	mm
L	0.276 ± 0.008	7.00 ± 0.20
W	0.079 ± 0.008	2.00 ± 0.20
T	0.031 ± +.004/-0.008	0.80 ± +0.1/-0.2
a	0.020 ± 0.012	0.50 ± 0.30

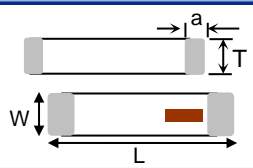


Terminal Configuration

No.	Function
1	RF Feed Point
2	To trace element

Layout Recommendation #1

Test board p/n: 0900AT43A0070-EB1SMA

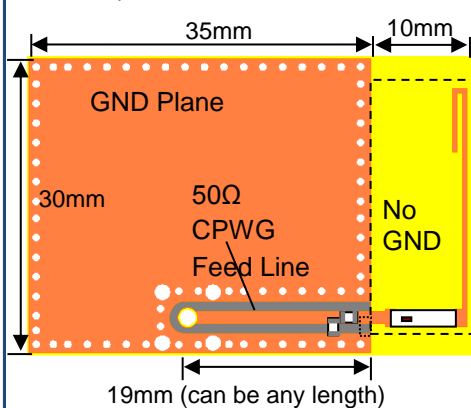

- Orderable EVB for evaluation, it comes with a female SMA connector. Go to: www.johansontechnology.com/request-a-sample and ask for p/n 0900AT43A0070-EB1SMA

- Need help laying out the antenna, want us to review your antenna design (free!), require the Gerber files for this EVB, or would like us to validate the new tuning values of your PCB (fee may apply) go to: www.johansontechnology.com/ask-a-question

www.johansontechnology.com/ipc-antenna-services

- The total antenna area usage for this EVB is approx. 25x10mm (due to trace element), but the trace can be re-shaped to reduce effective area and conform to the designer's PCB!



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 1.4

2015 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"


868 and 915MHz dual (wideband) ISM band SMD chip antenna P/N 0900AT43A0070

Detail Specification: 6/13/2016

Page 2 of 8

Recommended Application ISM

Layout Recommendation #1

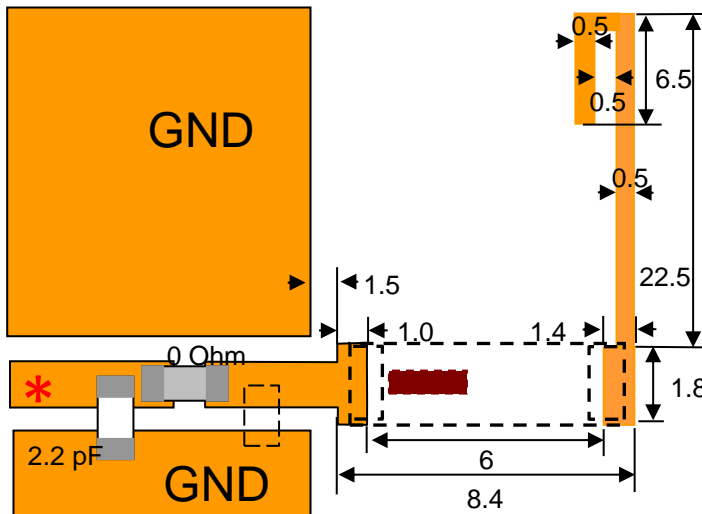


* Line width should be designed to match 50ohm characteristic impedance, depending on your PCB material and thickness (distance to GND)

• Attention: Matching circuits and component values will be different on the client's design, depending on PCB layout, geometry, etc. It is recommended that the designer leave available slots for a "pi" (or shunt-series-shunt) network. The antenna matching network values you see here are used when antenna is mounted on Johanson's evaluation board.

• Need help laying out the antenna, want us to review your antenna design (free!), require the Gerber files for this EVB, or would like us to validate the new tuning values of your PCB (fee may apply) go to: www.johansontechnology.com/ask-a-question

Typical Electrical Characteristics S11 return loss (T=25 °C) on Layout #1

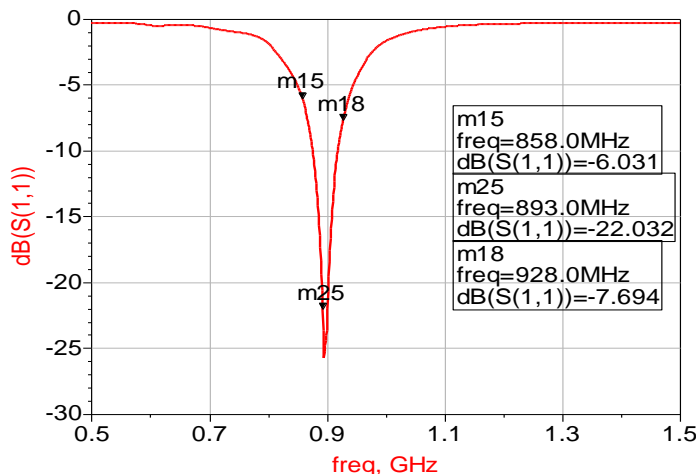

This antenna has about 20MHz of guard-band on each side

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 1.4

2015 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"


868 and 915MHz dual (wideband) ISM band SMD chip antenna P/N 0900AT43A0070

Detail Specification: 6/13/2016

Page 3 of 8

Recommended Application ISM

Typical Radiation Patterns (@25C) of Layout Recommendation #1

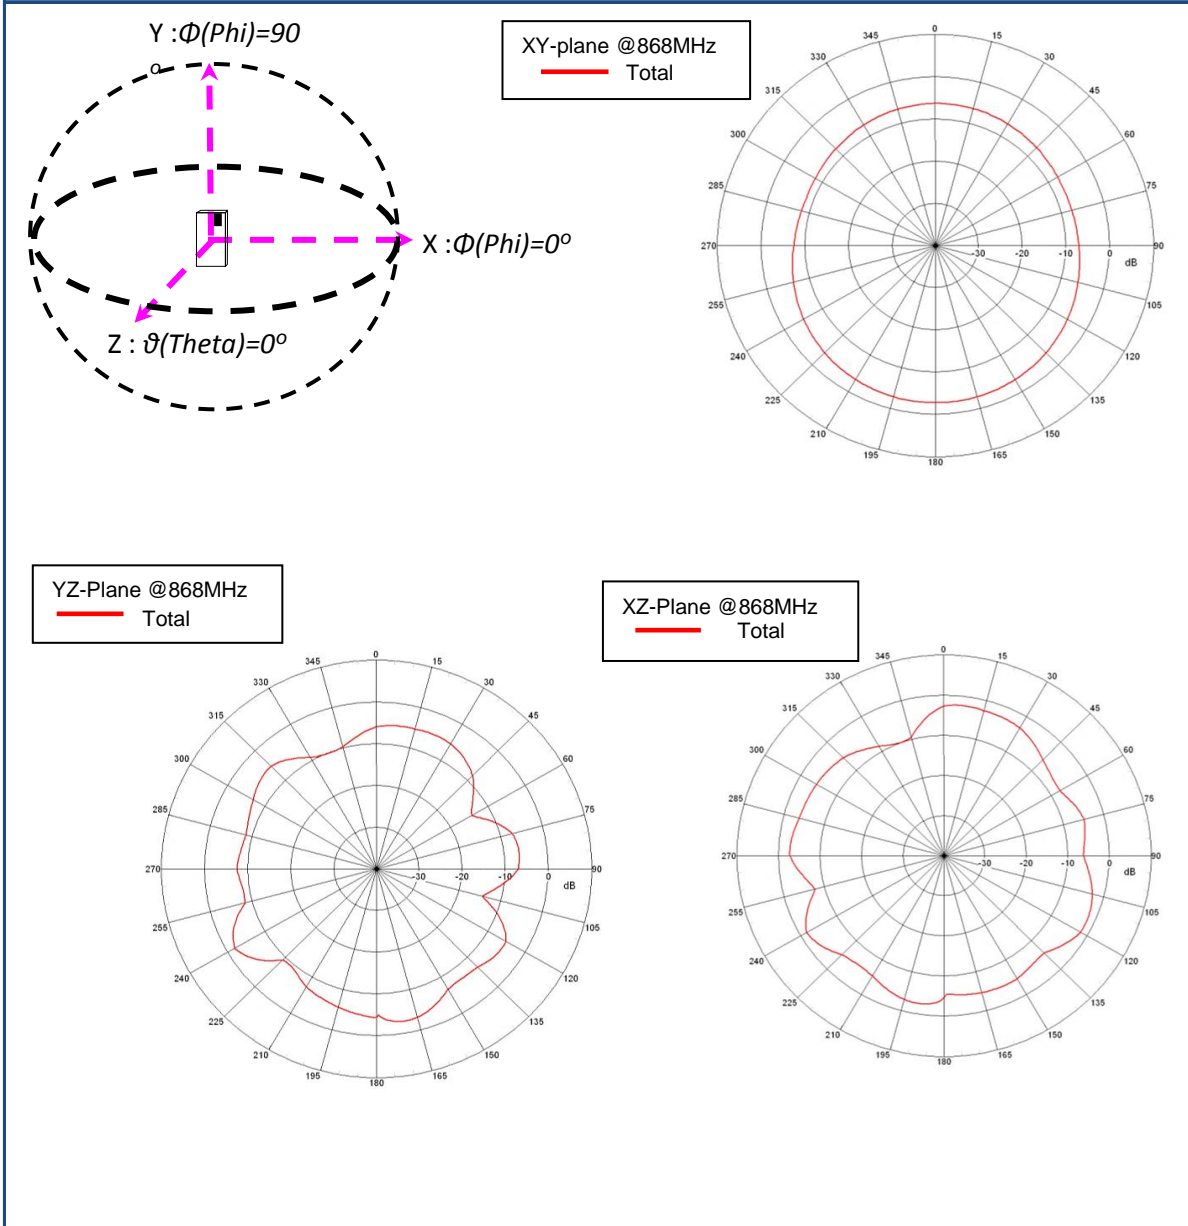

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 1.4

2015 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"


868 and 915MHz dual (wideband) ISM band SMD chip antenna P/N 0900AT43A0070

Detail Specification: 6/13/2016

Page 4 of 8

Recommended Application ISM

Typical Radiation Patterns (@25C) of Layout Recommendation #1

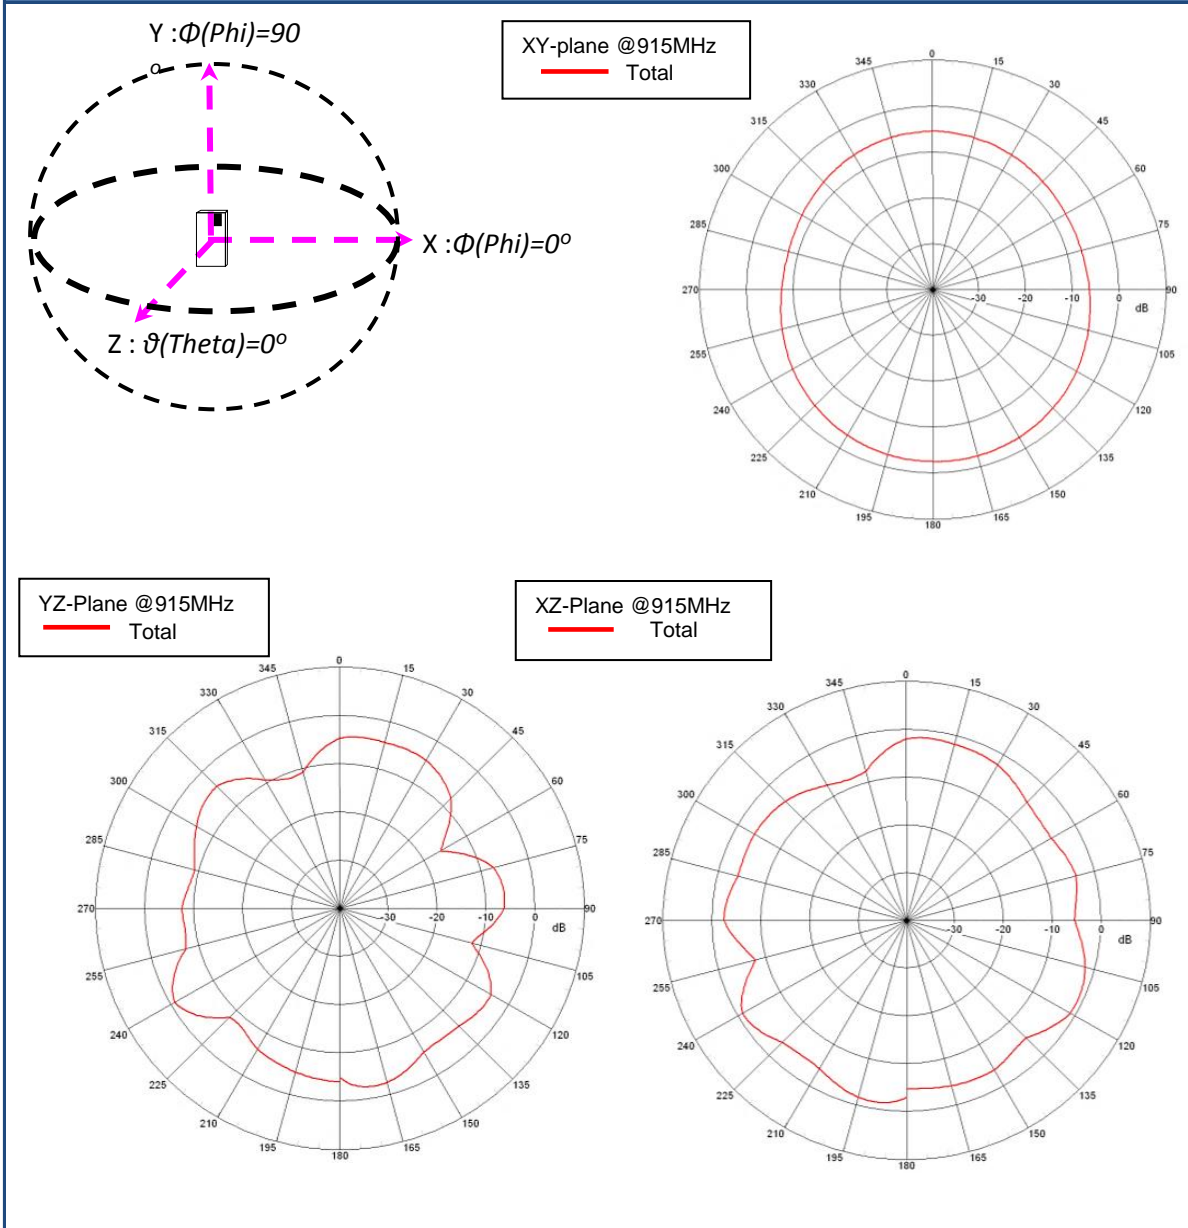

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 1.4

2015 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"

868 and 915MHz dual (wideband) ISM band SMD chip antenna P/N 0900AT43A0070


Detail Specification: 6/13/2016

Page 5 of 8

Recommended Application ISM

Layout Recommendation #2

Test board p/n: 0900AT43A0070-EB2SMA

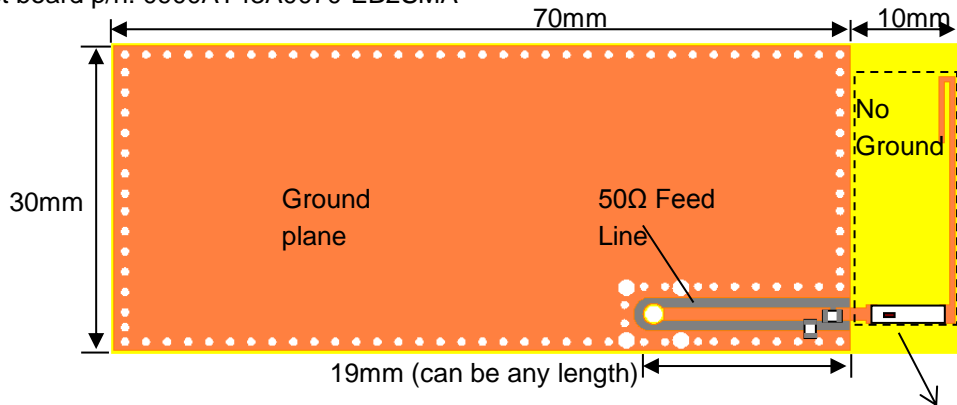


• Orderable EVB for evaluation, it comes with a female SMA connector. Go to: www.johansontechnology.com/request-a-sample and ask for p/n 0900AT43A0070-EB2SMA

• The total antenna area usage for this EVB is approx. 25x10mm (due to trace element), but the trace can be re-shaped to reduce effective area and conform to the designer's PCB!

• Need help laying out the antenna, want us to review the design (free!), require the Gerber files for this EVB, or would like us to validate the new tuning values of your PCB (fee may apply) go to: www.johansontechnology.com/ask-a-question

www.johansontechnology.com/ipc-antenna-services

* Line width should be designed to match 50ohm characteristic impedance, depending on your PCB material and thickness (dist to GND)

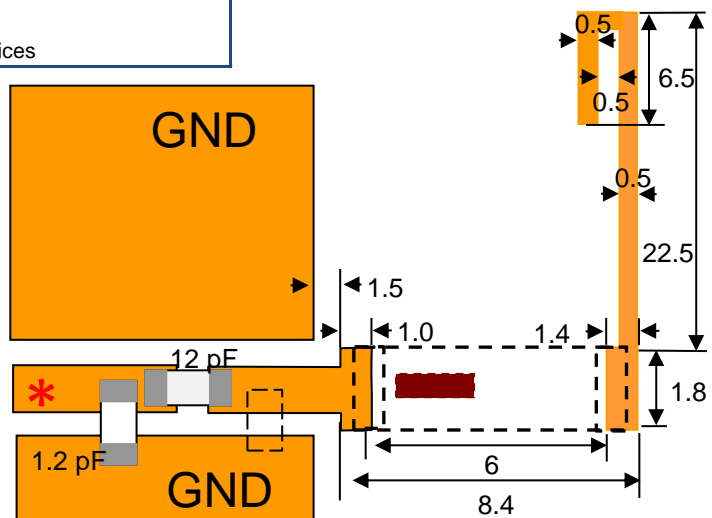

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 1.4

2015 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"


868 and 915MHz dual (wideband) ISM band SMD chip antenna P/N 0900AT43A0070

Detail Specification: 6/13/2016

Page 6 of 8


Recommended Application ISM

Typical Electrical Characteristics S11 return loss (T=25 °C) on Layout #2

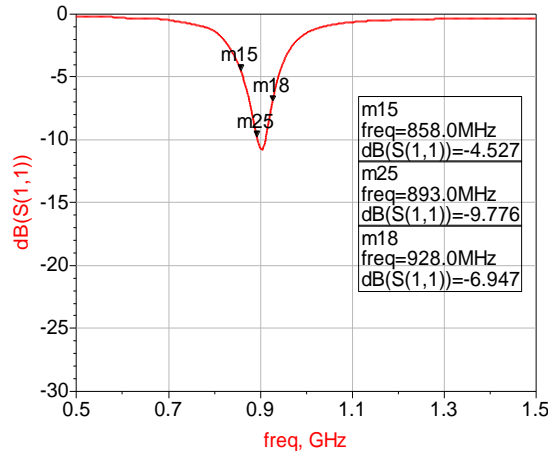

This antenna has about 20MHz of guard-band on each side

Typical Radiation Patterns (@25C) of Layout Recommendation #2

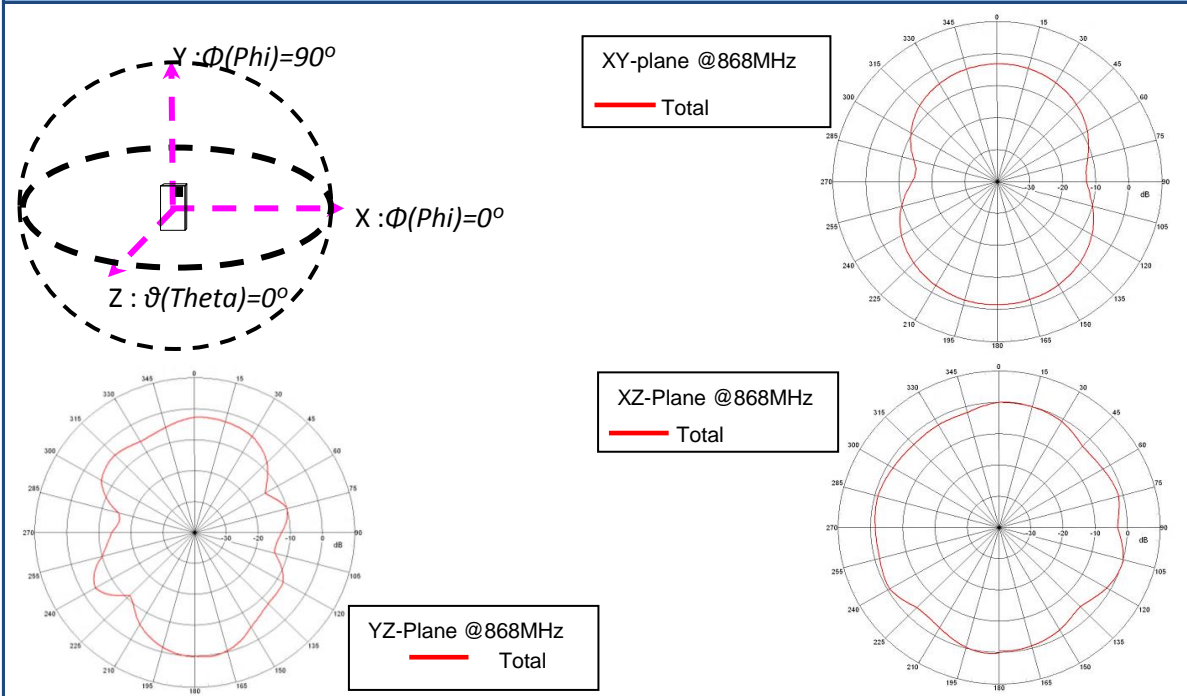

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 1.4

2015 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"


868 and 915MHz dual (wideband) ISM band SMD chip antenna P/N 0900AT43A0070

Detail Specification: 6/13/2016

Page 7 of 8

Recommended Application ISM

Typical Radiation Patterns (@25C) of Layout Recommendation #2

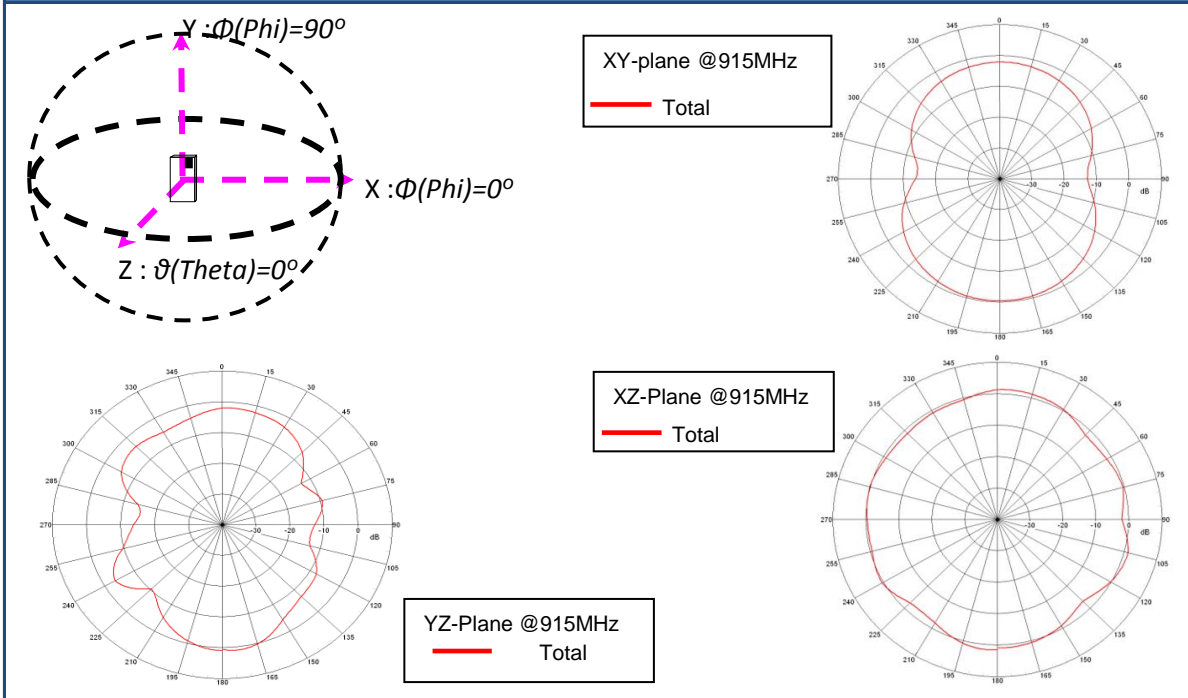


Alternative layout with reduced effective area

No EVB available for this layout

Total radiated efficiency will be reduced by about 10%

Do you have more questions about this layout?
 Contact our apps team at:

www.johansontechnology.com/ask-a-question

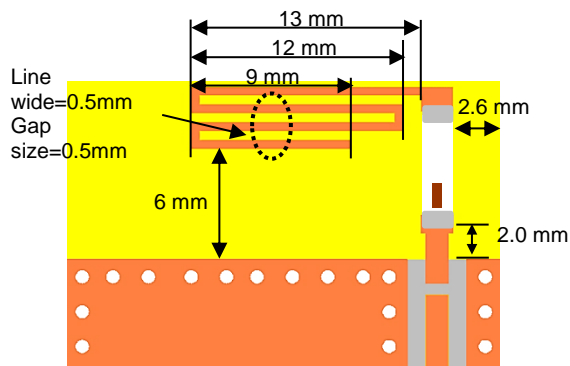

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 1.4

2015 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"

868 and 915MHz dual (wideband) ISM band SMD chip antenna P/N 0900AT43A0070

Detail Specification: 6/13/2016

Page 8 of 8

Recommended Application ISM

Antenna tuning, optimization, and validation Services

www.johansontechnology.com/ipc-antenna-services

For layout review contact our Applications Team at:

www.johansontechnology.com/ask-a-question

Soldering Information

www.johansontechnology.com/typical-soldering-profile

MSL Info

www.johansontechnology.com/msl-rating

Packaging information

www.johansontechnology.com/tape-reel-packaging

For more antennas and download measured S-parameters, go to:

www.johansontechnology.com/antennas

RoHS Compliance

www.johansontechnology.com/rohs-compliance

Recommended Storage Condition and Max Shelf Life

www.johansontechnology.com/recommended-storage-conditions

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 1.4

2015 Johanson Technology, Inc. All Rights Reserved

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А