

# MAX11270

## 24-Bit, 10mW, 130dB SNR, 64ksps Delta-Sigma ADC with Integrated PGA

### General Description

The MAX11270 is a 24-bit delta-sigma ADC that achieves excellent 130dB SNR while dissipating an ultra-low 10mW. Sample rates up to 64ksps allow both precision DC and AC measurements. Integral nonlinearity is guaranteed to 4ppm maximum. The THD is -122dB. The MAX11270 communicates via an SPI-compatible serial interface and is available in a small 24-pin TSSOP package.

The MAX11270 offers a  $6.5\text{nV}/\sqrt{\text{Hz}}$  noise programmable gain amplifier with gain settings between 1x to 128x. Optional buffers are also included to provide isolation of the signal inputs from the switched capacitor sampling network. This allows the MAX11270 to be used with high-impedance sources without compromising available dynamic range.

The MAX11270 operates from a single 2.7V to 3.6V analog supply, or split  $\pm 1.8\text{V}$  analog supplies, allowing the analog input to be sampled below ground. The digital supply range is 2.0V to 3.6V, allowing communication with 2.5V, 3V, or 3.3V logic.

### Applications


- Scientific Instrumentation
- High-Precision Portable Sensors
- Medical Equipment
- ATE

Ordering Information and Functional Diagram appear at end of data sheet.

### Features and Benefits

- High Resolution for Instrumentation Applications that Require a Wide Dynamic Range
  - 130dB SNR at 1.9sps
  - 112dB SNR at 1000sps
  - 20.4-Bit Noise-Free Resolution at 1.9sps
  - 17.4-Bit Noise-Free Resolution at 1000sps
- Longer Battery Life for Portable Applications
  - 2.4mA Operating Mode Current
  - 4.4mA PGA Low-Noise Mode Current
  - 1 $\mu\text{A}$  Sleep Current
- High Accuracy for DC Measurements
  - 1ppm INL (typ), 4ppm (max)
- Single or Split Analog Supplies Provide Input Voltage Range Flexibility
  - 2.7V to 3.6V (Single Supply) or  $\pm 1.8\text{V}$  (Split Supplies)
- Flexible High-Performance Filter Architecture Simplifies Design
  - Programmable SINC Filter
- Enables System Integration
  - Low-Noise PGA with Gains of 1, 2, 4, 8, 16, 32, 64, 128
  - Signal Buffer Optional
  - 3 General-Purpose I/Os
- Enables Integrated Part and System Calibration for Gain and Offset
- Robust 24-Pin TSSOP Packaging

### Typical Application Circuit

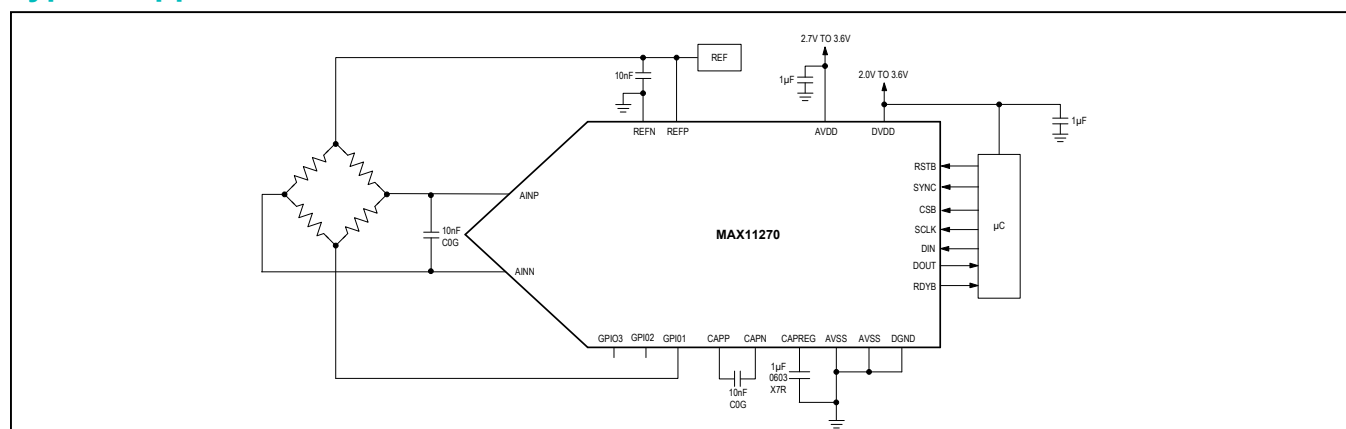

---

**TABLE OF CONTENTS**

---

|                                                    |    |
|----------------------------------------------------|----|
| General Description . . . . .                      | 1  |
| Applications . . . . .                             | 1  |
| Features and Benefits . . . . .                    | 1  |
| Typical Application Circuit . . . . .              | 1  |
| Absolute Maximum Ratings . . . . .                 | 6  |
| Package Thermal Characteristics . . . . .          | 6  |
| Electrical Characteristics . . . . .               | 6  |
| Typical Operating Characteristics . . . . .        | 10 |
| Pin Configuration . . . . .                        | 14 |
| Pin Description . . . . .                          | 14 |
| Functional Diagram . . . . .                       | 16 |
| Detailed Description . . . . .                     | 17 |
| System Clock . . . . .                             | 17 |
| Voltage Reference Inputs . . . . .                 | 17 |
| Analog Inputs . . . . .                            | 17 |
| Input Buffers . . . . .                            | 17 |
| Bypass/Direct Connect . . . . .                    | 17 |
| Programmable Gain Amplifier (PGA) . . . . .        | 17 |
| Input Voltage Range . . . . .                      | 18 |
| Noise Performance vs. Data Rate . . . . .          | 18 |
| Power-On Reset . . . . .                           | 23 |
| Power-Down Modes . . . . .                         | 23 |
| Digital Filters . . . . .                          | 25 |
| SINC Filter . . . . .                              | 25 |
| Serial Interface . . . . .                         | 25 |
| Chip Select (CSB) . . . . .                        | 25 |
| SCLK (Serial Clock) . . . . .                      | 25 |
| DIN (Serial Data Input) . . . . .                  | 25 |
| DOUT (Serial Data Output) . . . . .                | 26 |
| Data Ready (RDYB) . . . . .                        | 26 |
| SPI Incomplete Write Command Termination . . . . . | 26 |
| SPI Incomplete Read Command Termination . . . . .  | 27 |
| SPI Timing Characteristics . . . . .               | 27 |
| Modes and Registers . . . . .                      | 30 |
| Conversion Mode (MODE = 0) . . . . .               | 30 |
| Register Access Mode (MODE = 1) . . . . .          | 30 |
| Register Map . . . . .                             | 31 |

**TABLE OF CONTENTS (continued)**

|                                                                          |    |
|--------------------------------------------------------------------------|----|
| Register Address Map . . . . .                                           | 31 |
| Status Register (Read Only) . . . . .                                    | 32 |
| Control Registers . . . . .                                              | 34 |
| Control 1 Register (Read/Write) . . . . .                                | 34 |
| Control 2 Register (Read/Write) . . . . .                                | 35 |
| Control 3 Register (Read/Write) . . . . .                                | 36 |
| Control 4 Register (Read/Write) . . . . .                                | 36 |
| Control 5 Register (Read/Write) . . . . .                                | 37 |
| Data Register (Read Only) . . . . .                                      | 37 |
| Calibration . . . . .                                                    | 38 |
| Self-Calibration . . . . .                                               | 38 |
| System Calibration . . . . .                                             | 38 |
| SPI System Offset Calibration Register (SOC_SPI) . . . . .               | 39 |
| ADC System Offset Calibration Register (SOC_ADC) . . . . .               | 39 |
| SPI System Gain Calibration Register (SGC_SPI) . . . . .                 | 39 |
| ADC System Gain Calibration Register (SGC_ADC) . . . . .                 | 39 |
| SPI Self-Cal Offset Calibration Register (SCOC_SPI) . . . . .            | 40 |
| ADC Self-Cal Offset Calibration Register (SCOC_ADC) . . . . .            | 40 |
| SPI Self-Cal Gain Calibration Register (SCGC_SPI) . . . . .              | 40 |
| ADC Self-Cal Gain Calibration Register (SCGC_ADC) . . . . .              | 40 |
| GPIOs . . . . .                                                          | 42 |
| Conversion Synchronization Using SYNC Pin or SYNC_SPI Function . . . . . | 42 |
| Continuous Mode . . . . .                                                | 42 |
| Pulse Mode . . . . .                                                     | 43 |
| Modulator MODBITS Mode . . . . .                                         | 43 |
| Initializing MODBITS Mode . . . . .                                      | 43 |
| Exiting MODBITS Mode . . . . .                                           | 43 |
| MODBITS Mode Pin Configurations . . . . .                                | 43 |
| DOUT/MB0 . . . . .                                                       | 44 |
| GPIO3/MSYNC . . . . .                                                    | 44 |
| GPIO1/MB1 . . . . .                                                      | 44 |
| RDYB/ICLK . . . . .                                                      | 44 |
| Ordering Information . . . . .                                           | 46 |
| Chip Information . . . . .                                               | 46 |
| Package Information . . . . .                                            | 46 |
| Revision History . . . . .                                               | 47 |

---

**LIST OF FIGURES**

---

|                                                                                                                   |    |
|-------------------------------------------------------------------------------------------------------------------|----|
| Figure 1. PGA Structure . . . . .                                                                                 | 17 |
| Figure 2. Usable Input and Output Common-Mode Range . . . . .                                                     | 17 |
| Figure 3a. SINC Magnitude Response . . . . .                                                                      | 24 |
| Figure 3b. SINC Mag Response Zoomed-In . . . . .                                                                  | 24 |
| Figure 4. DATA Ready Timing for All Conversion Modes . . . . .                                                    | 25 |
| Figure 5. SPI Register Write Timing Diagram . . . . .                                                             | 26 |
| Figure 6. SPI Register Read Timing Diagram . . . . .                                                              | 27 |
| Figure 7. SPI Data Readout Timing Diagram . . . . .                                                               | 27 |
| Figure 8. SPI Command Byte Timing Diagram . . . . .                                                               | 28 |
| Figure 9. Calibration Flow Diagram . . . . .                                                                      | 40 |
| Figure 10. Synchronization Using Continuous Sync Mode Showing Relationship Between SYNC Pin and CLK Pin . . . . . | 41 |
| Figure 11. Synchronization Using Pulse Sync Mode Showing Relationship Between SYNC, RDYB, and CLK Pins . . . . .  | 42 |
| Figure 12. Pin Configuration with MODBITS . . . . .                                                               | 42 |
| Figure 13. Timing Diagram for MODBITS Mode . . . . .                                                              | 44 |

---

**LIST OF TABLES**

---

|                                                                                                                          |    |
|--------------------------------------------------------------------------------------------------------------------------|----|
| Table 1. Continuous Mode SNR (dB) vs Data Rate and PGA Gain with Sinc Filter* . . . . .                                  | 18 |
| Table 2. Continuous Mode Input-Referred Noise ( $\mu V_{RMS}$ ) vs. Data Rate and PGA Gain with Sinc Filter* . . . . .   | 19 |
| Table 3. Single-Cycle Mode SNR (dB) vs. Data Rate and PGA Gain with Sinc Filter* . . . . .                               | 20 |
| Table 4. Single-Cycle Mode Input-Referred Noise ( $\mu V_{RMS}$ ) vs. Data Rate and PGA Gain with Sinc Filter* . . . . . | 21 |
| Table 5. MAX11270 Command Behavior from Pin (RSTB, SYNC) and SPI (RESET, SYNC_SPI) . . . . .                             | 22 |
| Table 6. Command Byte for Conversion Modes (MODE = 0) . . . . .                                                          | 29 |
| Table 7. Command Byte for Register Access Mode (MODE = 1) . . . . .                                                      | 29 |
| Table 8. Register Address Map . . . . .                                                                                  | 30 |
| Table 9. Programmable Conversion Rates . . . . .                                                                         | 32 |
| Table 10. ADC Output Code Data Format . . . . .                                                                          | 37 |
| Table 11. MODBITS Mode Pins . . . . .                                                                                    | 43 |

## Absolute Maximum Ratings

AVDD to AVSS ..... -0.3V to +3.9V  
 DVDD to DGND ..... -0.3V to +3.9V  
 DVDD to AVSS ..... -0.3V to +3.9V  
 AVSS to DGND ..... -1.95V to +0.3V  
 Analog Inputs  
 (AINP, AINM, REFP, REFN, CAPP, CAPN)  
 to AVSS ..... -0.3V to the lower of 3.9V or ( $V_{AVDD} + 0.3V$ )  
 Digital Inputs to DGND  
 (RSTB, SYNC, DIN, SCLK, CLK,  
 GPIO1-3) ..... -0.3V to the lower of 3.9V or ( $V_{DVDD} + 0.3V$ )  
 Digital Outputs to DGND  
 (RDYB, DOUT,  
 GPIO1-3) ..... -0.3V to the lower of 3.9V or ( $V_{DVDD} + 0.3V$ )

Digital Inputs to AVSS  
 (RSTB, SYNC, DIN, SCLK, CLK,  
 GPIO1–GPIO3) ..... -0.3V to +3.9V  
 Digital Outputs to AVSS  
 (RDYB, DOUT, GPIO1–3) ..... -0.3V to +3.9V  
 CAPREG to DGND ..... -0.3V to +2.2V  
 CAPREG to AVSS ..... -0.3V to +3.9V  
 Continuous Power Dissipation (Single-Layer Board)  
 TSSOP (derate 13.9mW/°C above +70°C) ..... 1111.10mW  
 Operating Temperature Range ..... -40°C to +85°C  
 Storage Temperature Range ..... -55°C to +150°C  
 Junction Temperature (continuous) ..... +150°C  
 Lead temperature (soldering, 10s) ..... +300°C  
 Soldering Temperature (reflow) ..... +260°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## Package Thermal Characteristics (Note 1)

### TSSOP

Junction-to-Case Thermal Resistance ( $\theta_{JC}$ ) ..... 13°C/W

Junction-to-Ambient Thermal Resistance ( $\theta_{JA}$ ) ..... 72°C/W

**Note 1:** Package thermal resistances were obtained using the method described in JEDEC specification JESD51-7, using a four-layer board. For detailed information on package thermal considerations, refer to [www.maximintegrated.com/thermal-tutorial](http://www.maximintegrated.com/thermal-tutorial).

## Electrical Characteristics

( $V_{AVDD} = 3.6V$ ,  $V_{AVSS} = 0V$ ,  $V_{DVDD} = 2.0V$ ,  $V_{REFP} = 2.5V$ ,  $V_{REFN} = 0V$ ;  $f_{DATA} = 1000sps$ , External Clock = 8.192MHz; Continuous conversion mode (SCYCLE = 0); PGA maximum output is 300mV below AVDD and minimum output is 300mV above AVSS,  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted. Typical values are at  $T_A = +25^\circ C$ .) (Note 2)

| PARAMETER                                      | SYMBOL           | CONDITIONS                          | MIN  | TYP  | MAX | UNITS  |
|------------------------------------------------|------------------|-------------------------------------|------|------|-----|--------|
| STATIC PERFORMANCE                             |                  |                                     |      |      |     |        |
| Noise-Free Resolution<br>(Note 3)              | NFR              | 1.9sps data rate (Bypass Mode only) | 19.2 | 20.4 |     | Bits   |
|                                                |                  | 1ksps data rate (Bypass Mode only)  | 16.9 | 17.4 |     |        |
| NOISE REFERRED TO INPUT $V_N$ (See Tables 1–4) |                  |                                     |      |      |     |        |
| Integral Nonlinearity                          | INL              | Bypass, Buffer, PGA = 1, 2          |      | 1    | 4   | ppm    |
|                                                |                  | PGA > 2                             |      | 2    |     |        |
| Offset Error                                   | $V_{OS}$         | After system offset calibration     |      | 10   |     | nV     |
| Offset Drift                                   | $V_{OS\_DRIFT}$  |                                     |      | 50   |     | nV/°C  |
| Gain Error                                     | $G_{ERR}$        | After system gain calibration       |      | 2    |     | ppm    |
| Gain Drift                                     | $G_{ERR\_DRIFT}$ |                                     |      | 2.5  |     | ppm/°C |
| DC Common-Mode Rejection (Note 4)              | $CMR_{DC}$       | Bypass and Buffer mode              | 120  | 135  |     | dB     |
|                                                |                  | PGA Gain = 4                        | 100  | 120  |     |        |
| AVDD, AVSS DC Supply Rejection Ratio           | PSRRA            | Bypass and Buffer mode              | 80   | 105  |     | dB     |
|                                                |                  | PGA Gain = 4                        | 80   | 100  |     |        |
| DVDD DC Supply Rejection Ratio                 | PSRRD            | Bypass and Buffer mode              | 95   | 120  |     | dB     |
|                                                |                  | PGA Gain = 4                        | 95   | 120  |     |        |

**Electrical Characteristics (continued)**

( $V_{AVDD} = 3.6V$ ,  $V_{AVSS} = 0V$ ,  $V_{DVDD} = 2.0V$ ,  $V_{REFP} = 2.5V$ ,  $V_{REFN} = 0V$ ;  $f_{DATA} = 1000sps$ , External Clock = 8.192MHz; Continuous conversion mode (SCYCLE = 0); PGA maximum output is 300mV below AVDD and minimum output is 300mV above AVSS,  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted. Typical values are at  $T_A = +25^{\circ}C$ .) (Note 2)

| PARAMETER                               | SYMBOL           | CONDITIONS               | MIN              | TYP        | MAX              | UNITS        |
|-----------------------------------------|------------------|--------------------------|------------------|------------|------------------|--------------|
| <b>ANALOG INPUTS/REFERENCE INPUTS</b>   |                  |                          |                  |            |                  |              |
| AIN Voltage Range                       | $V_{RNG}$        | Unipolar                 | 0                |            | $V_{REF}$        | V            |
|                                         |                  | Bipolar                  | $-V_{REF}$       |            | $V_{REF}$        |              |
| Absolute Input Voltage                  | $V_{ABS_{RNG}}$  | Bypass mode              | $V_{AVSS}$       |            | $V_{AVDD}$       | V            |
|                                         |                  | PGA mode                 | $V_{AVSS} + 0.3$ |            | $V_{AVDD} - 1.3$ |              |
|                                         |                  | Buffer mode              | $V_{AVSS} + 0.1$ |            | $V_{AVDD} - 0.1$ |              |
| AIN DC Input Leakage (Note 4)           | $I_{IN_{LEAK}}$  | Sleep mode enabled       | -10              |            | +10              | nA           |
| AIN Common-Mode Input Conductance       | $G_{AINCM}$      | Bypass                   |                  | $\pm 8$    |                  | nA/V         |
| AIN Common-Mode Input Current           | $I_{AINCM}$      | Buffer                   |                  | $\pm 500$  |                  | nA           |
|                                         |                  | PGA                      |                  | $\pm 21$   |                  | nA           |
| AIN Differential Mode Input Conductance | $G_{AINDIFF}$    | Bypass                   |                  | $\pm 23$   |                  | $\mu A/V$    |
| AIN Differential Mode Input Current     | $I_{AINDIFF}$    | Buffer                   |                  | $\pm 20$   |                  | nA           |
|                                         |                  | PGA                      |                  | $\pm 0.15$ |                  | nA           |
| REF Differential Input Conductance      | $G_{REFDIFF}$    | Active conversion state  |                  | $\pm 46.5$ |                  | $\mu A/V$    |
| REF Input Current at Power Down         | $I_{REF\_PD}$    | Sleep and Standby states |                  | $\pm 100$  |                  | nA           |
| AIN Input Capacitance                   | $C_{IN}$         | Buffer disabled          |                  | 3          |                  | pF           |
| REF Input Capacitance                   | $C_{REF}$        | Buffer disabled          |                  | 4.5        |                  | pF           |
| Input and REF Sampling Rate             | $f_S$            |                          |                  | 4.096      |                  | MHz          |
| $V_{REFP} - V_{REFN}$ Voltage Range     | $V_{RABS_{RNG}}$ | (Note 5)                 |                  |            | $V_{AVDD}$       | V            |
| REF Voltage Range                       | $V_{REF}$        |                          | 2.0              |            | $V_{AVDD}$       | V            |
| <b>DIGITAL FILTER RESPONSE</b>          |                  |                          |                  |            |                  |              |
| <b>SINC FILTER</b>                      |                  |                          |                  |            |                  |              |
| Bandwidth (-3dB)                        | $BW_{SINC}$      |                          |                  | 0.203      |                  | $f_{DATA}$   |
| Settling Time (Latency)                 |                  |                          |                  | 5          |                  | $1/f_{DATA}$ |

**Electrical Characteristics (continued)**

( $V_{AVDD} = 3.6V$ ,  $V_{AVSS} = 0V$ ,  $V_{DVDD} = 2.0V$ ,  $V_{REFP} = 2.5V$ ,  $V_{REFN} = 0V$ ;  $f_{DATA} = 1000sps$ , External Clock = 8.192MHz; Continuous conversion mode (SCYCLE = 0); PGA maximum output is 300mV below AVDD and minimum output is 300mV above AVSS,  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted. Typical values are at  $T_A = +25^{\circ}C$ .) (Note 2)

| PARAMETER                         | SYMBOL            | CONDITIONS                                 | MIN                | TYP  | MAX                | UNITS   |
|-----------------------------------|-------------------|--------------------------------------------|--------------------|------|--------------------|---------|
| <b>LOGIC INPUTS</b>               |                   |                                            |                    |      |                    |         |
| Input Current                     | $I_{LEAK\_DIG}$   | Leakage current only                       | -1                 |      | +1                 | $\mu A$ |
| Input Low Voltage                 | $V_{IL}$          |                                            |                    |      | 0.3x<br>$V_{DVDD}$ | V       |
| Input High Voltage                | $V_{IH}$          |                                            | 0.7x<br>$V_{DVDD}$ |      |                    | V       |
| Input Hysteresis                  | $V_{HYS}$         |                                            |                    | 200  |                    | mV      |
| GPIO Input Low Voltage            | $V_{IL\_GPIO}$    |                                            |                    |      | 0.4                | V       |
| GPIO Input High Voltage           | $V_{IH\_GPIO}$    |                                            | 1.0                |      |                    | V       |
| GPIO Input Hysteresis             | $V_{HYS\_GPIO}$   |                                            |                    | 20   |                    | mV      |
| <b>LOGIC OUTPUTS</b>              |                   |                                            |                    |      |                    |         |
| Output Low Level                  | $V_{OL}$          | $I_{OL} = 1mA$                             |                    |      | 0.4                | V       |
| Output High Level                 | $V_{OH}$          | $I_{OH} = 1mA$                             | 0.9x<br>$V_{DVDD}$ |      |                    | V       |
| Floating State Leakage Current    | $I_{DIGO\_LEAK}$  |                                            | -10                |      | +10                | $\mu A$ |
| Floating State Output Capacitance | $C_{DIGO}$        |                                            |                    | 9    |                    | pF      |
| <b>POWER REQUIREMENTS</b>         |                   |                                            |                    |      |                    |         |
| Analog Negative Supply            | $V_{AVSS}$        | For split supplies, $V_{AVSS} = -V_{AVDD}$ | -1.8               |      | 0                  | V       |
| Analog Positive Supply            | $V_{AVDD}$        | For split supplies, $V_{AVDD} = -V_{AVSS}$ | $V_{AVSS} + 2.7$   |      | $V_{AVSS} + 3.6$   | V       |
| Digital Supply                    | $V_{DVDD}$        |                                            | 2.0                |      | 3.6                | V       |
| AVDD Sleep Current                | $I_{AVDD\_SLEEP}$ |                                            |                    | 0.9  | 3                  | $\mu A$ |
| AVDD Standby Current              | $I_{AVDD\_STBY}$  |                                            |                    | 1.5  | 3                  | $\mu A$ |
| DVDD Sleep Current                | $I_{DVDD\_SLEEP}$ |                                            |                    | 0.25 | 1                  | $\mu A$ |
| DVDD Standby Current              | $I_{DVDD\_STBY}$  |                                            |                    | 21   | 200                | $\mu A$ |
| Analog Supply Current             | $I_{AVDD}$        | Bypass mode                                |                    | 2.4  | 3.0                | mA      |
|                                   |                   | Buffers mode                               |                    | 2.8  | 3.5                |         |
|                                   |                   | PGA low-power mode                         |                    | 3.6  | 5.0                |         |
|                                   |                   | PGA low-noise mode                         |                    | 4.4  | 6.0                |         |
| DVDD Operating Current            | $I_{DVDD}$        | SINC filter                                |                    | 0.77 | 1.5                | mA      |



**Electrical Characteristics (continued)**

( $V_{AVDD} = 3.6V$ ,  $V_{AVSS} = 0V$ ,  $V_{DVDD} = 2.0V$ ,  $V_{REFP} = 2.5V$ ,  $V_{REFN} = 0V$ ;  $f_{DATA} = 1000sps$ , External Clock = 8.192MHz; Continuous conversion mode (SCYCLE = 0); PGA maximum output is 300mV below AVDD and minimum output is 300mV above AVSS,  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted. Typical values are at  $T_A = +25^{\circ}C$ .) (Note 2)

| PARAMETER                                        | SYMBOL      | CONDITIONS                                                                                               | MIN | TYP | MAX | UNITS       |
|--------------------------------------------------|-------------|----------------------------------------------------------------------------------------------------------|-----|-----|-----|-------------|
| <b>SPI TIMING REQUIREMENTS (See Figures 4–7)</b> |             |                                                                                                          |     |     |     |             |
| SCLK Frequency                                   | $f_{SCLK}$  |                                                                                                          |     |     | 5   | MHz         |
| SCLK Clock Period                                | $t_{CP}$    |                                                                                                          | 200 |     |     | ns          |
| SCLK Pulse Width High                            | $t_{CH}$    | Allow 40% duty cycle                                                                                     | 80  |     |     | ns          |
| SCLK Pulse Width Low                             | $t_{CL}$    | Allow 40% duty cycle                                                                                     | 80  |     |     | ns          |
| CSB Low Setup                                    | $t_{CSS0}$  | CSB low to 1st SCLK rise setup                                                                           | 40  |     |     | ns          |
| CSB High Setup (Note 4)                          | $t_{CSS1}$  | Required to prevent a 17th SCLK RE from being recognized by the device in a free-running application     | 40  |     |     | ns          |
| CSB Hold                                         | $t_{CSH1}$  | SCLK falling edge to CSB rising edge, CSB hold time                                                      | 3   |     |     | ns          |
| CSB Pulse Width                                  | $t_{CSW}$   | Minimum CSB pulse width high                                                                             | 40  |     |     | ns          |
| DIN Setup                                        | $t_{DS}$    | DIN setup to SCLK rising edge                                                                            | 40  |     |     | ns          |
| DIN Hold                                         | $t_{DH}$    | DIN hold after SCLK rising edge                                                                          | 0   |     |     | ns          |
| DOUT Transition                                  | $t_{DOT}$   | DOUT transition valid after SCLK fall                                                                    |     |     | 40  | ns          |
| DOUT Hold                                        | $t_{DOH}$   | Output hold time remains valid after SCLK fall                                                           | 3   |     |     | ns          |
| DOUT Disable                                     | $t_{DOD}$   | CSB rise to DOUT disable, $C_{LOAD} = 20pF$                                                              |     |     | 25  | ns          |
| CSB Fall to DOUT Valid                           | $t_{DOE}$   | Default value of DOUT is '1' for minimum specification, max specification for valid '0' on RDYB          | 0   |     | 40  | ns          |
| SCLK Fall to RDYB '1'                            | $t_{R1}$    | RDYB transitions from '0' to '1' on falling edge of SCLK after LSB of DATA is shifted onto DOUT          | 0   |     | 40  | ns          |
| RSTB Fall or SYNC Rise to RDYB '1'               | $t_{R2}$    | RDYB transitions from '0' to '1' on falling edge of RSTB or rising edge of SYNC after 2 $f_{CLK}$ cycles |     |     | 2   | $1/f_{CLK}$ |
| Minimum SYNC High Pulse Width                    | $t_{SYNC1}$ |                                                                                                          | 2   |     |     | $1/f_{CLK}$ |
| Minimum RSTB Low Pulse Width                     | $t_{RSTB0}$ |                                                                                                          | 2   |     |     | $1/f_{CLK}$ |

**Note 2:** Limits are 100% production tested at  $T_A = +25^{\circ}C$ . Limits over the operating temperature range are guaranteed by design and device characterization.










**Note 3:** Noise-free resolution is defined using the peak-to-peak input range and the peak-to-peak noise voltage. The peak-to-peak input range,  $V_{IN\_RANGE\_P-P}$  is defined as  $2 \times V_{REF}$ . The peak-to-peak noise voltage is defined as the RMS noise voltage times 6.6. The NFR is calculated for bypass mode only and with SINC filter using the formula,  $NFR = \log(V_{IN\_RANGE\_P-P} / (6.6 \times V_{NOISE\_RMS})) / \log(2)$ .

**Note 4:** These specifications are not fully tested and are guaranteed by design and/or characterization.

**Note 5:** Reference common mode  $(V_{REFP} + V_{REFN})/2 \leq (V_{AVDD} + V_{AVSS})/2 + 0.1V$ .









## Typical Operating Characteristics

( $V_{AVDD} = 3.6V$ ,  $V_{AVSS} = 0V$ ,  $V_{DVDD} = 2.0V$ ,  $V_{REFP} = 2.5V$ ,  $V_{REFN} = 0V$ ;  $f_{DATA} = 1000sps$ , External Clock = 8.192MHz; Continuous conversion mode (SCYCLE = 0); PGA maximum output is 300mV below AVDD and minimum output is 300mV above AVSS,  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted. Typical values are at  $T_A = +25^{\circ}C$ .)

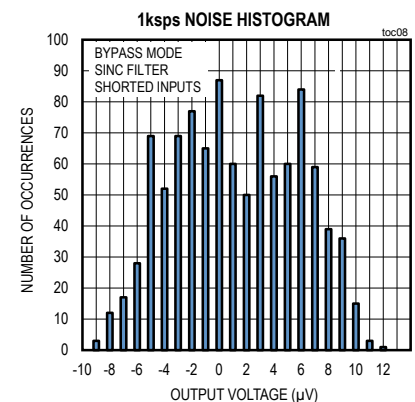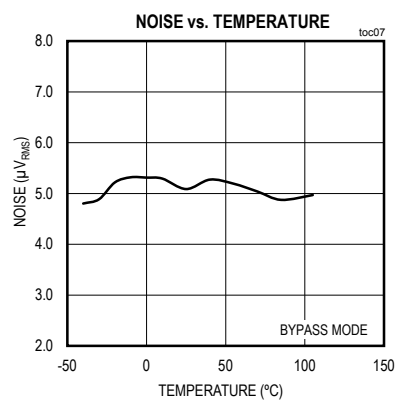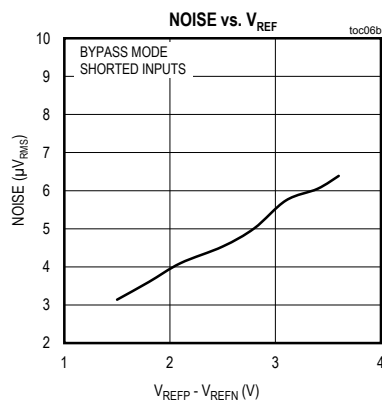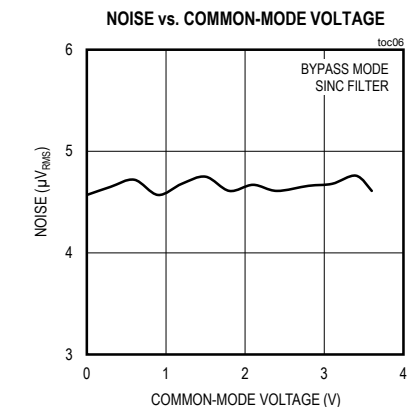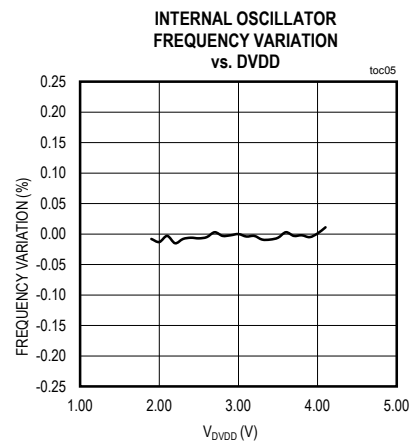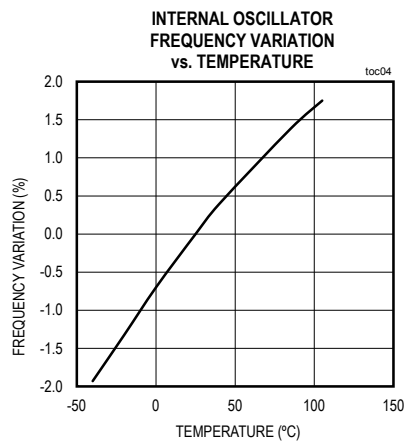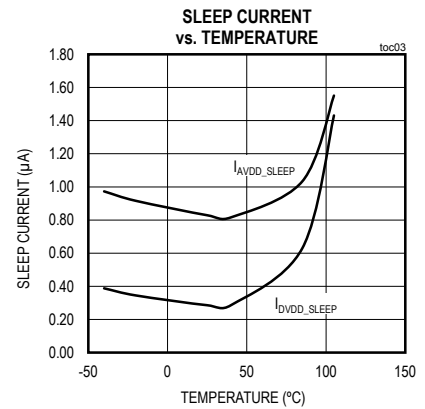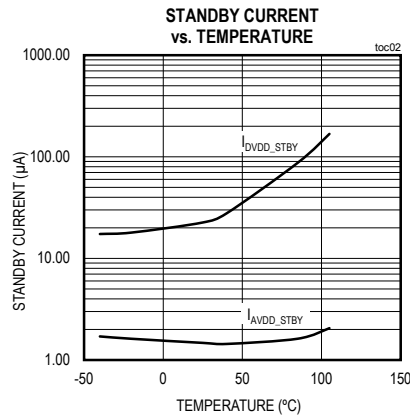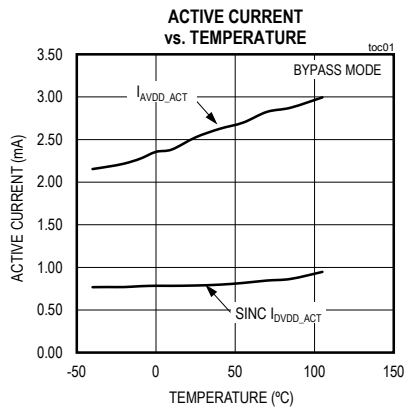





## Typical Operating Characteristics (continued)

( $V_{AVDD} = 3.6V$ ,  $V_{AVSS} = 0V$ ,  $V_{DVDD} = 2.0V$ ,  $V_{REFP} = 2.5V$ ,  $V_{REFN} = 0V$ ;  $f_{DATA} = 1000sps$ , External Clock = 8.192MHz; Continuous conversion mode (SCYCLE = 0); PGA maximum output is 300mV below AVDD and minimum output is 300mV above AVSS,  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted. Typical values are at  $T_A = +25^\circ C$ .)

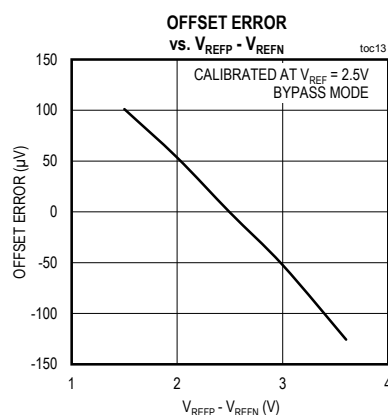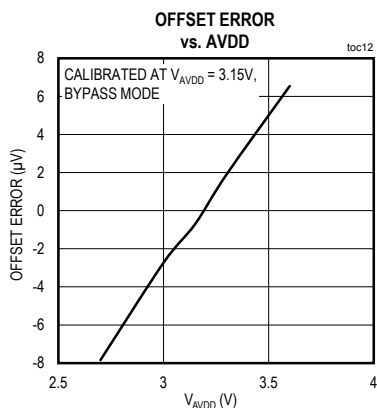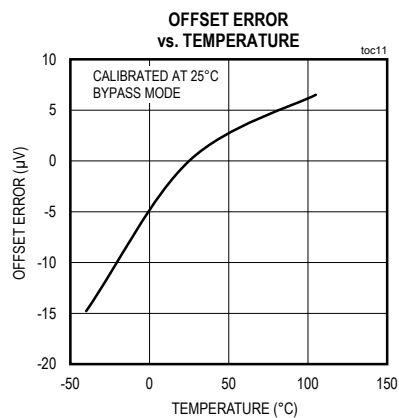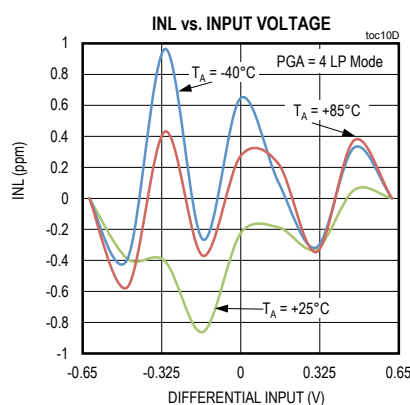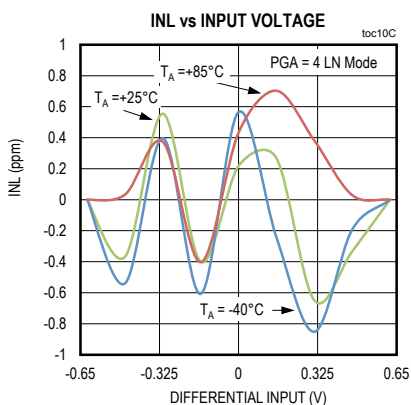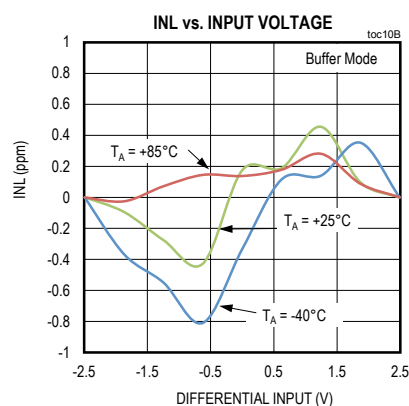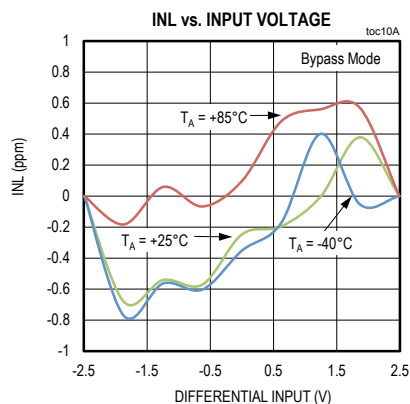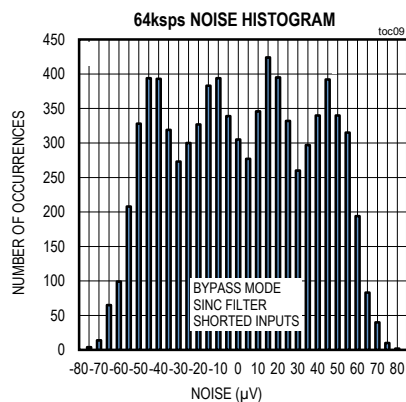





**Typical Operating Characteristics (continued)**

( $V_{AVDD} = 3.6V$ ,  $V_{AVSS} = 0V$ ,  $V_{DVDD} = 2.0V$ ,  $V_{REFP} = 2.5V$ ,  $V_{REFN} = 0V$ ;  $f_{DATA} = 1000sps$ , External Clock = 8.192MHz; Continuous conversion mode (SCYCLE = 0); PGA maximum output is 300mV below AVDD and minimum output is 300mV above AVSS,  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted. Typical values are at  $T_A = +25^{\circ}C$ .)

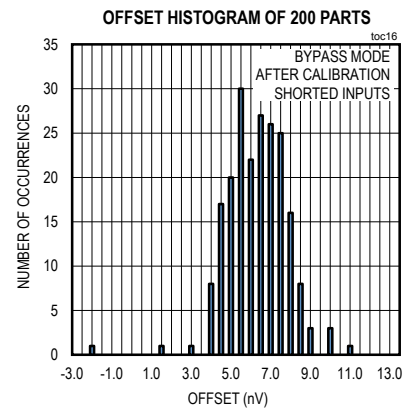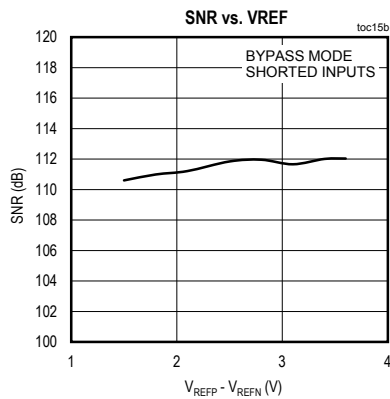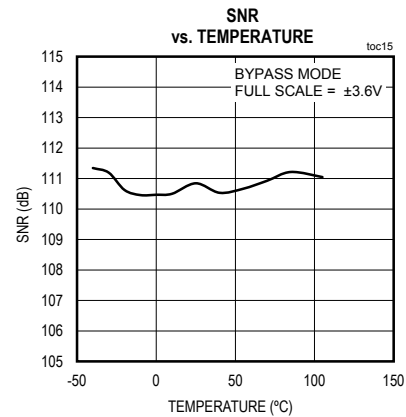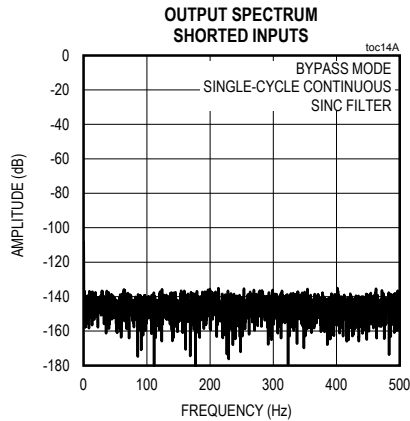

### Typical Operating Characteristics (continued)


( $V_{AVDD} = 3.6V$ ,  $V_{AVSS} = 0V$ ,  $V_{DVDD} = 2.0V$ ,  $V_{REFP} = 2.5V$ ,  $V_{REFN} = 0V$ ;  $f_{DATA} = 1000sps$ , External Clock = 8.192MHz; Continuous conversion mode (SCYCLE = 0); PGA maximum output is 300mV below AVDD and minimum output is 300mV above AVSS,  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted. Typical values are at  $T_A = +25^{\circ}C$ .)

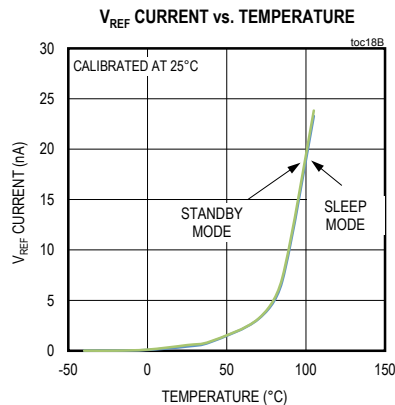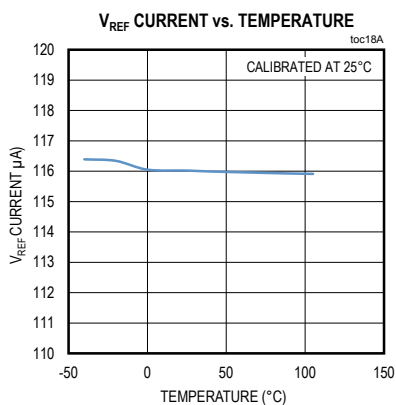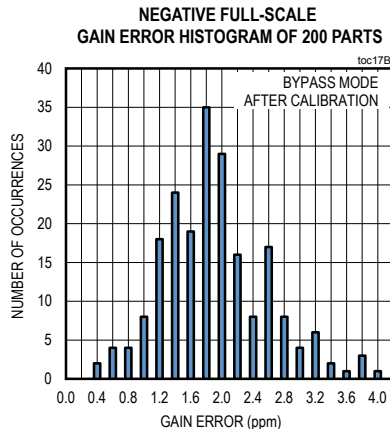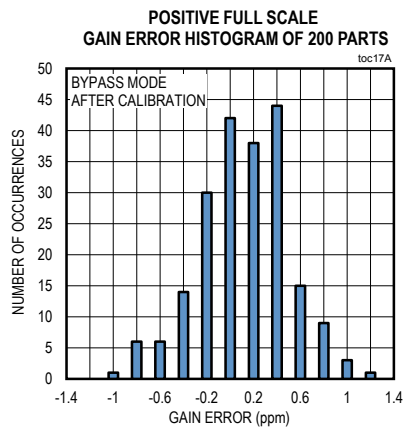

MAX11270

24-Bit, 10mW, 130dB SNR, 64ksps Delta-Sigma  
ADC with Integrated PGA

Pin Configuration

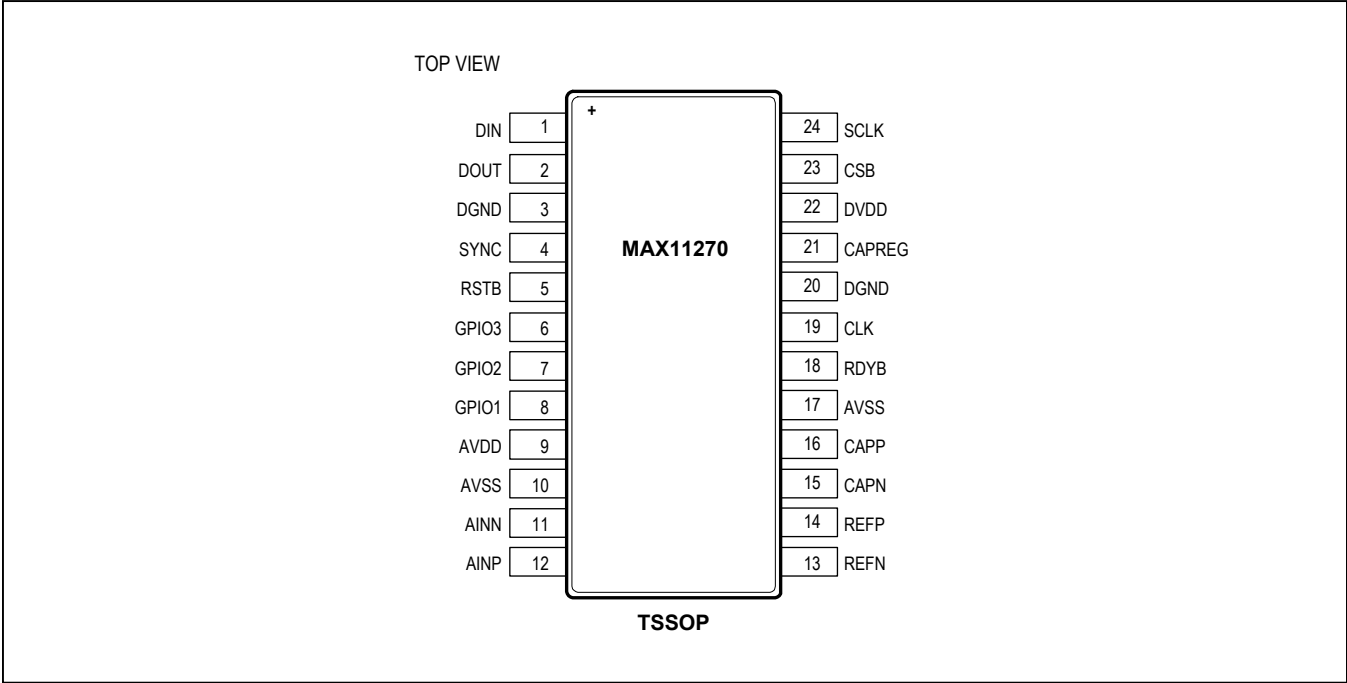

Pin Description

| PIN   | NAME  | FUNCTION                                                                                                                                                                                                                                                                                         |
|-------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1     | DIN   | Serial Data Input. Data is clocked into DIN on the rising edge of SCLK. DIN configures the internal register writes or a command operation.                                                                                                                                                      |
| 2     | DOUT  | Serial Data Output or Real-Time Modulator MBO Output. DOUT outputs 32 or 24 bits of filtered data in normal data mode. DOUT transitions on the falling edge of SCLK.                                                                                                                             |
| 3, 20 | DGND  | Digital Ground                                                                                                                                                                                                                                                                                   |
| 4     | SYNC  | SYNC Reset. SYNC resets both the digital filter and the modulator.-<br>Connect SYNC from multiple MAX11270s in parallel to synchronize more than one ADC to an external trigger. This is a digital input pin and is not internally pulled down. For normal operation drive or pull this pin low. |
| 5     | RSTB  | The RSTB function is a complete reset of all digital functions resulting in a power-on reset default state. This is a digital input pin and is not internally pulled up. For normal operation drive or pull this pin high.                                                                       |
| 6     | GPIO3 | General-Purpose I/O 3 or Modulator Sync Output. GPIO3 is configurable as a digital input or output. GPIO pins have weak pull ups and do not require external bias if unused. For lowest power operation do not connect or drive high with GPIO configured as input (default).                    |
| 7     | GPIO2 | General-Purpose I/O 2. Register controllable via SPI. GPIO pins have weak pull ups and do not require external bias if unused. For lowest power operation do not connect or drive high with GPIO configured as input (default).                                                                  |
| 8     | GPIO1 | General-Purpose I/O 1. Register controllable via SPI. GPIO pins have weak pull ups and do not require external bias if unused. For lowest power operation do not connect or drive high with GPIO configured as input (default).                                                                  |


## Pin Description (continued)

| PIN    | NAME   | FUNCTION                                                                                                                                                                                                                                                                                                                                                                                                              |
|--------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 9      | AVDD   | Analog Positive Supply Voltage. In single-supply mode, $V_{AVDD} = 2.7V$ to $3.6V$ with $V_{AVSS} = 0V$ . In dual-supply mode, AVDD and AVSS can range from $\pm 1.35V$ to $\pm 1.8V$ .                                                                                                                                                                                                                               |
| 10, 17 | AVSS   | Analog Negative Supply Voltage. Connect AVSS to the most negative supply. Connect $V_{AVSS} = 0V$ in single-supply mode. Connect AVSS between $-1.8V$ and $0V$ for dual-supply mode.                                                                                                                                                                                                                                  |
| 11     | AINN   | Negative Analog Input. The analog inputs can measure both unipolar and bipolar ranges, depending on the AVDD and AVSS voltages.                                                                                                                                                                                                                                                                                       |
| 12     | AINP   | Positive Analog Input. The analog inputs can measure both unipolar and bipolar ranges, depending on the AVDD and AVSS voltages.                                                                                                                                                                                                                                                                                       |
| 13     | REFN   | Negative Reference Input. REFN must be less than REFP. REFN voltage must be between AVDD and AVSS.                                                                                                                                                                                                                                                                                                                    |
| 14     | REFP   | Positive Reference Input. REFP must be greater than REFN. REFP voltage must be between AVDD and AVSS.                                                                                                                                                                                                                                                                                                                 |
| 15     | CAPN   | PGA Filter Negative Capacitor Output. Connect a 10nF COG capacitor between CAPN and CAPP.                                                                                                                                                                                                                                                                                                                             |
| 16     | CAPP   | PGA Filter Positive Capacitor Output. Connect a 10nF COG capacitor between CAPN and CAPP.                                                                                                                                                                                                                                                                                                                             |
| 18     | RDYB   | Active-Low Data Ready Output or Internal Clock Output. RDYB asserts low when the data is ready. When in continuous conversion mode, a SYNC or POR event inhibits output of the first 4 data values to allow for filter settling when the SINC filter is selected. A SYNC or POR event inhibits output of the first 63 data values to allow for filter settling when using the FIR filters.                            |
| 19     | CLK    | External Clock Input. For external clock mode, set the EXTCLK bit = 1 and provide a digital clock signal at CLK. The MAX11270 is specified with a clock frequency of 8.192MHz. Other clock frequencies may be used, but the data rate and digital filter notch frequencies will scale accordingly. This is a digital input pin and is not internally pulled down. When external clock is disabled drive this pin low. |
| 21     | CAPREG | Internal 1.8V Subregulator Reservoir Output. Bypass with a 10 $\mu$ F capacitor to DGND. Minimum capacitor value required for stability is 220nF.                                                                                                                                                                                                                                                                     |
| 22     | DVDD   | Digital Supply Voltage. Supply DVDD with 2.0V to 3.6V, with respect to DGND.                                                                                                                                                                                                                                                                                                                                          |
| 23     | CSB    | Active-Low Chip-Select Input. Set CSB low to access the serial interface. CSB is used for frame synchronization for communications when SCLK is continuous. Drive CSB high to reset the SPI interface.                                                                                                                                                                                                                |
| 24     | SCLK   | Serial Clock Input. Apply an external serial clock at SCLK to issue commands or access data from the MAX11270.                                                                                                                                                                                                                                                                                                        |

MAX11270

24-Bit, 10mW, 130dB SNR, 64ksps Delta-Sigma  
ADC with Integrated PGA

Functional Diagram

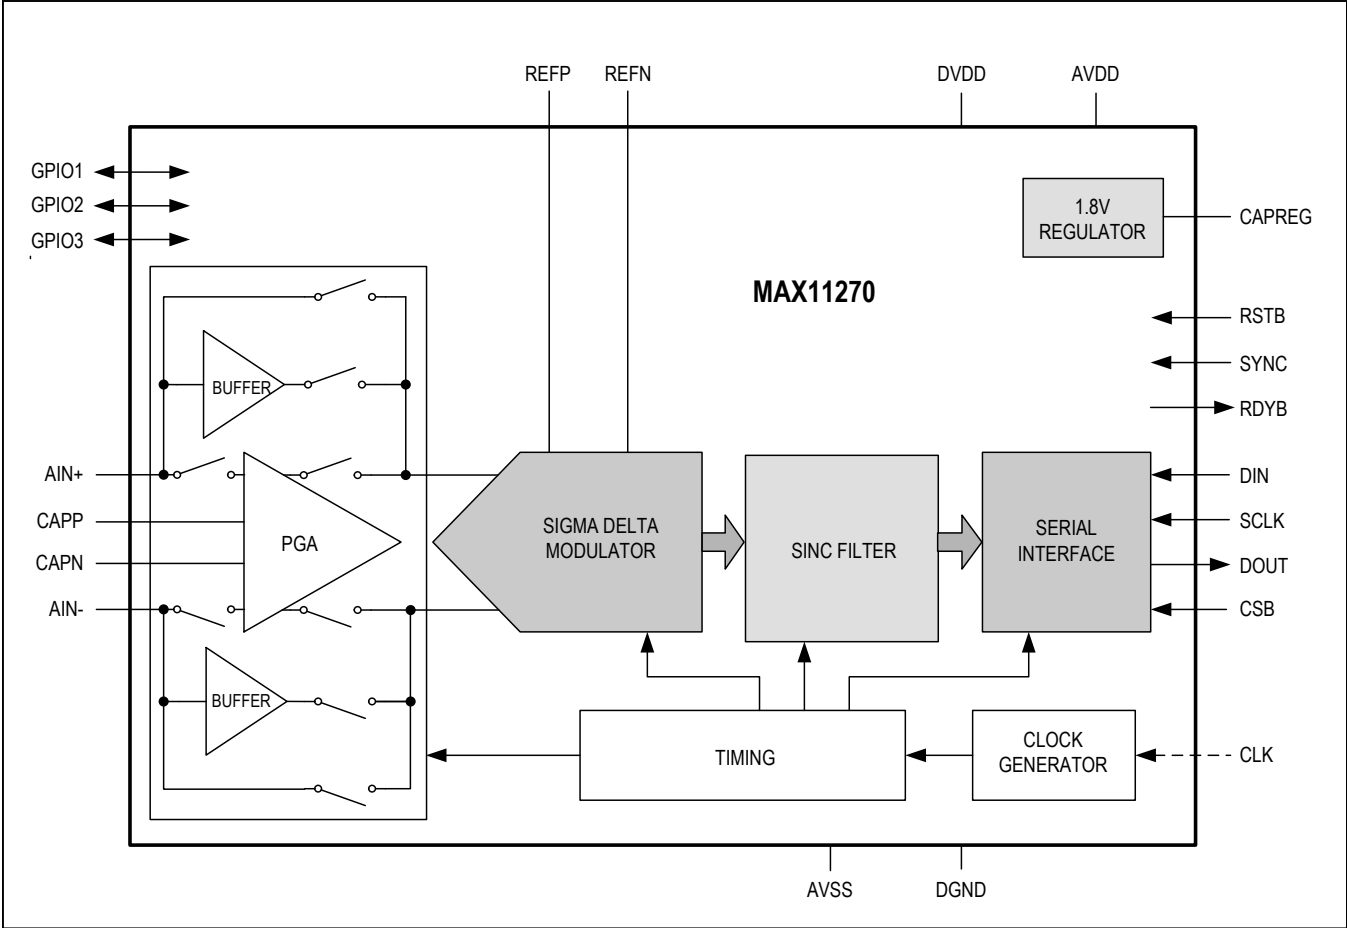



## Detailed Description

The MAX11270 is an ultra-low power ADC that resolves a very high dynamic range. This ADC is capable of resolving microvolt-level changes to the analog input, making it a good fit for seismic, instrumentation, and ATE applications. The user can select between programmable gain amplifier, unity-gain buffer or connect directly to the delta-sigma sampling network.

The MAX11270 includes a high-accuracy internal oscillator that requires no external components. Data is output through a serial interface at sample rates up to 12.8ksps with no data latency and 64ksps continuous. The MAX11270 has a fifth-order digital SINC filter.

The MAX11270 is highly configurable via the internal registers, which can be accessed via the SPI interface. This includes PGA gain selection, offset and gain calibration, and a scalable sample rate to optimize performance.

## System Clock

The MAX11270 incorporates a highly stable internal oscillator that provides the system clock. The system clock is trimmed to 8.192MHz and is divided further down to run the digital and analog timing.

## Voltage Reference Inputs

The MAX11270 provide differential inputs REFP and REFN for an external reference voltage. Connect the external reference directly across the REFP and REFN pins to obtain the differential reference voltage. The  $V_{REFP}$  should always be greater than  $V_{REFN}$  and the common-mode voltage range is between 1V and  $V_{AVDD} - 1V$ .

## Analog Inputs

The MAX11270 measures a pair of differential analog inputs (AINP, AINN) in buffered, direct connect or PGA. See the [Control 2 Register \(Read/Write\)](#) section for programming and enabling the PGA, buffers, or direct connect. The default configuration is direct connect, with both PGA and input buffers powered down.

## Input Buffers

The input buffer isolates the inputs from the capacitive load presented by the modulator, allowing for high source-impedance analog transducers.

## Bypass/Direct Connect

The MAX11270 offers the option to bypass both buffers and PGA and route the analog inputs directly to the modulator. This option lowers the power of the part since both buffers and PGA are shut off.

## Programmable Gain Amplifier (PGA)

The integrated PGA provides gain settings from 1x to 128x. See the [Control 2 Register \(Read/Write\)](#) section for enabling and programming the PGA. The PGA configuration is shown in [Figure 1](#). Direct connection is available to bypass the PGA enabling direct connection to the modulator. The PGA's absolute input voltage range is CMIRNG and the PGA output voltage range is  $V_{OUTRNG}$  as specified in the [Electrical Characteristics](#). The PGA output common-mode voltage is the same as the input common-mode voltage.

Note that linearity and performance degrade when the usable input common-mode voltage of the PGA is exceeded. The usable input common-mode range and output common-mode range are shown in [Figure 2](#). The following equations describe the relationship between the analog inputs and PGA output.

AINP = Positive input to the PGA

AINN = Negative input to the PGA

CAPP = Positive output of PGA

CAPN = Negative output of PGA

$V_{CM}$  = Input common mode

GAIN = PGA gain

$V_{REF}$  = ADC reference input voltage

$V_{IN} = V_{AINP} - V_{AINN}$

**Note:** Input voltage range is limited by the reference voltage as described by  $V_{IN} \leq \pm V_{REF}/GAIN$

$$V_{CM} = \frac{(V_{AINP} + V_{AINN})}{2}$$

$$V_{CAPP} = V_{CM} + GAIN \times (V_{AINP} - V_{CM})$$

$$V_{CAPN} = V_{CM} - GAIN \times (V_{CM} - V_{AINN})$$

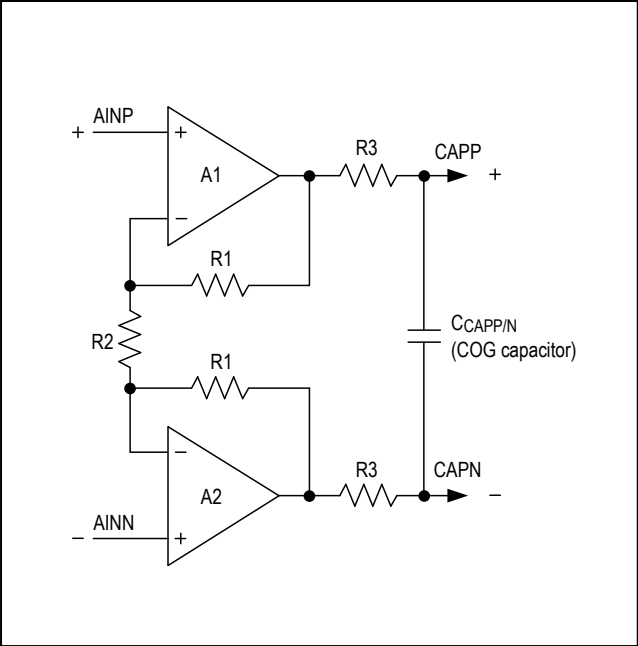


Figure 1. PGA Structure

### Input Voltage Range

The ADC input range is programmable for bipolar ( $-V_{REF}$  to  $+V_{REF}$ ) or unipolar (0 to  $V_{REF}$ ) ranges. The U/B bit in the CTRL1 register configures the MAX11270 for unipolar or bipolar transfer functions. See [Figure 2](#).

### Noise Performance vs. Data Rate

The MAX11270 offers software-selectable output data rates in order to optimize data rate and noise. The RATE bits in the command byte determines the ADC's output data rate. The MAX11270 offers zero latency in single-cycle conversion mode. Set SCYCLE = 0 in the CTRL1 register to run in continuous conversion mode and SCYCLE = 1 for single-cycle conversion mode.

Single-cycle conversion mode gives an output result with no data latency for up to 12.8ksps. In continuous conversion mode, the maximum output data rate is 64ksps. In continuous conversion mode, the output data requires four additional 24-bit cycles to settle from an input step. For optimal SNR vs. power, it is recommended to use different PGA modes. For gain settings 8 and below, use low-power PGA mode, for gain setting above 8, use low-noise PGA mode.

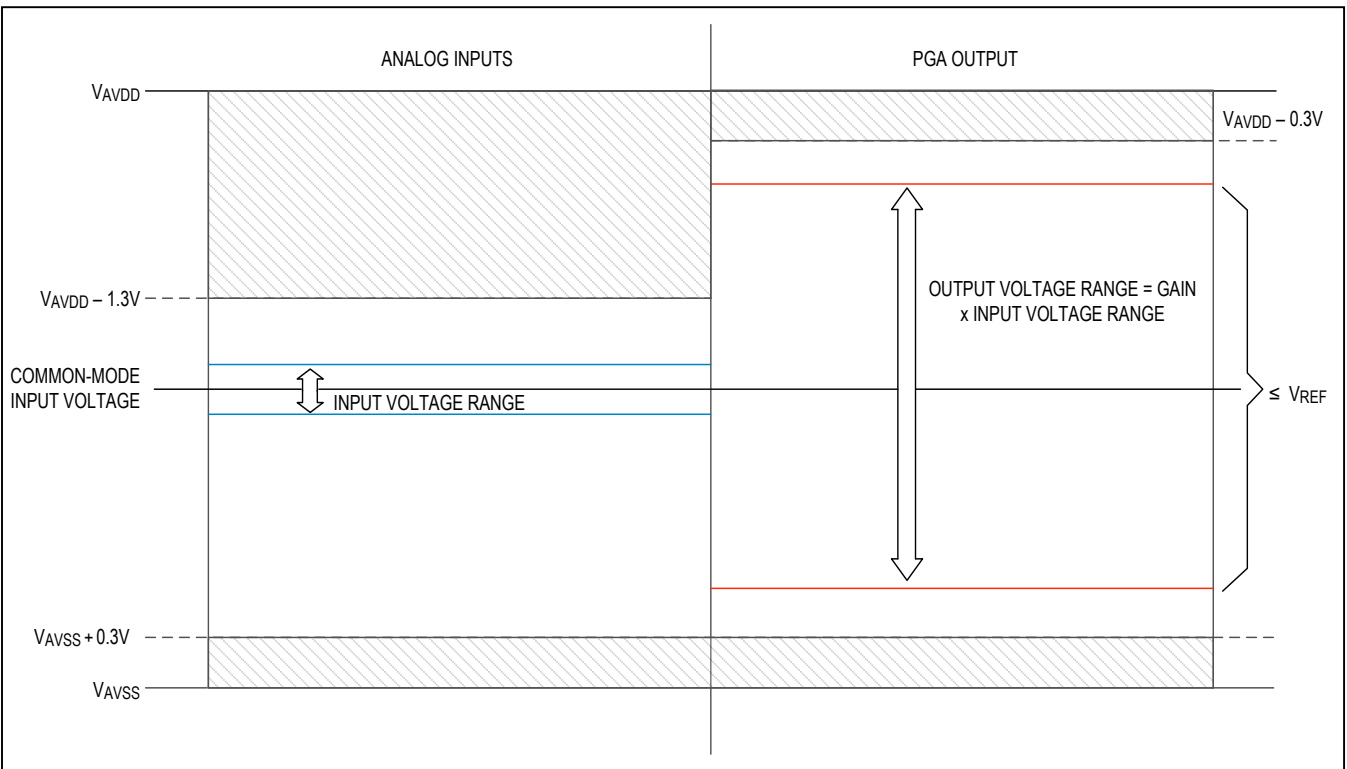


Figure 2. Usable Input and Output Common-Mode Range

**Table 1. Continuous Mode SNR (dB) vs Data Rate and PGA Gain with Sinc Filter\***

| DATA RATE (sps) | DIRECT CONNECT | BUFFER | PGA ENABLED: GAIN SETTING |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|-----------------|----------------|--------|---------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|                 |                |        | 1                         |       | 2     |       | 4     |       | 8     |       | 16    |       | 32    |       | 64    |       | 128   |       |
|                 |                |        | LN                        | LP    | LN    | LP    | LN    | LP    | LN    | LP    | LN    | LP    | LN    | LP    | LN    | LP    | LN    | LP    |
| 1.9             | 129.8          | 130.2  | 128.8                     | 128.7 | 130.0 | 129.5 | 129.8 | 129.8 | 130.0 | 130.0 | 129.7 | 129.7 | 130.0 | 129.5 | 128.7 | 127.6 | 126.1 | 124.0 |
| 3.9             | 129.8          | 129.9  | 128.6                     | 128.5 | 130.1 | 129.9 | 130.0 | 129.7 | 129.9 | 129.7 | 129.4 | 129.4 | 129.6 | 128.8 | 127.9 | 126.9 | 124.3 | 122.6 |
| 7.8             | 129.4          | 129.8  | 128.4                     | 128.3 | 129.9 | 129.6 | 129.7 | 129.6 | 129.5 | 129.5 | 129.5 | 129.3 | 128.6 | 127.7 | 126.6 | 125.4 | 122.3 | 120.2 |
| 15.6            | 129.3          | 129.5  | 128.2                     | 128.2 | 129.5 | 129.5 | 129.6 | 129.5 | 129.2 | 129.0 | 128.7 | 127.8 | 127.9 | 126.5 | 124.8 | 123.4 | 119.7 | 117.0 |
| 31.2            | 125.5          | 125.6  | 124.4                     | 124.2 | 125.7 | 125.5 | 125.7 | 125.5 | 125.2 | 125.2 | 124.9 | 124.7 | 123.9 | 123.5 | 121.3 | 120.2 | 116.6 | 114.7 |
| 62.5            | 123.4          | 123.6  | 122.3                     | 122.1 | 123.6 | 123.4 | 123.5 | 123.5 | 123.2 | 123.2 | 122.8 | 122.7 | 121.6 | 121.2 | 118.8 | 117.5 | 113.8 | 111.9 |
| 125             | 119.9          | 119.9  | 118.7                     | 118.6 | 120.0 | 120.0 | 119.9 | 119.9 | 119.7 | 119.7 | 119.4 | 119.3 | 118.4 | 117.8 | 115.7 | 114.3 | 110.8 | 108.8 |
| 250             | 117.9          | 118.0  | 116.7                     | 116.7 | 118.0 | 118.0 | 117.9 | 117.9 | 117.7 | 117.8 | 117.3 | 117.1 | 116.1 | 115.4 | 113.1 | 111.6 | 108.0 | 105.9 |
| 500             | 114.1          | 114.2  | 113.0                     | 112.9 | 114.2 | 114.2 | 114.1 | 114.1 | 114.0 | 114.0 | 113.6 | 113.5 | 112.6 | 112.0 | 110.0 | 108.4 | 105.0 | 102.9 |
| 1000            | 112.0          | 112.1  | 110.9                     | 110.8 | 112.2 | 112.2 | 112.0 | 112.0 | 111.9 | 111.9 | 111.5 | 111.2 | 110.3 | 109.5 | 107.3 | 105.7 | 102.2 | 100.0 |
| 2000            | 108.1          | 108.2  | 106.9                     | 106.9 | 108.3 | 108.3 | 108.2 | 108.2 | 108.1 | 108.1 | 107.8 | 107.5 | 106.8 | 106.1 | 104.2 | 102.6 | 99.2  | 97.1  |
| 4000            | 106.1          | 106.2  | 104.9                     | 104.9 | 106.2 | 106.2 | 106.1 | 106.1 | 106.0 | 106.0 | 105.6 | 105.3 | 104.5 | 103.8 | 101.8 | 100.2 | 96.7  | 94.6  |
| 8000            | 102.2          | 102.3  | 101.0                     | 101.0 | 102.4 | 102.4 | 102.3 | 102.3 | 102.2 | 102.2 | 102.0 | 101.7 | 101.2 | 100.6 | 99.0  | 97.6  | 94.4  | 92.4  |
| 16000           | 100.2          | 100.3  | 99.0                      | 99.0  | 100.3 | 100.4 | 100.3 | 100.3 | 100.2 | 100.2 | 100.0 | 99.9  | 99.4  | 99.0  | 97.5  | 96.3  | 93.2  | 91.3  |
| 32000           | 96.2           | 96.3   | 95.1                      | 95.1  | 96.4  | 96.4  | 96.3  | 96.4  | 96.3  | 96.3  | 96.2  | 96.0  | 95.7  | 95.3  | 94.1  | 93.0  | 90.2  | 88.4  |
| 64000           | 94.2           | 94.2   | 93.0                      | 92.9  | 94.3  | 94.4  | 94.2  | 94.2  | 94.2  | 94.2  | 94.1  | 93.9  | 93.6  | 93.2  | 91.9  | 90.8  | 87.9  | 86.2  |

\* $V_{IN} = 0V$ ,  $V_{AVDD} = 3.6V$ ,  $V_{AVSS} = 0V$ ,  $V_{REF} = 3.6V$ ,  $T_A = +25^{\circ}C$ , external clock. Data taken with PGA output 150mV from AVDD and AVSS. This table is not tested and is based on characterization data.

**Table 2. Continuous Mode Input-Referred Noise ( $\mu\text{V}_{\text{RMS}}$ ) vs. Data Rate and PGA Gain with Sinc Filter\***

| DATA RATE (sps) | DIRECT CONNECT | BUFFER | PGA ENABLED: GAIN SETTING |        |        |        |        |        |       |       |       |       |       |       |       |       |       |       |
|-----------------|----------------|--------|---------------------------|--------|--------|--------|--------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|                 |                |        | 1                         |        | 2      |        | 4      |        | 8     |       | 16    |       | 32    |       | 64    |       | 128   |       |
|                 |                |        | LN                        | LP     | LN     | LP     | LN     | LP     | LN    | LP    | LN    | LP    | LN    | LP    | LN    | LP    | LN    | LP    |
| 1.9             | 0.825          | 0.805  | 0.837                     | 0.838  | 0.451  | 0.475  | 0.220  | 0.217  | 0.109 | 0.110 | 0.058 | 0.057 | 0.029 | 0.031 | 0.017 | 0.019 | 0.011 | 0.020 |
| 3.9             | 0.824          | 0.833  | 0.857                     | 0.865  | 0.446  | 0.455  | 0.215  | 0.222  | 0.111 | 0.113 | 0.060 | 0.060 | 0.030 | 0.034 | 0.018 | 0.021 | 0.013 | 0.016 |
| 7.8             | 0.866          | 0.844  | 0.875                     | 0.878  | 0.452  | 0.471  | 0.221  | 0.223  | 0.116 | 0.117 | 0.060 | 0.061 | 0.034 | 0.038 | 0.021 | 0.024 | 0.016 | 0.021 |
| 15.6            | 0.868          | 0.865  | 0.893                     | 0.878  | 0.476  | 0.476  | 0.224  | 0.225  | 0.120 | 0.123 | 0.065 | 0.072 | 0.037 | 0.044 | 0.026 | 0.031 | 0.022 | 0.030 |
| 31.2            | 1.350          | 1.368  | 1.391                     | 1.412  | 0.741  | 0.750  | 0.352  | 0.357  | 0.190 | 0.189 | 0.101 | 0.103 | 0.058 | 0.062 | 0.039 | 0.044 | 0.032 | 0.039 |
| 62.5            | 1.717          | 1.717  | 1.766                     | 1.800  | 0.938  | 0.957  | 0.455  | 0.453  | 0.239 | 0.238 | 0.129 | 0.131 | 0.076 | 0.080 | 0.052 | 0.060 | 0.043 | 0.054 |
| 125             | 2.580          | 2.611  | 2.658                     | 2.682  | 1.418  | 1.427  | 0.684  | 0.686  | 0.355 | 0.355 | 0.191 | 0.194 | 0.111 | 0.119 | 0.075 | 0.087 | 0.061 | 0.077 |
| 250             | 3.238          | 3.283  | 3.346                     | 3.370  | 1.786  | 1.790  | 0.860  | 0.865  | 0.447 | 0.449 | 0.243 | 0.249 | 0.144 | 0.156 | 0.101 | 0.120 | 0.085 | 0.108 |
| 500             | 5.031          | 5.084  | 5.177                     | 5.211  | 2.758  | 2.764  | 1.333  | 1.332  | 0.686 | 0.690 | 0.370 | 0.378 | 0.214 | 0.232 | 0.145 | 0.172 | 0.120 | 0.153 |
| 1000            | 6.385          | 6.439  | 6.586                     | 6.600  | 3.500  | 3.501  | 1.692  | 1.693  | 0.878 | 0.886 | 0.476 | 0.490 | 0.281 | 0.309 | 0.197 | 0.236 | 0.166 | 0.212 |
| 2000            | 9.980          | 10.059 | 10.352                    | 10.315 | 5.454  | 5.484  | 2.633  | 2.637  | 1.360 | 1.370 | 0.728 | 0.747 | 0.420 | 0.456 | 0.282 | 0.335 | 0.232 | 0.295 |
| 4000            | 12.674         | 12.749 | 13.146                    | 13.073 | 6.956  | 6.932  | 3.339  | 3.353  | 1.723 | 1.743 | 0.931 | 0.963 | 0.545 | 0.594 | 0.372 | 0.445 | 0.311 | 0.395 |
| 8000            | 19.739         | 19.953 | 20.455                    | 20.371 | 10.814 | 10.830 | 5.198  | 5.204  | 2.674 | 2.695 | 1.421 | 1.456 | 0.799 | 0.857 | 0.512 | 0.599 | 0.403 | 0.510 |
| 16000           | 24.895         | 25.179 | 25.751                    | 25.728 | 13.670 | 13.602 | 6.556  | 6.568  | 3.364 | 3.373 | 1.773 | 1.808 | 0.980 | 1.036 | 0.607 | 0.698 | 0.465 | 0.576 |
| 32000           | 39.335         | 39.649 | 40.563                    | 40.547 | 21.501 | 21.502 | 10.328 | 10.287 | 5.260 | 5.292 | 2.758 | 2.807 | 1.510 | 1.579 | 0.905 | 1.017 | 0.659 | 0.811 |
| 64000           | 49.899         | 50.430 | 51.554                    | 51.724 | 27.340 | 27.206 | 13.142 | 13.149 | 6.729 | 6.740 | 3.519 | 3.590 | 1.920 | 2.023 | 1.165 | 1.313 | 0.855 | 1.040 |

\* $V_{\text{IN}} = 0\text{V}$ ,  $V_{\text{AVDD}} = 3.6\text{V}$ ,  $V_{\text{AVSS}} = 0\text{V}$ ,  $V_{\text{REF}} = 3.6\text{V}$ ,  $T_A = +25^\circ\text{C}$ , external clock. This table is not tested and is based on characterization data.

Table 3. Single-Cycle Mode SNR (dB) vs. Data Rate and PGA Gain with Sinc Filter\*

| DATA RATE (sps) | DIRECT CONNECT | BUFFER | PGA ENABLED: GAIN SETTING |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|-----------------|----------------|--------|---------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|                 |                |        | 1                         |       | 2     |       | 4     |       | 8     |       | 16    |       | 32    |       | 64    |       | 128   |       |
|                 |                |        | LN                        | LP    | LN    | LP    | LN    | LP    | LN    | LP    | LN    | LP    | LN    | LP    | LN    | LP    | LN    | LP    |
| 50              | 123.9          | 123.6  | 119.0                     | 119.0 | 121.9 | 121.9 | 123.3 | 123.3 | 123.2 | 123.2 | 123.0 | 122.7 | 122.0 | 121.1 | 119.1 | 117.6 | 114.1 | 112.1 |
| 62.5            | 124.0          | 123.4  | 119.0                     | 119.0 | 121.7 | 121.7 | 123.1 | 123.1 | 123.0 | 123.0 | 122.8 | 122.3 | 121.5 | 120.5 | 118.7 | 116.7 | 113.1 | 111.2 |
| 100             | 120.1          | 119.8  | 115.3                     | 115.2 | 118.1 | 118.1 | 119.5 | 119.6 | 119.3 | 119.2 | 119.2 | 118.9 | 118.0 | 117.5 | 115.7 | 114.4 | 111.0 | 108.9 |
| 125             | 120.2          | 119.9  | 115.2                     | 115.1 | 118.1 | 118.1 | 119.4 | 119.3 | 119.3 | 119.2 | 119.0 | 118.8 | 118.0 | 117.1 | 115.2 | 113.5 | 110.1 | 108.1 |
| 200             | 118.2          | 117.6  | 113.0                     | 113.0 | 116.0 | 116.0 | 117.3 | 117.3 | 117.3 | 117.2 | 116.9 | 116.7 | 115.8 | 115.0 | 112.9 | 111.4 | 107.9 | 105.7 |
| 250             | 118.0          | 117.6  | 113.0                     | 113.0 | 115.9 | 115.9 | 117.3 | 117.3 | 117.1 | 117.1 | 116.8 | 116.4 | 115.4 | 114.5 | 112.3 | 110.6 | 107.2 | 104.9 |
| 400             | 114.2          | 113.8  | 109.1                     | 109.1 | 112.1 | 112.0 | 113.5 | 113.5 | 113.4 | 113.3 | 113.1 | 112.8 | 112.2 | 111.5 | 109.6 | 108.0 | 104.8 | 102.6 |
| 500             | 114.2          | 113.7  | 109.1                     | 109.1 | 112.0 | 112.0 | 113.4 | 113.4 | 113.2 | 113.2 | 112.9 | 112.5 | 111.8 | 110.9 | 108.8 | 107.3 | 103.7 | 101.6 |
| 800             | 112.0          | 111.7  | 107.0                     | 107.1 | 109.9 | 110.0 | 111.3 | 111.3 | 111.2 | 111.1 | 110.8 | 110.5 | 109.6 | 108.7 | 106.6 | 105.0 | 101.4 | 99.2  |
| 1000            | 112.0          | 111.6  | 107.0                     | 106.9 | 109.9 | 109.8 | 111.2 | 111.2 | 111.1 | 110.9 | 110.6 | 110.1 | 109.1 | 108.0 | 105.8 | 103.9 | 100.3 | 98.2  |
| 1600            | 108.1          | 107.7  | 103.1                     | 103.1 | 106.0 | 106.0 | 107.4 | 107.3 | 107.3 | 107.1 | 106.8 | 106.5 | 105.6 | 104.8 | 102.7 | 101.1 | 97.5  | 95.3  |
| 2000            | 107.9          | 107.5  | 103.0                     | 102.9 | 105.9 | 105.8 | 107.2 | 107.2 | 107.1 | 106.9 | 106.5 | 106.1 | 105.0 | 103.9 | 101.5 | 99.8  | 96.2  | 94.0  |
| 3200            | 106.0          | 105.6  | 101.0                     | 101.0 | 103.9 | 103.9 | 105.2 | 105.2 | 105.1 | 105.0 | 104.6 | 104.2 | 103.2 | 102.2 | 99.9  | 98.2  | 94.6  | 92.4  |
| 4000            | 105.8          | 105.4  | 100.8                     | 100.8 | 103.7 | 103.7 | 105.0 | 105.0 | 104.8 | 104.7 | 104.2 | 103.7 | 102.4 | 101.3 | 98.8  | 97.0  | 93.2  | 91.1  |
| 6400            | 101.9          | 101.5  | 96.9                      | 96.9  | 99.8  | 99.8  | 101.2 | 101.2 | 101.0 | 100.9 | 100.5 | 100.1 | 99.0  | 98.0  | 95.7  | 93.9  | 90.2  | 88.2  |
| 12800           | 101.4          | 100.9  | 96.4                      | 96.3  | 99.2  | 99.2  | 100.6 | 100.5 | 100.3 | 100.1 | 99.5  | 98.9  | 97.5  | 96.4  | 93.7  | 91.9  | 88.1  | 86.0  |

\* $V_{IN} = 0V$ ,  $V_{AVDD} = 3.6V$ ,  $V_{AVSS} = 0V$ ,  $V_{REF} = 3.6V$ ,  $T_A = +25^{\circ}C$ , external clock. Data taken with PGA output 150mV from AVDD and AVSS. This table is not tested and is based on characterization data.

**Table 4. Single-Cycle Mode Input-Referred Noise ( $\mu\text{VRMS}$ ) vs. Data Rate and PGA Gain with Sinc Filter\***

| DATA RATE (sps) | DIRECT CONNECT | BUFFER | PGA ENABLED: GAIN SETTING |        |        |        |       |       |       |       |       |       |       |       |       |       |       |       |
|-----------------|----------------|--------|---------------------------|--------|--------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|                 |                |        | 1                         |        | 2      |        | 4     |       | 8     |       | 16    |       | 32    |       | 64    |       | 128   |       |
|                 |                |        | LN                        | LP     | LN     | LP     | LN    | LP    | LN    | LP    | LN    | LP    | LN    | LP    | LN    | LP    | LN    | LP    |
| 50              | 1.620          | 1.614  | 1.655                     | 1.643  | 0.835  | 0.833  | 0.423 | 0.420 | 0.219 | 0.219 | 0.115 | 0.120 | 0.067 | 0.074 | 0.046 | 0.055 | 0.038 | 0.048 |
| 62.5            | 1.604          | 1.652  | 1.648                     | 1.633  | 0.850  | 0.847  | 0.432 | 0.433 | 0.225 | 0.224 | 0.118 | 0.125 | 0.071 | 0.079 | 0.049 | 0.061 | 0.043 | 0.054 |
| 100             | 2.502          | 2.517  | 2.524                     | 2.571  | 1.298  | 1.285  | 0.653 | 0.651 | 0.344 | 0.346 | 0.179 | 0.186 | 0.105 | 0.112 | 0.068 | 0.080 | 0.055 | 0.070 |
| 125             | 2.479          | 2.493  | 2.566                     | 2.580  | 1.296  | 1.293  | 0.666 | 0.670 | 0.343 | 0.347 | 0.183 | 0.187 | 0.105 | 0.117 | 0.073 | 0.088 | 0.061 | 0.077 |
| 200             | 3.136          | 3.232  | 3.298                     | 3.234  | 1.655  | 1.644  | 0.842 | 0.834 | 0.432 | 0.435 | 0.232 | 0.240 | 0.136 | 0.150 | 0.094 | 0.112 | 0.078 | 0.101 |
| 250             | 3.204          | 3.248  | 3.297                     | 3.301  | 1.669  | 1.649  | 0.847 | 0.844 | 0.439 | 0.441 | 0.237 | 0.248 | 0.142 | 0.158 | 0.101 | 0.122 | 0.085 | 0.111 |
| 400             | 4.961          | 5.031  | 5.144                     | 5.151  | 2.580  | 2.601  | 1.311 | 1.310 | 0.675 | 0.684 | 0.361 | 0.374 | 0.206 | 0.224 | 0.138 | 0.165 | 0.112 | 0.144 |
| 500             | 4.976          | 5.076  | 5.153                     | 5.095  | 2.603  | 2.612  | 1.326 | 1.331 | 0.688 | 0.690 | 0.368 | 0.388 | 0.216 | 0.238 | 0.151 | 0.179 | 0.127 | 0.162 |
| 800             | 6.371          | 6.380  | 6.556                     | 6.533  | 3.302  | 3.298  | 1.682 | 1.691 | 0.869 | 0.881 | 0.469 | 0.487 | 0.277 | 0.307 | 0.194 | 0.234 | 0.165 | 0.212 |
| 1000            | 6.381          | 6.480  | 6.597                     | 6.628  | 3.337  | 3.344  | 1.710 | 1.710 | 0.883 | 0.899 | 0.484 | 0.509 | 0.294 | 0.333 | 0.214 | 0.264 | 0.187 | 0.240 |
| 1600            | 9.983          | 10.128 | 10.317                    | 10.336 | 5.197  | 5.227  | 2.648 | 2.658 | 1.367 | 1.390 | 0.743 | 0.771 | 0.440 | 0.484 | 0.306 | 0.368 | 0.260 | 0.333 |
| 2000            | 10.201         | 10.312 | 10.479                    | 10.516 | 5.283  | 5.299  | 2.699 | 2.708 | 1.403 | 1.434 | 0.772 | 0.809 | 0.473 | 0.534 | 0.350 | 0.425 | 0.303 | 0.389 |
| 3200            | 12.812         | 12.905 | 13.183                    | 13.192 | 6.664  | 6.649  | 3.391 | 3.406 | 1.764 | 1.786 | 0.963 | 1.006 | 0.583 | 0.649 | 0.419 | 0.511 | 0.363 | 0.466 |
| 4000            | 12.996         | 13.159 | 13.416                    | 13.415 | 6.764  | 6.795  | 3.464 | 3.474 | 1.815 | 1.843 | 1.010 | 1.071 | 0.634 | 0.723 | 0.478 | 0.591 | 0.425 | 0.544 |
| 6400            | 20.411         | 20.637 | 21.067                    | 21.080 | 10.571 | 10.598 | 5.395 | 5.426 | 2.816 | 2.842 | 1.546 | 1.617 | 0.940 | 1.056 | 0.686 | 0.837 | 0.600 | 0.758 |
| 12800           | 21.755         | 21.988 | 22.412                    | 22.461 | 11.320 | 11.330 | 5.806 | 5.855 | 3.051 | 3.129 | 1.724 | 1.847 | 1.114 | 1.277 | 0.860 | 1.056 | 0.769 | 0.975 |

\* $V_{IN} = 0V$ ,  $V_{AVDD} = 3.6V$ ,  $V_{AVSS} = 0V$ ,  $V_{REF} = 3.6V$ ,  $T_A = +25^\circ\text{C}$ , external clock. Data taken with PGA output 150mV from AVDD and AVSS. This table is not tested and is based on characterization data.

**Power-On Reset**

The MAX11270 contains power-on reset (POR) supply monitoring circuitry on both the digital supply (DVDD) and the positive analog supply (AVDD). The POR circuitry ensures proper device default conditions after either a digital or analog power-sequencing event.

The digital POR trigger threshold is typically 1.2V with respect to  $V_{DGND}$  and has 100mV of hysteresis. The analog POR trigger threshold is typically 1.25V with respect to  $V_{AVSS}$  and has 100mV of hysteresis. Both POR circuits have lowpass filters that prevent high-frequency supply glitches from triggering the POR.

**Power-Down Modes**

The MAX11270 can be powered down via the IMPD bit in the command byte. The PD[1:0] bits of the CTRL1 register are used to select the power-down state. The SPI remains fully functional in all power-down states.

**Sleep Mode:** The sleep mode can be set by writing 01 to the PD[1:0] bits. In this state the internal subregulator that powers the digital core is powered off. This is the lowest power state for the device.

**Standby Mode (10):** The standby mode is set by writing 10 to the PD[1:0] bits. In this mode the device is not active, but the internal subregulator is still powered on. This allows conversions to start immediately after receiving a start conversion command.

**Table 5. MAX11270 Command Behavior from Pin (RSTB, SYNC) and SPI (RESET, SYNC\_SPI)**

| COMMAND ISSUED                      | COMMAND- ISSUED VIA | STATE BEFORE COMMAND | STATE AFTER COMMAND | TRANSITION TIME (MAX) | COMMAND INTERPRETATION AND RESULTING CHIP STATE |
|-------------------------------------|---------------------|----------------------|---------------------|-----------------------|-------------------------------------------------|
| RESET<br>SPI or PIN                 | SPI, PIN            | STBY                 | STBY                | —                     | Chip POR                                        |
|                                     |                     | SLEEP                | STBY                | 5ms                   | Chip POR                                        |
|                                     |                     | Calibration          | STBY                | —                     | Calibration stops, chip POR                     |
|                                     |                     | Conversion           | STBY                | —                     | Conversion stops, chip POR                      |
| IMPD<br>CTRL1:PD='01'<br>SLEEP Mode | SPI                 | STBY                 | SLEEP               | —                     | Chip changes from STBY to SLEEP                 |
|                                     |                     | SLEEP                | SLEEP               | —                     | Chip remains in SLEEP                           |
|                                     |                     | Calibration          | SLEEP               | —                     | Calibrations stop                               |
|                                     |                     | Conversion           | SLEEP               | —                     | Conversion stop                                 |
| IMPD<br>CTRL1:PD='10'<br>STBY Mode  | SPI                 | STBY                 | STBY                | —                     | Chip remains in standby                         |
|                                     |                     | SLEEP                | STBY                | —                     | Chip changes from SLEEP to standby              |
|                                     |                     | Calibration          | STBY                | —                     | Calibrations stop, chip changes to standby      |
|                                     |                     | Conversion           | STBY                | —                     | Conversions stop, chip changes to standby       |

**Table 5. MAX11270 Command Behavior from Pin (RSTB, SYNC) and SPI (RESET, SYNC\_SPI)  
(continued)**

| COMMAND ISSUED        | COMMAND-<br>ISSUED VIA | STATE<br>BEFORE<br>COMMAND | STATE<br>AFTER<br>COMMAND | TRANSITION<br>TIME (MAX) | COMMAND INTERPRETATION AND<br>RESULTING CHIP STATE                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-----------------------|------------------------|----------------------------|---------------------------|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SYNC                  | SPI, PIN               | STBY                       | STBY                      | —                        | SYNC ignored, chip remains in STBY mode                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|                       |                        | Calibration                | Calibration               | —                        | SYNC ignored                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|                       |                        | Conversion                 | Conversion                | —                        | Pulse SYNC mode, conversions restart                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|                       |                        | Conversion                 | Conversion                | —                        | Continuous SYNC mode, 1 <sup>st</sup> SYNC rising edge set clock counter, subsequent rising edges are compared against clock counter. If count is off by more than $\pm 1$ clock counts then restart conversions otherwise do nothing and continue conversions in progress. If a SYNC rising edge occurs before the first RDYB asserts after conversions are started then SYNC is ignored. Once the first RDYB asserts, all subsequent SYNC rising edges are evaluated. |
| CMD Register Write    | SPI                    | STBY                       | STBY                      | —                        | Chip remains in standby                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|                       |                        | SLEEP                      | SLEEP                     | —                        | Chip remains in SLEEP                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|                       |                        | Calibration                | STBY                      | —                        | Calibration stops, chip goes to STBY mode                                                                                                                                                                                                                                                                                                                                                                                                                               |
|                       |                        | Conversion                 | STBY                      | —                        | Conversion stops, chip goes to STBY mode                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Convert Command Write | SPI                    | STBY                       | Conversion                | —                        | Exit standby, conversion starts                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|                       |                        | SLEEP (SPI)                | Conversion                | —                        | Exit SLEEP mode, conversion starts                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                       |                        | Calibration                | Conversion                | —                        | Calibration stops then a new conversion starts                                                                                                                                                                                                                                                                                                                                                                                                                          |
|                       |                        | Conversion                 | Conversion                | —                        | Conversion stops and a new conversion starts                                                                                                                                                                                                                                                                                                                                                                                                                            |



## Digital Filters

The digital filter is a mode-configurable digital filter and decimator that processes a one-bit data stream from the fourth order delta-sigma modulator and implements a fifth order SINC function with an averaging function to produce a 24-bit wide data stream.

### SINC Filter

The SINC filter allows MAX11270 to achieve very high SNR. One feature of the fifth order SINC filter is a bandwidth that is about twenty percent of the data rate. The following example shows 3dB BW of about 3kHz for 16ksps data rate.

### Serial Interface

The MAX11270 interface is fully compatible with SPI, QSPI™, and MICROWIRE®-standard serial interfaces. The SPI interface provides access to on-chip registers that are 8 bits to 24 bits wide.

### Chip Select (CSB)

CSB is an active-low chip-select input to communicate with the MAX11270. CSB transitioning from low to high is used to reset the SPI interface. When CSB is low, data

is clocked into the device from DIN on the rising edge of SCLK. Data is clocked out of DOUT on the falling edge of SCLK. When CSB is high, SCLK and DIN are ignored and DOUT is high impedance allowing DOUT to be shared with other devices.

### SCLK (Serial Clock)

The serial clock (SCLK) is used to synchronize data communication between the host device and the MAX11270. Data is shifted in on the rising edge of SCLK and data is shifted out on the falling edge of SCLK. SCLK remains low when not active.

### DIN (Serial Data Input)

Data present on DIN is clocked into internal registers on the rising edge of SCLK.

*QSPI is a trademark of Motorola, Inc.*

*MICROWIRE is a registered trademark of National Semiconductor Corp.*

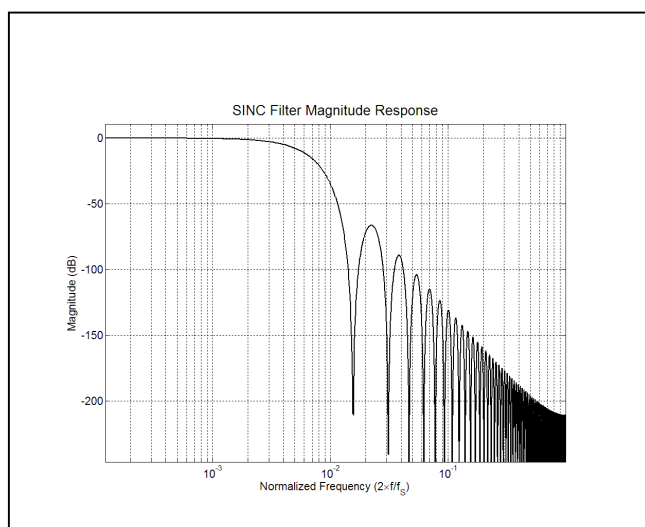


Figure 3a. SINC Magnitude Response

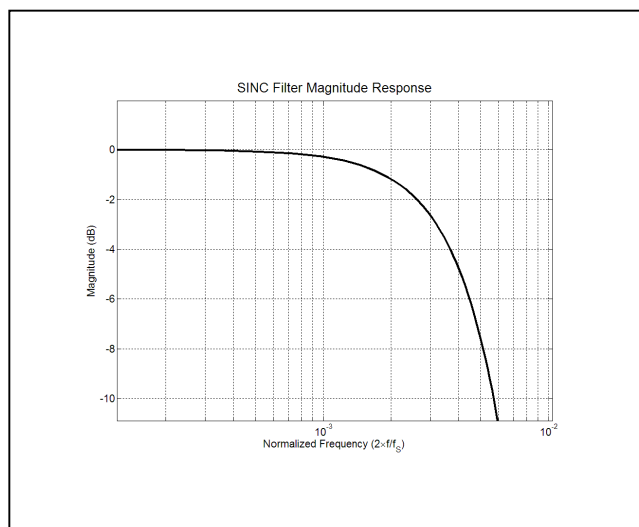


Figure 3b. SINC Mag Response Zoomed-In

**DOUT (Serial Data Output)**

The DOUT pin is actively driven when CSB is low and high impedance when CSB is high. Data are shifted out on DOUT on the falling edge of SCLK.

**Data Ready (RDYB)**

The RDYB output displays the conversion status. RDYB is forced low when a conversion result is ready for read-out and remains low until the user reads the conversion result. RDYB returns high after SCLK is pulled high, following a complete read of the data register. RDYB also resets high for 4 master clock cycles prior to DATA register update (see Figure 4).

When the modulator is in one of the continuous operating modes and the part has either experienced a RESET, SYNC, or POR event, then the RDYB pin will remain high until the selected filter is settled. If the SINC filter is selected then RDYB remains high for five  $t_{CNV}$  times and afterwards data appears at each  $t_{CNV}$ .

The conversion status can also be determined by reading the MSTAT bit in the STAT1 register.

**SPI Incomplete Write Command Termination**

In case of register writes, the register values get updated every 8th clock cycle with a byte of data starting from the MSB. A minimum of 16 SCLKs are needed to write the first byte of data in a multibyte register or for an 8-bit register. For example, a 24-bit register write requires 8 SCLKs for register access byte and 24 SCLKs (data bits to be written). If only 15 SCLKs were issued out of 32 expected, the register value will not be updated. At least 16 SCLKs are required to update the MSB byte. For example, when the user issues a write command for a 24-bit register write and terminates after 16 SCLKs, only the MSB byte, bits 23 to 16 of the register are updated. Bits 15 to 0 retain the old value of the register.

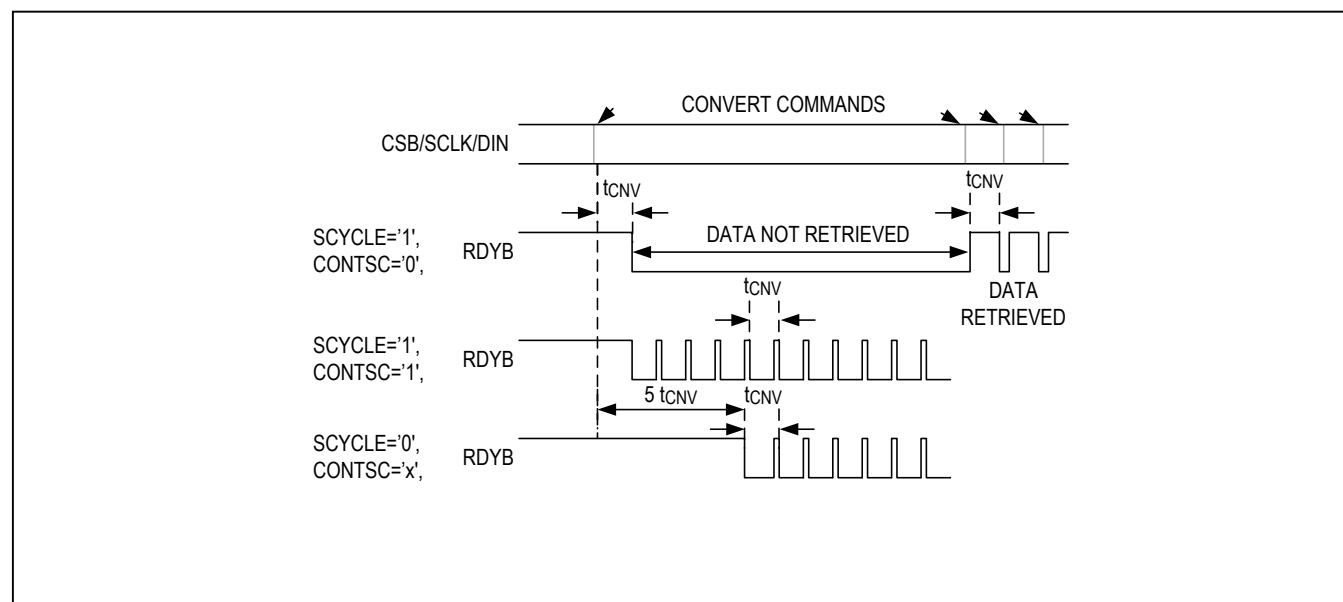


Figure 4. DATA Ready Timing for All Conversion Modes

**SPI Incomplete Read Command Termination**

The SPI interface stays in read mode for as long as CSB stays low independent of the number of SCLKs issued. The CSB pin must be toggled high to remove the device from the bus and reset the internal SPI controller. Any activity on the DIN pin is ignored while in the register read mode. The read operation is terminated if the CSB pin is toggled high before the maximum number of SCLK is issued.

When reading from DATA registers, the behavior of RDYB will depend on how many bits are read. If at least 23 bits are read, the read operation is complete and RDYB resets to high. If the user reads less than 23 bits, internally the logic considers the read incomplete, and RDYB stays low. The user can initiate a new read within the same conversion cycle and the new 24-bit read must complete before the next DATA register update.

**SPI Timing Characteristics**

The SPI timing diagrams illustrating command byte and register access operations are shown in [Figure 4 to Figure 7](#). The MAX11270 timing allows for the input data to be changed by the user at both rising and falling edges of SCLK. The data read out by the device on SCLK falling edges can be sampled by the user on subsequent rising or falling edges.

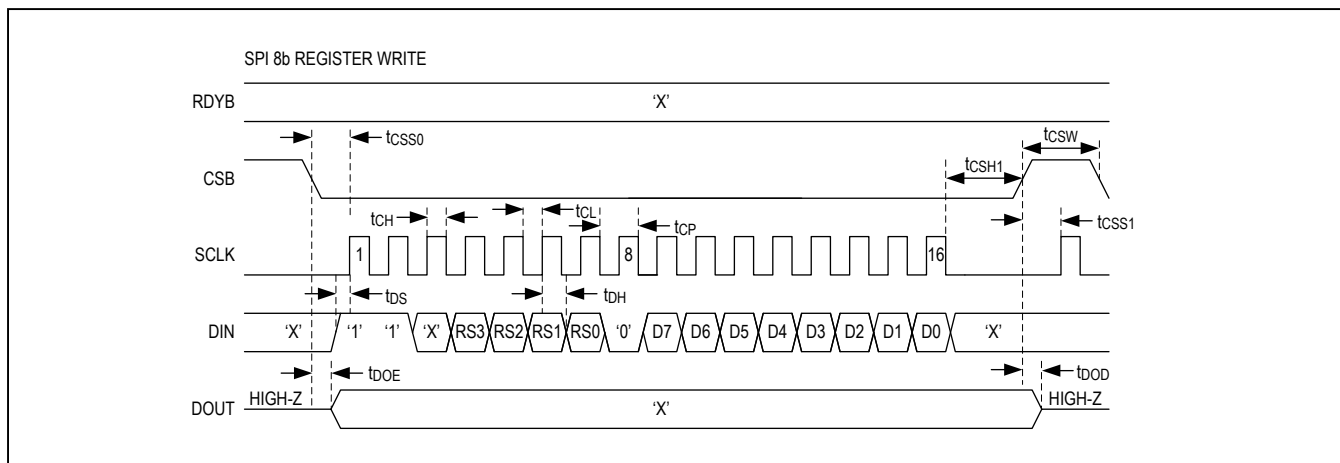
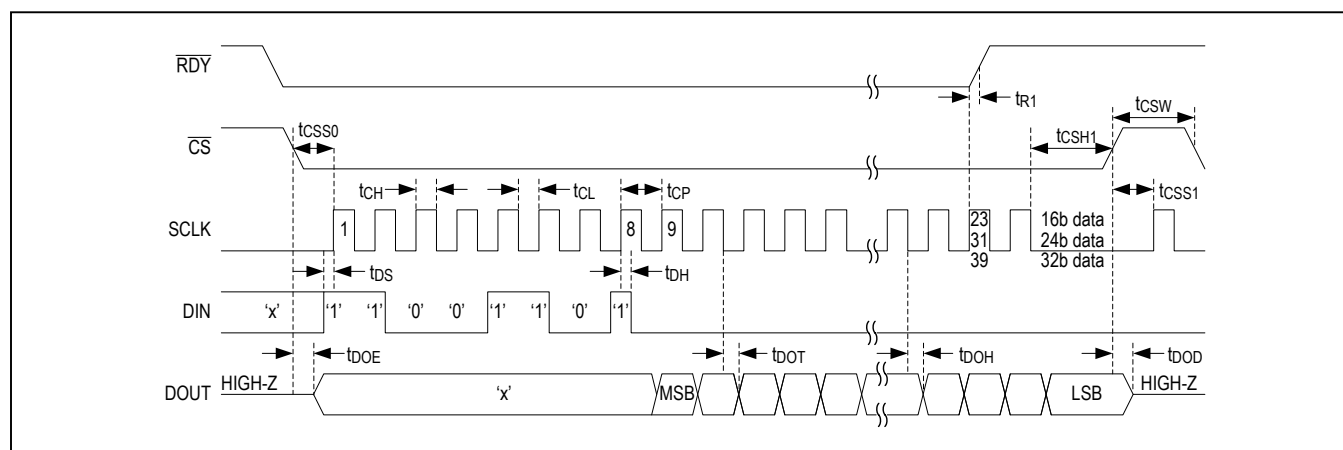
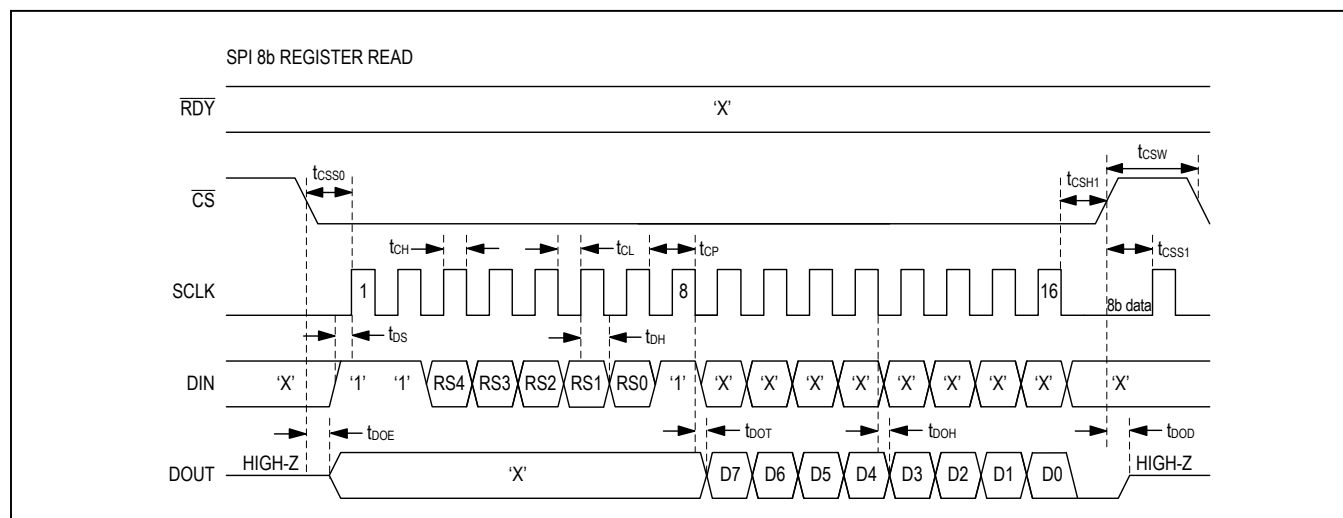


Figure 5. SPI Register Write Timing Diagram



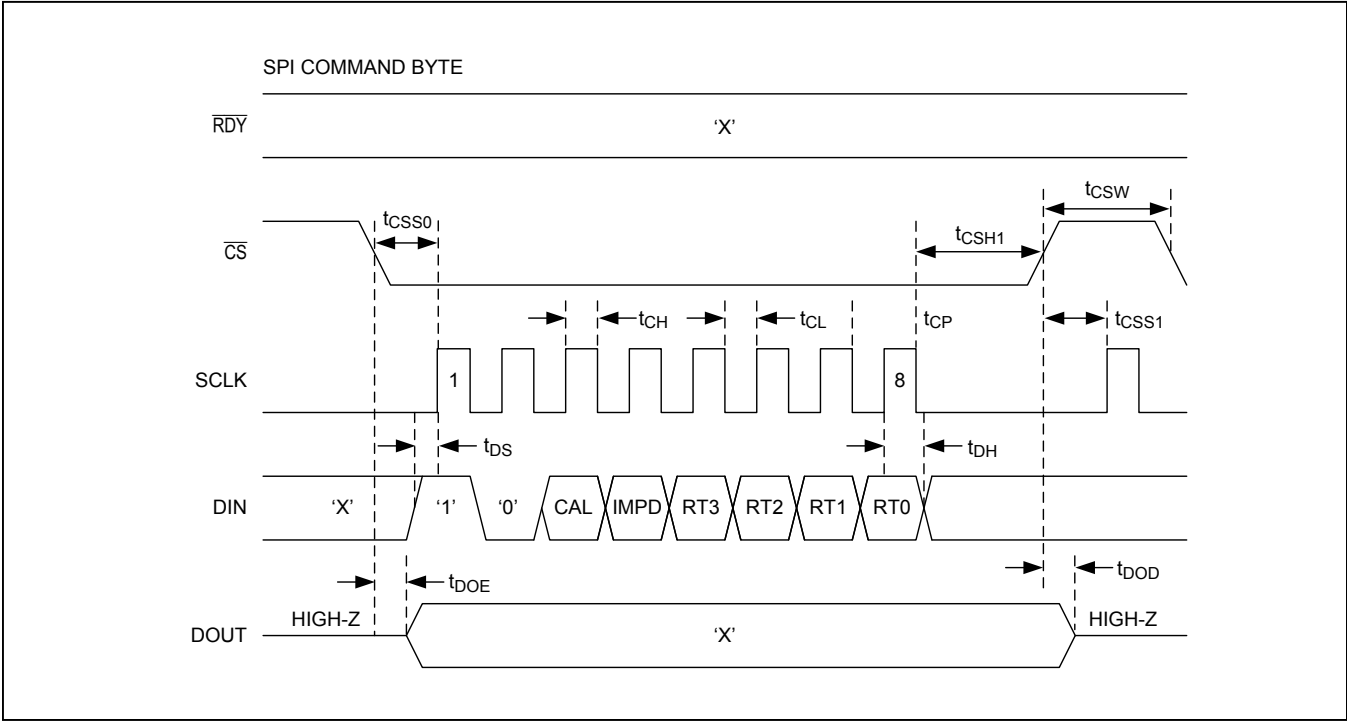


Figure 8. SPI Command Byte Timing Diagram

## Modes and Registers

The MAX11270 interface operates in two modes, conversion mode or register access mode, which is selected by the command byte. Every SPI transaction to the MAX11270 starts with a command byte. The command byte begins with a START bit (B7), which must be set to 1. The next bit is the MODE bit (B6), which selects between conversion mode or register access mode. Based on the mode selection the remaining bits in the command byte get decoded accordingly.

If the command byte is for a register read/write request, hold CSB low for the entire read or write operation and pull CSB high at the end of the command. For example, if the command is to read a 24-bit data register; hold CSB low for 32 SCLK cycles (8 cycles of command plus 24 cycles of data). CSB transitions must not occur near the rising edge of SCLK and must conform to the setup and hold timing detailed in the timing section.

Pulling CSB from low to high ends the current SPI transaction. If CSB is pulled high in the middle of a register write command, the registers will retain any partially written data. This does not cause a change in state of any internal register that was being accessed for read or write

### Conversion Mode (MODE = 0)

**Table 6. Command Byte for Conversion Modes (MODE = 0)**

| BIT      | B7 (MSB)  | B6       | B5  | B4   | B3    | B2    | B1    | B0    |
|----------|-----------|----------|-----|------|-------|-------|-------|-------|
| BIT NAME | START = 1 | MODE = 0 | CAL | IMPD | RATE3 | RATE2 | RATE1 | RATE0 |

Set the MODE bit to 0 to: start a conversion with a rate defined by RATE[3:0], immediately power down the part or perform a calibration.

The CAL bit (B5) determines if a calibration is to be performed. Set CAL = 1 to perform a calibration, for all other operations set CAL = 0. The calibration is done based on the setting of the calibration bits CTRL 5. Also see discussion on calibration in the following sections.

The IMPD bit (B4) controls the software power-down. Set IMPD = 1 to power down the MAX11270 and enter sleep mode or standby mode, based on the setting of the PD Bits in CTRL1, once the command byte is complete. The power-down status does not change until another command byte is received that is interpreted as a conversion byte (MODE = 0, IMPD = 0). Set IMPD = 0 for normal operation.

The data rate bits RATE[3:0] determine the conversion speed. The speed table is shown later in [Table 7](#).

### Register Access Mode (MODE = 1)

**Table 7. Command Byte for Register Access Mode (MODE = 1)**

| BIT      | B7 (MSB)  | B6       | B5  | B4  | B3  | B2  | B1  | B0  |
|----------|-----------|----------|-----|-----|-----|-----|-----|-----|
| BIT NAME | START = 1 | MODE = 1 | RS4 | RS3 | RS2 | RS1 | RS0 | R/W |

MODE 1 or Register Access Mode is used for reading from and writing to the registers of the MAX11270. Set the MODE bit (B6) = 1 to configure the command byte for Register Access Modes.

The bits RS[4:0] determine the register that is addressed as shown in [Table 6](#).

The R/W bit enables either a read or a write of the register. Set  $\overline{R/W}$  = 0 to write to the selected register and  $\overline{R/W}$  = 1 to read from the selected register.

## Register Map

### Register Address Map

There are 14 registers that can be accessed in the MAX11270. The majority of registers can be both written to and read from, but the STAT and DATA registers are read only. The RAM and SYNC are not physical registers, but addresses to enable special operating modes.

**Table 8. Register Address Map**

| REGISTER NAME | R/ $\overline{W}$ | ADDRESS SELECT RS[3:0] | B7                                                                                                                   | B6       | B5      | B4      | B3      | B2      | B1     | B0     |
|---------------|-------------------|------------------------|----------------------------------------------------------------------------------------------------------------------|----------|---------|---------|---------|---------|--------|--------|
| STAT          | R                 | 0x0                    | INRESET                                                                                                              | ERROR    | —       | —       | PDSTAT1 | PDSTAT0 | RDERR  | AOR    |
|               |                   |                        | RATE3                                                                                                                | RATE2    | RATE1   | RATE0   | SYSGOR  | DOR     | MSTAT  | RDY    |
| CTRL1         | R/ $\overline{W}$ | 0x1                    | EXTCK                                                                                                                | SYNCMODE | PD1     | PD0     | U/~B    | FORMAT  | SCYCLE | CONTSC |
| CTRL2         | R/ $\overline{W}$ | 0x2                    | DGAIN1                                                                                                               | DGAIN0   | BUFEN   | LPMODE  | PGAEN   | PGAG2   | PGAG1  | PGAG0  |
| CTRL3         | R/ $\overline{W}$ | 0x3                    | —                                                                                                                    | —        | ENMSYNC | MODBITS | DATA32  | —       | —      | —      |
| CTRL4         | R/ $\overline{W}$ | 0x4                    | —                                                                                                                    | DIR3     | DIR2    | DIR1    | —       | DIO3    | DIO2   | DIO1   |
| CTRL5         | R/ $\overline{W}$ | 0x5                    | CAL1                                                                                                                 | CAL0     | —       | —       | NOSYSG  | NOSYSO  | NOSCG  | NOSCO  |
| DATA          | R                 | 0x6                    | D[23:0]                                                                                                              |          |         |         |         |         |        |        |
| SOC_SPI       | R/ $\overline{W}$ | 0x7                    | B[23:0]                                                                                                              |          |         |         |         |         |        |        |
| SGC_SPI       | R/ $\overline{W}$ | 0x8                    | B[23:0]                                                                                                              |          |         |         |         |         |        |        |
| SCOC_SPI      | R/ $\overline{W}$ | 0x9                    | B[23:0]                                                                                                              |          |         |         |         |         |        |        |
| SCGC_SPI      | R/ $\overline{W}$ | 0xA                    | B[23:0]                                                                                                              |          |         |         |         |         |        |        |
| RAM           | R/ $\overline{W}$ | 0xC                    | Address space only, not a physical register. Please contact factory for instructions on using internal RAM function. |          |         |         |         |         |        |        |
| SYNC_SPI      | W                 | 0xD                    | Address space only, not a physical register. Please contact factory for instructions on using internal RAM function. |          |         |         |         |         |        |        |
| SOC_ADC       | R                 | 0x15                   | B[23:0]                                                                                                              |          |         |         |         |         |        |        |
| SGC_ADC       | R                 | 0x16                   | B[23:0]                                                                                                              |          |         |         |         |         |        |        |
| SCOC_ADC      | R                 | 0x17                   | B[23:0]                                                                                                              |          |         |         |         |         |        |        |
| SCGC_ADC      | R                 | 0x18                   | B[23:0]                                                                                                              |          |         |         |         |         |        |        |

**Status Register (Read Only)**

The 16-bit status register is a read-only register that indicates the following: power-down status, if the modulator was reset or overloaded, the data rate, overrange condition, when a measurement is in progress and when a measurement is complete.

| BIT      | B15     | B14   | B13 | B12 | B11     | B10     | B09   | B08 | B07   | B06   | B05   | B04   | B03    | B02 | B01   | B00 |
|----------|---------|-------|-----|-----|---------|---------|-------|-----|-------|-------|-------|-------|--------|-----|-------|-----|
| BIT NAME | INRESET | ERROR | —   | —   | PDSTAT1 | PDSTAT0 | RDERR | AOR | RATE3 | RATE2 | RATE1 | RATE0 | SYSGOR | DOR | MSTAT | RDY |
| DEFAULT  | 0       | 0     | 1   | 1   | 1       | 0       | 0     | 0   | 1     | 0     | 0     | 1     | 0      | 0   | 0     | 0   |

| BIT | DEFAULT | LABEL   | FUNCTION                                                                                                                                                                                                                                                                                                              |
|-----|---------|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 00  | 0       | RDY     | Ready bit. RDY = 1 when a new conversion result is available. A read of the DATA register resets RDY = 0. The function of the RDY bit is redundant and is duplicated by RDYB pin.                                                                                                                                     |
| 01  | 0       | MSTAT   | Measurement status bit. MSTAT = 1 indicates that a conversion, self-calibration, or system calibration is in progress and that the modulator is busy. When the modulator is not converting, MSTAT = 0.                                                                                                                |
| 02  | 0       | DOR     | Data overrange bit. DOR = 1 indicates that the conversion result has exceeded the maximum or minimum value and that the result has been clipped or limited to the maximum value. DOR = 0 when the conversion result is within the full-scale range.                                                                   |
| 03  | 0       | SYSGOR  | System gain overrange bit. SYSGOR = 1 indicates that a system gain calibration was overranged. The SGC calibration coefficient maximum value is 1.9999999.                                                                                                                                                            |
| 04  | 1       | RATE0   | Data rate bits. See Table 13. The RATE bits indicate the conversion rate that corresponds to the result in the DATA register or the rate that was used for calibration coefficient calculation.<br><b>Note:</b> RATE bits always show the rate of previous conversion and not the rate of the conversion in progress. |
| 05  | 0       | RATE1   |                                                                                                                                                                                                                                                                                                                       |
| 06  | 0       | RATE2   |                                                                                                                                                                                                                                                                                                                       |
| 07  | 1       | RATE3   |                                                                                                                                                                                                                                                                                                                       |
| 08  | 0       | AOR     | Analog overrange bit. AOR = 1 when the modulator detects that the analog input voltage exceeds 1.3 x full-scale range.                                                                                                                                                                                                |
| 09  | 0       | RDERR   | Data read error bit. RDERR = 1 when new result is being written to the DATA register while user is reading from the DATA register. RDERR = 0 otherwise.                                                                                                                                                               |
| 10  | 0       | PDSTAT0 | 00: ADC is converting<br>01: Device is fully powered down<br>10: In standby mode with modulator powered OFF but subregulator powered ON.<br>11: Reserved.                                                                                                                                                             |
| 11  | 1       | PDSTAT1 |                                                                                                                                                                                                                                                                                                                       |
| 12  | 1       | —       |                                                                                                                                                                                                                                                                                                                       |
| 13  | 1       | —       | —                                                                                                                                                                                                                                                                                                                     |
| 14  | 0       | ERROR   | Error bit. ERROR = 1 when CAL[1:0] bits are set to invalid setting of 11.                                                                                                                                                                                                                                             |
| 15  | 0       | INRESET | In reset bit. INRESET = 1 when software reset is initiated till the part exits reset mode.                                                                                                                                                                                                                            |



**Table 9. Programmable Conversion Rates**

| RATE[3:0] | CONTINUOUS DATA RATE, SCYCLE = 0 | SCYCLE = 1 SINGLE-CYCLE<br>CONTINUOUS DATA RATE (sps) |
|-----------|----------------------------------|-------------------------------------------------------|
|           | SINC FILTER (sps)                |                                                       |
| 0000      | 1.9                              | 50                                                    |
| 0001      | 3.9                              | 62.5                                                  |
| 0010      | 7.8                              | 100                                                   |
| 0011      | 15.6                             | 125                                                   |
| 0100      | 31.2                             | 200                                                   |
| 0101      | 62.5                             | 250                                                   |
| 0110      | 125                              | 400                                                   |
| 0111      | 250                              | 500                                                   |
| 1000      | 500                              | 800                                                   |
| 1001      | 1000                             | 1000                                                  |
| 1010      | 2000                             | 1600                                                  |
| 1011      | 4000                             | 2000                                                  |
| 1100      | 8000                             | 3200                                                  |
| 1101      | 16000                            | 4000                                                  |
| 1110      | 32000                            | 6400                                                  |
| 1111      | 64000                            | 12800                                                 |

\*Continuous data rate with SCYCLE = 0, single cycle with CONTSC = 1, SCYCLE = 1.

**Control Registers**

These are registers reserved for configuring the MAX11270.

**Control 1 Register (Read/Write)**

The CTRL1 register is an 8-bit read/write register. The byte written to the CTRL1 register determines the clock setting, synchronization mode, power-down or reset state, input range is unipolar or bipolar, data output is two's complement or offset binary, and conversion mode is in single cycle or continuous.

| BIT      | B07   | B06  | B05 | B04 | B03 | B02    | B01    | B00    |
|----------|-------|------|-----|-----|-----|--------|--------|--------|
| BIT NAME | EXTCK | SYNC | PD1 | PD0 | U/B | FORMAT | SCYCLE | CONTSC |
| DEFAULT  | 0     | 0    | 0   | 0   | 0   | 0      | 1      | 0      |

| BIT | DEFAULT | LABEL  | FUNCTION                                                                                                                                                                                                                    |                                                                                                                                                                     |
|-----|---------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 00  | 0       | CONTSC | Continuous single-cycle bit. Set CONTSC = 1 to select continuous conversions. Set CONTSC = 0 to select a single conversion.                                                                                                 |                                                                                                                                                                     |
| 01  | 1       | SCYCLE | Single-cycle control bit. Set SCYCLE = 1 to select single-cycle mode. The MAX11270 completes one no-latency conversion and then powers down into a leakage-only state. Set SCYCLE = 0 to select continuous conversion mode. |                                                                                                                                                                     |
| 02  | 0       | FORMAT | Bipolar range format bit. When reading bipolar data, set FORMAT = 0 to select two's complement and FORMAT = 1 to select offset binary. The data from unipolar range is always formatted in offset binary format.            |                                                                                                                                                                     |
| 03  | 0       | U/B    | U/B: Unipolar/bipolar bit. Set $U/\overline{B}$ = 1 to select the unipolar input range (0 to $V_{REF}$ ). Set $U/\overline{B}$ = 0 to select the bipolar input range ( $\pm V_{REF}$ ).                                     |                                                                                                                                                                     |
| 04  | 0       | PD0    | 00                                                                                                                                                                                                                          | Normal power-up state. This is the default state.                                                                                                                   |
|     |         |        | 01                                                                                                                                                                                                                          | Sleep Mode—Powers down the subregulator and the entire digital circuitry. Upon resumption of power to the digital the PD[1:0] reverts to the default state of '00'. |
| 05  | 0       | PD1    | 10                                                                                                                                                                                                                          | Standby power—Powers down the analog blocks leaving the subregulator powered up.                                                                                    |
|     |         |        | 11                                                                                                                                                                                                                          | Resets all registers to POR state leaving the subregulator powered. The PD[1:0] bits are reset to '00'. The operation of this state is identical to the RSTB pin.   |
| 06  | 0       | SYNC   | Set SYNC = 1 to select continuous synchronization mode. Set SYNC = 0 to select pulse synchronization mode.                                                                                                                  |                                                                                                                                                                     |
| 07  | 0       | EXTCK  | External clock bit. Set EXTCLK = 1 to selects the external clock as the system clock. Set EXTCLK = 0 to select the internal oscillator as the system clock.                                                                 |                                                                                                                                                                     |

**Control 2 Register (Read/Write)**

The CTRL2 register is an 8-bit read/write register. The byte written to the CTRL2 register determines the digital and analog gain settings, and whether the buffers or PGA is enabled.

| BIT      | B07    | B06    | B05   | B04    | B03   | B02   | B01   | B00   |
|----------|--------|--------|-------|--------|-------|-------|-------|-------|
| BIT NAME | DGAIN1 | DGAIN0 | BUFEN | LPMODE | PGAEN | PGAG2 | PGAG1 | PGAG0 |
| DEFAULT  | 0      | 0      | 0     | 0      | 0     | 0     | 0     | 0     |

| BIT | DEFAULT | LABEL  | FUNCTION                                                                                                                             |                                |
|-----|---------|--------|--------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|
| 00  | 0       | PGA0   | 000                                                                                                                                  | X1 PGA Gain-Setting bits       |
|     |         |        | 001                                                                                                                                  | X2                             |
|     |         |        | 010                                                                                                                                  | X4                             |
| 01  | 0       | PGA1   | 011                                                                                                                                  | X8                             |
|     |         |        | 100                                                                                                                                  | X16                            |
|     |         |        | 101                                                                                                                                  | X32                            |
| 02  | 0       | PGA2   | 110                                                                                                                                  | X64                            |
|     |         |        | 111                                                                                                                                  | X128                           |
| 03  | 0       | PGAEN  | PGA Enable Bit. Set PGAEN = 1 to enable the PGA. Set PGAEN = 0 to disable the PGA.                                                   |                                |
| 04  | 0       | LPMODE | PGA Low Power. Set LPMODE = 1 for lower power. Set LPMODE = 0 for standard power.                                                    |                                |
| 05  | 0       | BUFEN  | Analog input buffer enable bit. Set BUFEN = 1 to enable the analog input buffers. Set BUFEN = 0 to disable the analog input buffers. |                                |
| 06  | 0       | DGAIN0 | 00                                                                                                                                   | x1 Modulator Digital Gain Bits |
|     |         |        | 01                                                                                                                                   | x2                             |
| 07  | 0       | DGAIN1 | 10                                                                                                                                   | x4                             |
|     |         |        | 11                                                                                                                                   | x8                             |

**Control 3 Register (Read/Write)**

The CTRL3 register is an 8-bit read/write register. The byte written to the CTRL3 register determines the operation of the modulator output.

| BIT      | B07 | B06 | B05     | B04     | B03    | B02 | B01 | B00 |
|----------|-----|-----|---------|---------|--------|-----|-----|-----|
| BIT NAME | —   | —   | ENMSYNC | MODBITS | DATA32 | —   | —   | —   |
| DEFAULT  | 0   | 1   | 1       | 0       | 0      | 0   | 0   | 1   |

| BIT | DEFAULT | LABEL   | FUNCTION                                                                                                                                                                                                   |
|-----|---------|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 00  | 1       | —       | Reserved bit                                                                                                                                                                                               |
| 01  | 0       | —       | Reserved bit                                                                                                                                                                                               |
| 02  | 0       | —       | Reserved bit                                                                                                                                                                                               |
| 03  | 0       | DATA32  | 32-bit data mode bit. Set DATA32 = 1 to read 32 bits of data at DOUT. Set DATA32 = 0 for 24-bit data reads at DOUT. See the <i>Data Register</i> section.                                                  |
| 04  | 0       | MODBITS | Modulator output mode enable bit. Set MODBITS = 1 to enable the modulator output on DOUT and GPIO1. Set MODBITS = 0 for standard data output mode on DOUT.                                                 |
| 05  | 1       | ENMSYNC | Modulator synchronization pulse enable bit. Set ENMSYNC = 1 to enable the synchronization pulse for modulator output mode. Set ENMSYNC = 0 to disable the synchronization pulse for modulator output mode. |
| 06  | 1       | —       | Reserved bit                                                                                                                                                                                               |
| 07  | 0       | —       | Reserved bit                                                                                                                                                                                               |

**Control 4 Register (Read/Write)**

The CTRL4 register is an 8-bit read/write register. The byte written to the CTRL4 register determines whether the GPIOs are inputs or outputs, and whether they are enabled.

| BIT      | B07 | B06  | B05  | B04  | B03 | B02  | B01  | B00  |
|----------|-----|------|------|------|-----|------|------|------|
| BIT NAME | —   | DIR3 | DIR2 | DIR1 | —   | DIO3 | DIO2 | DIO1 |
| DEFAULT  | 0   | 0    | 0    | 0    | 1   | 1    | 1    | 1    |

| BIT | DEFAULT | LABEL | FUNCTION                                                                                                                                                                                                                                                                                                       |
|-----|---------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 00  | 1       | DIO1  | GPIO bit values. When GPIO is configured as an output, set the DIO bits = 0 to set the associated GPIO output as a 0. When GPIO are configured as inputs, these bits indicate the pin status.                                                                                                                  |
| 01  | 1       | DIO2  |                                                                                                                                                                                                                                                                                                                |
| 02  | 1       | DIO3  |                                                                                                                                                                                                                                                                                                                |
| 03  | 1       | —     |                                                                                                                                                                                                                                                                                                                |
| 04  | 0       | DIR1  | GPIO direction bits. Set the DIR bits = 0 to configure the associated GPIO as an input. The value returned by a read of the DIO bit is the value being driven on the pin. Set the DIR bits = 1 to configure the associated GPIO as an output. The GPIO is driven to the logic value of the associated DIO bit. |
| 05  | 0       | DIR2  |                                                                                                                                                                                                                                                                                                                |
| 06  | 0       | DIR3  |                                                                                                                                                                                                                                                                                                                |
| 07  | 0       | —     |                                                                                                                                                                                                                                                                                                                |

**Control 5 Register (Read/Write)**

The CTRL5 register is an 8-bit read/write register. The byte written to the CTRL5 register determines the MAX11270's reset, data overflow, and calibration modes.

| BIT      | B07  | B06  | B05 | B04 | B03    | B02    | B01   | B00   |
|----------|------|------|-----|-----|--------|--------|-------|-------|
| BIT NAME | CAL1 | CAL0 | —   | —   | NOSYSG | NOSYSO | NOSCG | NOSCO |
| DEFAULT  | 0    | 0    | 0   | 0   | 1      | 1      | 0     | 0     |

| BIT | DEFAULT | LABEL  | FUNCTION                                                                                                                                                                                                                                                                                                 |
|-----|---------|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 00  | 0       | NOSCO  | No self-calibration offset bit. Set NOSCO = 1 to disable the use of the self-calibration offset value when computing the final offset and gain-corrected data value. Set NOSCO = 0 to enable the use of the self-calibration offset value when computing the final offset and gain-corrected data value. |
| 01  | 0       | NOSCG  | No self-calibration gain bit. Set NOSCG = 1 to disable the use of the self-calibration gain value when computing the final offset and gain-corrected data value. Set NOSCG = 0 to enable the use of the self-calibration gain value when computing the final offset and gain-corrected data value.       |
| 02  | 1       | NOSYSO | No system offset bit. Set NOSYSO = 1 to disable the use of the system offset value when computing the final offset and gain-corrected data value. Set NOSYSO = 0 to enable the use of the system offset value when computing the final offset-corrected data value.                                      |
| 03  | 1       | NOSYSG | No system gain bit. Set NOSYSG = 1 to disable the use of the system gain value when computing the final offset and gain-corrected data value. Set NOSYSG = 0 to enable the use of the system gain value when computing the final gain-corrected data value.                                              |
| 04  | 0       | —      | Reserved                                                                                                                                                                                                                                                                                                 |
| 05  | 0       | —      | Reserved                                                                                                                                                                                                                                                                                                 |
| 06  | 0       | CAL0   | 00 Perform Self Calibration<br>01 Perform System-Level Offset Calibration                                                                                                                                                                                                                                |
| 07  | 0       | CAL1   | 10 Perform System-Level Full-Scale Calibration<br>11 Reserved                                                                                                                                                                                                                                            |

**Data Register (Read Only)**

The data register is a 32-bit or 24-bit read-only register. Any attempt to write data to the data register has no effect. The data from this register is clocked out MSB first. The data register holds the conversion result. The result is stored in either two's complement or offset binary format, depending on the FORMAT bit in CTRL1 register.

The data format in unipolar mode is always offset binary. In bipolar mode, set the FORMAT bit = 1 for offset binary or FORMAT = 0 for two's complement. Any input exceeding the available input range is limited to the minimum or maximum data value. Attempts to read this register while data is being updated (4 system clocks before RDYB asserts low) will result in invalid data being read, see Figure 13. Note that the STATUS register RDERR bit is set when this condition is detected.

| BIT     | B31 | B30 | B29 | B28 | B27 | B26 | B25 | B24 | B23 | B22 | B21 | B20 | B19 | B18 | B17 | B16 | B15 | B14 | B13 | B12 | B11 | B10 | B09 | B08 | B07 | B06 | B05 | B04 | B03 | B02 | B01 | B00 |
|---------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| DEFAULT | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |     |

**Table 10. ADC Output Code Data Format**

| CODE<br>TRANSITION | ANALOG INPUT<br>(A <sub>INP</sub> - A <sub>INN</sub> ) (V) | DIGITAL OUTPUT CODE (Hex) |        |                  |        |
|--------------------|------------------------------------------------------------|---------------------------|--------|------------------|--------|
|                    |                                                            | OFFSET BINARY             |        | TWO's COMPLEMENT |        |
|                    |                                                            | 32-BIT                    | 24-BIT | 32-BIT           | 24-BIT |
| ≥ FS               | ≥ V <sub>REF</sub>                                         | FFFFFFFF                  | FFFFFF | 7FFFFFFF         | 7FFFFF |
| FS – 1 LSB         | V <sub>REF</sub> × (1 – (1/2 <sup>N</sup> – 1))            | FFFFFFFE                  | FFFFFE | 7FFFFFFE         | 7FFFFE |
| Midscale + 1 LSB   | V <sub>REF</sub> /2 <sup>N</sup> – 1                       | 80000001                  | 800001 | 00000001         | 000001 |
| Midscale           | V <sub>REF</sub> /2 <sup>N</sup>                           | 80000000                  | 800000 | 00000000         | 000000 |
| Midscale – 1 LSB   | –V <sub>REF</sub> /2 <sup>N</sup> – 1                      | 7FFFFFFF                  | 7FFFFF | FFFFFFF          | FFFFF  |
| ZS + 1 LSB         | –V <sub>REF</sub> × (1 – (1/2 <sup>N</sup> – 1))           | 00000001                  | 000001 | 80000001         | 800001 |
| ≤ ZS               | ≤ –V <sub>REF</sub>                                        | 00000000                  | 000000 | 80000000         | 800000 |

$N$  = number of data bits, 32 or 24.

$V_{REF} = V_{REFP} - V_{REFN}$ .

## Calibration

Two types of calibration are available: self-calibration and system calibration. Self-calibration is used to reduce the MAX11270 gain and offset errors during changing operating conditions such as supply voltages, ambient temperature, and time. System calibration is used to reduce the gain and offset of the entire signal path. This enables calibration of board level components and the integrated PGA. System calibration requires the MAX11270 inputs to be reconfigured for zero scale and full scale during calibration. See [Figure 9](#) for details of the calibration signal flow.

The on-chip calibration registers are enabled or disabled by programming the NOSYSG, NOSYSO, NOSCG, and NOSCO bits in the CTRL5 register. See [Table 6](#)

## Self-Calibration

The self-calibration is an internal operation and does not disturb the analog inputs. Self-calibration is accomplished in two independent phases, offset and gain. The first phase disconnects the inputs to the modulator and shorts them together internally to develop a zero-scale signal. A conversion is then completed and the results are post-processed to generate an offset coefficient which cancels all internally generated offsets. The second phase connects the inputs to the reference to develop a full-scale signal. A conversion is then completed and the results are post-processed to generate a full-scale coefficient, which scales the converters full-scale analog range to the full-scale digital range.

The entire self-calibration sequence requires two independent conversions, one for offset and one for full scale.

The conversion rate is 50sps which provides the lowest noise and most accurate calibrations. The self-calibration operation excludes the PGA. A system-level calibration is available in order to calibrate the PGA signal path.

The calibration operations are controlled with the CAL bit in the command byte. Request a self-calibration by setting the CAL bit to 1, with the CTRL5:CAL[1:0] = 00. A self-calibration requires 200ms to complete, and both the SCOC and SCGC registers contain the values that correct the chip output for zero scale and full scale.

## System Calibration

This mode is used when board level components and the integrated PGA calibration is desired. A system calibration requires the user to configure the input to the proper level for the calibration operation. The offset and full-scale system calibrations are performed using separate command bytes by configuring the CTRL5:CAL [1:0] bits. The system offset and system full scale require setting these CAL bits appropriately before issuing the calibration command byte.

Request a system zero-scale calibration by setting the CAL bit to 1 and the CTRL5:CAL[1:0] bit = 01 and connect a system zero-level signal to the input pins. The system zero calibration requires 100ms to complete, and the SOC register contains values that correct the chip zero scale.

Request a system full-scale calibration by setting the CAL bit to 1 and the CTRL5:CAL[1:0] = 10 and connect a system full-scale signal level to the input pins. The system full-scale calibration requires 100ms to complete, and the SGC register contains values that correct for the chip full-scale value.

A third level of calibration allows a write to the internal calibration registers through the SPI interface to achieve any digital offset or scaling with the following restrictions. The range of digital offset correction is  $\pm V_{REF}/4$ . The resolution of offset correction is 0.5 LSB. The range of digital gain correction is from 0.75 to 2. The resolution of gain is less than 1ppm.

#### **SPI System Offset Calibration Register (SOC\_SPI)**

The system offset calibration register is a 24-bit read/write register. The data written/read to/from this register is clocked in/out MSB first. The format is always in two's complement. This register temporarily holds the system offset calibration value from the user. This value gets copied into the SOC\_ADC register. The value written to this register remains until it is overwritten. This value gets invalidated for calibration after a system-calibration operation is requested. Any attempt to write to this register during an active calibration operation will be ignored.

#### **ADC System Offset Calibration Register (SOC\_ADC)**

This is 24-bit read only register. There are two ways this register value is updated. One way is if a system offset calibration operation is requested. Another way is if a user writes a value to SOC\_SPI register, the value will then get copied into SOC\_ADC from SOC\_SPI.

The system offset calibration value is subtracted from each conversion result if NOSYSO = 0 in the CTRL5 register. The system offset calibration value is subtracted from the conversion result after self-calibration, but before system gain correction. It is also applied prior to the 1x or 2x scale factor associated with bipolar and unipolar modes. Attempts to read this register while data is being updated (4 system clocks before RDYB asserts low) will result in invalid data being read, see Figure 13. Note that the STATUS register RDERR bit is set when this condition is detected.

#### **SPI System Gain Calibration Register (SGC\_SPI)**

The system gain calibration register is a 24-bit read/write register. The data written/read to/from this register is clocked in/out MSB first. The format is unsigned binary. This register temporarily holds the system gain calibration value from the user. This value gets copied into the SGC\_ADC register. The value written to this register remains until it is overwritten. This value gets invalidated for calibration after a system-calibration operation is requested. Any attempt to write to this register during an active calibration operation will be ignored.

#### **ADC System Gain Calibration Register (SGC\_ADC)**

This is 24-bit read only register. There are two ways this register value is updated. One way is if a system gain calibration operation is requested. Another way is if a user writes a value to SGC\_SPI register, the value will then get copied into SGC\_ADC from SGC\_SPI.

The system gain calibration value is used to scale the offset-corrected conversion result if NOSYSG = 0 in the CTRL5 register. The system gain calibration value scales the gain corrected result by up to 2x or can correct a gain error of approximately 50%. The amount of positive gain error that can be corrected is determined by modulator overload characteristics which may be as much as +125%. The gain will be corrected to within 1ppm. Attempts to read this register while data is being updated (4 system clocks before RDYB asserts low) will result in invalid data being read, see Figure 13. Note that the STATUS register RDERR bit is set when this condition is detected.

**SPI Self-Cal Offset Calibration Register (SCOC\_SPI)**

The Self-Cal Offset register is a 24-bit read/write register. The data written/read to/from this register is clocked in/out MSB first. The format is always in two's complement format. This register temporarily holds the self-cal offset calibration value from the user. This value gets copied into the SCOC\_ADC register. The value written to this register remains until it is overwritten. This value gets invalidated for calibration after a system-calibration operation is requested. Any attempt to write to this register during an active calibration operation will be ignored.

**ADC Self-Cal Offset Calibration Register (SCOC\_ADC)**

This is a 24-bit read-only register. There are two ways this register value is updated. One way is if a self-cal operation is requested. Another way is if a user writes a value to SCOC\_SPI register, the value will then get copied into SCOC\_ADC from SCOC\_SPI.

The self-cal offset value is subtracted from each conversion result if NOSCO = 0 in the CTRL5 register. The self-cal offset value is subtracted from the conversion result before the self-calibration gain correction and before the system offset and gain correction. It is also applied prior to the 2x scale factor associated with unipolar mode. Attempts to read this register while data is being updated (4 system clocks before RDYB asserts low) will result in invalid data being read, see Figure 13. Note that the STATUS register RDERR bit is set when this condition is detected.

**SPI Self-Cal Gain Calibration Register (SCGC\_SPI)**

The self-cal gain calibration register is a 24-bit read/write register. The data written/read to/from this register is clocked in/out MSB first. The format is unsigned binary. This register temporarily holds the self-cal gain calibration value from the user. This value gets copied into the SCGC\_ADC register. The value written to this register remains until it is overwritten. This value gets invalidated for calibration after a system-calibration operation is requested. Any attempt to write to this register during an active calibration operation will be ignored.

**ADC Self-Cal Gain Calibration Register (SCGC\_ADC)**

This is a 24-bit read only register. There are two ways this register value is updated. One way is if a self-cal operation is requested. Another way is if a user writes a value to SCGC\_SPI register, the value will then get copied into SCGC\_ADC from SCGC\_SPI.

The self-cal gain calibration value is used to scale the self-cal offset corrected conversion result before the system offset and gain calibration values have been applied – provided NOSCG = 0 in the CTRL5 register. The self-cal gain calibration value scales the self-cal offset corrected conversion result by up to 2x or can correct a gain error of approximately 50%. The gain will be corrected to within 1ppm. Attempts to read this register while data is being updated (4 system clocks before RDYB asserts low) will result in invalid data being read, see Figure 13. Note that the STATUS register RDERR bit is set when this condition is detected.



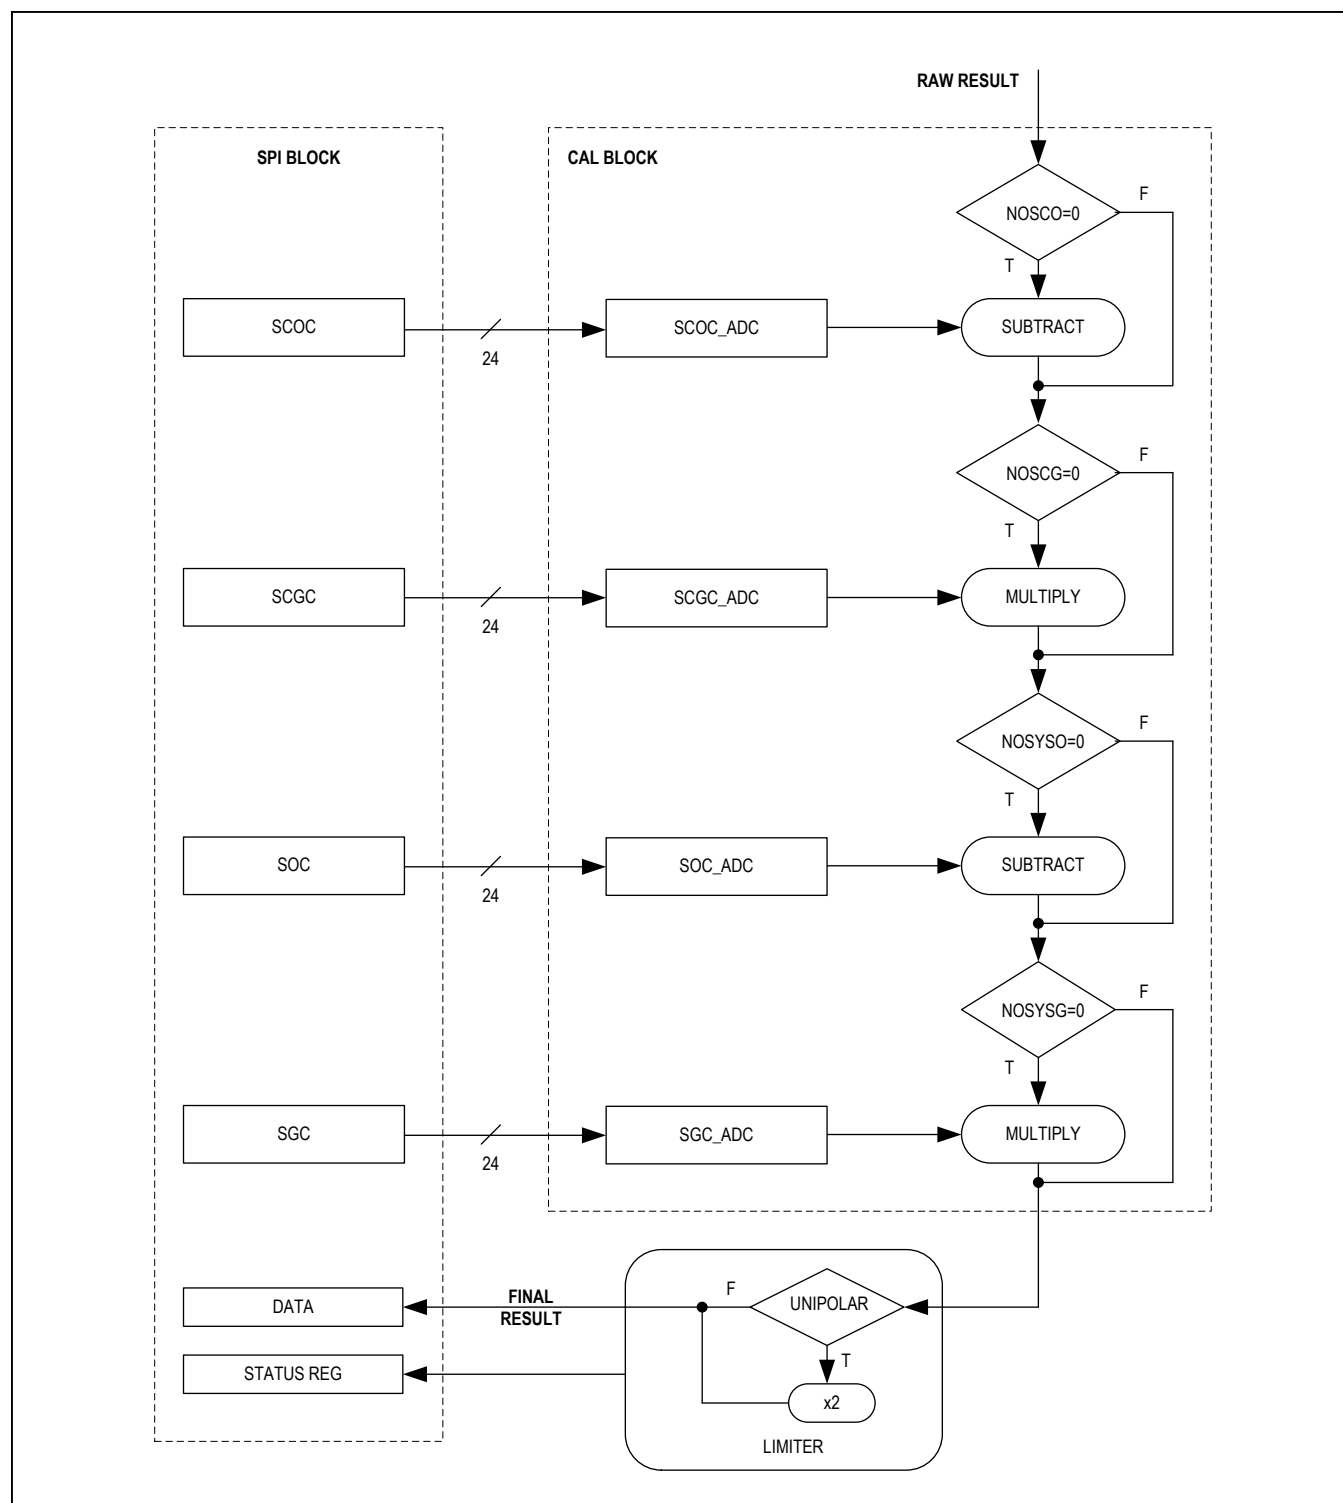


Figure 9. Calibration Flow Diagram

## GPIOs

The MAX11270 provides three general-purpose input/output ports that are programmable through the CTRL4 register. Set the DIR bits in the CTRL4 register to select the pins to be configured as inputs or outputs. All pins are inputs by default. When programmed as output, set the DIO bits in the CTRL4 register to set pin state to 0 or 1.

## Conversion Synchronization Using SYNC Pin or SYNC\_SPI Function

The SYNC pin can be used to synchronize the data conversions to external events. This can be done by either pulling the SYNC pin high or addressing the SYNC\_SPI register in a SPI command byte. There are two methods available in the device to synchronize conversion results using external signals on the SYNC pin: continuous mode or pulse mode.

### Continuous Mode

Continuous synchronization mode is used to detect if the current conversions are synchronized to a continuous synchronization pulse with a period greater than the data rate. This synchronization mode compares the number of device master clocks between the RDYB assertion to the rising edge of the SYNC pin. The relative edges should stay aligned within 1 master clock period of the initial SYNC pulse and remain within integer multiples of the data rate. If the rising edge of the SYNC pin occurs after an integer multiple of the data rate and is greater than plus or minus 1 master clock from the initial SYNC rising edge then the chip resets the conversion in progress, flushes the digital filter contents and starts a new conversion. The conversion reset process incurs the full digital filter latency before valid results are available.

See [Figure 10](#) for timing waveform relationships between the chip master clock and the SYNC pin. Due to startup delays, any SYNC pin assertions before the first RDYB assertion are ignored. The first SYNC pin assertion after a RDYB assertion establishes the relationship between the SYNC pin and the conversion ready, timed in master clock units. This relationship is defined as  $n$ , which constitutes the number of clocks that occur between the assertion of RDYB and the rising edge of the SYNC pin.

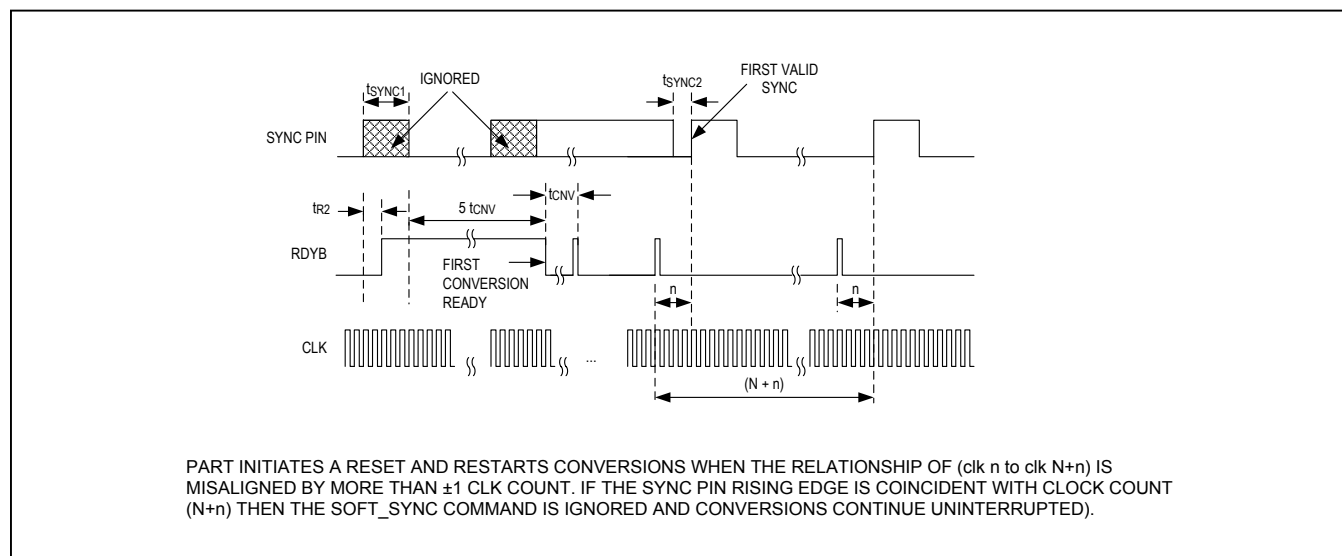


Figure 10. Synchronization Using Continuous Sync Mode Showing Relationship Between SYNC Pin and CLK Pin

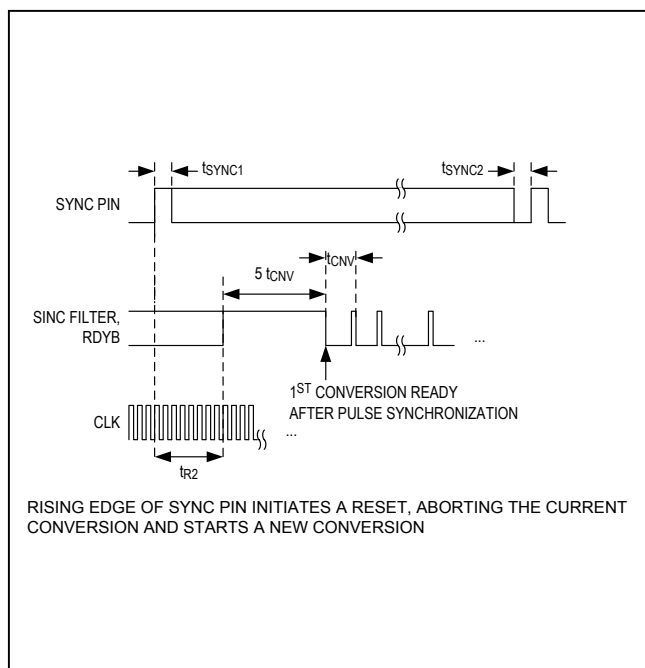


Figure 11. Synchronization Using Pulse Sync Mode Showing Relationship Between SYNC, RDYB, and CLK Pins

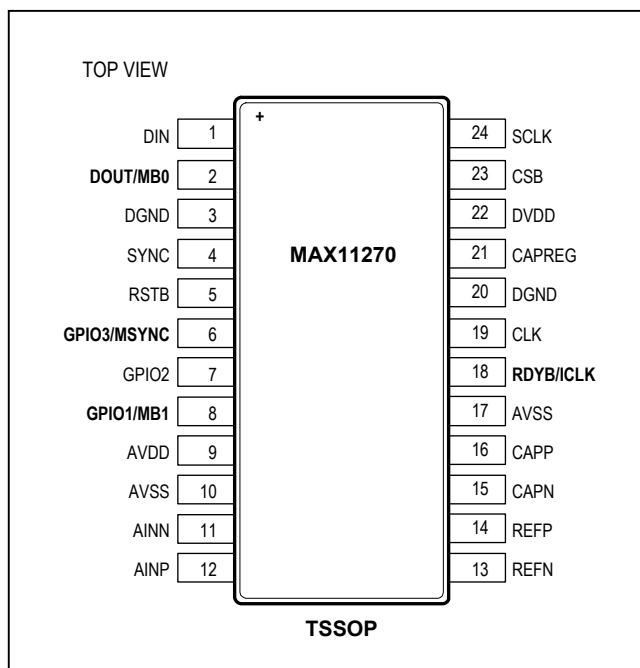


Figure 12. Pin Configuration with MODBITS

### Pulse Mode

Pulse or single event synchronization mode starts a new conversion upon the rising edge of the SYNC pin. When the SYNC pin is asserted the chip begins conversions using the speed settings from the previous convert command, if no previous convert command was issued prior to the SYNC pin asserting then the default conversion speed of 1ksps is used. Note that convert start and SYNC pin rising edge cannot be applied at the same time. Any activity on the SYNC pin is ignored until after the first RDYB assertion following a convert start. This is required due to convert start overhead which delays the first conversion result by 32 master clocks.

### Modulator MODBITS Mode

The MODBITS mode bypasses the MAX11270's internal filters and outputs the real-time 5-bit modulator data to the DOUT and GPIO pins.

MODBITS mode is controlled by the MODBITS and ENMSYNC bits in the CTRL3 register.

### Initializing MODBITS Mode

Set the CTRL3: MODBITS to 1 to enter the MODBITS mode and read the real-time modulator output data. After setting the control bits, a conversion command must be issued. This starts the modulator without running the rest of the digital logic needed for a full conversion. Setting CTRL3: ENMSYNC = 1 enables the modulator SYNC pulses to shift out onto GPIO3/MSYNC. The modulator mode can be run even if this bit is disabled. If ENMSYNC = 0, the SYNC pulses will not be shifted out on GPIO3/MSYNC.

### Exiting MODBITS Mode

To go back to normal conversion mode, set MODBITS = 0. If MODBITS = 0, ENMSYNC is a don't care. After setting MODBITS = 0, issue a conversion command to activate the MAX11270 in normal data read mode.

### MODBITS Mode Pin Configurations

The DOUT/MB0, GPIO3/MSYNC, and GPIO1/MB1 pins offer dual functionality, depending on whether MODBITS real-time modulator data mode or normal data output mode is selected.

**DOUT/MB0**

In MODBIT mode, the DOUT/MB0 outputs the real-time modulator data (MB0). When the ENMSYNC bit = 0, DOUT/MB0 outputs the first MSYNC pulse and shifts out the even bits of the modulator data (bit 4, bit 2, and bit 0). The first SYNC pulse (indicating valid modulator data) will be shifted out on the positive clock edge (referred to as clock edge 1) for initial synchronization. For all other data cycles, the clock edge 1 will output 0 on this pin (as well as 0 on GPIO1/MB1) indicating the end of a current data stream. On clock edge 2, 3, and 4 DOUT/MB0 shifts out the even data bits as described earlier.

**GPIO3/MSYNC**

When ENMSYNC = 1 in the MODBIT mode, GPIO3/MSYNC functions as the modulator sync (MSYNC) output. The SYNC pulse from the modulator is shifted out on the positive clock edge. When the sync signal shifts out on the GPIO3/MSYNC pin, the data is “00” on both the DOUT/MB0 and GPIO1/MB1 pins and marks the starting point of the next modulator data.

**GPIO1/MB1**

In MODBIT mode, the GPIO1/MB1 functions as a real-time modulator data output. On clock edge 1, GPIO1/MB1 always outputs 0 (irrespective of the state of ENMSYNC). On clock edge 2 and 3, this pin will shift out the odd bits of the modulator data (bit 3 and bit 1). GPIO1/MB1 is 0 on clock edge 3 as well.

**RDYB/ICLK**

When the MODBITS bit = 1, the internal system clock (running at 8.192MHz) is output on RDYB/ICLK. This enables aligning the data to the clock edge.

The description of the data shift described above is detailed in the [Figure 13](#). It shows both cases with ENMSYNC = 0 or 1 and the difference in the behavior of GPIO3/MSYNC and DOUT/MB0. RDYB and GPIO1/MB1 are unaffected by the ENMSYNC bit.

**Table 11. MODBITS Mode Pins**

| NORMAL FUNCTION | MODBITS FUNCTION | DESCRIPTION                                                                                                               |
|-----------------|------------------|---------------------------------------------------------------------------------------------------------------------------|
| DOUT            | MB0              | ENMSYNC=0, output MSYNC first followed by even bits of modulator data. ENMSYNC=1, output even bits of modulator data only |
| GPIO1           | MB1              | Odd bits (bits 1 and 3) of modulator data                                                                                 |
| GPIO3           | MSYNC            | Shifts SYNC pulses from the modulator                                                                                     |
| RDYB            | ICLK             | Internal clock                                                                                                            |

MAX11270

24-Bit, 10mW, 130dB SNR, 64ksps Delta-Sigma  
ADC with Integrated PGA

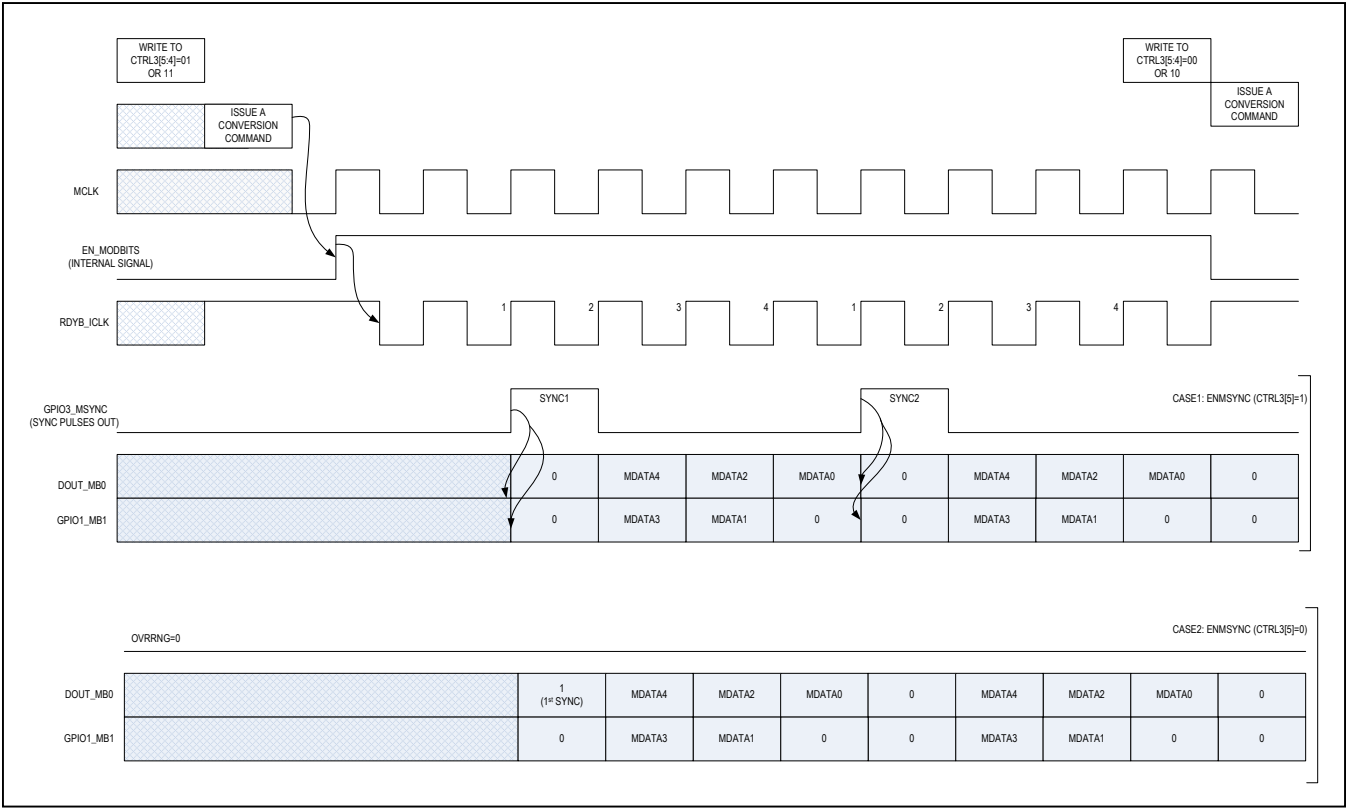


Figure 13. Timing Diagram for MODBITS Mode

MAX11270

24-Bit, 10mW, 130dB SNR, 64ksps Delta-Sigma  
ADC with Integrated PGA

## Ordering Information

| PART         | TEMP RANGE     | PIN-PACKAGE |
|--------------|----------------|-------------|
| MAX11270EUG+ | -40°C to +85°C | 24 TSSOP    |

+Denotes a lead(Pb)-free/RoHS-compliant package.

## Chip Information

PROCESS: BiCMOS

## Package Information

For the latest package outline information and land patterns (footprints), go to [www.maximintegrated.com/packages](http://www.maximintegrated.com/packages). Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

| PACKAGE TYPE | PACKAGE CODE | OUTLINE NO.             | LAND PATTERN NO.        |
|--------------|--------------|-------------------------|-------------------------|
| 24 TSSOP     | U24+2        | <a href="#">21-0066</a> | <a href="#">90-0118</a> |

## Revision History

| REVISION<br>NUMBER | REVISION<br>DATE | DESCRIPTION                                                                                                                                                            | PAGES<br>CHANGED                                       |
|--------------------|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|
| 0                  | 8/14             | Initial release                                                                                                                                                        | —                                                      |
| 1                  | 5/15             | Corrected errors in data sheet, changed Reference Voltage range specification.<br>Revised <i>Typical Operating Characteristics</i> , register tables and descriptions. | 1, 6, 7, 9, 11–13,<br>16–18, 25, 30, 34,<br>37, 39, 40 |

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim Integrated's website at [www.maximintegrated.com](http://www.maximintegrated.com).

Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the Electrical Characteristics table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А