



BIPOLAR ANALOG INTEGRATED CIRCUIT

μ PC2745TB, μ PC2746TB

3 V, SUPER MINIMOLD SILICON MMIC WIDEBAND AMPLIFIER FOR MOBILE COMMUNICATIONS

DESCRIPTION

The μ PC2745TB and μ PC2746TB are silicon monolithic integrated circuits designed as buffer amplifier for mobile communications. These low current amplifiers operate on 3.0 V (1.8 V MIN.).

These ICs are manufactured using our 20 GHz fr NESATIII silicon bipolar process. This process uses silicon nitride passivation film and gold electrodes. These materials can protect chip surface from external pollution and prevent corrosion/migration. Thus, these IC have excellent performance, uniformity and reliability.

FEATURES

- Supply voltage : Recommended $V_{CC} = 2.7$ to 3.3 V
Circuit operation $V_{CC} = 1.8$ to 3.3 V
- Upper limit operating frequency : μ PC2745TB; $f_u = 2.7$ GHz TYP. @3 dB bandwidth
 μ PC2746TB; $f_u = 1.5$ GHz TYP. @3 dB bandwidth
- High isolation : μ PC2745TB; ISL = 38 dB TYP. @f = 500 MHz
 μ PC2746TB; ISL = 45 dB TYP. @f = 500 MHz
- Power gain : μ PC2745TB; $G_P = 12$ dB TYP. @f = 500 MHz
 μ PC2746TB; $G_P = 19$ dB TYP. @f = 500 MHz
- Saturated output power : μ PC2745TB; $P_{O(sat)} = -1$ dBm TYP. @f = 500 MHz
 μ PC2746TB; $P_{O(sat)} = 0$ dBm TYP. @f = 500 MHz
- High-density surface mounting : 6-pin super minimold package ($2.0 \times 1.25 \times 0.9$ mm)

APPLICATIONS

- 1.5 GHz to 2.5 GHz communication system : μ PC2745TB
- 800 MHz to 900 MHz communication system : μ PC2746TB

ORDERING INFORMATION


| Part Number | Package | Marking | Supplying Form |
|---------------------|----------------------|---------|--|
| μ PC2745TB-E3-A | 6-pin super minimold | C1Q | • Embossed tape 8 mm wide • 1, 2, 3 pins face the perforation side of the tape • Qty 3 kpcs/reel |
| μ PC2746TB-E3-A | | C1R | |

Remark To order evaluation samples, contact your nearby sales office.
Part number for sample order: μ PC2745TB-A, μ PC2746TB-A

Caution: Observe precautions when handling because these devices are sensitive to electrostatic discharge.

The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.

PIN CONNECTION

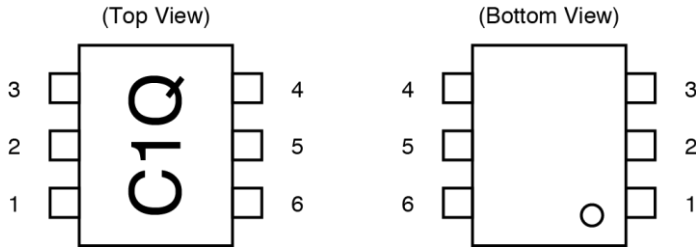

Marking is an example of μ PC2745TB

| Pin No. | Pin Name |
|---------|-----------------|
| 1 | INPUT |
| 2 | GND |
| 3 | GND |
| 4 | OUTPUT |
| 5 | GND |
| 6 | V _{CC} |

PRODUCT LINE-UP (T_A = +25°C, V_{CC} = 3.0 V, Z_S = Z_L = 50 Ω)


| Part No. | f _u (GHz) | P _{O(sat)} (dBm) | G _P (dB) | NF (dB) | I _{CC} (mA) | Package | Making |
|----------------|----------------------|---------------------------|---------------------|---------|----------------------|----------------------|--------|
| μ PC2745T | 2.7 | -1.0 | 12 | 6.0 | 7.5 | 6-pin minimold | C1Q |
| μ PC2745TB | | | | | | 6-pin super minimold | |
| μ PC2746T | 1.5 | 0 | 19 | 4.0 | 7.5 | 6-pin minimold | C1R |
| μ PC2746TB | | | | | | 6-pin super minimold | |
| μ PC2747T | 1.8 | -7.0 | 12 | 3.3 | 5.0 | 6-pin minimold | C1S |
| μ PC2747TB | | | | | | 6-pin super minimold | |
| μ PC2748T | 0.2 to 1.5 | -3.5 | 19 | 2.8 | 6.0 | 6-pin minimold | C1T |
| μ PC2748TB | | | | | | 6-pin super minimold | |
| μ PC2749T | 2.9 | -6.0 | 16 | 4.0 | 6.0 | 6-pin minimold | C1U |
| μ PC2749TB | | | | | | 6-pin super minimold | |

Remark Typical performance. Please refer to **ELECTRICAL CHARACTERISTICS** in detail.

Caution The package size distinguish between minimold and super minimold.

SYSTEM APPLICATION EXAMPLE

DIGITAL CELLULAR SYSTEM BLOCK DIAGRAM

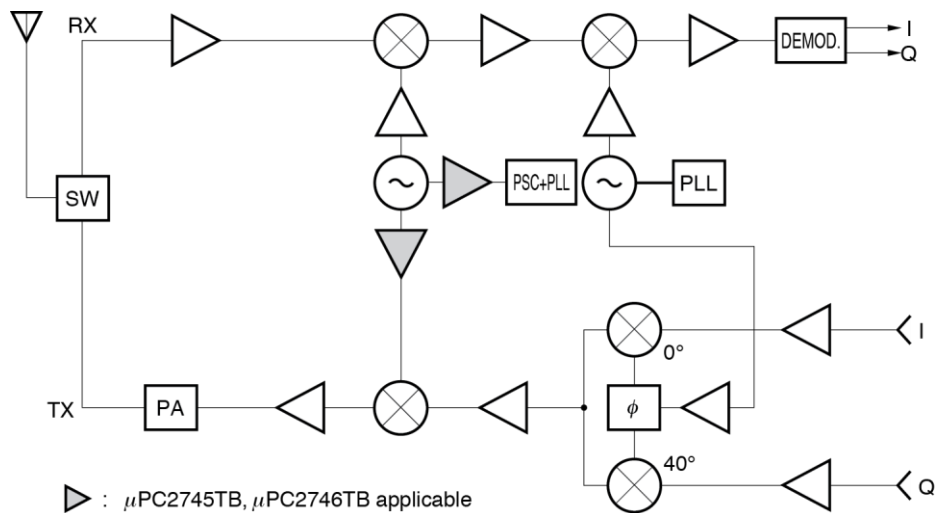

PIN EXPLANATION

| Pin No. | Pin Name | Applied Voltage (V) | Pin Voltage (V) <small>Note</small> | Function and Applications | Internal Equivalent Circuit |
|-------------|-----------------|---------------------|--|--|-----------------------------|
| 1 | INPUT | — | 0.87 ----- 0.82 | Signal input pin. A internal matching circuit, configured with resistors, enables 50 Ω connection over a wide band. this pin must be coupled to signal source with capacitor for DC cut. | |
| 2 3 5 | GND | 0 | — | Ground pin. This pin should be connected to system ground with minimum inductance. Ground pattern on the board should be formed as wide as possible. All the ground pins must be connected together with wide ground pattern to decrease impedance difference. | |
| 4 | OUTPUT | — | 1.95 ----- 2.54 | Signal output pin. A internal matching circuit, configured with resistors, enables 50 Ω connection over a wide band. This pin must be coupled to next stage with capacitor for DC cut. | |
| 6 | V _{CC} | 2.7 to 3.3 | — | Power supply pin. This pin should be externally equipped with bypass capacity to minimize ground impedance. | |

Note Pin voltage is measured at V_{CC} = 3.0 V. Above: μ PC2745TB, Below: μ PC2746TB

ABSOLUTE MAXIMUM RATINGS

| Parameter | Symbol | Conditions | Ratings | Unit |
|-------------------------------|------------------|------------------------------------|-------------|------|
| Supply Voltage | V _{CC} | T _A = +25°C | 4.0 | V |
| Circuit Current | I _{CC} | T _A = +25°C | 16 | mA |
| Power Dissipation | P _D | T _A = +85°C Note | 270 | mW |
| Operating Ambient Temperature | T _A | | -40 to +85 | °C |
| Storage Temperature | T _{stg} | | -55 to +150 | °C |
| Input Power | P _{in} | T _A = +25°C | 0 | dBm |

Note Mounted on double-sided copper-clad 50 × 50 × 1.6 mm epoxy glass PWB

RECOMMENDED OPERATING RANGE

| Parameter | Symbol | MIN. | TYP. | MAX. | Unit |
|----------------|-----------------|------|------|------|------|
| Supply Voltage | V _{CC} | 2.7 | 3.0 | 3.3 | V |

ELECTRICAL CHARACTERISTICS

(T_A = +25°C, V_{CC} = 3.0 V, Z_S = Z_L = 50 Ω, unless otherwise specified)


| Parameter | Symbol | Test Conditions | μ PC2745TB | | | μ PC2746TB | | | Unit |
|---------------------------------|---------------------|--|----------------|------|------|----------------|------|------|------|
| | | | MIN. | TYP. | MAX. | MIN. | TYP. | MAX. | |
| Circuit Current | I _{CC} | No signal | 5.0 | 7.5 | 10.0 | 5.0 | 7.5 | 10.0 | mA |
| Power Gain | G _P | f = 500 MHz | 9 | 12 | 14 | 16 | 19 | 21 | dB |
| Noise Figure | NF | f = 500 MHz | — | 6.0 | 7.5 | — | 4.0 | 5.5 | dB |
| Upper Limit Operating Frequency | f _u | 3 dB down below from gain at f = 0.1 GHz | 2.3 | 2.7 | — | 1.1 | 1.5 | — | GHz |
| Isolation | ISL | f = 500 MHz | 33 | 38 | — | 40 | 45 | — | dB |
| Input Return Loss | RL _{in} | f = 500 MHz | 8 | 11 | — | 10 | 13 | — | dB |
| Output Return Loss | RL _{out} | f = 500 MHz | 2.5 | 5.5 | — | 5.5 | 8.5 | — | dB |
| Saturated Output Power | P _{O(sat)} | f = 500 MHz, P _{in} = -6 dBm | -4.0 | -1.0 | — | -3.0 | 0 | — | dBm |

STANDARD CHARACTERISTICS FOR REFERENCE ($T_A = +25^\circ\text{C}$, $V_{CC} = 3.0\text{ V}$, $Z_S = Z_L = 50\ \Omega$)


| Parameter | Symbol | Test Conditions | Reference Value | | Unit |
|--------------------------------------|-----------------|--|-----------------|----------------|------|
| | | | μ PC2745TB | μ PC2746TB | |
| Circuit Current | I_{CC} | $V_{CC} = 1.8\text{ V}$, No signal | 4.5 | 4.5 | mA |
| Power Gain | G_P | $V_{CC} = 3.0\text{ V}$, $f = 1.0\text{ GHz}$ | 12.0 | 18.5 | dB |
| | | $V_{CC} = 3.0\text{ V}$, $f = 2.0\text{ GHz}$ | 11.0 | — | |
| | | $V_{CC} = 1.8\text{ V}$, $f = 0.5\text{ GHz}$ | 7.0 | 14.0 | |
| Noise Figure | NF | $V_{CC} = 3.0\text{ V}$, $f = 1.0\text{ GHz}$ | 5.5 | 4.2 | dB |
| | | $V_{CC} = 3.0\text{ V}$, $f = 2.0\text{ GHz}$ | 5.7 | — | |
| | | $V_{CC} = 1.8\text{ V}$, $f = 0.5\text{ GHz}$ | 8.0 | 5.0 | |
| Upper Limit Operating Frequency | f_u | $V_{CC} = 1.8\text{ V}$, 3 dB down below from gain at $f = 0.1\text{ GHz}$ | 1.8 | 1.1 | GHz |
| Isolation | ISL | $V_{CC} = 3.0\text{ V}$, $f = 1.0\text{ GHz}$ | 33 | 38 | dB |
| | | $V_{CC} = 3.0\text{ V}$, $f = 2.0\text{ GHz}$ | 30 | — | |
| | | $V_{CC} = 1.8\text{ V}$, $f = 0.5\text{ GHz}$ | 35 | 37 | |
| Input Return Loss | RL_{in} | $V_{CC} = 3.0\text{ V}$, $f = 1.0\text{ GHz}$ | 13.0 | 10.0 | dB |
| | | $V_{CC} = 3.0\text{ V}$, $f = 2.0\text{ GHz}$ | 14.0 | — | |
| | | $V_{CC} = 1.8\text{ V}$, $f = 0.5\text{ GHz}$ | 6.5 | 10.0 | |
| Output Return Loss | RL_{out} | $V_{CC} = 3.0\text{ V}$, $f = 1.0\text{ GHz}$ | 6.5 | 8.5 | dB |
| | | $V_{CC} = 3.0\text{ V}$, $f = 2.0\text{ GHz}$ | 8.5 | — | |
| | | $V_{CC} = 1.8\text{ V}$, $f = 0.5\text{ GHz}$ | 6.0 | 9.5 | |
| Saturated Output Power | $P_{O(sat)}$ | $V_{CC} = 3.0\text{ V}$, $f = 1.0\text{ GHz}$, $P_{in} = -6\text{ dBm}$ | -2.5 | -1.0 | dBm |
| | | $V_{CC} = 3.0\text{ V}$, $f = 2.0\text{ GHz}$, $P_{in} = -6\text{ dBm}$ | -3.5 | — | |
| | | $V_{CC} = 1.8\text{ V}$, $f = 0.5\text{ GHz}$, $P_{in} = -10\text{ dBm}$ | -11.0 | -8.0 | |
| 3rd Order Intermodulation Distortion | IM ₃ | $V_{CC} = 3.0\text{ V}$, $P_{out} = -10\text{ dBm}$, $f_1 = 500\text{ MHz}$, $f_2 = 502\text{ MHz}$ | -30.0 | -26.0 | dBc |
| | | $V_{CC} = 1.8\text{ V}$, $P_{out} = -20\text{ dBm}$, $f_1 = 500\text{ MHz}$, $f_2 = 502\text{ MHz}$ | -31.0 | -37.0 | |
| | | $V_{CC} = 3.0\text{ V}$, $P_{out} = -10\text{ dBm}$, $f_1 = 1\ 000\text{ MHz}$, $f_2 = 1\ 002\text{ MHz}$ | -26.0 | — | |



TEST CIRCUIT

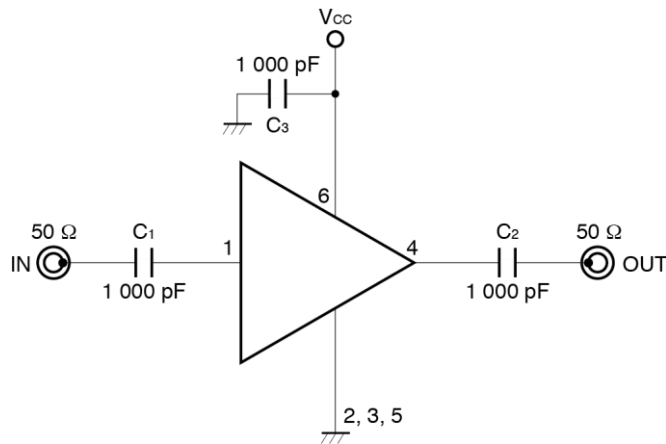

EXAMPLE OF APPLICATION CIRCUIT

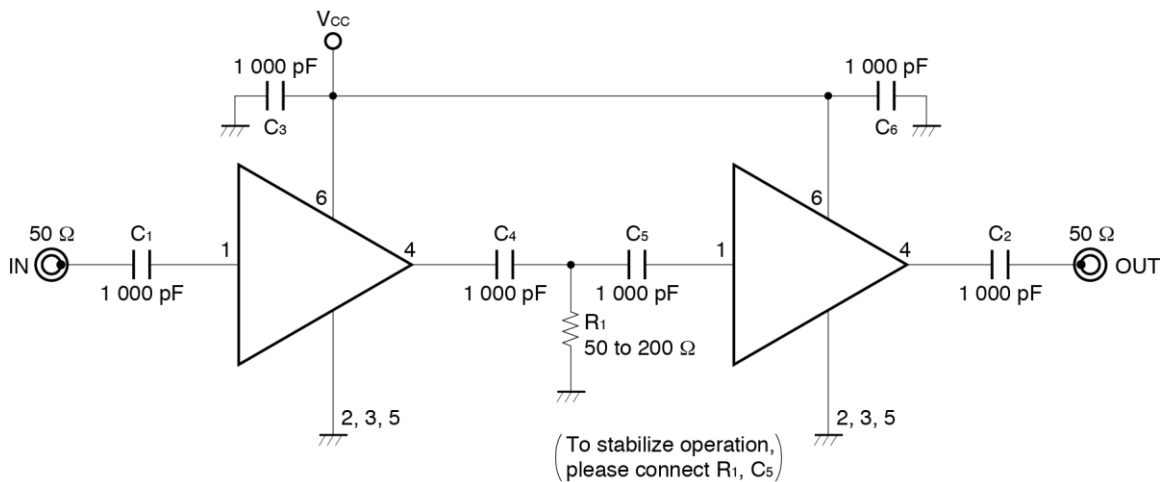

The application circuits and their parameters are for references only and are not intended for use in actual design-ins.

CAPACITORS FOR THE V_{CC}, INPUT, AND OUTPUT PINS


Capacitors of 1 000 pF are recommendable as the bypass capacitor for the V_{CC} pin and the coupling capacitors for the input and output pins.

The bypass capacitor connected to the V_{CC} pin is used to minimize ground impedance of V_{CC} pin. So, stable bias can be supplied against V_{CC} fluctuation.

The coupling capacitors, connected to the input and output pins, are used to cut the DC and minimize RF serial impedance. Their capacitance are therefore selected as lower impedance against a 50 Ω load. The capacitors thus perform as high pass filters, suppressing low frequencies to DC.

To obtain a flat gain from 100 MHz upwards, 1 000 pF capacitors are used in the test circuit. In the case of under 10 MHz operation, increase the value of coupling capacitor such as 10 000 pF. Because the coupling capacitors are determined by equation, $f_c = 1/(2\pi RC)$.

ILLUSTRATION OF THE TEST CIRCUIT ASSEMBLED ON EVALUATION BOARD

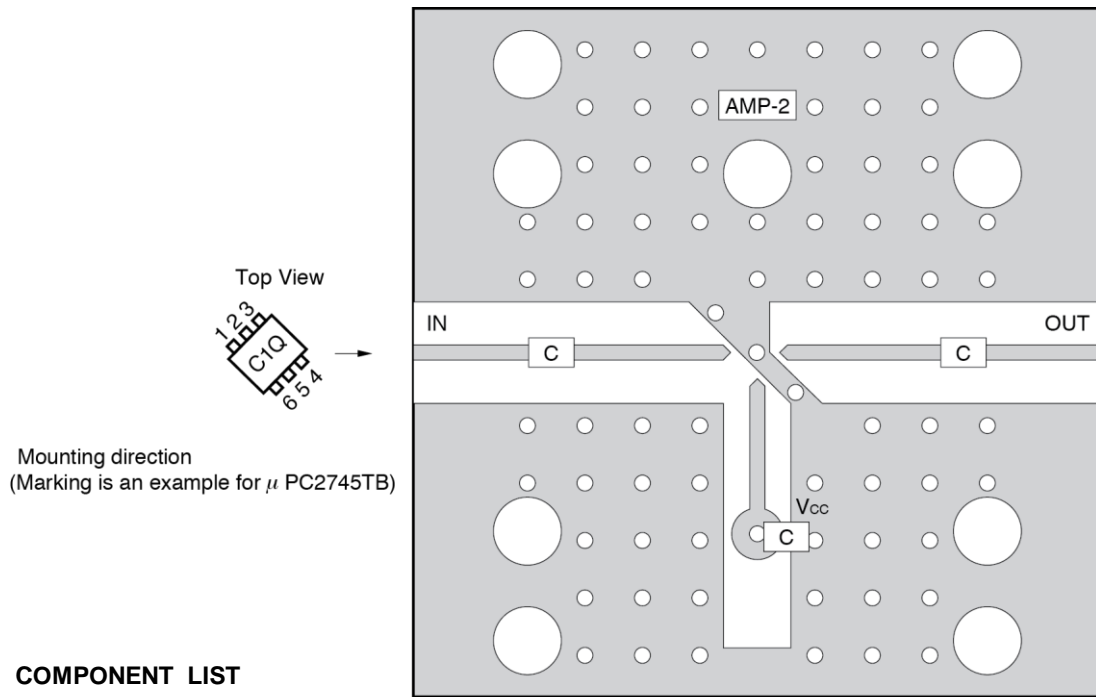

COMPONENT LIST

| | Value |
|---|----------|
| C | 1 000 pF |

Notes


1. 30 × 30 × 0.4 mm double sided copper clad polyimide board.
2. Back side: GND pattern
3. Solder plated on pattern
4. $\oplus \oplus \oplus$: Through holes

For more information on the use of this IC, refer to the following application note: **USAGE AND APPLICATIONS OF 6-PIN MINI-MOLD, 6-PIN SUPER MINI-MOLD SILICON HIGH-FREQUENCY WIDEBAND AMPLIFIER MMIC (P11976E).**


TYPICAL CHARACTERISTICS (T_A = +25°C, unless otherwise specified)

— μ PC2745TB —


CIRCUIT CURRENT vs. SUPPLY VOLTAGE

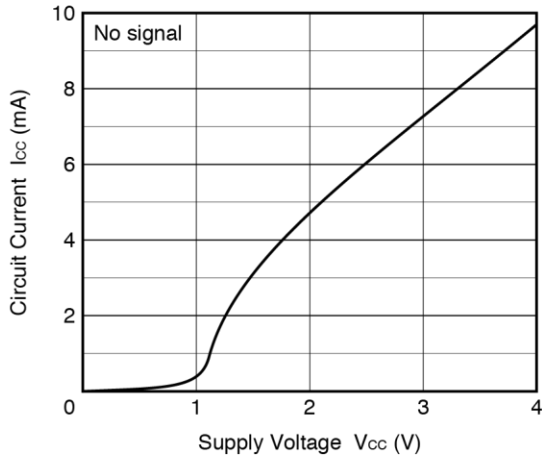


CIRCUIT CURRENT vs. OPERATING AMBIENT TEMPERATURE

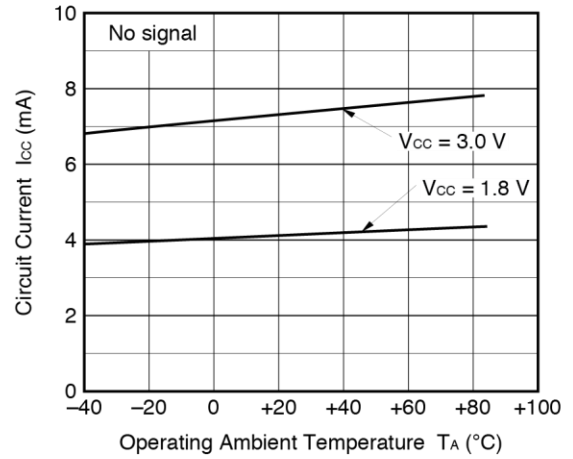


NOISE FIGURE, POWER GAIN vs. FREQUENCY

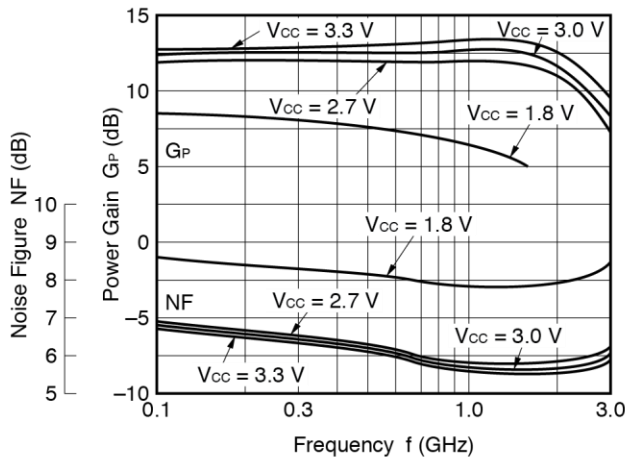


POWER GAIN vs. FREQUENCY

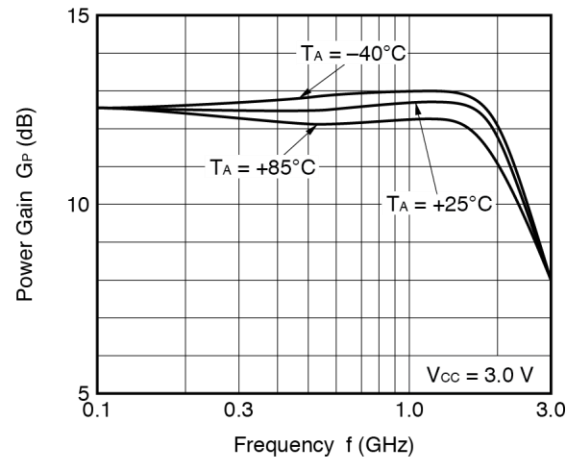

ISOLATION vs. FREQUENCY






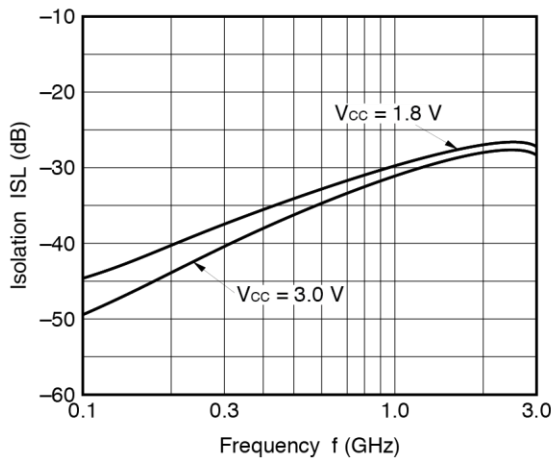


INPUT RETURN LOSS, OUTPUT RETURN LOSS vs. FREQUENCY

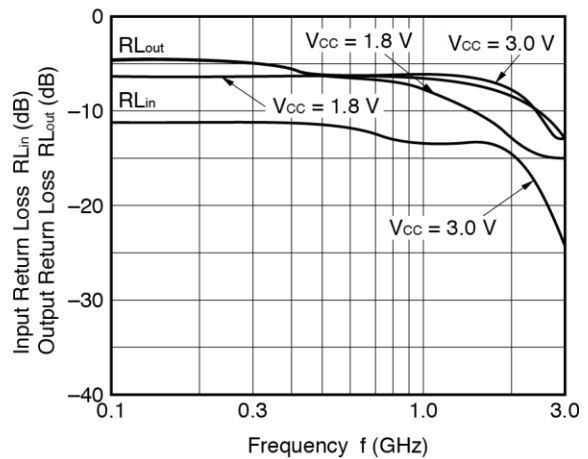

Remark The graphs indicate nominal characteristics.

— μ PC2745TB —

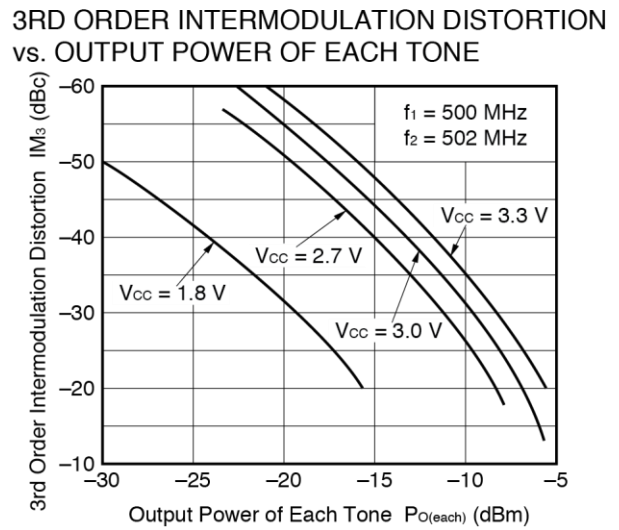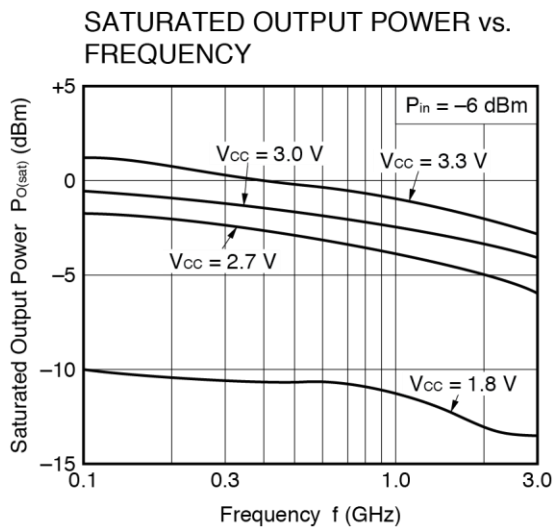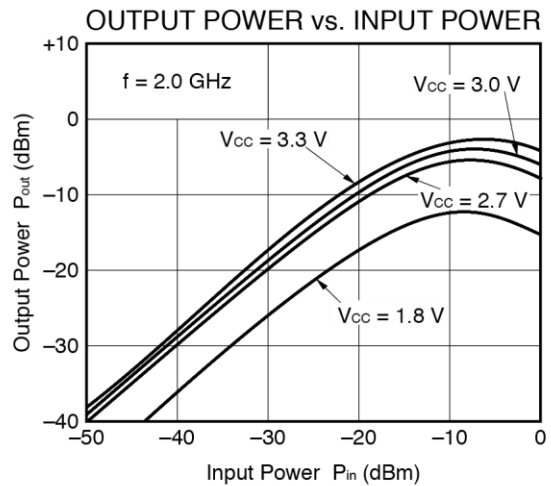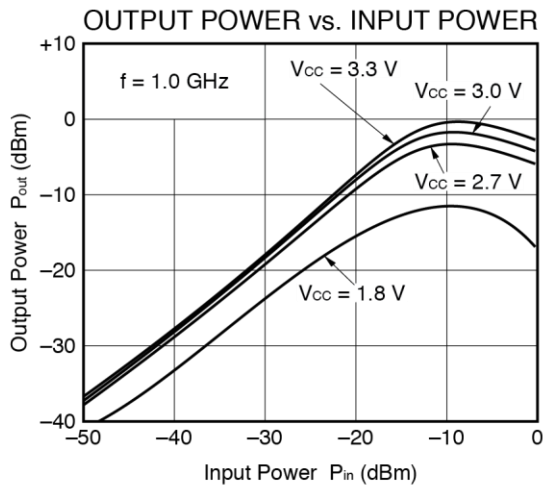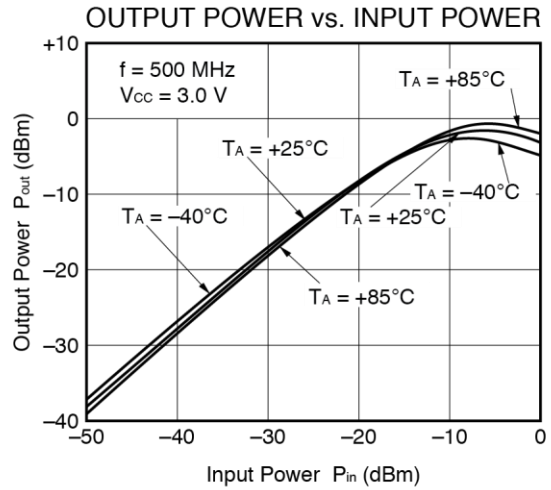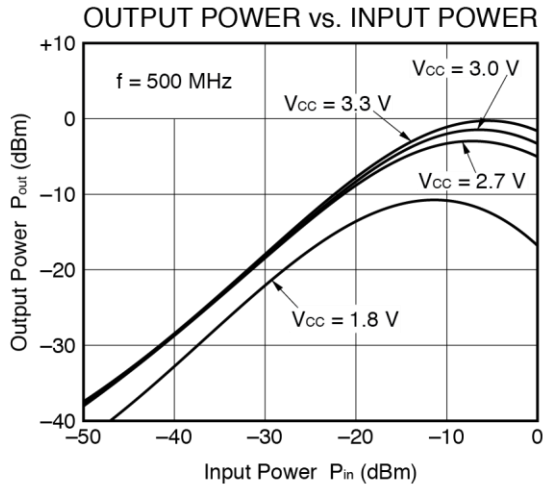


Remark The graphs indicate nominal characteristics.


SMITH CHART ($T_A = +25^\circ\text{C}$, $V_{CC} = 3.0\text{ V}$)

— μ PC2745TB —

S₁₁-FREQUENCY

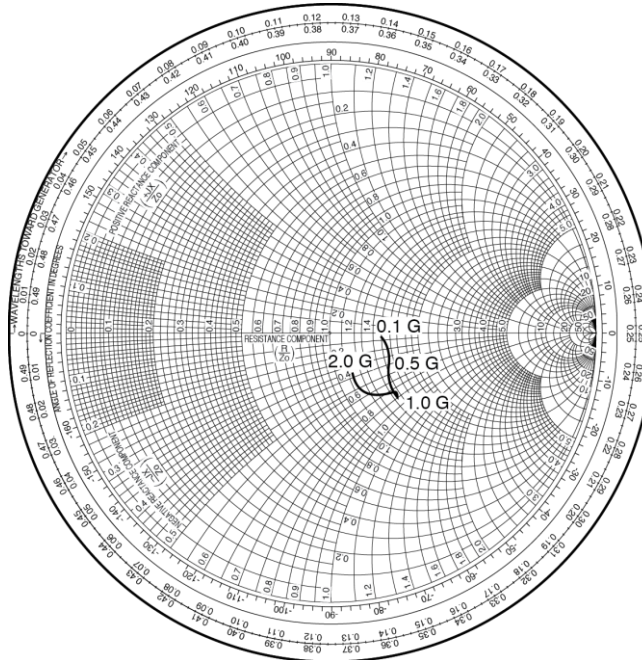

S₂₂-FREQUENCY

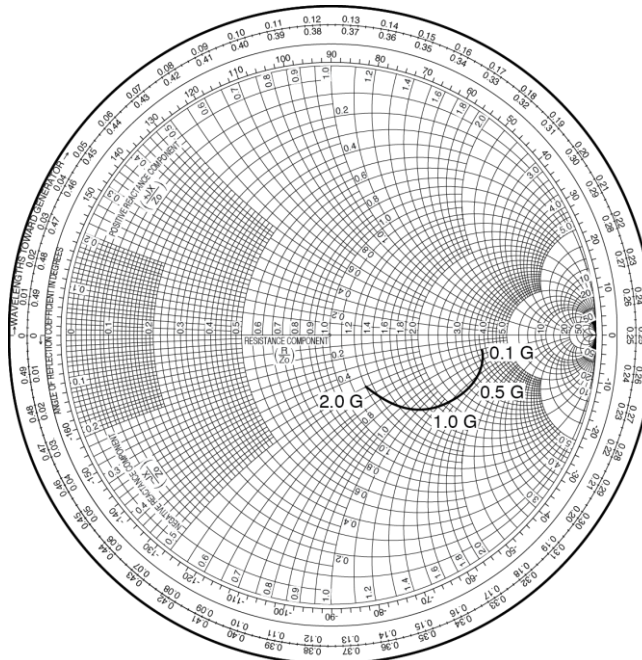


S-PARAMETERS

- S-parameters and noise parameters are provided on our Web site in a format (S2P) that enables the direct import of the parameters to microwave circuit simulators without the need for keyboard inputs.
- [Click here to download S-parameters.](#)
- [\[RF and Microwave\] ® \[Device Parameters\]](#)
- URL <http://www.necel.com/microwave/en/>


TYPICAL CHARACTERISTICS ($T_A = +25^\circ\text{C}$, unless otherwise specified)

— μ PC2746TB —


CIRCUIT CURRENT vs. SUPPLY VOLTAGE

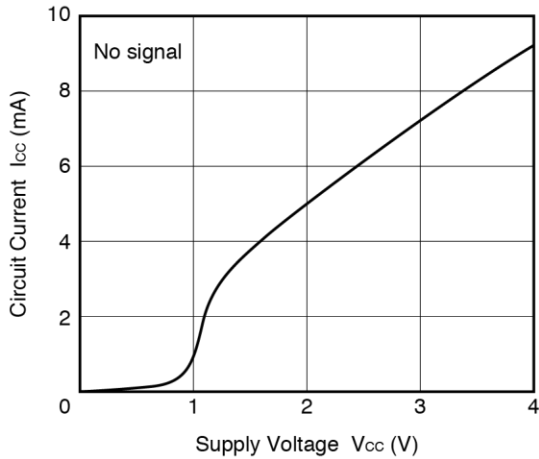


CIRCUIT CURRENT vs. OPERATING AMBIENT TEMPERATURE

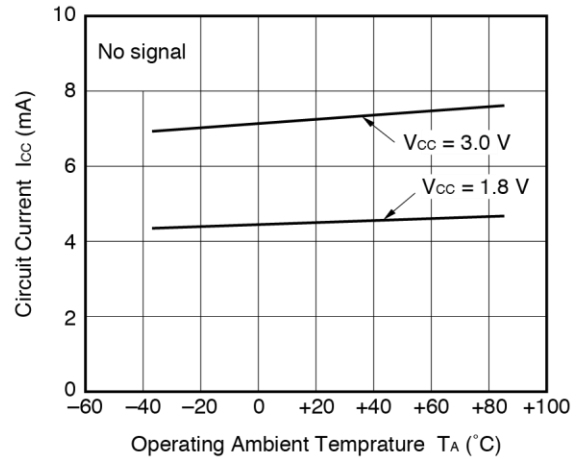


NOISE FIGURE, POWER GAIN vs. FREQUENCY

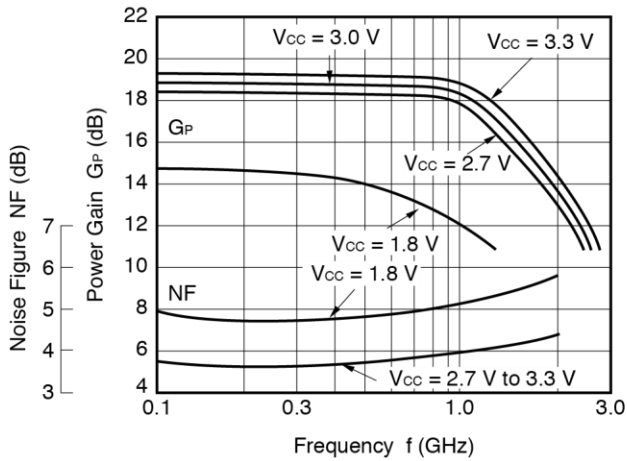


POWER GAIN vs. FREQUENCY

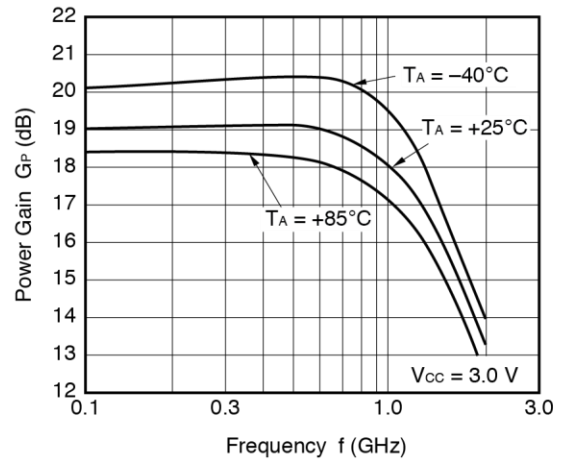

ISOLATION vs. FREQUENCY

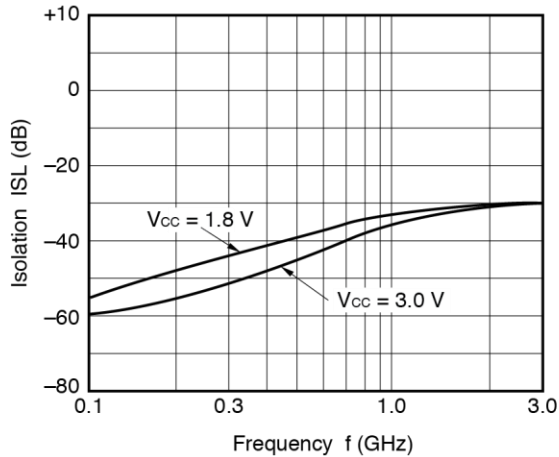


INPUT RETURN LOSS, OUTPUT RETURN LOSS vs. FREQUENCY

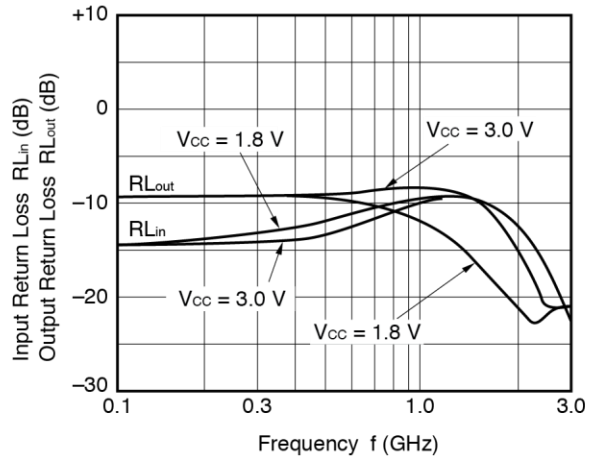


Remark The graphs indicate nominal characteristics.

— μ PC2746TB —


OUTPUT POWER vs. INPUT POWER

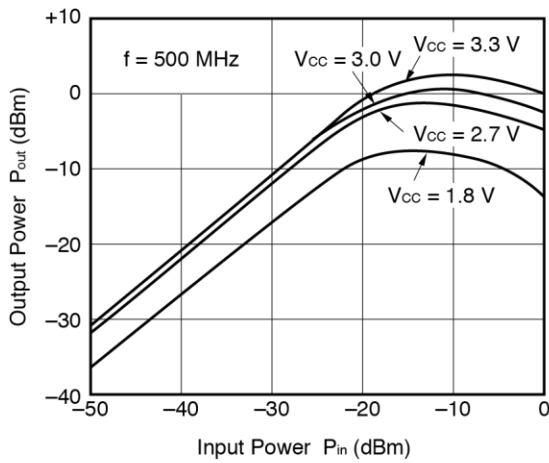


OUTPUT POWER vs. INPUT POWER

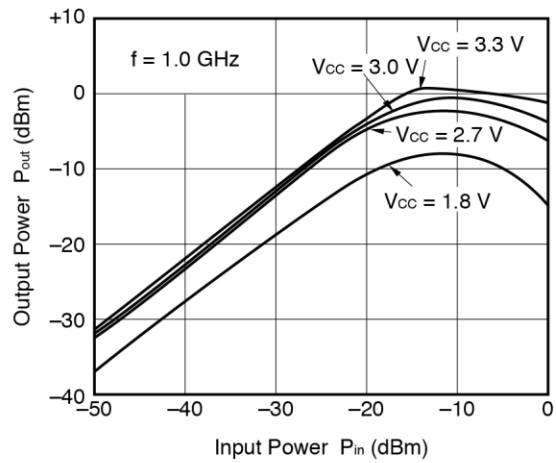


OUTPUT POWER vs. INPUT POWER

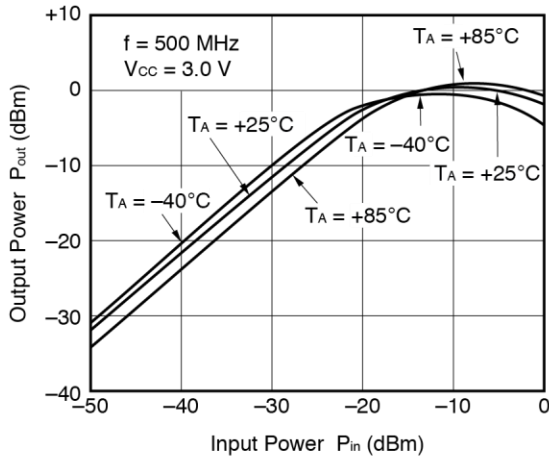


OUTPUT POWER vs. INPUT POWER

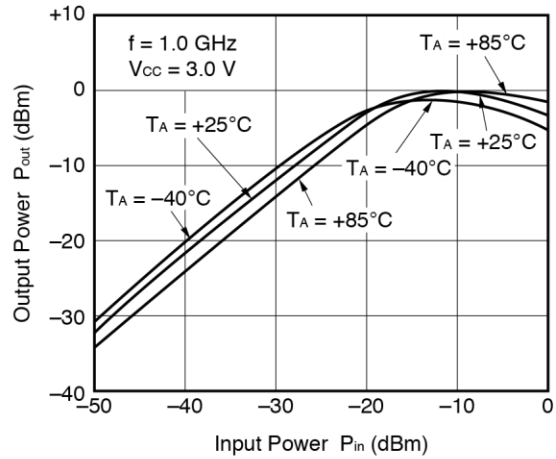

SATURATED OUTPUT POWER vs. FREQUENCY

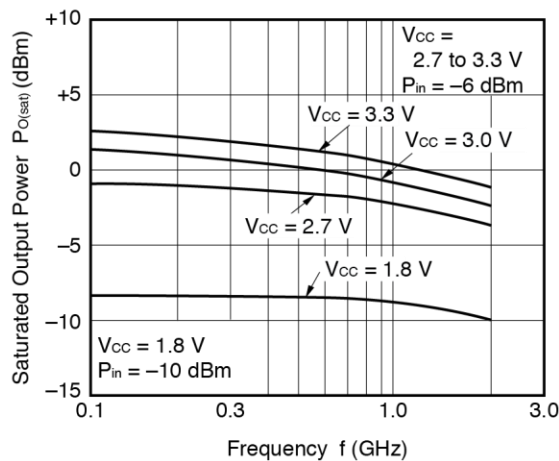

3RD ORDER INTERMODULATION DISTORTION vs. OUTPUT POWER OF EACH TONE

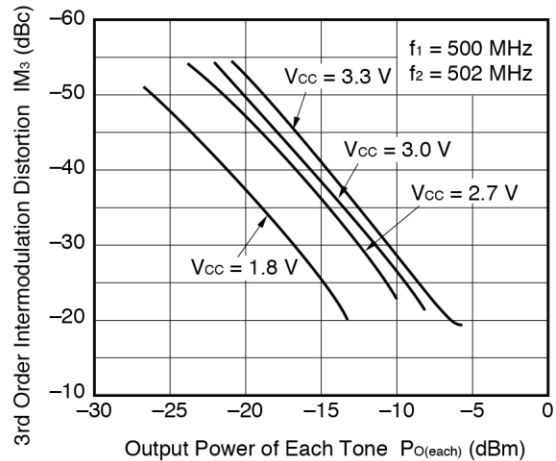


Remark The graphs indicate nominal characteristics.


SMITH CHART ($T_A = +25^\circ\text{C}$, $V_{CC} = 3.0\text{ V}$)

— μ PC2746TB —

S₁₁-FREQUENCY

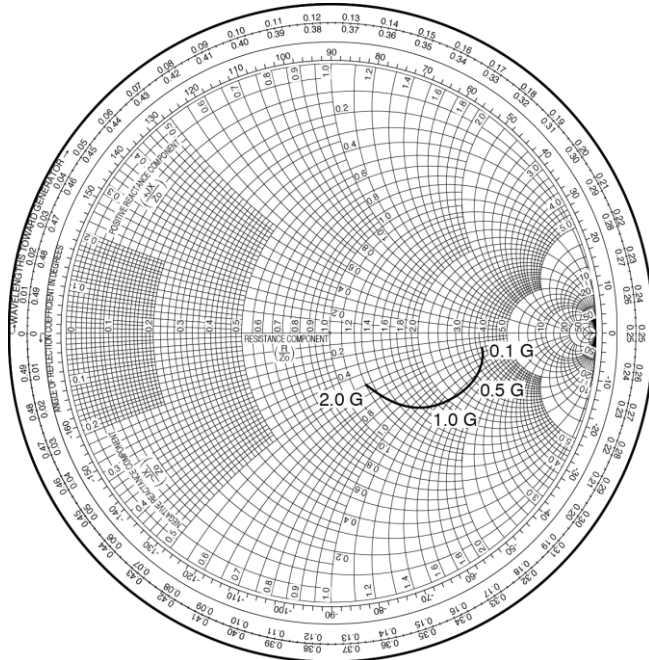

S₂₂-FREQUENCY

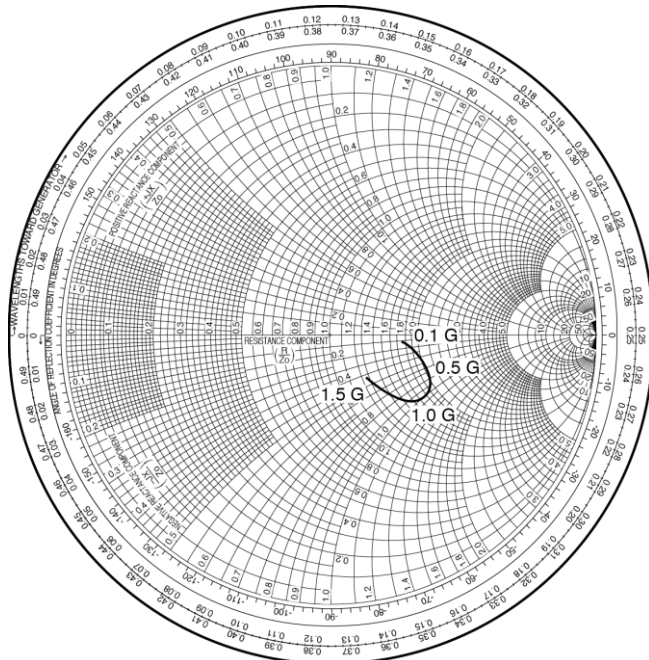


S-PARAMETERS

- S-parameters and noise parameters are provided on our Web site in a format (S2P) that enables the direct import of the parameters to microwave circuit simulators without the need for keyboard inputs.
- [Click here to download S-parameters.](#)
- [RF and Microwave] ® [Device Parameters]
- URL <http://www.necel.com/microwave/en/>

PACKAGE DIMENSIONS

6-PIN SUPER MINIMOLD (UNIT: mm)

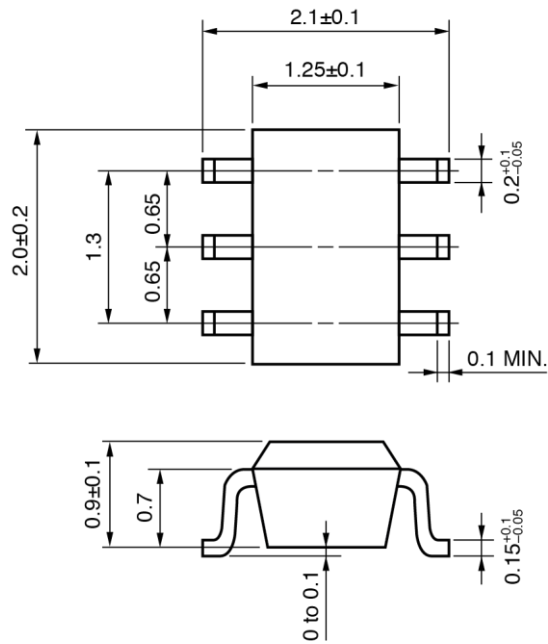

NOTES ON CORRECT USE

- (1) Observe precautions for handling because of electro-static sensitive devices.
- (2) Form a ground pattern as widely as possible to minimize ground impedance (to prevent undesired oscillation).
All the ground pins must be connected together with wide ground pattern to decrease impedance difference.
- (3) The bypass capacitor should be attached to the Vcc pin.
- (4) The DC cut capacitor must be attached to input pin and output pin.

RECOMMENDED SOLDERING CONDITIONS

This product should be soldered and mounted under the following recommended conditions. For soldering methods and conditions other than those recommended below, contact your nearby sales office.

| Soldering Method | Soldering Conditions | Condition Symbol |
|------------------|---|------------------|
| Infrared Reflow | Peak temperature (package surface temperature) : 260°C or below Time at peak temperature : 10 seconds or less Time at temperature of 220°C or higher : 60 seconds or less Preheating time at 120 to 180°C : 120±30 seconds Maximum number of reflow processes : 3 times Maximum chlorine content of rosin flux (% mass) : 0.2%(Wt.) or below | IR260 |
| VPS | Peak temperature (package surface temperature) : 215°C or below Time at temperature of 200°C or higher : 25 to 40 seconds Preheating time at 120 to 150°C : 30 to 60 seconds Maximum number of reflow processes : 3 times Maximum chlorine content of rosin flux (% mass) : 0.2%(Wt.) or below | VP215 |
| Wave Soldering | Peak temperature (molten solder temperature) : 260°C or below Time at peak temperature : 10 seconds or less Preheating temperature (package surface temperature) : 120°C or below Maximum number of flow processes : 1 time Maximum chlorine content of rosin flux (% mass) : 0.2%(Wt.) or below | WS260 |
| Partial Heating | Peak temperature (pin temperature) : 350°C or below Soldering time (per side of device) : 3 seconds or less Maximum chlorine content of rosin flux (% mass) : 0.2%(Wt.) or below | HS350 |

Caution Do not use different soldering methods together (except for partial heating).

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А