

# General Specifications

## Electrical Capacity (Resistive Load)

**Power Level (silver):** 3A @ 125V AC or 3A @ 250V AC or 3A @ 30V DC  
**Logic Level (gold):** 0.4VA maximum @ 28V AC/DC maximum  
 (Applicable Range 0.1mA ~ 0.1A @ 20mV ~ 28V)  
 Note: Find additional explanation of operating range in Supplement section.

## Other Ratings

**Contact Resistance:** 50 milliohms maximum for silver; 100 milliohms maximum for gold  
**Insulation Resistance:** 200 megohms minimum @ 500V DC  
**Dielectric Strength:** 1,000V AC minimum between contacts for 1 minute minimum;  
 1,500V AC minimum between contacts & case for 1 minute minimum  
**Mechanical Life:** 1,000,000 operations minimum for momentary circuit  
 200,000 operations minimum for maintained circuit  
**Electrical Life:** 100,000 operations minimum  
**Nominal Operating Force:** 4.41N  
**Contact Timing:** Nonshorting (break-before-make)  
**Travel:** Pretravel .059" (1.5mm); Overtravel .059" (1.5mm); Total Travel .118" (3.0mm)

## Materials & Finishes

**Housing:** Glass fiber reinforced polyamide (UL94V-0)  
**Snap-in Frame:** Stainless steel  
**Movable Contact:** Silver alloy or copper with gold plating  
**Stationary Contacts:** Silver alloy or copper with gold plating  
**Base:** Liquid crystal polymer (UL94V-0)  
**Switch Terminals:** Phosphor bronze with silver or gold plating  
**Lamp Terminals:** Brass with silver plating

## Environmental Data

**Operating Temperature Range:** -25°C through +50°C (-13°F through +122°F) for Illuminated  
 -25°C through +70°C (-13°F through +158°F) for Nonilluminated  
 Note: When used with a polyvinyl chloride splash cover, the lowest limit is 0°C (32°F)  
**Humidity:** 90 ~ 95% humidity for 96 hours @ 40°C (104°F)  
**Vibration:** 10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning in 1 minute; 3 right angled directions for 2 hours  
**Shock:** 50G (490m/s<sup>2</sup>) acceleration (tested in 6 right angled directions, with 5 shocks in each direction)  
**Sealing:** Not available for snap-in; see next section for panel seal.

## Installation

**Cap Installation Force:** 3.92N maximum downward force on cap  
**Quick Connect Force:** 52.95N maximum downward force on connector  
**Soldering Time & Temperature:** Manual Soldering: See Profile A in Supplement section.

## Standards & Certifications

**Flammability Standards:** UL94V-0 housing & base  
**UL:** **File No. E44145 - Recognized only when ordered with marking on switch.**  
 Add "/U" or "/CUL" before first dash in part number to order UL recognized switch.  
 All models recognized at 3A @ 125V or 250V AC or 0.4VA @ 28V AC/DC maximum.  
**CSA:** **File No. 023535\_0\_000 - Certified only when ordered with marking on switch.**  
 Add "/C" before first dash in part number to order CSA certified switch.  
 All models certified at 3A @ 125V or 250V AC or 0.4VA @ 28V AC/DC maximum.

# Distinctive Characteristics

Carefully designed light diffusion and filtering system produces bright, full surface illumination with front panel relamping.

Spot illumination available in single and bicolor LEDs.

Choice of super bright LEDs in white, green, and blue in addition to standard or bright red, amber, and green LEDs.

Stainless steel clips provide secure mounting with a wide range of panel thicknesses.

Latchdown feature gives indication of circuit status. Audible and tactile feedback with smooth and responsive operation.

Snap-action contact mechanism gives long electrical life and sensitivity of actuation.

Combination solder lug and .110" quick connect terminals are epoxy sealed to prevent entry of flux, dust, and other contaminants.

Panel sealed model meets IP65 of IEC60529 specifications (similar to NEMA 4 & 13).

Compact switch design minimizes behind panel depth.

Matching indicators available.



Actual Size



Snap-in Mount Page D46



Panel Seal Page D57

TYPICAL SWITCH ORDERING EXAMPLE

LB

1

5

S

K

W01

Poles

|   |      |
|---|------|
| 1 | SPDT |
| 2 | DPDT |

Circuits

|                 |    |      |
|-----------------|----|------|
| 5               | ON | (ON) |
| ( ) = Momentary |    |      |
| 6               | ON | ON   |

Alternate Action with Latchdown

Shapes

|   |             |
|---|-------------|
| S | Square      |
| C | Round       |
| R | Rectangular |

Housing

|   |       |
|---|-------|
| K | Black |
| G | Gray  |

Contacts & Terminals

|     |                                                                                  |
|-----|----------------------------------------------------------------------------------|
| W01 | Silver Contacts<br>Rated 3A @ 125/250V AC<br>Solder Lug/Quick Connect Terminals* |
| G01 | Gold Contacts<br>Rated 0.4VA @ 28V AC/DC<br>Solder Lug/Quick Connect Terminals*  |

IMPORTANT:

!

Switches are supplied without UL, cULus & CSA marking unless specified. **UL, cULus & CSA recognized only when ordered with marking on the switch.** Specific models, ratings, & ordering instructions are noted on General Specifications page.

\* Wire harness & cable assemblies offered only in Americas

DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

LB15SKW01-5C12-JC

Red, 12-volt, Bright LED with Resistor

Clear Cap with Red Diffuser

SPDT ON-(ON) Circuit

Square Shape

Silver Contacts  
Rated 3A @ 125/250V AC;  
Solder Lug/Quick Connect Terminals

Black Housing



5C12

JC

Lamps

Incandescent Lamp Used with Solid Cap

|         |                |
|---------|----------------|
| 05      | 5-volt         |
| 12      | 12-volt        |
| No Code | Nonilluminated |

Incandescent or Neon Used with Insert Cap

|         |                      |
|---------|----------------------|
| 01      | 110-volt Neon        |
| 05      | 5-volt Incandescent  |
| 12      | 12-volt Incandescent |
| No Code | Nonilluminated       |

Bright LED Used with LED Cap

| Colors | Resistor |
|--------|----------|
| 5C     | Red      |
| 5D     | Amber    |
|        | Green    |
| 5F     | Green    |

Super Bright LED Used with LED Cap

|    |       |
|----|-------|
| 6B | White |
| 6F | Green |
| 6G | Blue  |

LED in Spot Illuminated Cap

|    |                    |
|----|--------------------|
| 1C | Red Single Color   |
| 1D | Amber Single Color |
| 1F | Green Single Color |
| CF | Red/Green Bicolor  |

Nonilluminated

|         |                |
|---------|----------------|
| No Code | Nonilluminated |
|---------|----------------|

Cap Types & Colors

Solid Cap: Lens/Filter Colors

|    |              |
|----|--------------|
| BJ | White/Clear  |
| CJ | Red/Clear    |
| EJ | Yellow/Clear |
| FJ | Green/Clear  |
| GJ | Blue/Clear   |

Insert Cap: Lens/Filter Colors

|     |              |
|-----|--------------|
| JB  | Clear/White  |
| JC  | Clear/Red    |
| JE  | Clear/Yellow |
| *JF | Clear/Green  |
| *JG | Clear/Blue   |

\*JF & JG not suitable with neon.

LED Cap: Lens/Diffuser Colors

|    |             |
|----|-------------|
| JB | Clear/White |
| JC | Clear/Red   |
| JD | Clear/Amber |
| JF | Clear/Green |

LED Cap: Lens/Diffuser Colors

|    |             |
|----|-------------|
| JB | Clear/White |
|----|-------------|

Spot Illuminated Cap Colors

|   |       |
|---|-------|
| A | Black |
| B | White |
| C | Red   |
| F | Green |

Available in Square and Round only.

Nonilluminated Cap Colors

|   |        |   |       |
|---|--------|---|-------|
| A | Black  | F | Green |
| B | White  | G | Blue  |
| C | Red    | H | Gray  |
| E | Yellow |   |       |


### POLES & CIRCUITS

|      |               | Plunger Position<br>( ) = Momentary |            | Connected Terminals |         | Throw & Switch/Lamp Schematics                                                                                       |
|------|---------------|-------------------------------------|------------|---------------------|---------|----------------------------------------------------------------------------------------------------------------------|
| Pole | Model         | Normal                              | Down       | Normal              | Down    | Notes: Switch is marked with NC, NO, COM, L+, L-.<br>Lamp circuit is isolated and requires an external power source. |
| SP   | LB15<br>*LB16 | ON<br>ON                            | (ON)<br>ON | 1-3                 | 1-2     | SPDT<br>                                                                                                             |
| DP   | LB25<br>*LB26 | ON<br>ON                            | (ON)<br>ON | 1-3 4-6             | 1-2 4-5 | DPDT<br>                                                                                                             |

\* When in latchdown position for the alternate circuit, cap position is .039" (1.0mm) above the built-in bezel.


### SHAPES & PANEL CUTOUTS

**S** .622" (15.8mm)  
Square

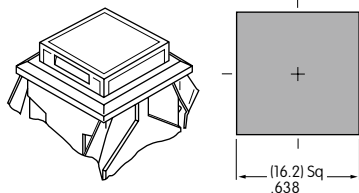


Cutout for 1 switch:  
.638" x .638" (16.2mm x 16.2mm)  
Cutout for 1 switch with barriers:  
.638" x .815" (16.2mm x 20.7mm)

**C** .854" (21.7mm)  
Round

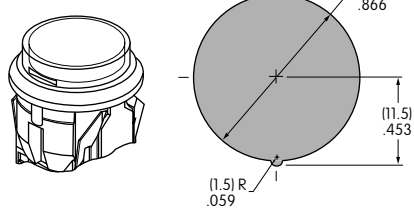

**R** .622" x .866" (15.8mm x 22.0mm)  
Rectangular

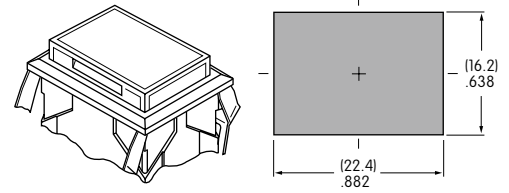

Cutout for 1 switch:  
.638" x .882" (16.2mm x 22.4mm)  
Cutout for 1 switch with barriers:  
.638" x 1.059" (16.2mm x 26.9mm)

Panel Thickness for Switches & Barriers: .039" ~ .157" (1.0 ~ 4.0mm)  
Panel Thickness for Protective Guards & Splash Covers: .039" ~ .138" (1.0 ~ 3.5mm)

### HOUSING

Housing Colors Available:

**K** Black

**G** Gray

### CONTACT MATERIALS, RATINGS & TERMINALS

**W01**

Silver Contacts

Power Level  
3A @ 125V AC & 250V AC

**G01**

Gold Contacts

Logic Level  
0.4VA max. @ 28V AC/DC max.

Complete explanation of operating range in Supplement section.

Solder Lug/Quick Connect

Optional PCB adaptors  
AT711 & AT712 available;  
illustrated in "Optional  
Accessories" immediately following  
"Typical Switch Dimensions."



### INCANDESCENT & NEON LAMP CODES & SPECIFICATIONS

AT607 & AT607N



T-1 Bi-pin

AT607 Incandescent 5-volt or 12-volt; AT607N Neon 110-volt

**05**

**12**

**01** \*

| Voltage             | V          | 5V AC         | 12V AC | 110V AC |
|---------------------|------------|---------------|--------|---------|
| Current             | I          | 115mA         | 60mA   | 1.5mA   |
| Endurance           | Avg. Hours | 10,000        | 10,000 |         |
| Ambient Temp. Range |            | -25°C ~ +50°C |        |         |

The electrical specifications shown are determined at a basic temperature of 25°C. Lamp circuit is isolated and requires external power source.

\* Recommended Resistors for Neon:  
33K ohms for 110V AC;  
100K ohms for 220V AC



### CAP TYPES & COLOR COMBINATIONS

Color Codes: B White C Red D Amber E Yellow F Green G Blue J Clear

#### Solid Cap for Incandescent Lamp & Nonilluminated

Lens/Filter  
Colors Available:



**AT476**  
Square



**AT4012**  
Round




**AT4026**  
Rectangular




Material: Polycarbonate Finish: Glossy

#### Insert Cap for Incandescent or Neon Lamp & Nonilluminated


Lens/Filter  
Colors Available:





**AT477**  
Square



**AT4013**  
Round



**AT4027**  
Rectangular



JF and JG not suitable with neon lamp.


Material: Polycarbonate Finish: Glossy

#### Cap for Bright LED without Resistor


Lens/Diffuser  
Colors Available:





**AT4176**  
Square



**AT4178**  
Round



**AT4177**  
Rectangular

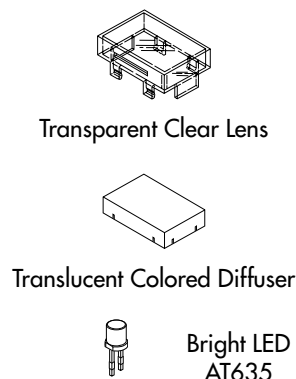


Material: Polycarbonate Finish: Glossy

#### Cap for Bright LED with Resistor


Lens/Diffuser  
Colors Available:





**AT4162**  
Square



**AT4164**  
Round



**AT4163**  
Rectangular

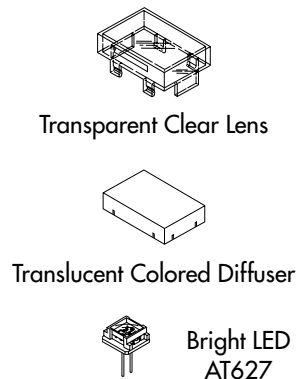

Material: Polycarbonate Finish: Glossy

CAP TYPES & COLOR COMBINATIONS

Color Codes: A Black B White C Red D Amber E Yellow F Green G Blue H Gray J Clear

Cap for Super Bright LEDs

JB

Clear Lens  
White Diffuser

AT4129  
Square

AT4128  
Round

AT4130  
Rectangular



Transparent  
Clear Lens

Material:  
Polycarbonate  
Finish: Glossy



Translucent  
White Diffuser



LEDs AT625  
AT631 AT632

Spot Illuminated Cap with LED

The electrical specifications shown are determined at a basic temperature of 25°C. LED circuit is isolated and requires an external power source. Single color LEDs are colored in OFF state; bicolor LEDs are translucent white in OFF state. Polarity marks are on the switch. If the source voltage exceeds the rated voltage, a ballast resistor is required. The resistor value can be calculated by using the formula in the Supplement section. Additional lamp detail is shown in the Accessories & Hardware section.

LED Specifications

|                                                      | Single Color LED<br>with 1 Element | Bicolor LED<br>with 2 Elements | Single Color |             |             | Bicolor         |
|------------------------------------------------------|------------------------------------|--------------------------------|--------------|-------------|-------------|-----------------|
|                                                      |                                    |                                | 1C<br>Red    | 1D<br>Amber | 1F<br>Green | CF<br>Red/Green |
| LED factory<br>assembled in Spot<br>Illuminated Caps |                                    |                                |              |             |             |                 |
| Not Available<br>Separately                          | Forward Peak Current               | $I_{FM}$                       | 10mA         | 30mA        | 30mA        | 30/25mA         |
|                                                      | Typical Forward Current            | $I_F$                          | 8mA          | 24mA        | 24mA        | 20mA            |
|                                                      | Forward Voltage                    | $V_F$                          | 1.9V         | 2.0V        | 2.1V        | 2.0/2.2V        |
|                                                      | Reverse Peak Voltage               | $V_{RM}$                       | 5V           | 5V          | 5V          | —               |
|                                                      | Current Reduction Rate Above 25°C  | $\Delta I_F$                   | 0.13mA/°C    | 0.40mA/°C   | 0.40mA/°C   | 0.43/0.38mA/°C  |
| Ambient Temperature Range                            |                                    |                                | -25° ~ +50°C |             |             |                 |

Cap Colors  
Available:



Material:  
Polycarbonate  
Finish: Glossy

AT480  
Square



AT4016  
Round



Cap with Window



Factory Assembled LED;  
Not Available Separately

When ordering spot illuminated cap separately, LED color must be specified.  
Examples: AT480CA (red LED, black cap); AT4016CFB (red/green bicolored LED, white cap)

Cap for Nonilluminated

Cap Colors  
Available:




AT484  
Square



AT4017  
Round



AT4030  
Rectangular



Cap  
No Lamp

Material: Polycarbonate Finish: Glossy

### TYPICAL SWITCH DIMENSIONS

#### Square

#### Single & Double Pole



LB15SKW01-12-CJ

Single pole models do not have terminals 4, 5, & 6.

#### Round

#### Single & Double Pole



LB16CKW01-12-CJ

Single pole models do not have terminals 4, 5, & 6.

#### Rectangular

#### Single & Double Pole



LB26RGW01-12-CJ



Single pole models do not have terminals 4, 5, & 6.

### OPTIONAL ACCESSORIES

#### PCB Adaptors

#### AT711 Single Pole • Straight PC Terminals

#### AT712 Double Pole • Straight PC Terminals



Note: Order adaptors separately.

## OPTIONAL ACCESSORIES

### Barriers

**AT497**  
End

**AT498**  
Center



Material: Polyamide



### Cutouts for More Than 1 Switch



**Square**

$$A = .752" (19.1\text{mm}) \times \text{Number of Switches} + .051" (1.3\text{mm})$$

**Rectangular**

$$A = .996" (25.3\text{mm}) \times \text{Number of Switches} + .051" (1.3\text{mm})$$

### Protective Guard

**AT499**  
Square  
Protective Guard

Opens 90°  
Closes manually





Material: Polyamide

Protective Guards reduce depth of switch behind panel by .020" (0.5mm).

### Spring Loaded Protective Guard

**AT4171**  
Square  
Protective Guard


Opens 180°  
Closes automatically



(N) = Number of switches \* Minimum dimension allows opening of cover to 180°

### Materials:

Cover: Clear Polycarbonate  
Base: Black GFR Polyamide  
Coil Spring: Stainless Steel



**Recommended Panel Thickness:**  
.039" ~ .106" (1.0mm ~ 2.7mm)

### OPTIONAL ACCESSORIES

#### AT4057 Rectangular Protective Guard

Opens 90°  
Closes manually



#### Protective Guard



Material: Polyamide

Protective Guards reduce depth of switch behind panel by .020" (0.5mm).

#### AT4172 Rectangular Protective Guard




#### Spring Loaded Protective Guard



Opens 180°  
Closes automatically

**Materials:**  
Cover: Clear Polycarbonate  
Base: Black GFR Polyamide  
Coil Spring: Stainless Steel

Recommended Panel Thickness:  
.039" ~ .106" (1.0mm ~ 2.7mm)



(N) = Number of switches \* Minimum dimension allows opening of cover to 180°

#### Dust Covers




#### AT4002 Round



#### AT4001 Square



#### AT4011 Rectangular

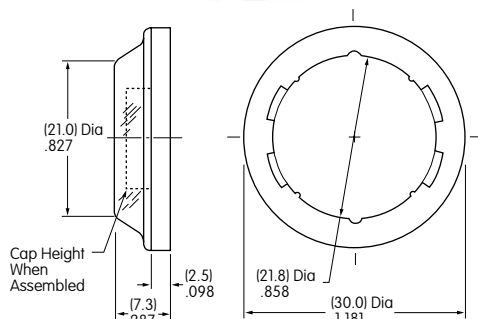

Materials: PVC with polyethylene gasket; PVC loses pliability below 0°C (32°F). Dust Covers reduce depth of switch behind panel by .020" (0.5mm).

### ASSEMBLY INSTRUCTIONS

#### Lamp Installation & LED Orientation

##### Incandescent & Neon Lamps AT607 & AT607N

Align projections on lamp with grooves (B) in holder when inserting lamp. To correctly join the lamp holder and cap base, match the cut corners (A).



##### Bright LED AT627

###### Panel Seal Models

For panel seal models, Bright LED must first be inserted into the lamp socket which is built into the switch. The cap can then be placed on the switch.




###### Snap-in Models

For snap-in models, Bright LED must be inserted into the cap first. Align cut corners (C) when inserting the LED.



##### Bright & Super Bright LEDs AT625, AT631, AT632, AT635

Align D-flat on LED with flat (B) in holder when inserting the LED. To correctly join the lamp holder and cap base, match the cut corners (A).

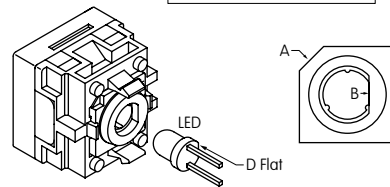

#### Switch & Cap Assembly

##### Round & Rectangular

Match clip on cap assembly with receptacle inside switch. Lamp terminals will then be aligned correctly with lamp socket.



##### Square

Match projection (C) on cap assembly with groove (C) inside switch. Lamp terminals will then be aligned correctly with lamp socket.




##### Panel Seal

With Lamps AT607, AT607N, and LEDs AT614, AT625, AT631, AT632: Match projection on cap assembly with notch inside switch. Lamp terminals will then be aligned correctly with lamp socket.

#### Installation & Maintenance


##### Snap-in Mount

Snap-in clip holds all switches firmly in place. To mount round switch, match the antirotation projection on switch with guide cut in panel. Snap into panel cutout.




##### Panel Seal Bushings Mount

Insert switch from the front of the panel with the o-ring between the built-in bezel and the panel. Install mounting nut AT075 (supplied with switch) from the rear of the panel. Overtightening mounting nut may damage the switch housing.



##### Lamp Replacement

Actuator must be in UP position. Pull off cap with cap extractor AT109. Replace lamp and reassemble as shown above.



AT109  
Cap Extractor



AT112  
Socket Wrench

LEGENDS

NKK Switches can provide custom legends for caps. Contact factory for more information.

Suggested Printable Area for Lens

**Recommended Methods:** Laser Etch on clear lens, Screen Print, or Pad Print on lens.  
Epoxy based ink is recommended.



Shaded areas are printable areas.

Suggested Printable Area for Film Insert

**Recommended Print Method:** Laser Print or Screen Print with Epoxy based ink

Film Insert: Clear Polyester, 4 mil max. thickness



Shaded areas are printable areas.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А