

# NST3946DXV6T1G, NST3946DXV6T5G

## Complementary General Purpose Transistor

The NST3946DXV6T1 device is a spin-off of our popular SOT-23/SOT-323 three-leaded device. It is designed for general purpose amplifier applications and is housed in the SOT-563 six-leaded surface mount package. By putting two discrete devices in one package, this device is ideal for low-power surface mount applications where board space is at a premium.

- $h_{FE}$ , 100–300
- Low  $V_{CE(sat)}$ ,  $\leq 0.4$  V
- Simplifies Circuit Design
- Reduces Board Space
- Reduces Component Count
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant

**Table 1. MAXIMUM RATINGS**

| Rating                                           | Symbol    | Value                 | Unit |
|--------------------------------------------------|-----------|-----------------------|------|
| Collector–Emitter Voltage<br>(NPN)<br>(PNP)      | $V_{CEO}$ | 40<br>–40             | Vdc  |
| Collector–Base Voltage<br>(NPN)<br>(PNP)         | $V_{CBO}$ | 60<br>–40             | Vdc  |
| Emitter–Base Voltage<br>(NPN)<br>(PNP)           | $V_{EBO}$ | 6.0<br>–5.0           | Vdc  |
| Collector Current – Continuous<br>(NPN)<br>(PNP) | $I_C$     | 200<br>–200           | mAdc |
| Electrostatic Discharge                          | ESD       | HBM>16000,<br>MM>2000 | V    |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.




**ON Semiconductor®**

<http://onsemi.com>



**SOT-563  
CASE 463A**



**NST3946DXV6T1\***

\*Q1 PNP  
Q2 NPN

### MARKING DIAGRAM



46 = Specific Device Code  
M = Date Code  
▪ = Pb-Free Package

(Note: Microdot may be in either location)

### ORDERING INFORMATION

| Device         | Package              | Shipping†         |
|----------------|----------------------|-------------------|
| NST3946DXV6T1G | SOT-563<br>(Pb-Free) | 4,000/Tape & Reel |
| NST3946DXV6T5G | SOT-563<br>(Pb-Free) | 8,000/Tape & Reel |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

# NST3946DXV6T1G, NST3946DXV6T5G

**Table 2. THERMAL CHARACTERISTICS**

| Characteristic (One Junction Heated)          | Symbol          | Max                                | Unit        |
|-----------------------------------------------|-----------------|------------------------------------|-------------|
| Total Device Dissipation<br>Derate above 25°C | $P_D$           | 357<br>(Note 1)<br>2.9<br>(Note 1) | mW<br>mW/°C |
| Thermal Resistance<br>Junction-to-Ambient     | $R_{\theta JA}$ | 350<br>(Note 1)                    | °C/W        |
| Characteristic (Both Junctions Heated)        | Symbol          | Max                                | Unit        |
| Total Device Dissipation<br>Derate above 25°C | $P_D$           | 500<br>(Note 1)<br>4.0<br>(Note 1) | mW<br>mW/°C |
| Thermal Resistance Junction-to-Ambient        | $R_{\theta JA}$ | 250<br>(Note 1)                    | °C/W        |
| Junction and Storage Temperature Range        | $T_J, T_{stg}$  | 55 to +150                         | °C          |

1. FR-4 @ Minimum Pad

## ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

| Characteristic | Symbol | Min | Max | Unit |
|----------------|--------|-----|-----|------|
|----------------|--------|-----|-----|------|

### OFF CHARACTERISTICS

|                                                                                                                                                  |                |               |             |           |      |
|--------------------------------------------------------------------------------------------------------------------------------------------------|----------------|---------------|-------------|-----------|------|
| Collector – Emitter Breakdown Voltage (Note 2)<br>( $I_C = 1.0 \text{ mAdc}, I_B = 0$ )<br>( $I_C = -1.0 \text{ mAdc}, I_B = 0$ )                | (NPN)<br>(PNP) | $V_{(BR)CEO}$ | 40<br>–40   | –<br>–    | Vdc  |
| Collector – Base Breakdown Voltage<br>( $I_C = 10 \text{ }\mu\text{Adc}, I_E = 0$ )<br>( $I_C = -10 \text{ }\mu\text{Adc}, I_E = 0$ )            | (NPN)<br>(PNP) | $V_{(BR)CBO}$ | 60<br>–40   | –<br>–    | Vdc  |
| Emitter – Base Breakdown Voltage<br>( $I_E = 10 \text{ }\mu\text{Adc}, I_C = 0$ )<br>( $I_E = -10 \text{ }\mu\text{Adc}, I_C = 0$ )              | (NPN)<br>(PNP) | $V_{(BR)EBO}$ | 6.0<br>–5.0 | –<br>–    | Vdc  |
| Base Cutoff Current<br>( $V_{CE} = 30 \text{ Vdc}, V_{EB} = 3.0 \text{ Vdc}$ )<br>( $V_{CE} = -30 \text{ Vdc}, V_{EB} = -3.0 \text{ Vdc}$ )      | (NPN)<br>(PNP) | $I_{BL}$      | –<br>–      | 50<br>–50 | nAdc |
| Collector Cutoff Current<br>( $V_{CE} = 30 \text{ Vdc}, V_{EB} = 3.0 \text{ Vdc}$ )<br>( $V_{CE} = -30 \text{ Vdc}, V_{EB} = -3.0 \text{ Vdc}$ ) | (NPN)<br>(PNP) | $I_{CEX}$     | –<br>–      | 50<br>–50 | nAdc |

### ON CHARACTERISTICS (Note 2)

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                    |               |                                                                |                                                        |     |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|---------------|----------------------------------------------------------------|--------------------------------------------------------|-----|
| DC Current Gain<br>( $I_C = 0.1 \text{ mAdc}, V_{CE} = 1.0 \text{ Vdc}$ )<br>( $I_C = 1.0 \text{ mAdc}, V_{CE} = 1.0 \text{ Vdc}$ )<br>( $I_C = 10 \text{ mAdc}, V_{CE} = 1.0 \text{ Vdc}$ )<br>( $I_C = 50 \text{ mAdc}, V_{CE} = 1.0 \text{ Vdc}$ )<br>( $I_C = 100 \text{ mAdc}, V_{CE} = 1.0 \text{ Vdc}$ )<br><br>( $I_C = -0.1 \text{ mAdc}, V_{CE} = -1.0 \text{ Vdc}$ )<br>( $I_C = -1.0 \text{ mAdc}, V_{CE} = -1.0 \text{ Vdc}$ )<br>( $I_C = -10 \text{ mAdc}, V_{CE} = -1.0 \text{ Vdc}$ )<br>( $I_C = -50 \text{ mAdc}, V_{CE} = -1.0 \text{ Vdc}$ )<br>( $I_C = -100 \text{ mAdc}, V_{CE} = -1.0 \text{ Vdc}$ ) | (NPN)<br><br><br><br><br><br>(PNP) | $h_{FE}$      | 40<br>70<br>100<br>60<br>30<br><br>60<br>80<br>100<br>60<br>30 | –<br>–<br>300<br>–<br>–<br><br>–<br>–<br>300<br>–<br>– | –   |
| Collector – Emitter Saturation Voltage<br>( $I_C = 10 \text{ mAdc}, I_B = 1.0 \text{ mAdc}$ )<br>( $I_C = 50 \text{ mAdc}, I_B = 5.0 \text{ mAdc}$ )<br><br>( $I_C = -10 \text{ mAdc}, I_B = -1.0 \text{ mAdc}$ )<br>( $I_C = -50 \text{ mAdc}, I_B = -5.0 \text{ mAdc}$ )                                                                                                                                                                                                                                                                                                                                                    | (NPN)<br><br><br>(PNP)             | $V_{CE(sat)}$ | –<br>–<br><br>–<br>–                                           | 0.2<br>0.3<br><br>–0.25<br>–0.4                        | Vdc |
| Base – Emitter Saturation Voltage<br>( $I_C = 10 \text{ mAdc}, I_B = 1.0 \text{ mAdc}$ )<br>( $I_C = 50 \text{ mAdc}, I_B = 5.0 \text{ mAdc}$ )<br><br>( $I_C = -10 \text{ mAdc}, I_B = -1.0 \text{ mAdc}$ )<br>( $I_C = -50 \text{ mAdc}, I_B = -5.0 \text{ mAdc}$ )                                                                                                                                                                                                                                                                                                                                                         | (NPN)<br><br><br>(PNP)             | $V_{BE(sat)}$ | 0.65<br>–<br><br>–0.65<br>–                                    | 0.85<br>0.95<br><br>–0.85<br>–0.95                     | Vdc |

# NST3946DXV6T1G, NST3946DXV6T5G

## ELECTRICAL CHARACTERISTICS (T<sub>A</sub> = 25°C unless otherwise noted) (continued)

| Characteristic                                                                                                                                                                                                   | Symbol                             | Min        | Max         | Unit               |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|------------|-------------|--------------------|
| <b>SMALL-SIGNAL CHARACTERISTICS</b>                                                                                                                                                                              |                                    |            |             |                    |
| Current-Gain – Bandwidth Product<br>(I <sub>C</sub> = 10 mAdc, V <sub>CE</sub> = 20 Vdc, f = 100 MHz)<br>(I <sub>C</sub> = -10 mAdc, V <sub>CE</sub> = -20 Vdc, f = 100 MHz)                                     | (NPN)<br>(PNP)<br>f <sub>T</sub>   | 300<br>250 | –<br>–      | MHz                |
| Output Capacitance<br>(V <sub>CB</sub> = 5.0 Vdc, I <sub>E</sub> = 0, f = 1.0 MHz)<br>(V <sub>CB</sub> = -5.0 Vdc, I <sub>E</sub> = 0, f = 1.0 MHz)                                                              | (NPN)<br>(PNP)<br>C <sub>obo</sub> | –<br>–     | 4.0<br>4.5  | pF                 |
| Input Capacitance<br>(V <sub>EB</sub> = 0.5 Vdc, I <sub>C</sub> = 0, f = 1.0 MHz)<br>(V <sub>EB</sub> = -0.5 Vdc, I <sub>C</sub> = 0, f = 1.0 MHz)                                                               | (NPN)<br>(PNP)<br>C <sub>ibo</sub> | –<br>–     | 8.0<br>10.0 | pF                 |
| Input Impedance<br>(V <sub>CE</sub> = 10 Vdc, I <sub>C</sub> = 1.0 mAdc, f = 1.0 kHz)<br>(V <sub>CE</sub> = -10 Vdc, I <sub>C</sub> = -1.0 mAdc, f = 1.0 kHz)                                                    | (NPN)<br>(PNP)<br>h <sub>ie</sub>  | 1.0<br>2.0 | 10<br>12    | k Ω                |
| Voltage Feedback Ratio<br>(V <sub>CE</sub> = 10 Vdc, I <sub>C</sub> = 1.0 mAdc, f = 1.0 kHz)<br>(V <sub>CE</sub> = -10 Vdc, I <sub>C</sub> = -1.0 mAdc, f = 1.0 kHz)                                             | (NPN)<br>(PNP)<br>h <sub>re</sub>  | 0.5<br>0.1 | 8.0<br>10   | X 10 <sup>-4</sup> |
| Small-Signal Current Gain<br>(V <sub>CE</sub> = 10 Vdc, I <sub>C</sub> = 1.0 mAdc, f = 1.0 kHz)<br>(V <sub>CE</sub> = -10 Vdc, I <sub>C</sub> = -1.0 mAdc, f = 1.0 kHz)                                          | (NPN)<br>(PNP)<br>h <sub>fe</sub>  | 100<br>100 | 400<br>400  | –                  |
| Output Admittance<br>(V <sub>CE</sub> = 10 Vdc, I <sub>C</sub> = 1.0 mAdc, f = 1.0 kHz)<br>(V <sub>CE</sub> = -10 Vdc, I <sub>C</sub> = -1.0 mAdc, f = 1.0 kHz)                                                  | (NPN)<br>(PNP)<br>h <sub>oe</sub>  | 1.0<br>3.0 | 40<br>60    | μmhos              |
| Noise Figure<br>(V <sub>CE</sub> = 5.0 Vdc, I <sub>C</sub> = 100 μAdc, R <sub>S</sub> = 1.0 k Ω, f = 1.0 kHz)<br>(V <sub>CE</sub> = -5.0 Vdc, I <sub>C</sub> = -100 μAdc, R <sub>S</sub> = 1.0 k Ω, f = 1.0 kHz) | (NPN)<br>(PNP)<br>NF               | –<br>–     | 5.0<br>4.0  | dB                 |

## SWITCHING CHARACTERISTICS

|                                                                                                                                  |                                  |        |            |    |
|----------------------------------------------------------------------------------------------------------------------------------|----------------------------------|--------|------------|----|
| Delay Time<br>(V <sub>CC</sub> = 3.0 Vdc, V <sub>BE</sub> = -0.5 Vdc)<br>(V <sub>CC</sub> = -3.0 Vdc, V <sub>BE</sub> = 0.5 Vdc) | (NPN)<br>(PNP)<br>t <sub>d</sub> | –<br>– | 35<br>35   | ns |
| Rise Time<br>(I <sub>C</sub> = 10 mAdc, I <sub>B1</sub> = 1.0 mAdc)<br>(I <sub>C</sub> = -10 mAdc, I <sub>B1</sub> = -1.0 mAdc)  | (NPN)<br>(PNP)<br>t <sub>r</sub> | –<br>– | 35<br>35   |    |
| Storage Time<br>(V <sub>CC</sub> = 3.0 Vdc, I <sub>C</sub> = 10 mAdc)<br>(V <sub>CC</sub> = -3.0 Vdc, I <sub>C</sub> = -10 mAdc) | (NPN)<br>(PNP)<br>t <sub>s</sub> | –<br>– | 200<br>225 | ns |
| Fall Time<br>(I <sub>B1</sub> = I <sub>B2</sub> = 1.0 mAdc)<br>(I <sub>B1</sub> = I <sub>B2</sub> = -1.0 mAdc)                   | (NPN)<br>(PNP)<br>t <sub>f</sub> | –<br>– | 50<br>75   |    |

2. Pulse Test: Pulse Width ≤ 300 μs; Duty Cycle ≤ 2.0%.



(NPN)

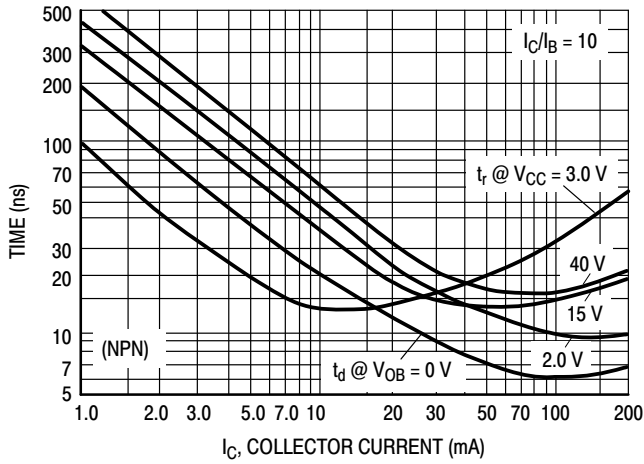


Figure 4. Turn-On Time

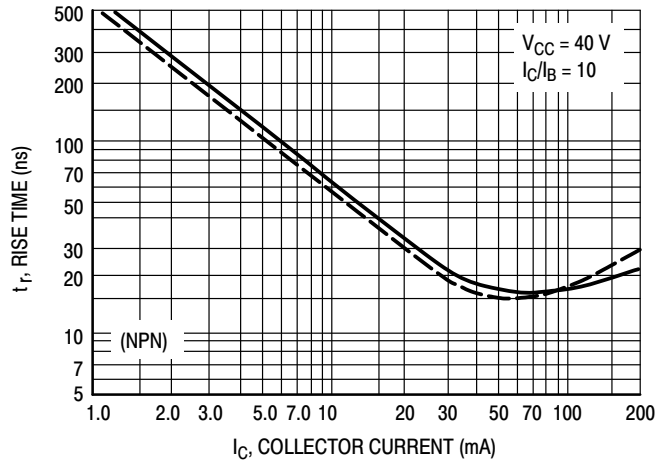


Figure 5. Rise Time

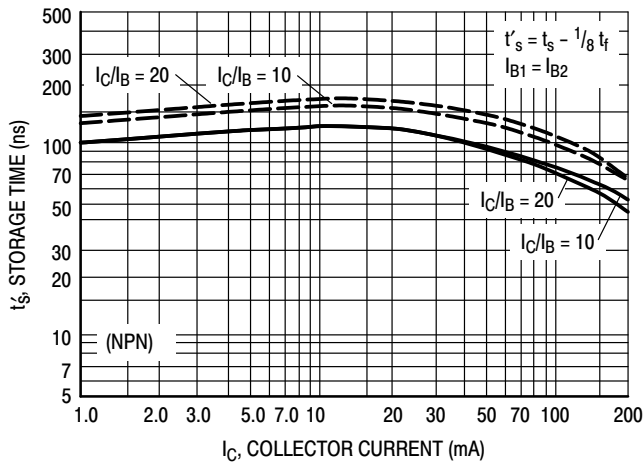


Figure 6. Storage Time

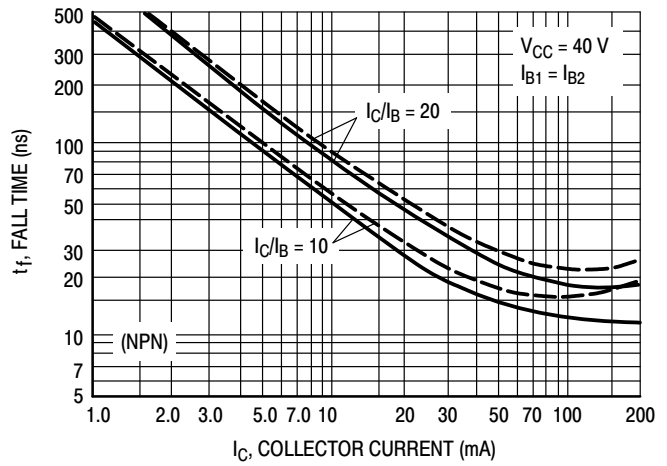


Figure 7. Fall Time

### TYPICAL AUDIO SMALL-SIGNAL CHARACTERISTICS NOISE FIGURE VARIATIONS

( $V_{CE} = 5.0$  Vdc,  $T_A = 25^\circ\text{C}$ , Bandwidth = 1.0 Hz)

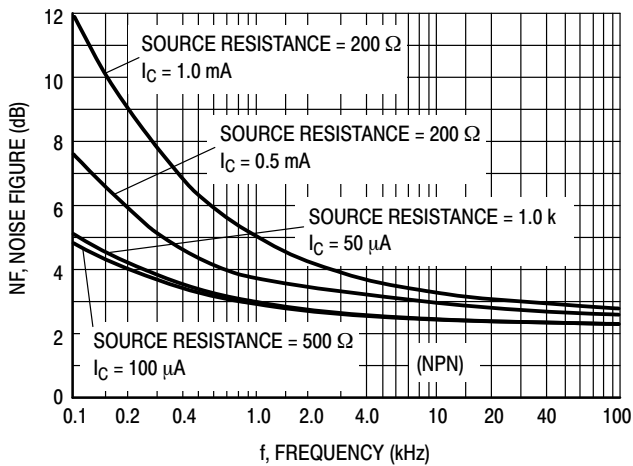


Figure 8. Noise Figure

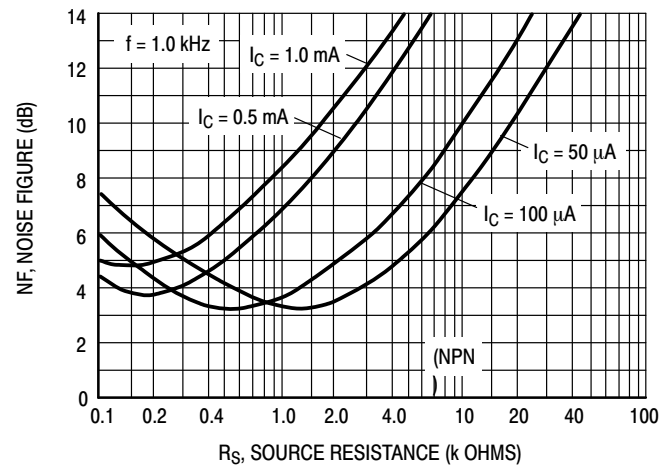


Figure 9. Noise Figure

# NST3946DXV6T1G, NST3946DXV6T5G

(NPN)

## h PARAMETERS

( $V_{CE} = 10 \text{ Vdc}$ ,  $f = 1.0 \text{ kHz}$ ,  $T_A = 25^\circ\text{C}$ )

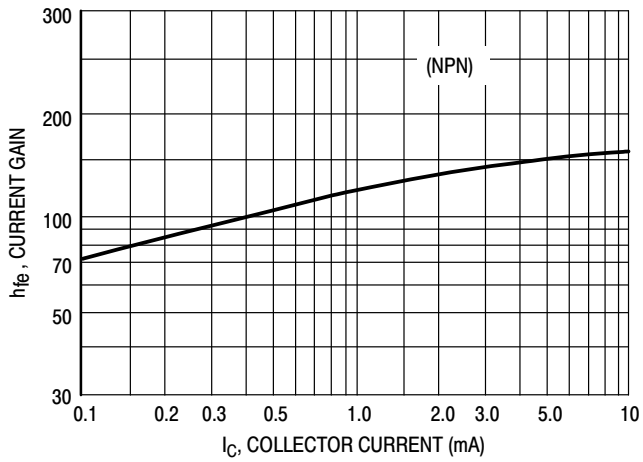


Figure 10. Current Gain

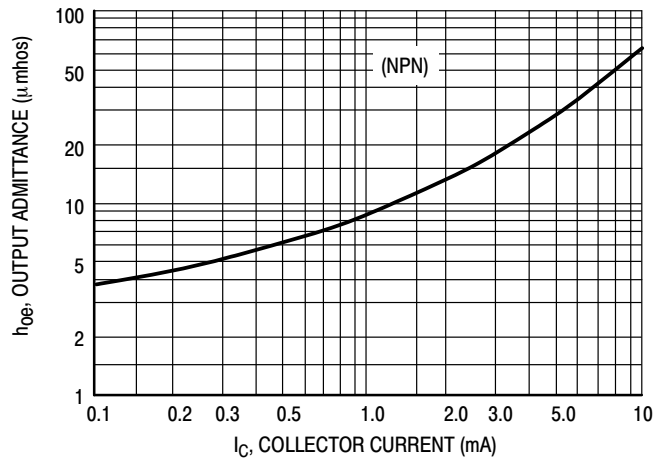


Figure 11. Output Admittance

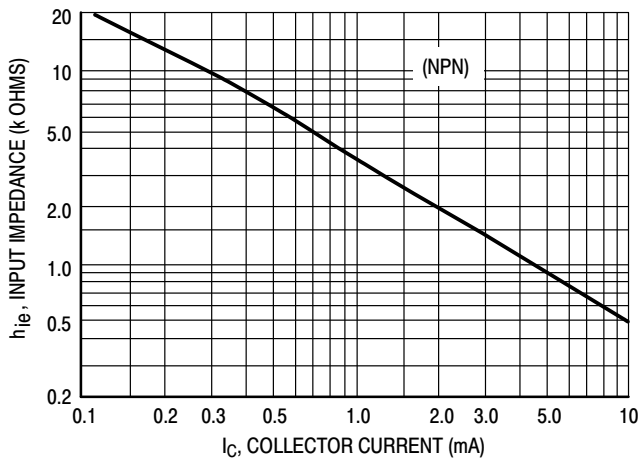


Figure 12. Input Impedance

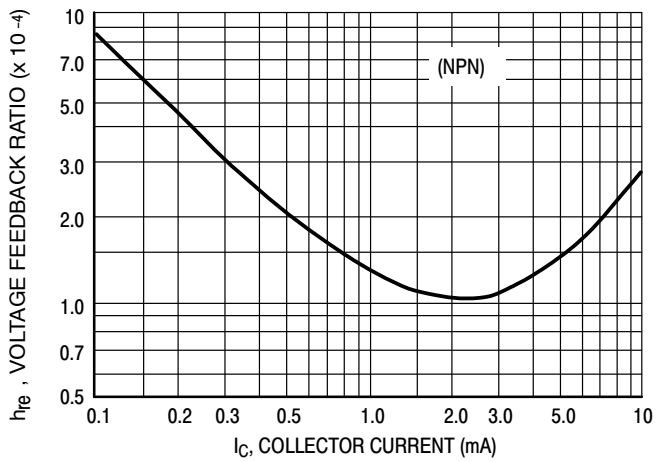


Figure 13. Voltage Feedback Ratio

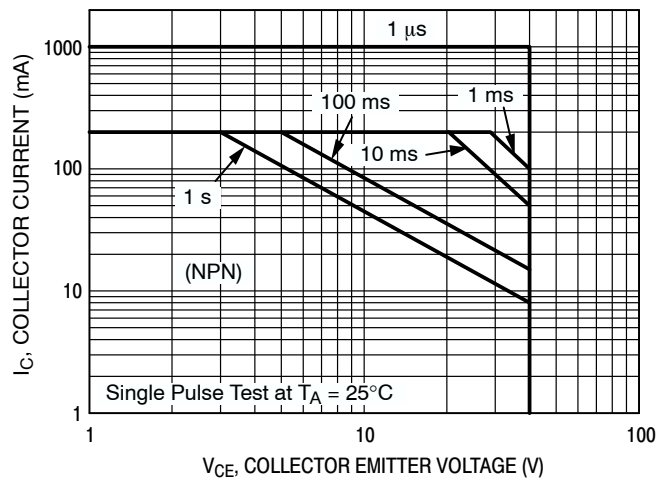


Figure 14. Safe Operating Area

# NST3946DXV6T1G, NST3946DXV6T5G

(NPN)

## TYPICAL STATIC CHARACTERISTICS

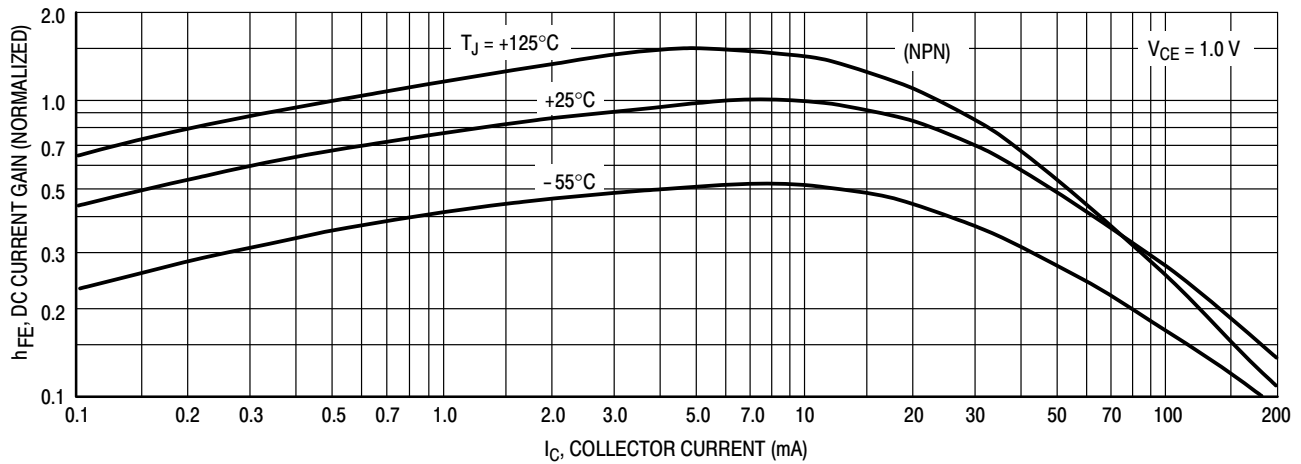


Figure 15. DC Current Gain

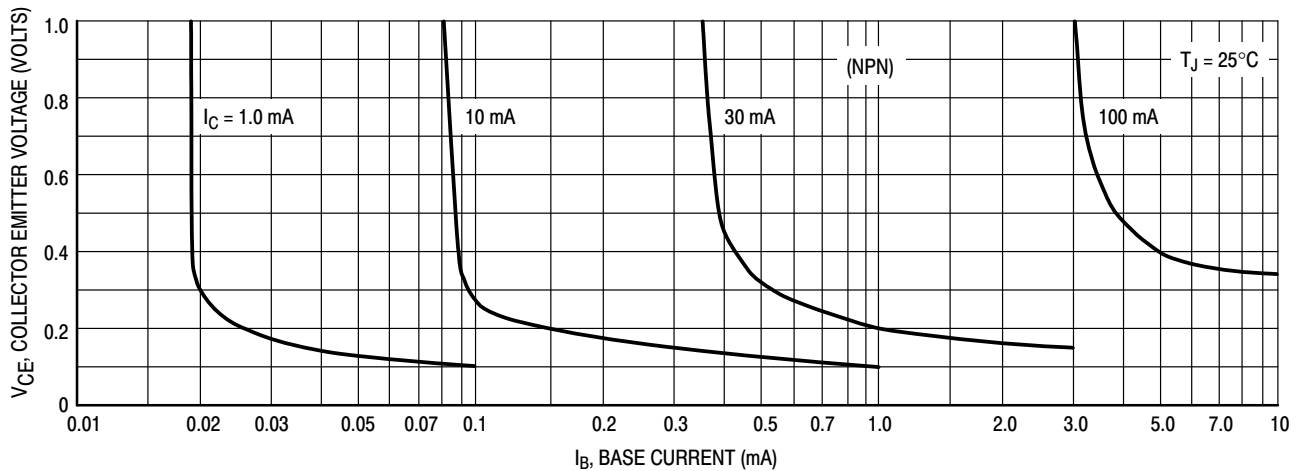


Figure 16. Collector Saturation Region

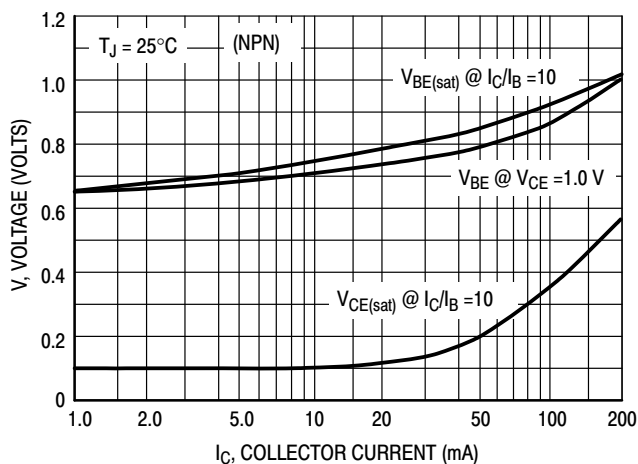


Figure 17. "ON" Voltages

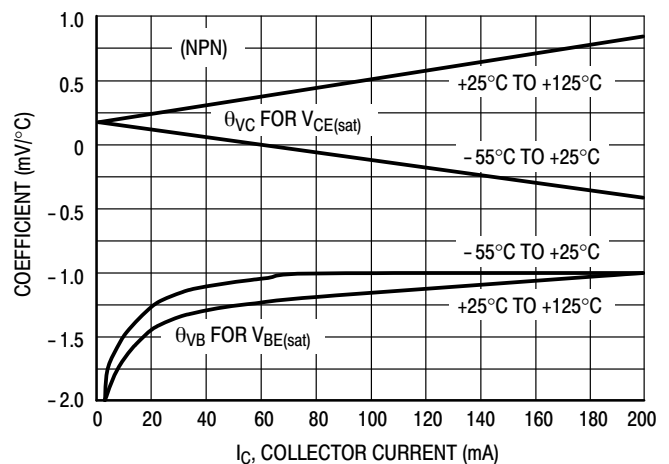


Figure 18. Temperature Coefficients

# NST3946DXV6T1G, NST3946DXV6T5G

(PNP)

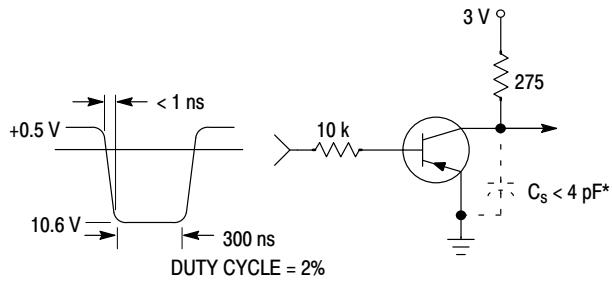


Figure 19. Delay and Rise Time Equivalent Test Circuit

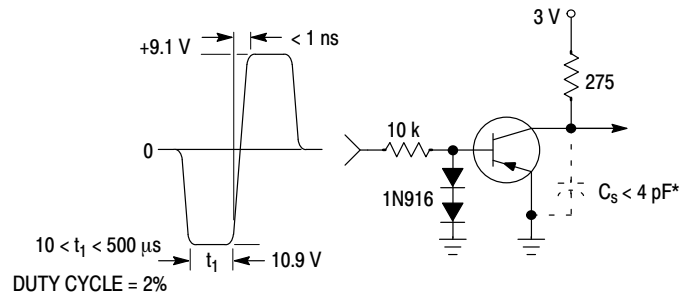


Figure 20. Storage and Fall Time Equivalent Test Circuit

## TYPICAL TRANSIENT CHARACTERISTICS

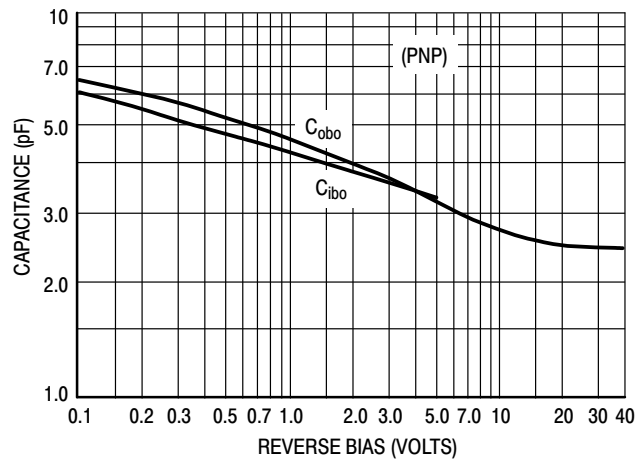


Figure 21. Capacitance

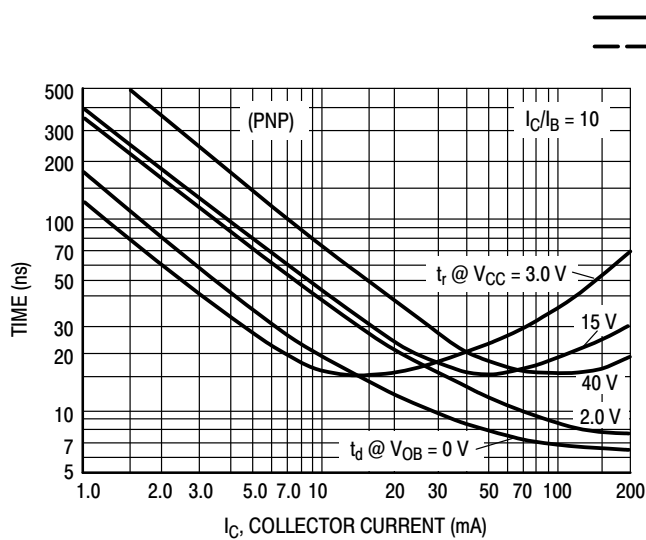


Figure 22. Turn-On Time

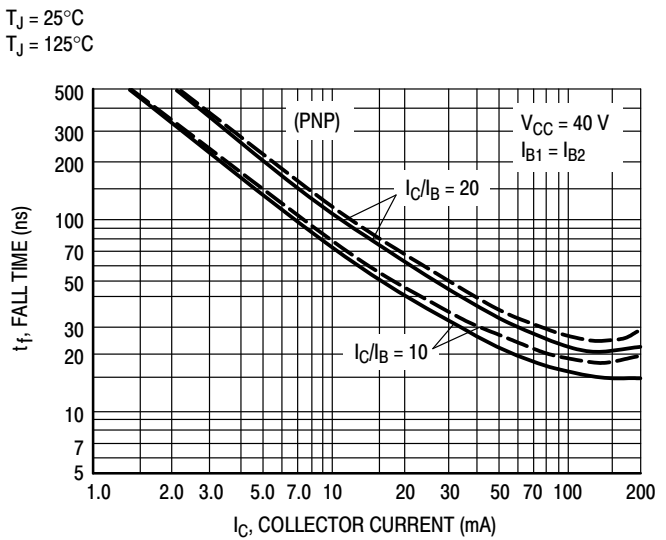


Figure 23. Fall Time



(PNP)

**TYPICAL AUDIO SMALL-SIGNAL CHARACTERISTICS**  
**NOISE FIGURE VARIATIONS**

( $V_{CE} = -5.0$  Vdc,  $T_A = 25^\circ\text{C}$ , Bandwidth = 1.0 Hz)

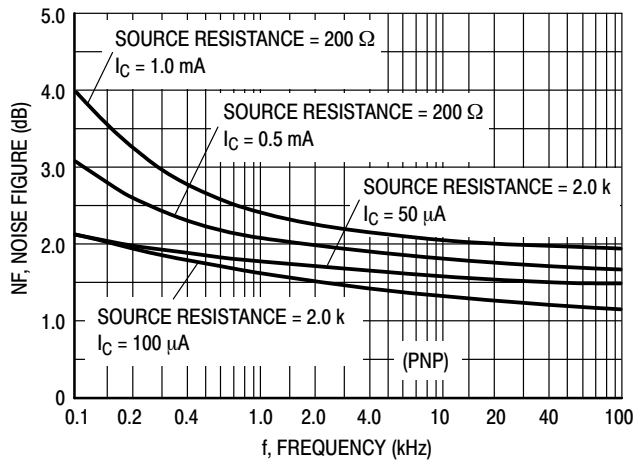


Figure 24.

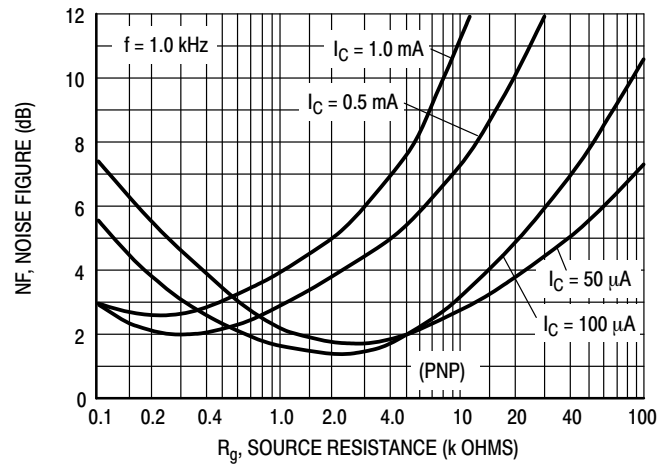


Figure 25.

**h PARAMETERS**

( $V_{CE} = -10$  Vdc,  $f = 1.0$  kHz,  $T_A = 25^\circ\text{C}$ )

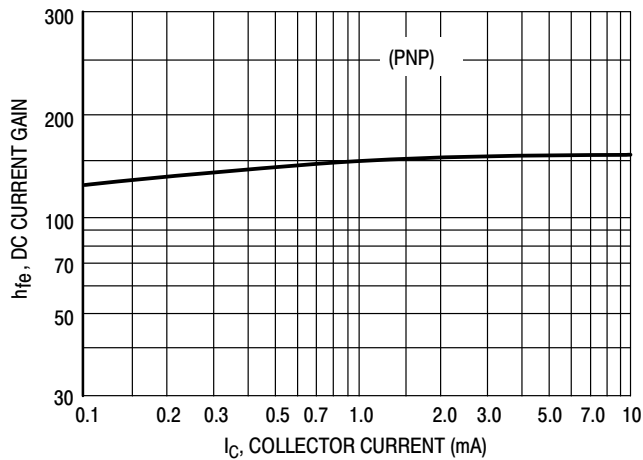


Figure 26. Current Gain

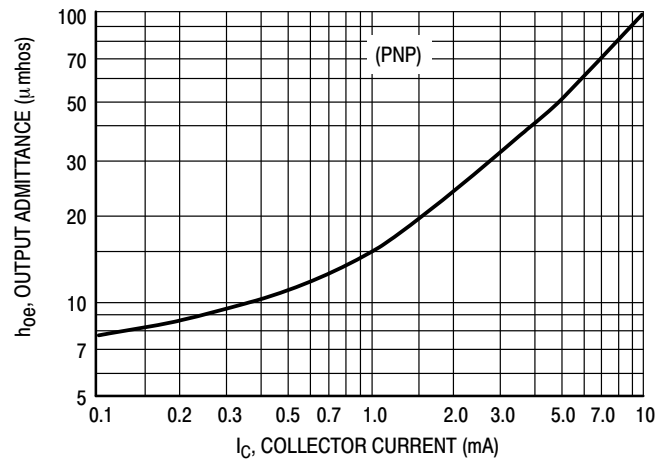


Figure 27. Output Admittance

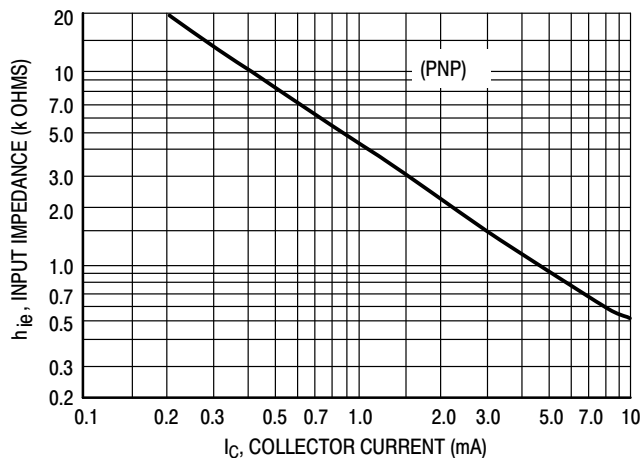


Figure 28. Input Impedance

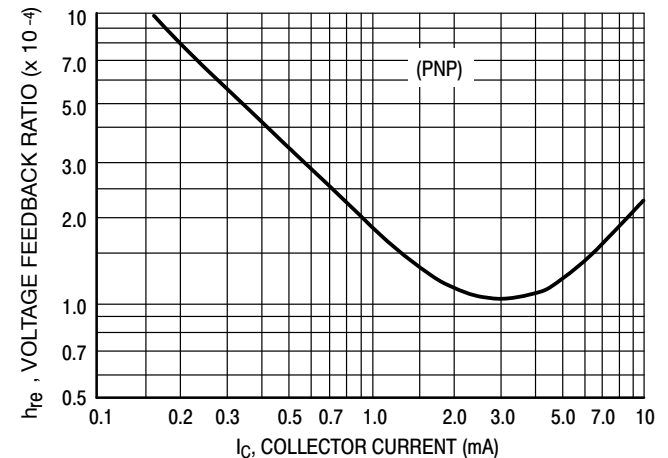


Figure 29. Voltage Feedback Ratio

(PNP)

TYPICAL STATIC CHARACTERISTICS

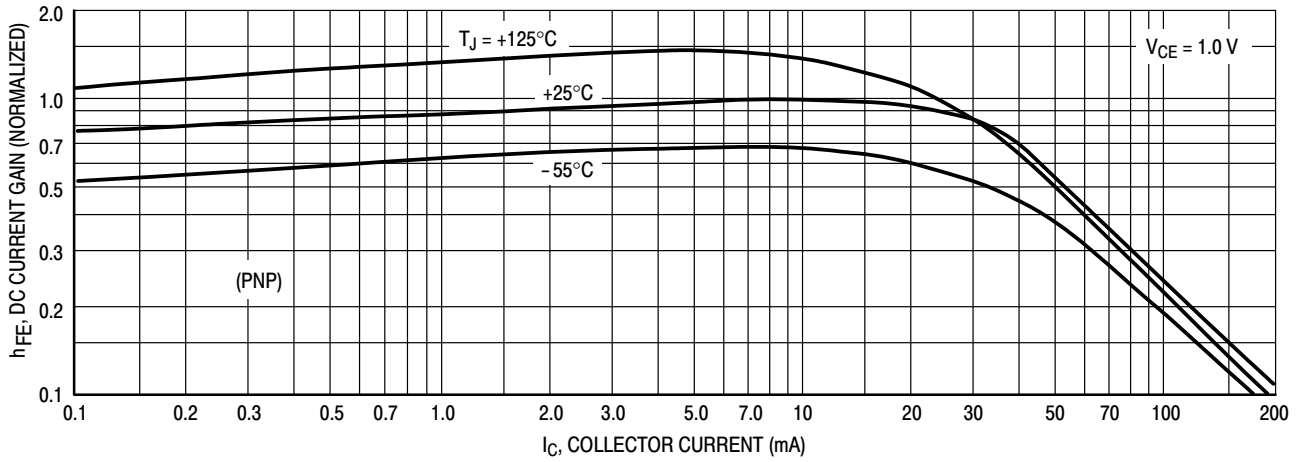


Figure 30. DC Current Gain

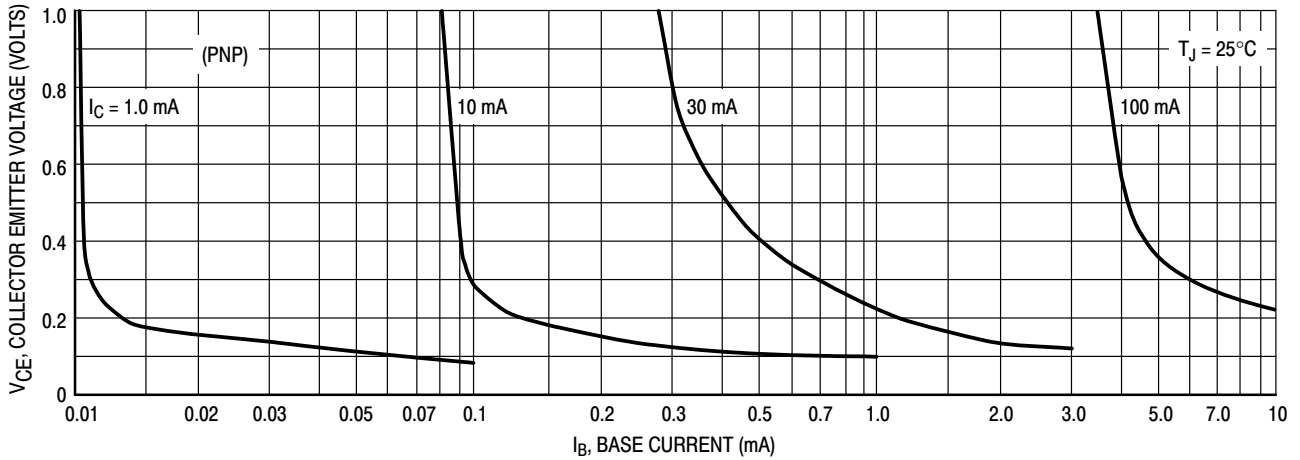


Figure 31. Collector Saturation Region

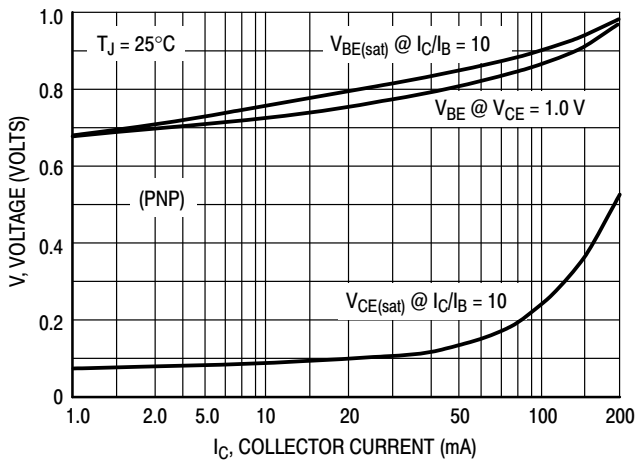


Figure 32. "ON" Voltages

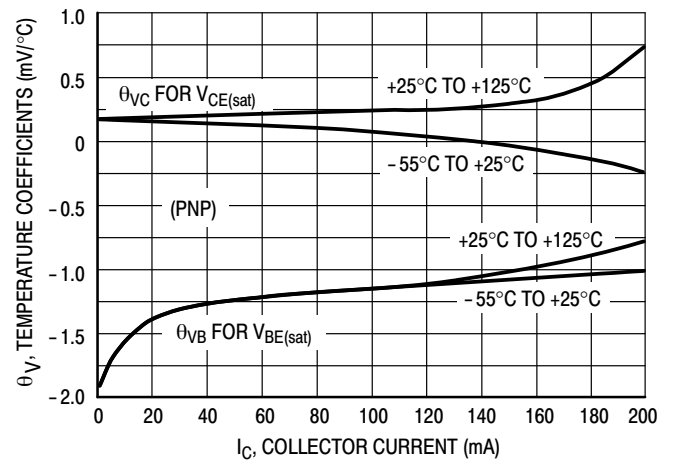
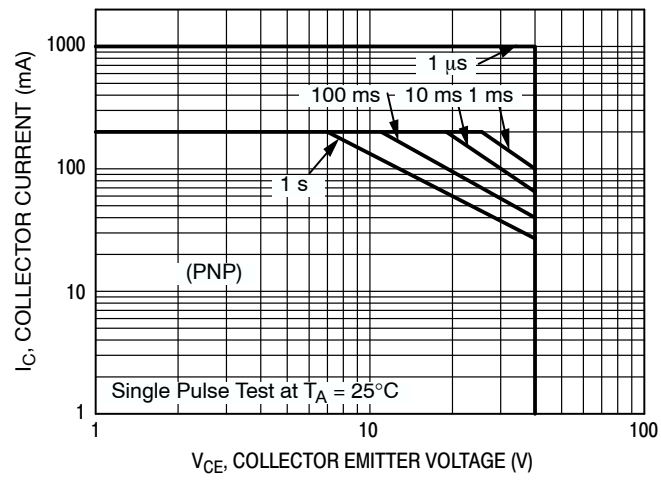


Figure 33. Temperature Coefficients

# NST3946DXV6T1G, NST3946DXV6T5G



**Figure 34. Safe Operating Area**


# NST3946DXV6T1G, NST3946DXV6T5G

## PACKAGE DIMENSIONS

### SOT-563, 6 LEAD

CASE 463A

ISSUE F

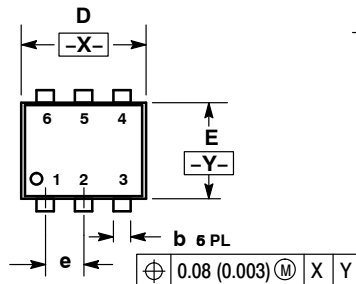


#### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETERS
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.

| DIM            | MILLIMETERS |      |      | INCHES   |       |       |
|----------------|-------------|------|------|----------|-------|-------|
|                | MIN         | NOM  | MAX  | MIN      | NOM   | MAX   |
| A              | 0.50        | 0.55 | 0.60 | 0.020    | 0.021 | 0.023 |
| b              | 0.17        | 0.22 | 0.27 | 0.007    | 0.009 | 0.011 |
| C              | 0.08        | 0.12 | 0.18 | 0.003    | 0.005 | 0.007 |
| D              | 1.50        | 1.60 | 1.70 | 0.059    | 0.062 | 0.066 |
| E              | 1.10        | 1.20 | 1.30 | 0.043    | 0.047 | 0.051 |
| e              | 0.5 BSC     |      |      | 0.02 BSC |       |       |
| L              | 0.10        | 0.20 | 0.30 | 0.004    | 0.008 | 0.012 |
| H <sub>E</sub> | 1.50        | 1.60 | 1.70 | 0.059    | 0.062 | 0.066 |

### SOLDERING FOOTPRINT\*

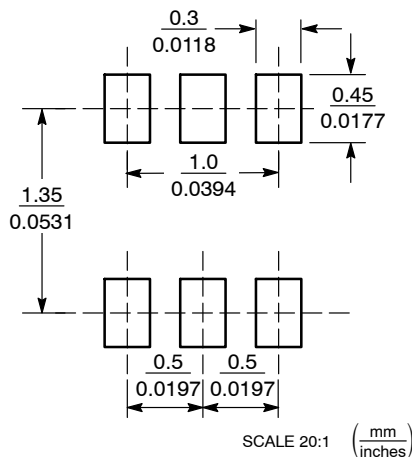

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERM/D.

ON Semiconductor and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marketing.pdf](http://www.onsemi.com/site/pdf/Patent-Marketing.pdf). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

N. American Technical Support: 800-282-9855 Toll Free  
USA/Canada

Europe, Middle East and Africa Technical Support:  
Phone: 421 33 790 2910

Japan Customer Focus Center  
Phone: 81-3-5817-1050

ON Semiconductor Website: [www.onsemi.com](http://www.onsemi.com)

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local  
Sales Representative

NST3946DXV6T1/D

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А