



## Product Description

GRF4014 is a broadband low noise gain block designed for small cell, wireless infrastructure and other high performance applications. With simple external matching, it exhibits outstanding broadband NF, linearity and return losses over wide fractional bandwidths with a single match.

Configured as a first stage LNA, linear driver or cascaded gain block, GRF4014 offers high levels of reuse both within a design and across platforms. The device is operated from a supply voltage ( $V_{DD}$ ) of 3.0 to 8.0V.  $I_{DDQ}$  can be adjusted over a wide range for optimal efficiency and linearity.

Consult with the GRF applications engineering team for custom tuning/evaluation board data and device s-parameters.

## Features

Reference: 5V/60mA/2.5 GHz


- EVB NF: 0.80 dB
- Gain: 16.5 dB
- OP1dB: 24.0 dBm
- OIP3: 39.0 dBm

Reference: 8V/110mA/2.5 GHz

- EVB NF: 0.83 dB
- Gain: 17.0 dB
- OP1dB: 28.3 dBm
- OIP3: 44.0 dBm
- Flexible Bias Voltage and Current
- Process: GaAs pHEMT

## Applications

- Linear Driver/LNA
- Small Cells and Cellular Repeaters
- Distributed Antenna Systems
- Microwave Backhaul

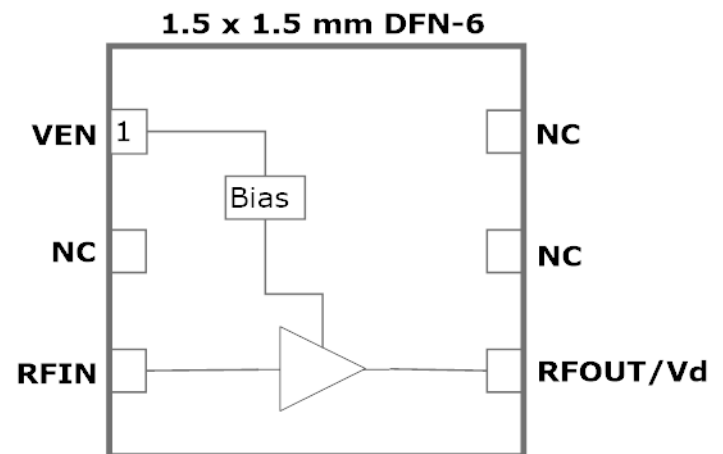

## Absolute Ratings:

Parameter	Symbol	Min.	Max.	Unit
Supply Voltage	V <sub>DD</sub>	0	9.0	V
RF Input Power CW : (Load VSWR < 2:1; V <sub>D</sub> : 5.0 volts)	P <sub>IN MAX</sub>		22	dBm
Operating Temperature (Package Heat Sink)	T <sub>AMB</sub>	-40	105	°C
Maximum Channel Temperature (MTTF > 10 <sup>6</sup> Hours)	T <sub>MAX</sub>		170	°C
Maximum Dissipated Power	P <sub>DISS MAX</sub>		1100	mW
<b>Electrostatic Discharge:</b>				
Charged Device Model:	CDM	1000		V
Human Body Model:	HBM	250		V
<b>Storage:</b>				
Storage Temperature	T <sub>STG</sub>	-65	150	°C
Moisture Sensitivity Level	MSL		1	--



**Caution!** ESD Sensitive Device



Exceeding Absolute Maximum Rating conditions may cause permanent damage to the device.

**Note:** For package dimensions and manufacturing information, see the [Guerrilla-RF.com](http://Guerrilla-RF.com) website for the following document located on the GRF4014 landing page: Manufacturing Note—MN-001 Product Tape and Reel, Solderability and Package Outline Specification.

[Link to manufacturing note](#)

## Pin Out (Top View)



## Pin Assignments:

Pin	Name	Description	Note
1	V <sub>ENABLE</sub>	Enable Voltage Input	V <sub>ENABLE</sub> and series resistor set I <sub>DDQ</sub> . V <sub>ENABLE</sub> < =0.2 volts disables device. On -die pull-down resistor will turn the part off if this node is allowed to float.
2	NC	No Connect or Ground	No internal connection to die
3	RF_In	LNA RF input	An external DC blocking cap must be used.
4	RF_Out	LNA RF output	V <sub>DD</sub> must be applied through a choke to this pin.
5	NC	No Connect or Ground	No internal connection to die
6	NC	No Connect or Ground	No internal connection to die
PKG BASE	GND	Ground	Provides DC and RF ground for LNA, as well as thermal heat sink. Recommend multiple 8 mil vias beneath the package for optimal RF and thermal performance. Refer to evaluation board top layer graphic on schematic page.



Released

# GRF4014

Broadband LNA/Linear Driver  
Tuning Range: 0.1 to 6.0 GHz

## Nominal Operating Parameters:

Parameter	Symbol	Specification			Unit	Condition
		Min.	Typ.	Max.		
Test Frequency	F <sub>TEST</sub>		2500		MHz	V <sub>DD</sub> = 5.0 V, T <sub>A</sub> = 25 °C
Gain	S <sub>21</sub>	15.5	16.5		dB	
Evaluation Board Noise Figure	NF		0.80	1.0	dB	Includes Board Losses
Output 1dB Compression Power	OP1dB	22.5	24.0		dBm	
Output 3rd Order Intercept	OIP3		39.0		dBm	8.0 dBm P <sub>OUT</sub> per tone at 2 MHz Spacing (2499 and 2501 MHz)
Switching Rise Time	T <sub>RISE</sub>		200		ns	
Switching Fall Time	T <sub>FALL</sub>		200		ns	
Supply Current	I <sub>DD</sub>		60		mA	Adjustable for optimal IP3
Leakage Current	I <sub>LEAKAGE</sub>		250		uA	V <sub>DD</sub> : 5.0V; V <sub>ENABLE</sub> : 0.0V
Thermal Data						
Thermal Resistance: (Infra-Red Scan)	Θ <sub>JC</sub>		50		°C/W	On standard Evaluation Board
Channel Temperature @ +85 C Reference (Package heat sink)	T <sub>CHANNEL</sub>		100		°C	V <sub>DD</sub> : 5.0 V; I <sub>DDQ</sub> : 60 mA; No RF; P <sub>DISS</sub> : 300 mW

Parameter	Symbol	Specification			Unit	Condition
		Min.	Typ.	Max.		
Test Frequency	F <sub>TEST</sub>		2500		MHz	V <sub>DD</sub> = 8.0 V, T <sub>A</sub> = 25 °C
Gain	S <sub>21</sub>		17.0		dB	
Evaluation Board Noise Figure	NF		0.83		dB	Includes Board Losses
Output 1dB Compression Power	OP1dB		28.3		dBm	
Output 3rd Order Intercept	OIP3		44.0		dBm	8.0 dBm P <sub>OUT</sub> per tone at 2 MHz Spacing (2499 and 2501 MHz)
Switching Rise Time	T <sub>RISE</sub>		200		ns	
Switching Fall Time	T <sub>FALL</sub>		200		ns	
Supply Current	I <sub>DD</sub>		110		mA	
Leakage Current	I <sub>LEAKAGE</sub>		325		uA	V <sub>DD</sub> : 5.0V; V <sub>ENABLE</sub> : 0.0V
Thermal Data						
Thermal Resistance: (Infra-Red Scan)	Θ <sub>JC</sub>		50		°C/W	On standard Evaluation Board
Channel Temperature @ +85 C Reference (Package heat sink)	T <sub>CHANNEL</sub>		129		°C	V <sub>DD</sub> : 8.0 V; I <sub>DDQ</sub> : 110 mA; No RF; P <sub>DISS</sub> : 880 mW





Released

# GRF4014

Broadband LNA/Linear Driver  
Tuning Range: 0.1 to 6.0 GHz

## GRF4014 Evaluation Board Data:

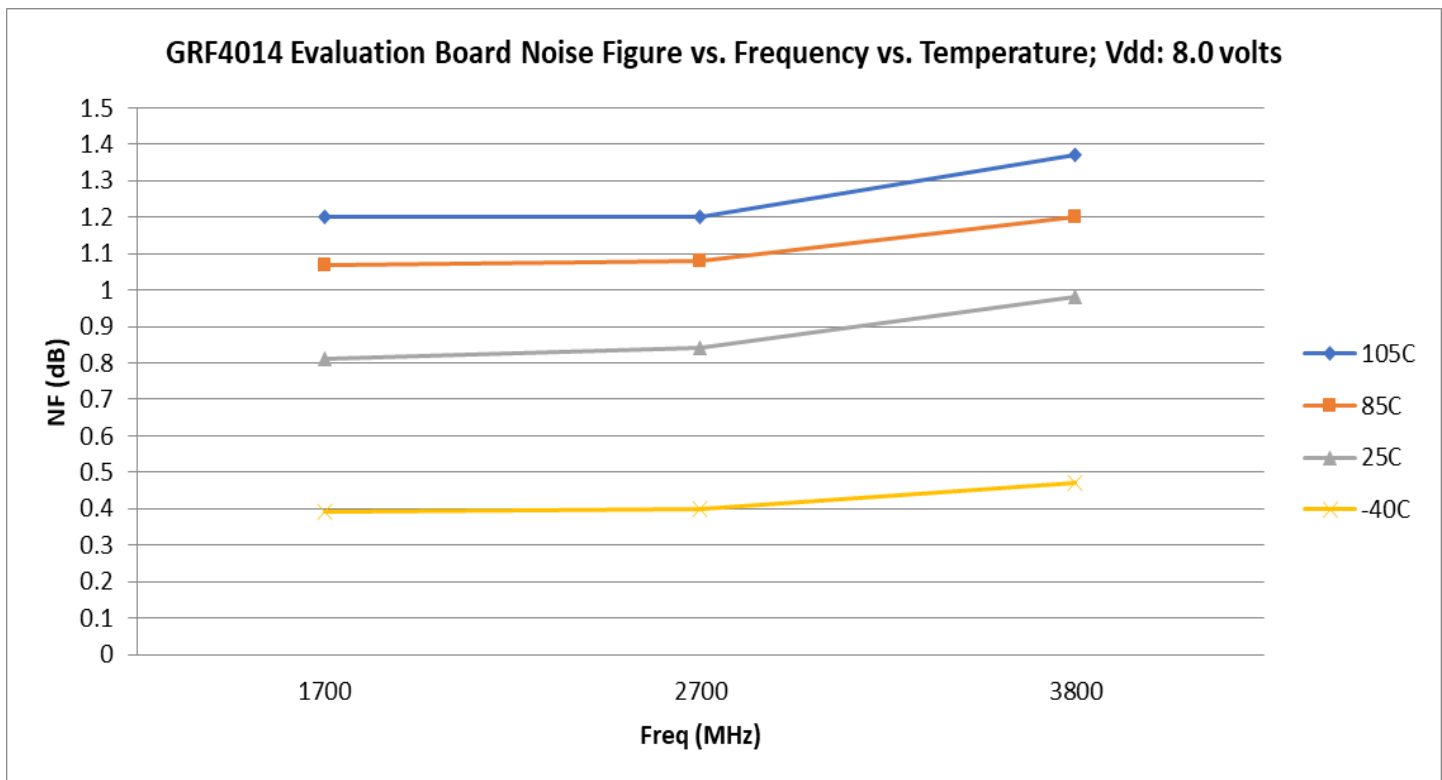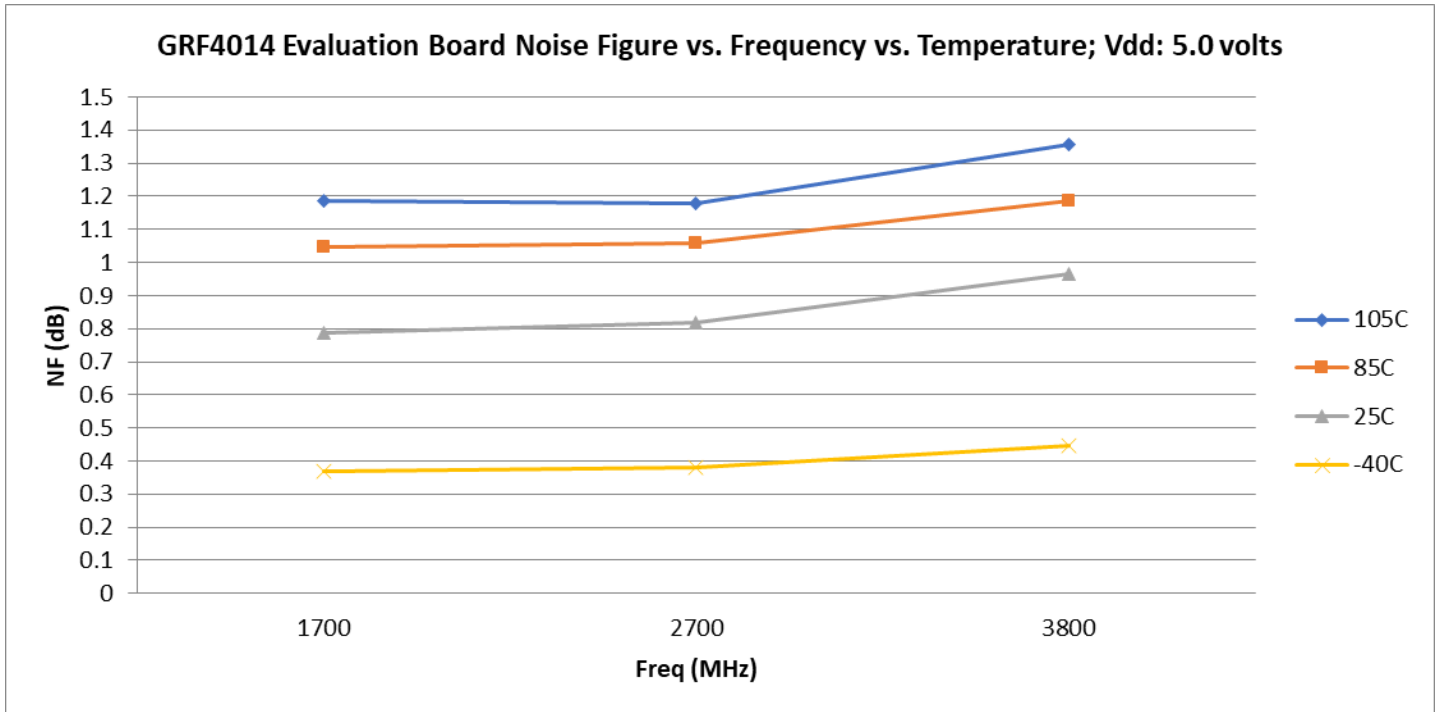





Released

# GRF4014

Broadband LNA/Linear Driver  
Tuning Range: 0.1 to 6.0 GHz

## GRF4014 Evaluation Board Data:

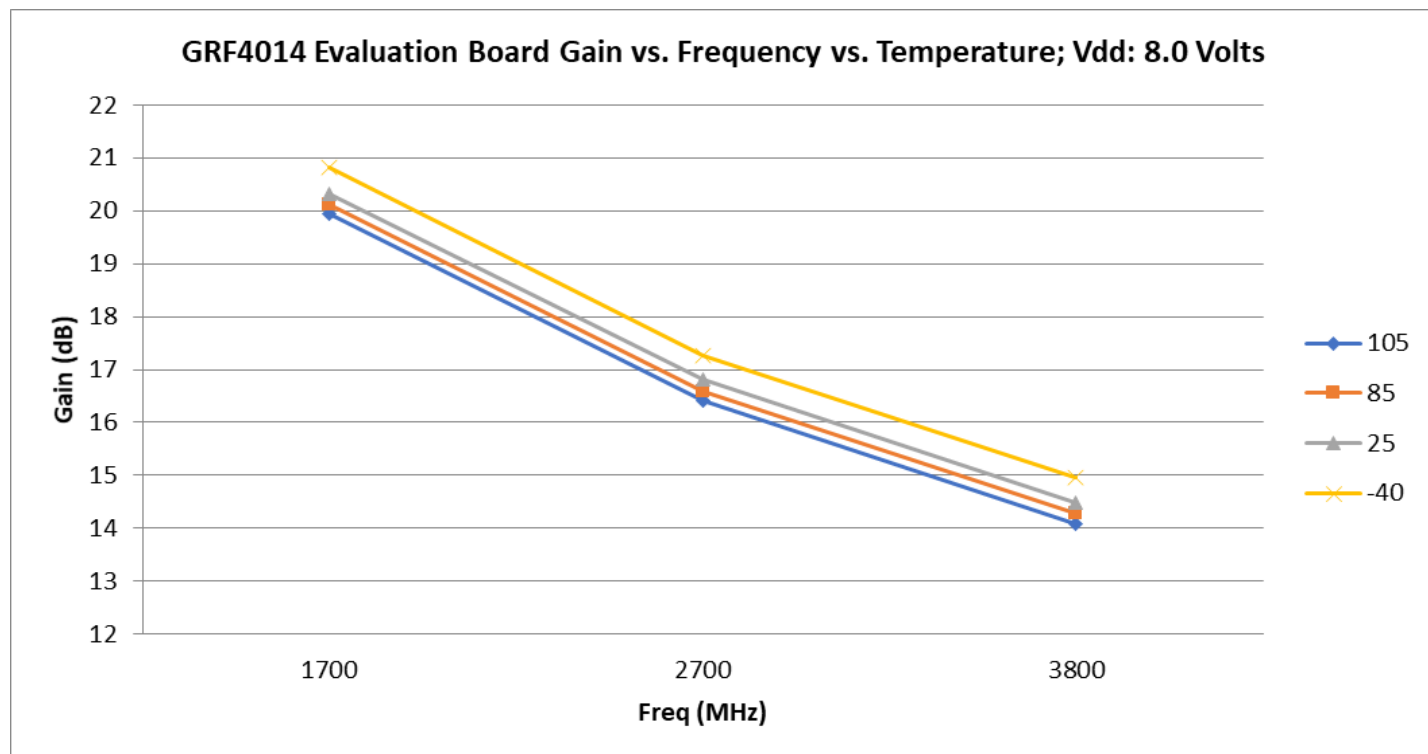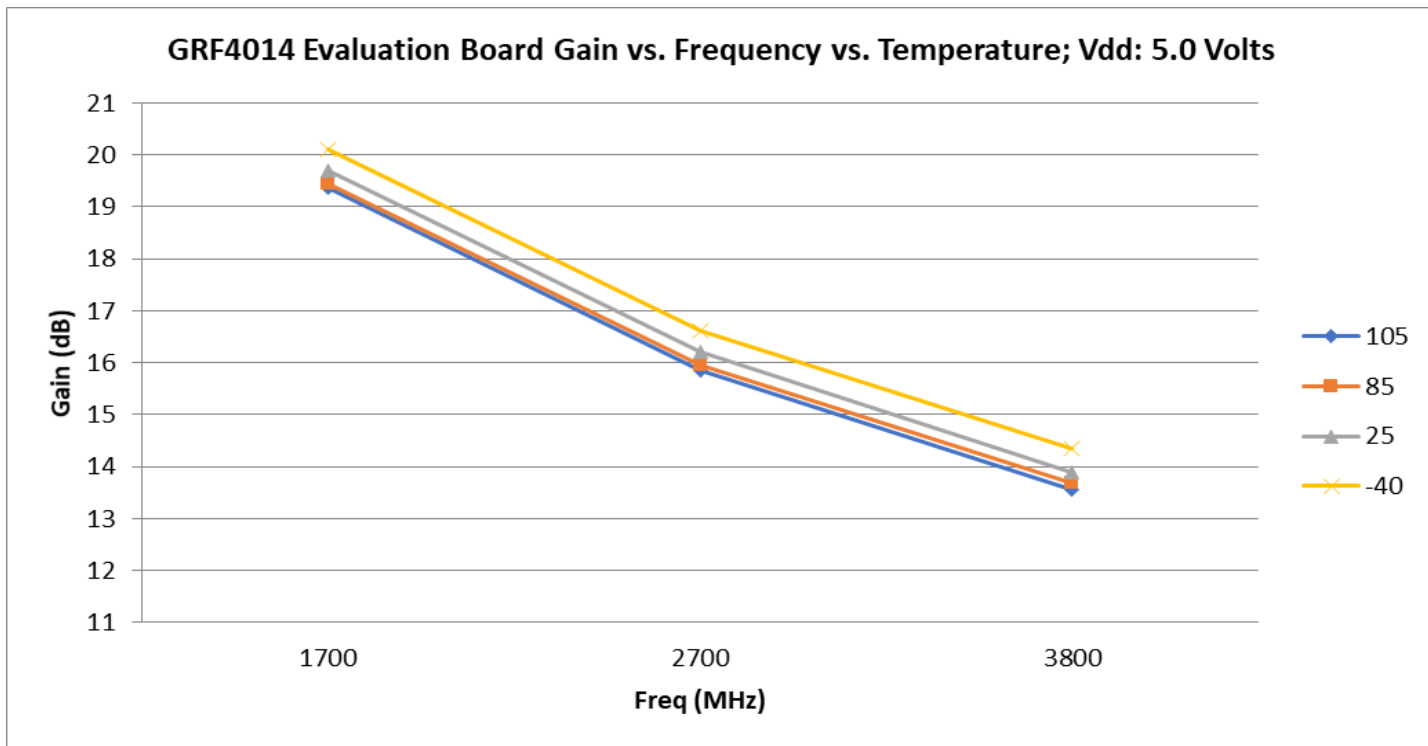





Released

# GRF4014

Broadband LNA/Linear Driver  
Tuning Range: 0.1 to 6.0 GHz

## GRF4014 Evaluation Board Data:

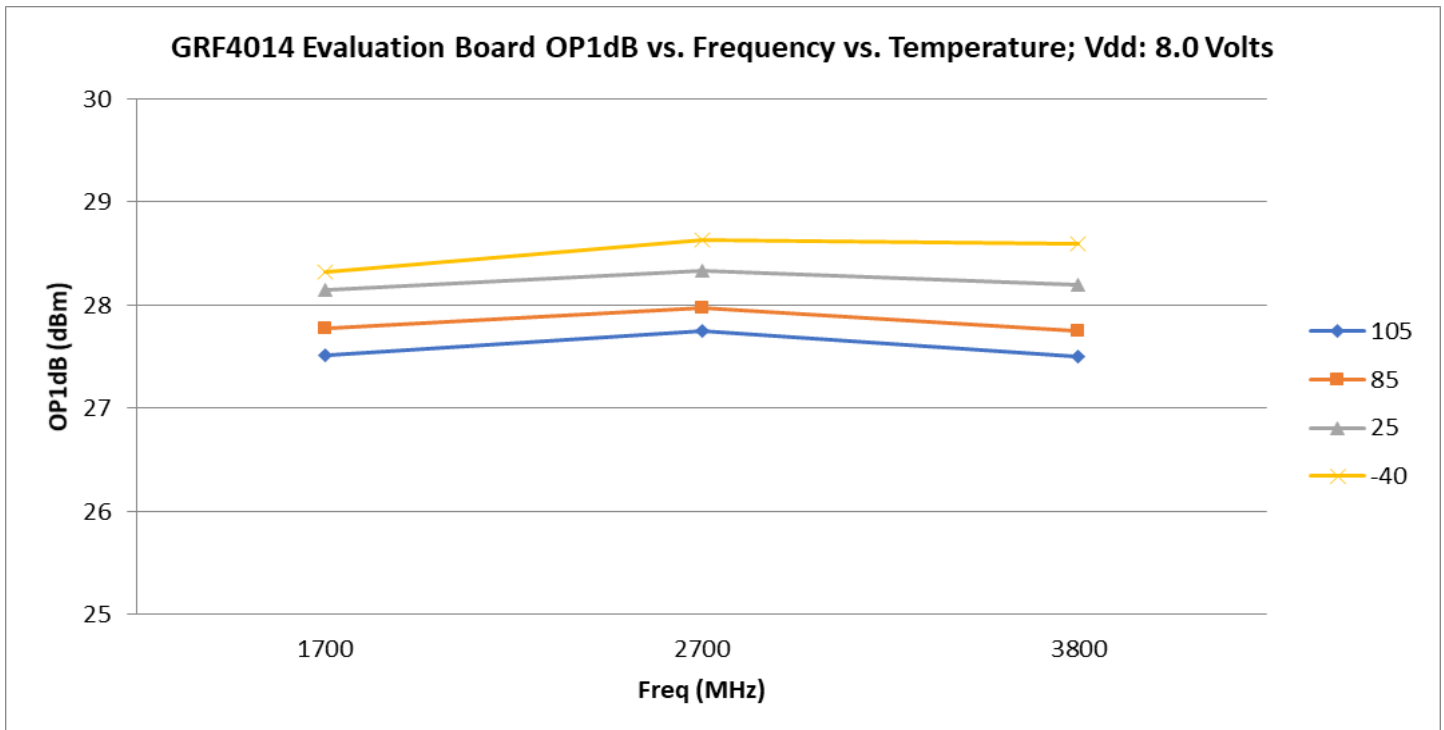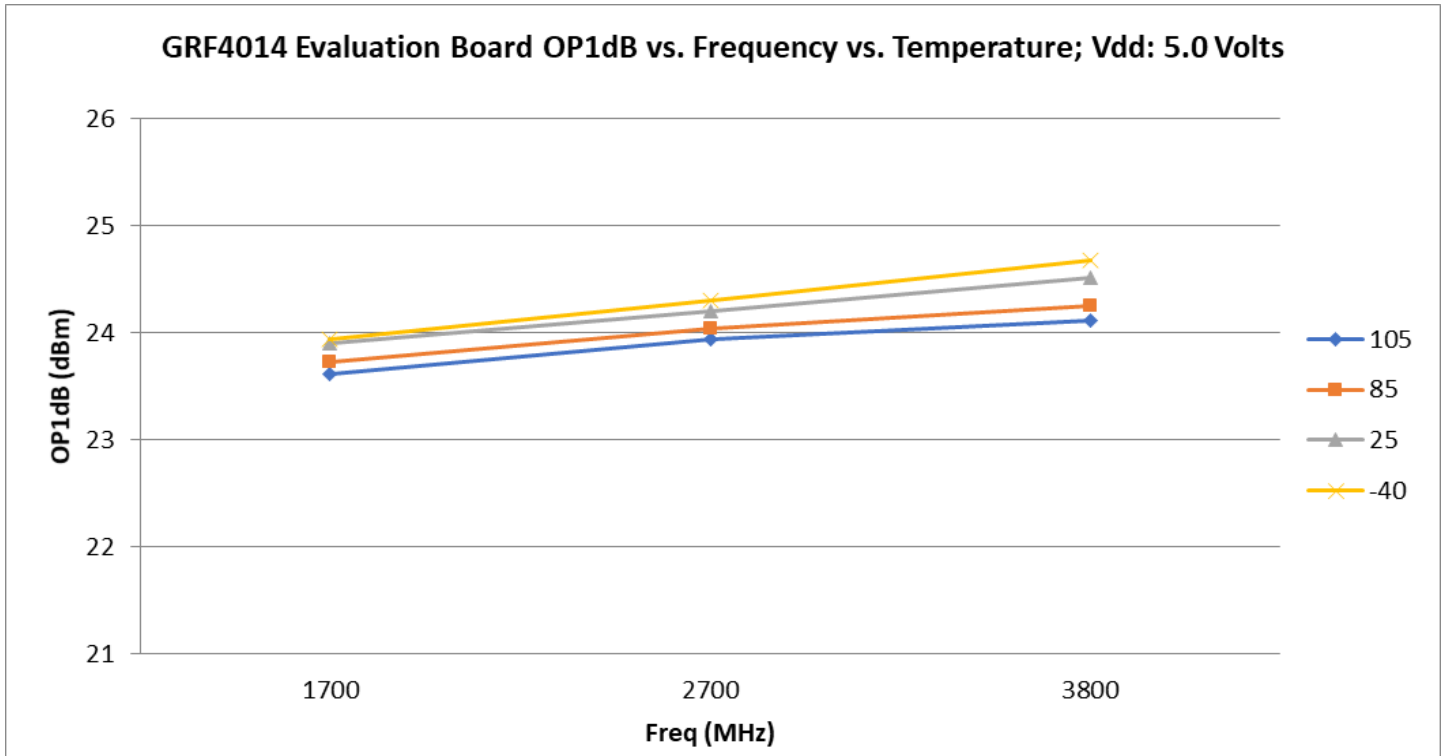





Released

# GRF4014



Broadband LNA/Linear Driver  
Tuning Range: 0.1 to 6.0 GHz

## GRF4014 Evaluation Board Data:

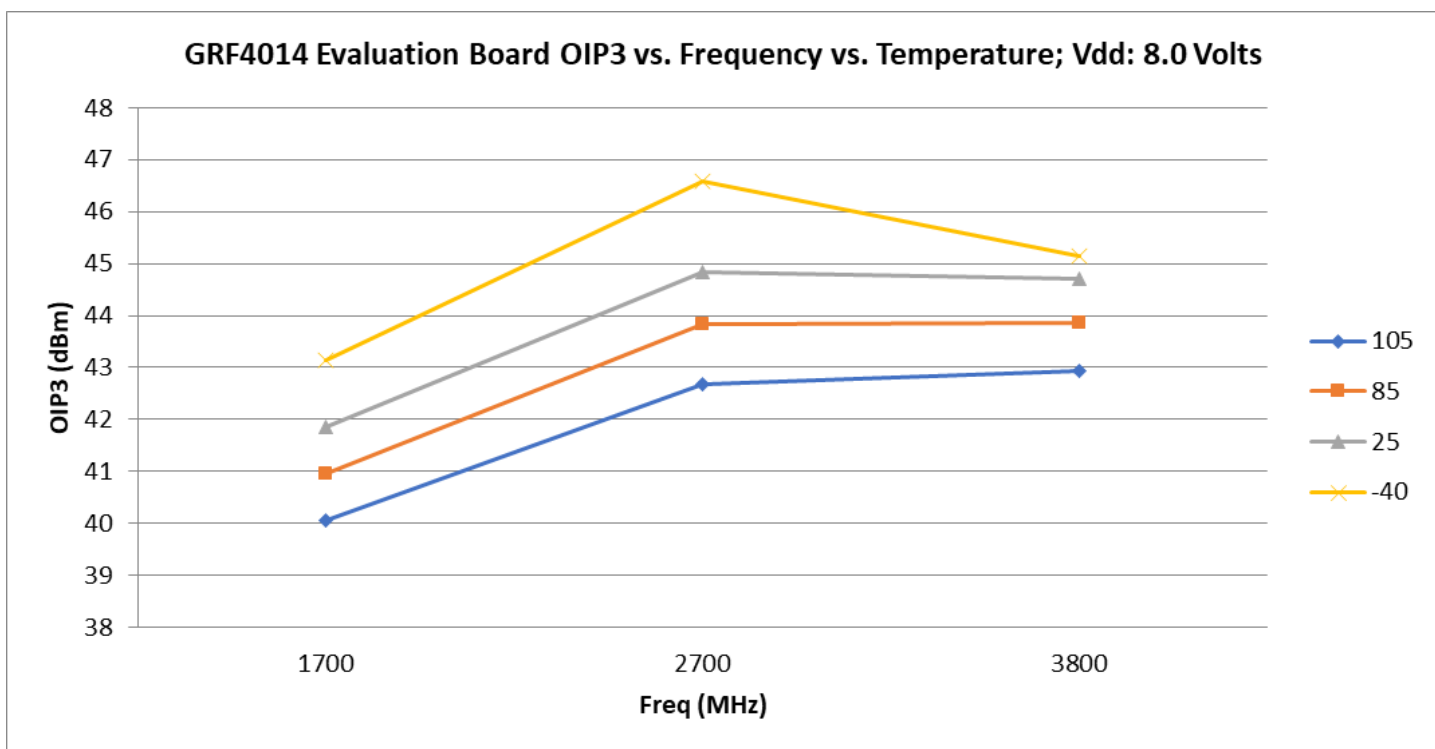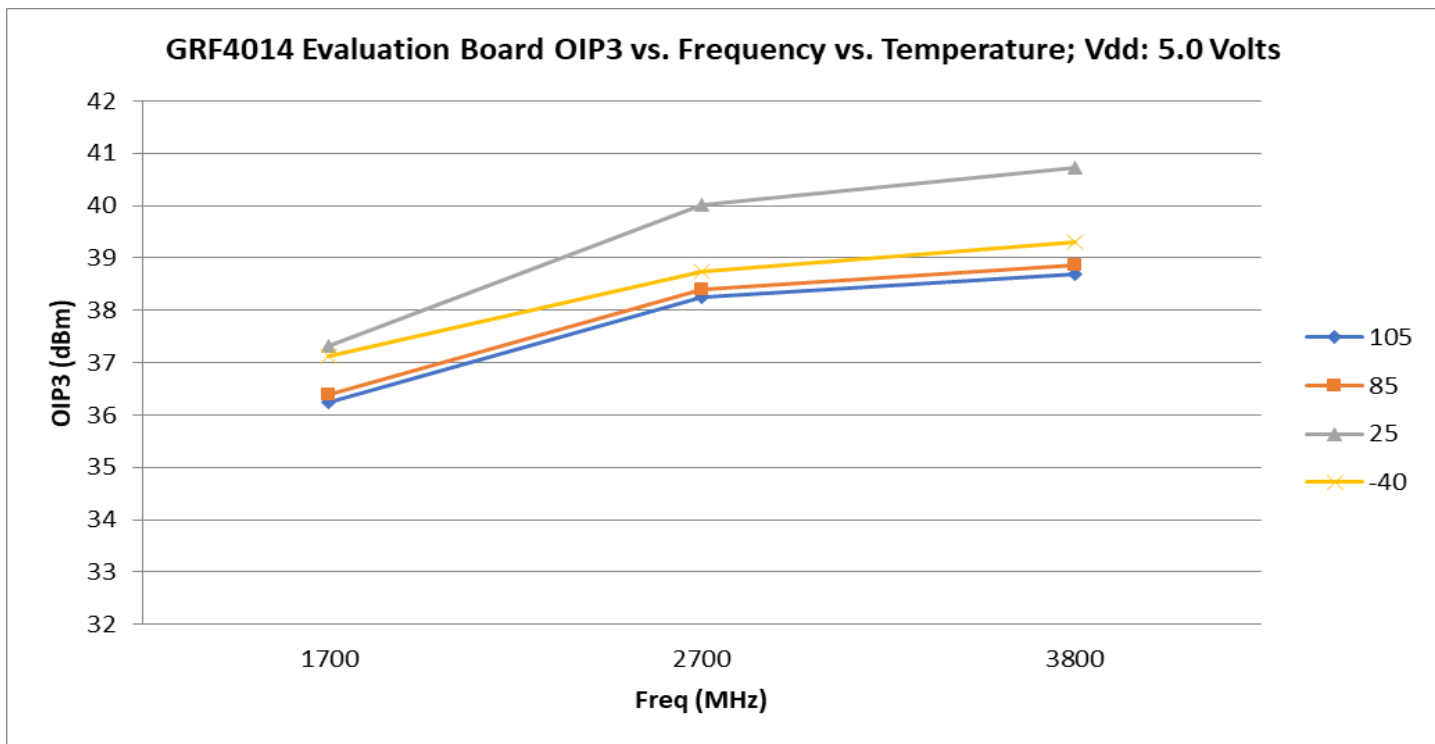



## GRF4014 Evaluation Board Data:

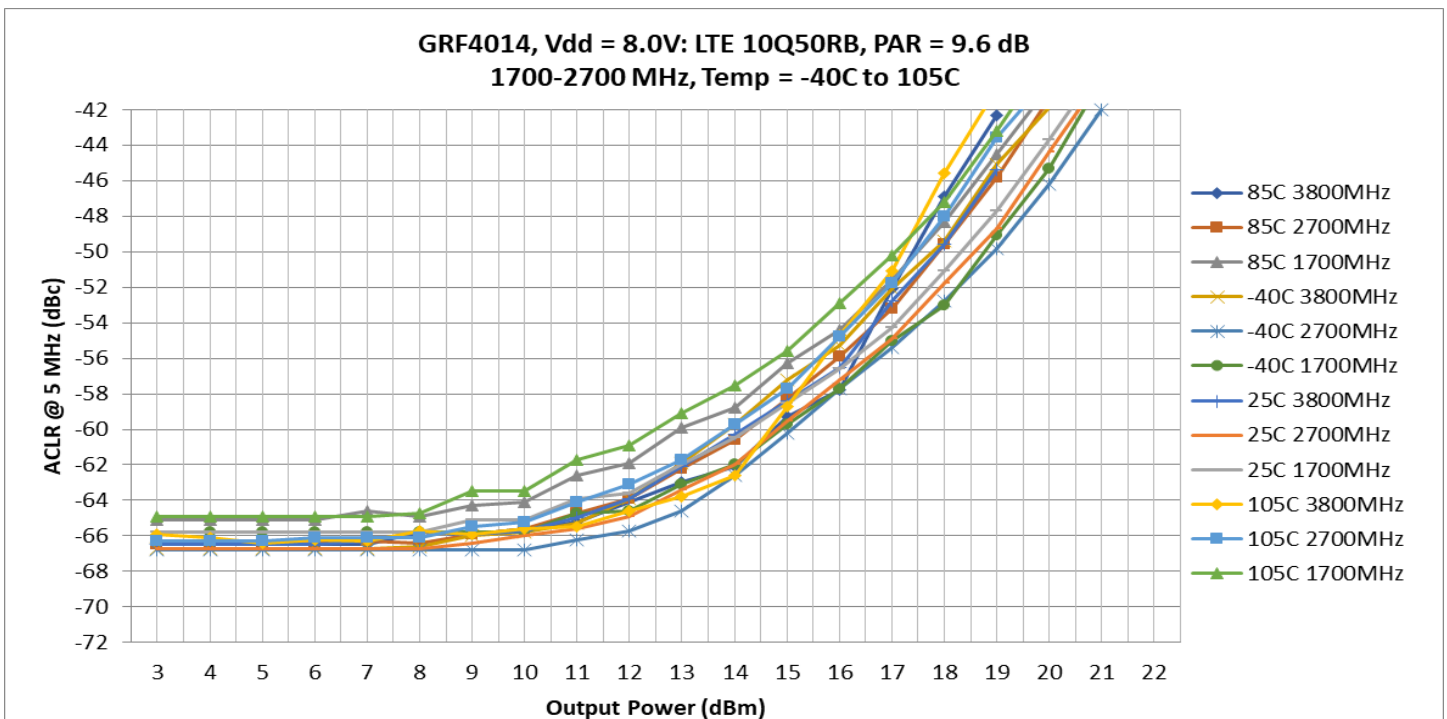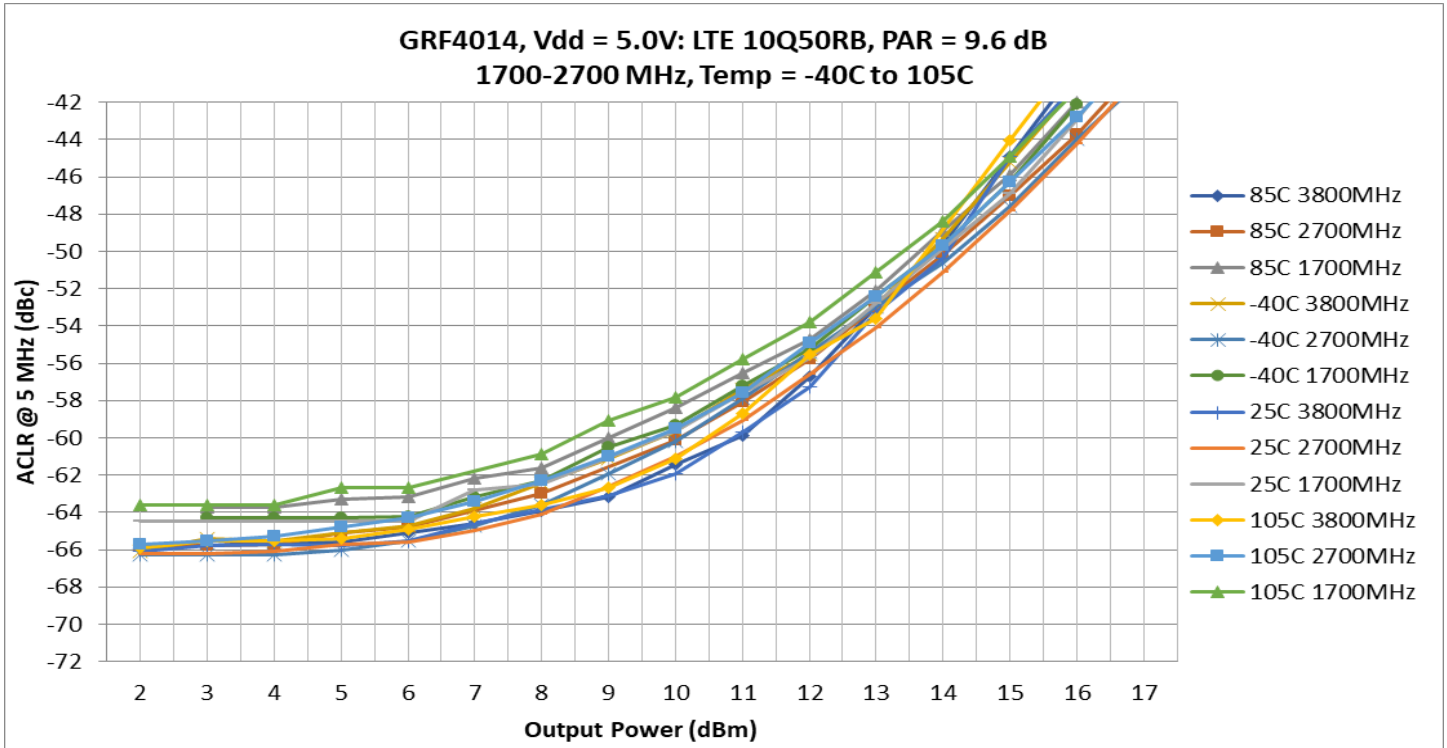




Released


# GRF4014

Broadband LNA/Linear Driver  
Tuning Range: 0.1 to 6.0 GHz


## GRF4014 Evaluation Board S-Pars and Stability Mu Factor: (1.7 – 3.8 GHz Match)

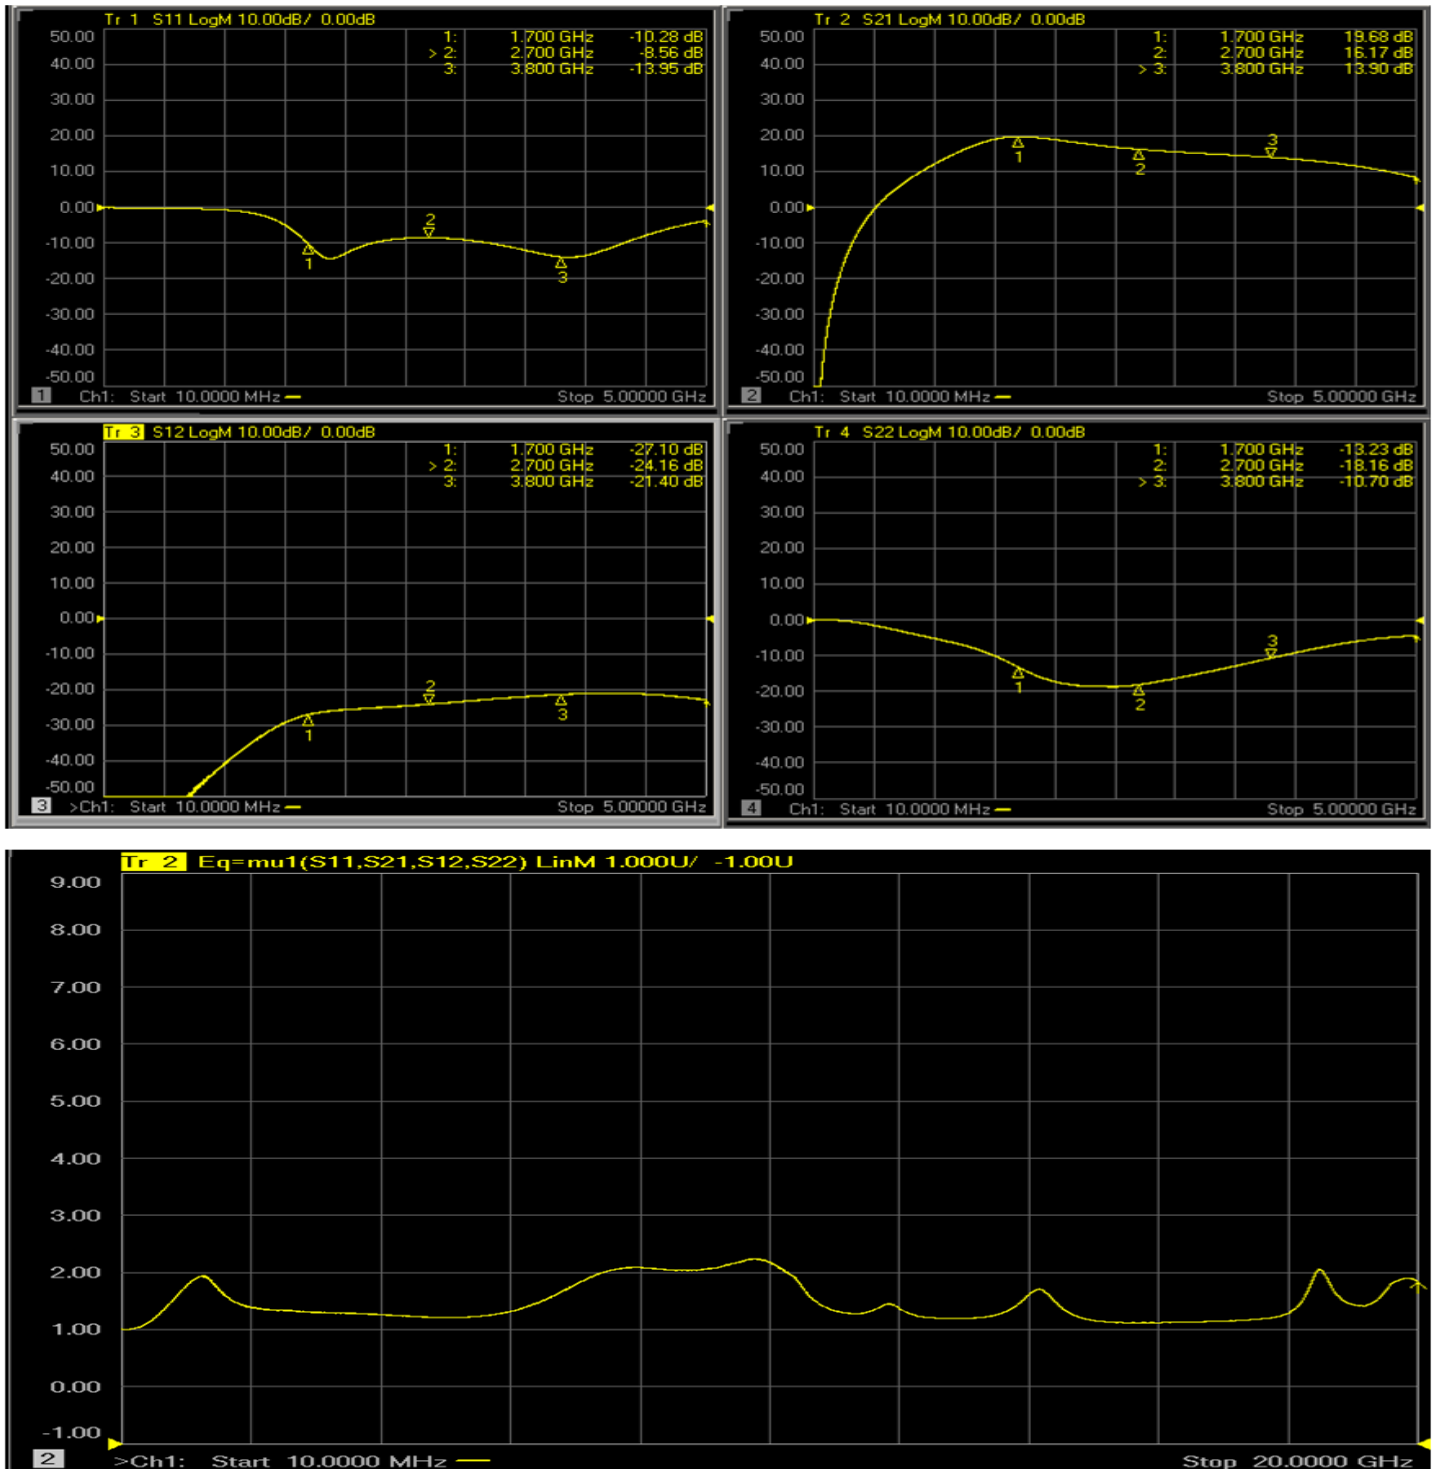

Note: Mu factor  $\geq 1.0$  implies unconditional stability.

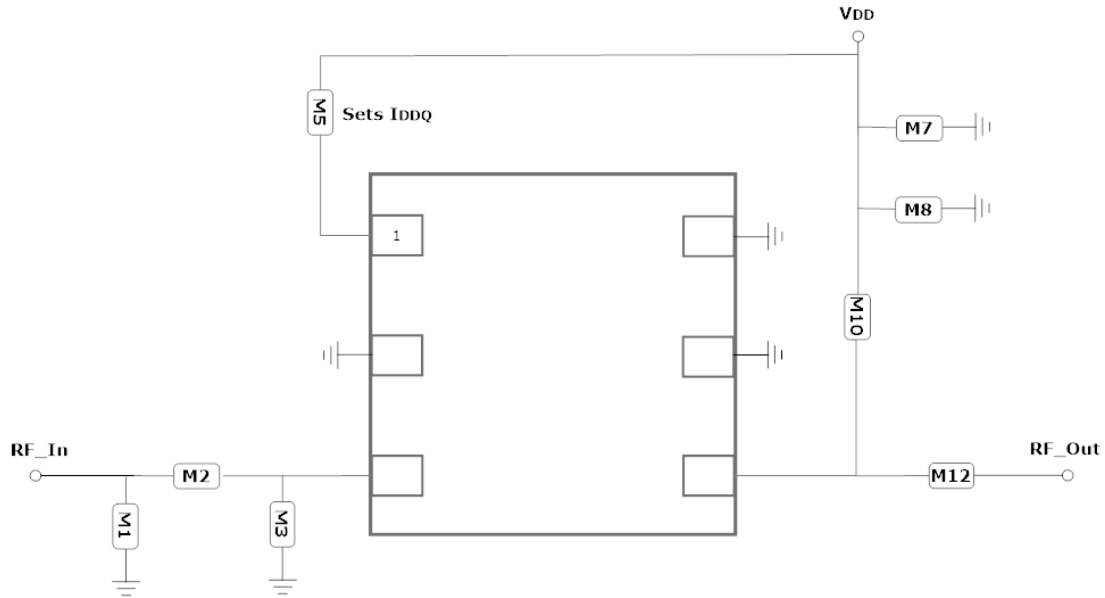

GRF4014 Application Schematic

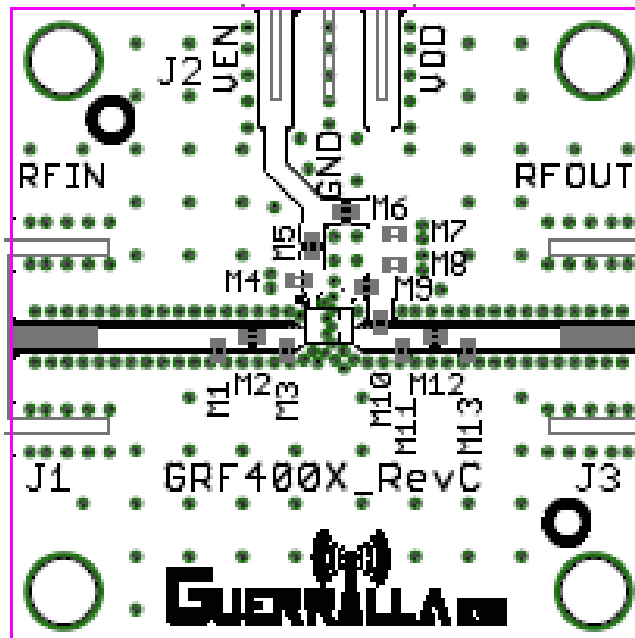

GRF4014 Evaluation Board Assembly Diagram



Released

# GRF4014

Broadband LNA/Linear Driver  
Tuning Range: 0.1 to 6.0 GHz

## GRF4014 Standard Evaluation Board BOM: (1.7 to 3.8 GHz Tune)

Component	Type	Manufacturer	Family	Value	Package Size	Substitution
M1	Inductor	Coilcraft	HP	3.6 nH	0402	ok
M2	Capacitor	Murata	GJM	2.0 pF	0402	ok
M3	Capacitor	Murata	GJM	1.0 pF	0402	ok
M5 (See curves)	Resistor: 5%	Various	—	—	0402	ok
M7	Capacitor	Murata	GRM	0.1 uF	0402	ok
M8	Capacitor	Murata	GRM	100 pF	0402	ok
M10	Inductor	Murata	LQP	6.8 nH	0402	ok
M12	Capacitor	Murata	GJM	8.2 pF	0402	ok
Evaluation Board	GRF400X_RevC					

Note: Standard evaluation board bias: Vdd: 5.0V; Venable: 5.0V; M5: 2k ohms





Released

# GRF4014

Broadband LNA/Linear Driver  
Tuning Range: 0.1 to 6.0 GHz

## GRF4014 Bias Resistor Selection Curves:

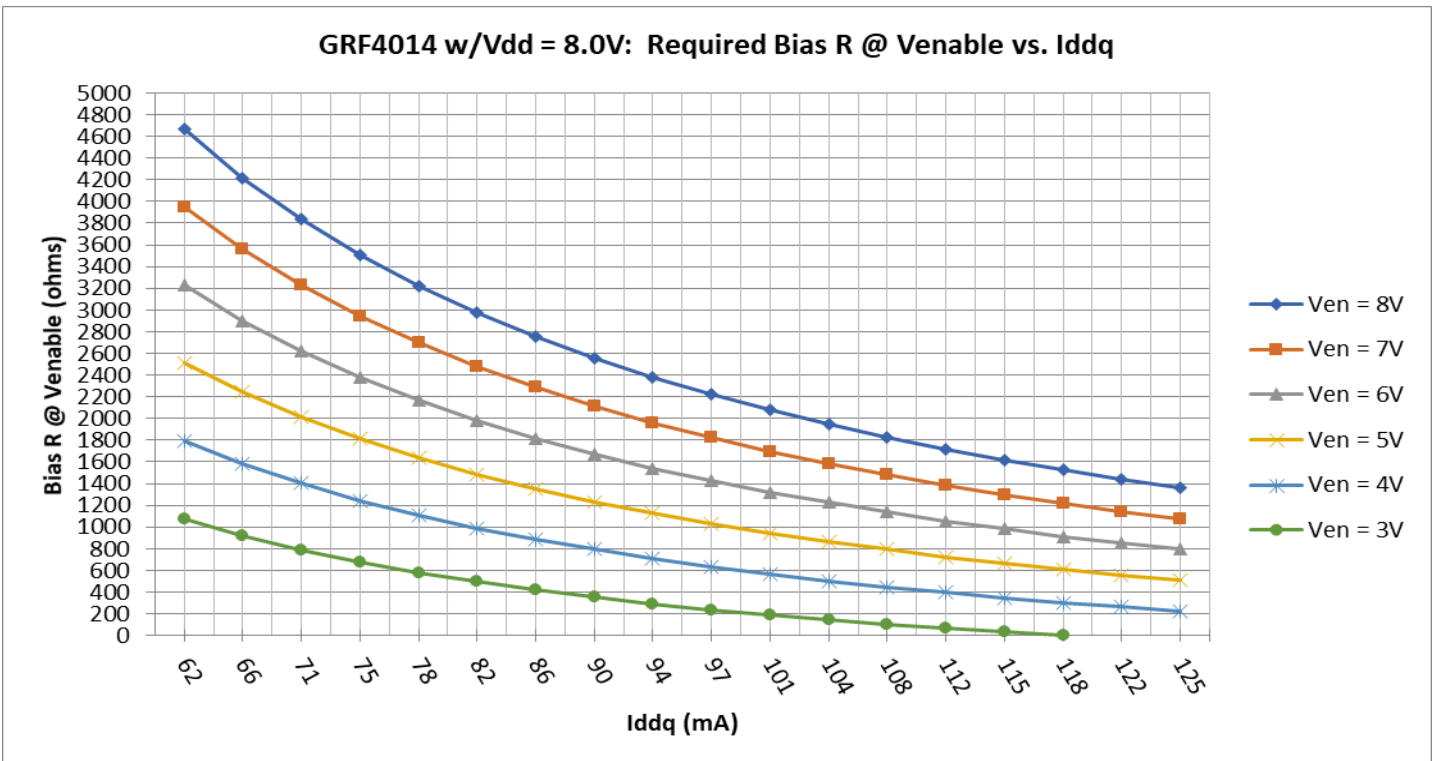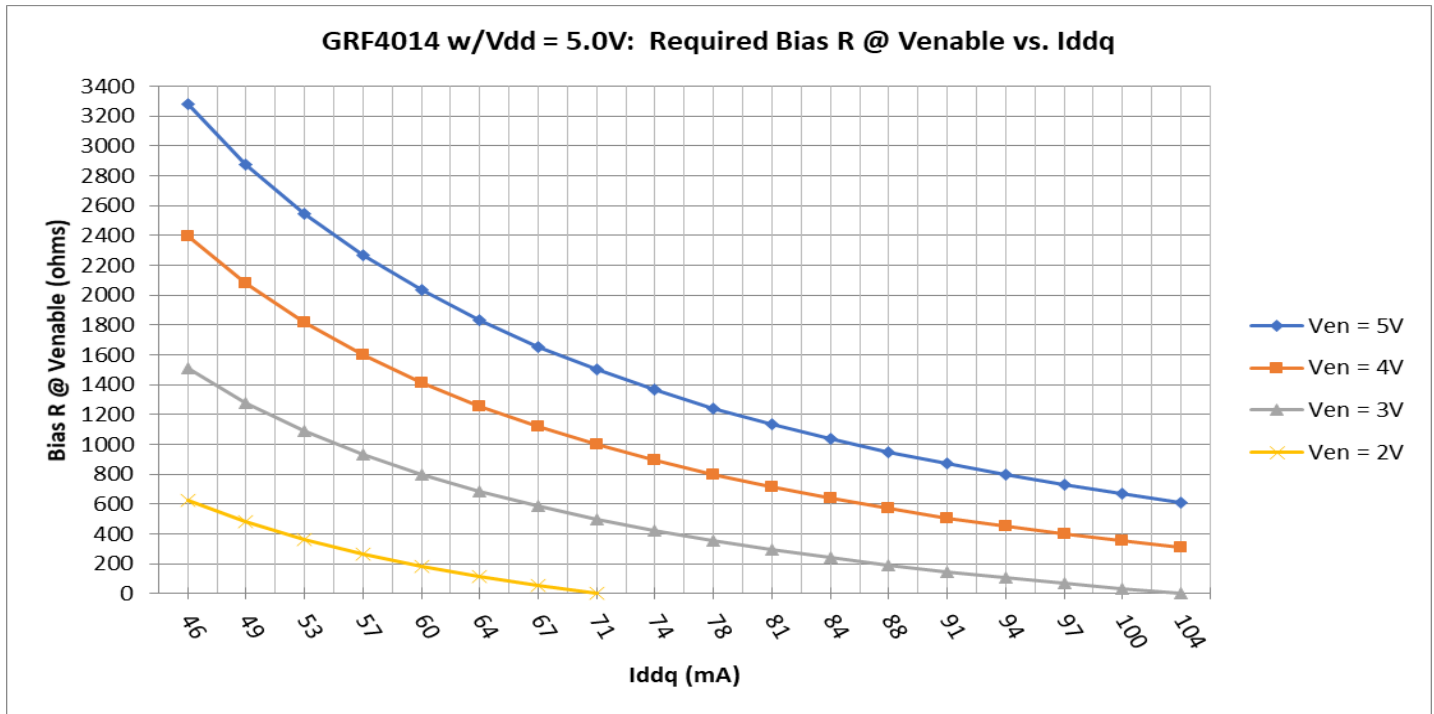



Released

# GRF4014

**Broadband LNA/Linear Driver**  
**Tuning Range: 0.1 to 6.0 GHz**

Data Sheet Release Status:	Notes
Advance	S-parameter and NF data based on EM simulations for the fully packaged device using foundry supplied transistor s-parameters. Linearity estimates based on device size, bias condition and experience with related devices.
Preliminary	All data based on evaluation board measurements in the Guerrilla RF Applications Lab.
Released	All data based on device qualification data. Typically, this data is nearly identical to the data found in the preliminary version. Max and min values for key RF parameters are included.

Information in this datasheet is specific to the Guerrilla RF, Inc. ("Guerrilla RF") product identified.

This datasheet, including the information contained in it, is provided by Guerrilla RF as a service to its customers and may be used for informational purposes only by the customer. Guerrilla RF assumes no responsibility for errors or omissions on this datasheet or the information contained herein. Information provided is believed to be accurate and reliable, however, no responsibility is assumed by Guerrilla RF for its use, nor for any infringement of patents, or other rights of third parties, resulting from its use. Guerrilla RF assumes no liability for any datasheet, datasheet information, materials, products, product information, or other information provided hereunder, including the sale, distribution, reproduction or use of Guerrilla RF products, information or materials.

No license, whether express, implied, by estoppel, by implication or otherwise is granted by this datasheet for any intellectual property of Guerrilla RF, or any third party, including without limitation, patents, patent rights, copyrights, trademarks and trade secrets. All rights are reserved by Guerrilla RF.

All information herein, products, product information, datasheets, and datasheet information are subject to change and availability without notice. Guerrilla RF reserves the right to change component circuitry, recommended application circuitry and specifications at any time without prior notice. Guerrilla RF may further change its datasheet, product information, documentation, products, services, specifications or product descriptions at any time, without notice. Guerrilla RF makes no commitment to update any materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

GUERRILLA RF INFORMATION, PRODUCTS, PRODUCT INFORMATION, DATASHEETS AND DATASHEET INFORMATION ARE PROVIDED "AS IS" AND WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. GUERRILLA RF DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. GUERRILLA RF SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Customers are solely responsible for their use of Guerrilla RF products in the Customer's products and applications or in ways which deviate from Guerrilla RF's published specifications, either intentionally or as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Guerrilla RF assumes no liability or responsibility for applications assistance, customer product design, or damage to any equipment resulting from the use of Guerrilla RF products outside of stated published specifications or parameters.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А