

M18 Cylindrical Photoelectric

E3F2

Threaded Cylindrical M18 Size Sensors with Built-in Amplifier

- Rugged stainless and nickel plated brass versions
- Chemical resistant, ABS resin case type
- Polarized models
- Compact and space-saving
- Long detection distance (7 m)
- DC switching types with connectors for easy maintenance
- Wide operating voltage range (10 to 30 VDC, or 24 to 240 VAC)
- Short-circuit and reverse connection protection (DC switching type)
- UL, CSA listed and CE marked



Ordering Information

■ SENSORS

Supply	Type	Connection	Output	Range	Housing	Part number
AC	Through-beam	Pre-leaded	Light-On	3 m	Plastic	E3F2-3Z1
			Dark-On		Plastic	E3F2-3Z2
	Retroreflective, Non-polarized		Light-On	2 m	Plastic	E3F2-R2Z1
			Dark-On		Plastic	E3F2-R2Z2
	Diffuse		Light-On	100 mm	Plastic	E3F2-DS10Z1N
			Dark-On		Plastic	E3F2-DS10Z2N
DC	Through-beam	Connector	NPN	7 m	Plastic	E3F2-7C4-P1
					NPB	E3F2-7C4-M1-C
					SS	E3F2-7C4-M1-S
			PNP		Plastic	E3F2-7B4-P1
					NPB	E3F2-7B4-M1-C
					SS	E3F2-7B4-M1-S
	Diffuse		NPN	10 cm	NPB	E3F2-DS10C4-M1-C
					SS	E3F2-DS10C4-M1-S
					Plastic	E3F2-DS10C4-P1
		30 cm		Plastic	E3F2-DS30C4-P1	

Note: NPB = Nickel plated brass; SS = Stainless steel

(This table continues on the next page.)

Ordering Information Table – continued from previous page

Supply	Type	Connection	Output	Range	Housing	Part number	
DC	Diffuse	Connector	PNP	10 cm	NPB	E3F2-DS10B4-M1-C	
					SS	E3F2-DS10B4-M1-S	
					Plastic	E3F2-DS10B4-P1	
				30 cm	Plastic	E3F2-DS30B4-P1	
	Retroreflective, Non-polarized		NPN	2 m	Plastic	E3F2-R2C4-P1	
			PNP		Plastic	E3F2-R2B4-P1	
	Retroreflective, Polarized		NPN		NPB	E3F2-R2RC4-M1-C	
					SS	E3F2-R2RC4-M1-S	
			PNP		NPB	E3F2-R2RB4-M1-C	
					SS	E3F2-R2RB4-M1-S	
	Through-beam	Pre-leaded	NPN		7 m	Plastic	E3F2-7C4
						NPB	E3F2-7C4-C
				SS		E3F2-7C4-S	
	PNP		7 m	Plastic	E3F2-7B4		
				NPB	E3F2-7B4-C		
				SS	E3F2-7B4-S		
	Diffuse		NPN	10 cm	NPB	E3F2-DS10C4-C	
					Plastic	E3F2-DS10C4-N	
					SS	E3F2-DS10C4-S	
				30 cm	Plastic	E3F2-DS30C4	
			PNP	10 cm	NPB	E3F2-DS10B4-C	
					Plastic	E3F2-DS10B4-N	
					SS	E3F2-DS10B4-S	
				30 cm	Plastic	E3F2-DS30B4	
	Retroreflective, Non-polarized		NPN	2 m	Plastic	E3F2-R2C4	
			PNP		Plastic	E3F2-R2B4	
	Retroreflective, Polarized		NPN	2 m	NPB	E3F2-R2RC4-C	
					SS	E3F2-R2RC4-S	
			PNP		NPB	E3F2-R2RB4-C	
					SS	E3F2-R2RB4-S	

Note: NPB = Nickel plated brass; SS = Stainless steel

■ ACCESSORIES (ORDER SEPARATELY)

Description	Part number
Sensor mounting bracket	Y92E-B18
Lens protector kit (glass plate, two gaskets and metal retainer)	E39-F31
Small corner cube reflector (38 H x 20 W x 11 D mm)	E39-R3
Adhesive backed reflector tape (10 H x 35 W x 0.7 D mm)	E39-RSA
Adhesive backed reflector tape (35 H x 40 W x 0.7 D mm)	E39-RSB
Mounting bracket for E39-R1 reflector	E39-L7
Right angle adapter for through-beam and retroreflective E3F2 sensors	E39-RU1

■ CONNECTOR CORDSETS

Connector type	Cable size	Length	Straight connector	Right angle connector
4-wire DC Micro Change® connector	22 AWG	2 m (6.56 ft)	Y96E-44SD2	Y96E-44RD2
		5 m (16.40 ft)	Y96E-44SD5	Y96E-44RD5
		10 m (32.8 ft)	Y96E-44SD10	Y96E-44RD10
Robotic cable with M12 connector		2 m (6.56 ft)	XS2F-D421-D80-R	XS2F-D422-D80-R
		5 m (16.40 ft)	XS2F-D421-G80-R	XS2F-D422-G80-R

REPLACEMENT PARTS

Description	Part number
Reflector for E3F2-R2□4 retroreflective sensors	E39-R1
Two plastic M18 mounting nuts	E3F-PHWS

Specifications

DC SWITCHING MODELS

Part number		E3F2-7C4-□, E3F2-7B4-□	E3F2-R2C4-□, E3F2-R2B4-□	E3F2-R2RC4-□, E3F2-R2RB4-□	E3F2-DS10C4-□, E3F2-DS10B4-□	E3F2-DS30C4-□, E3F2-DS30B4-□	
Method of detection		Through-beam	Retroreflective		Diffuse		
			Non-polarized	Polarized			
Sensing range		7 m (22.96 ft)	2 m (6.56 ft)	2 m (6.56 ft)	10 cm (3.94 in)	30 cm (11.81 in)	
Standard target		11 x 11 mm	56 x 56 mm		5 x 5 cm 90% Kodak White Card	10 x 10 cm 90% Kodak White Card	
Supply voltage		10-30 VDC 10% maximum permissible ripple, peak-to-peak					
Output		NPN or PNP open collector, 100 mA, residual voltage 2 V max. at 100 mA					
Current consumption		45 mA max.	25 mA max.				
Response time		2.5 ms max.					
Stabilization on Powerup		50 ms					
Ambient temperature	Operating	−25°C to 55°C (−13°F to 131°F) with no icing					
	Storage	−30°C to 70°C (−22°F to 158°F)					
Ambient light immunity		Incandescent: 3,000 lx; Sunlight: 10,000 lx					
Relative humidity	Operating	35% to 85% RH, no condensation					
	Storage	35% to 95% RH					
Insulation resistance		20 MΩ at 500 VDC					
Dielectric strength		1,000 VAC, 50/60 Hz for 1 min. between current carrying parts and case					
Vibration		10 to 55 Hz 1.5 mm double amplitude 1 hr each in X, Y, Z axes					
Shock		500 m/s ² (approx. 50 G)					
Enclosure		IP67, NEMA 6 for metal versions; IP66 NEMA, 4 for plastic versions					
Light source		Infrared LED		Red LED	Infrared LED		
Indicators		Power and light received LEDs					
Sensitivity adjustment		Fixed					Adjustable
Operation mode		Light-ON or Dark-ON selectable with control wire					
Weight	Metal	Pre-leaded 100 g; connector: 60 g					
	Plastic	Pre-leaded 85 g; connector: 40 g					
Circuit protection		Output short-circuit and reverse polarity					
Materials	Lens	Plastic					
	Housing	Plastic (ABS), nickel plated brass, stainless steel	Plastic	Nickel plated brass, stainless steel	Plastic (ABS), nickel plated brass, stainless steel		
	Cable sheath	PVC					


■ AC MODELS

Part number		E3F2-3Z1, E3F2-3Z2	E3F2-R2Z1, E3F2-R2Z2	E3F2-DS10Z1N, E3F2-DS10Z2N
Method of detection		Through-beam	Retroreflective	Diffuse
Sensing range		3 m (9.84 ft)	2 m (6.56 ft)	10 cm (3.94 in)
Standard target		11 mm	56 mm	10 x 10 cm 90% Kodak white card
Supply voltage		24–240 VAC $\pm 10\%$, 50/60 Hz		
Output		SCR 200 mA max.; residual voltage 5 V max. at 200 mA		
Power consumption		10 mA max.	5 mA max.	
Response time		30 ms max.		
Stabilization on Powerup		100 ms		
Ambient temperature	Operating	–25°C to 55°C (–13°F to 131°F) with no icing		
	Storage	–30°C to 70°C (–22°F to 158°F)		
Ambient light immunity		Incandescent: 3,000 lx; sunlight: 10,000 lx		
Relative humidity	Operating	35% to 85% RH, no condensation		
	Storage	35% to 95% RH		
Insulation resistance		20 M Ω at 500 VDC between current carrying parts and case		
Dielectric strength		1,500 VAC, 50/60 Hz for 1 min. between current carrying parts and case		
Vibration		10 to 55 Hz 1.5 mm double amplitude 2 hrs each in X, Y, Z axes		
Shock		500 m/s ² (approx. 50 G)		
Enclosure		IP66, NEMA 1, 2, 4 (indoor)		
Light source		Infrared LED		
Indicators		Power and light received LEDs		
Sensitivity adjustment		Fixed		
Operation mode		Light-ON (Z1 models) or Dark-ON (Z2 models)		
Weight	Pre-leaded models	110 g		
	Connector models	55 g		
Circuit protection		—		
Materials	Lens	Acrylate resin		
	Housing	Plastic ABS		
	Cable sheath	PVC		


Engineering Data

■ OPERATING RANGE (TYPICAL)


E3F2-3□□-□□ (Through-beam)

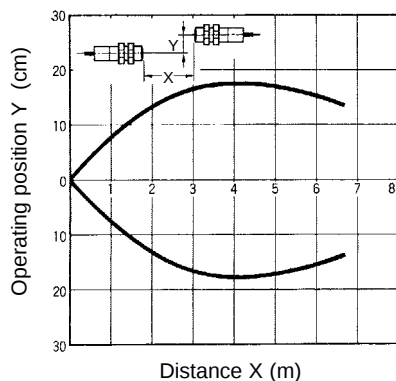


E3F2-R2□□-□□ (Retroreflective)

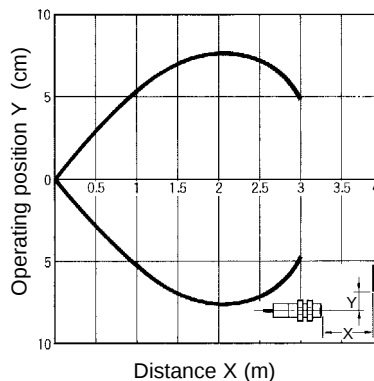


E3F2-3 and E39-RU1 (Right angle adapter)

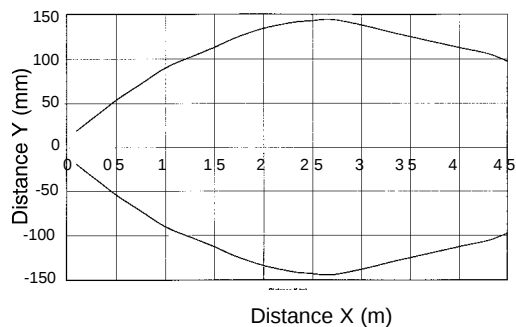


E3F2-R2 and E39-RU1 (Right angle adapter)

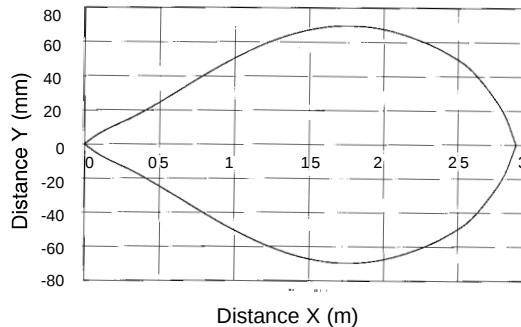


E3F2-7□-4□ (Through-beam)

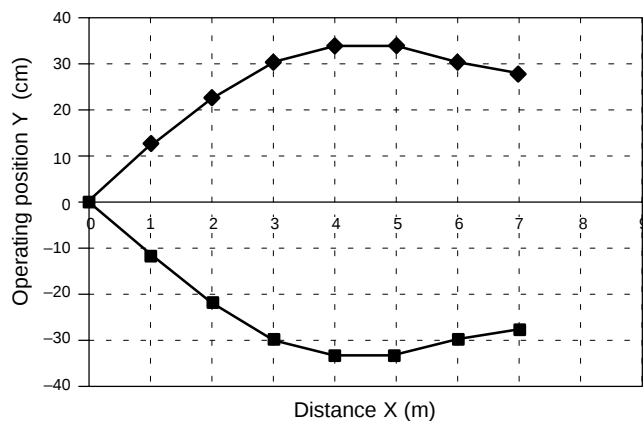


E3F2-R2R□-4□ (Polarized, retroreflective)

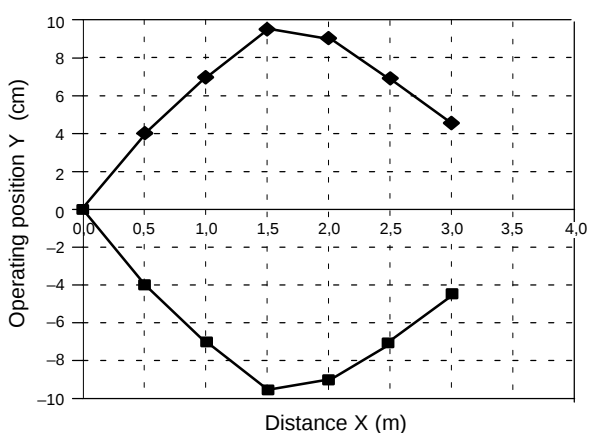

E3F2-DS10□□-4-N
E3F2-DS10□□-4-P1

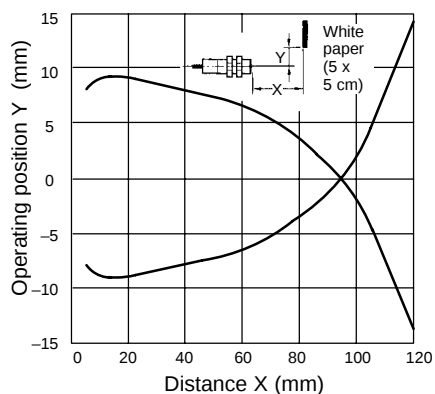


E3F2-DS30□□-□□ (Diffuse)

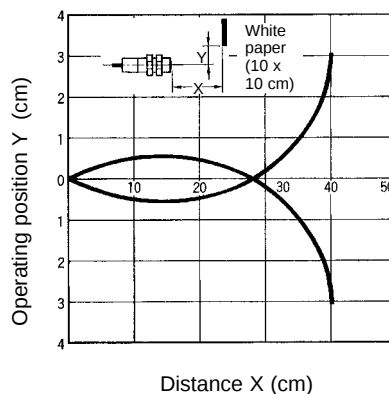


■ EXCESS GAIN VS. SET DISTANCE (TYPICAL)


E3F2-3□□-□□ (Through-beam)

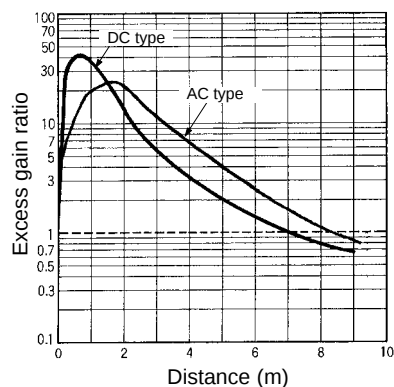


E3F2-R2□□-□□ (Retroreflective, Non-polarized)

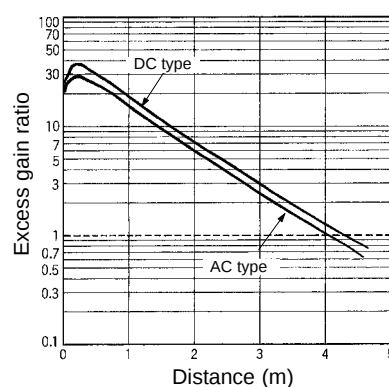


E3F2-3 and E39-RU1 (Right angle adapter)

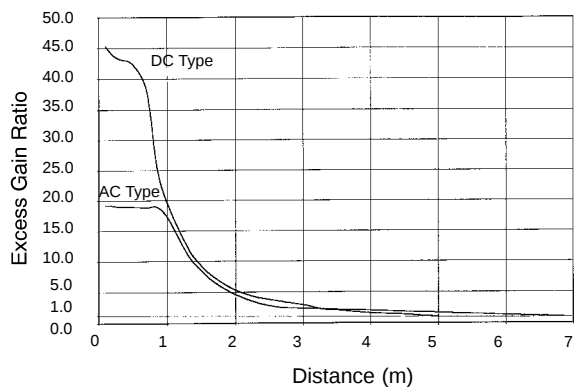


E3F2-R2 and E39-RU1 (Right angle adapter)

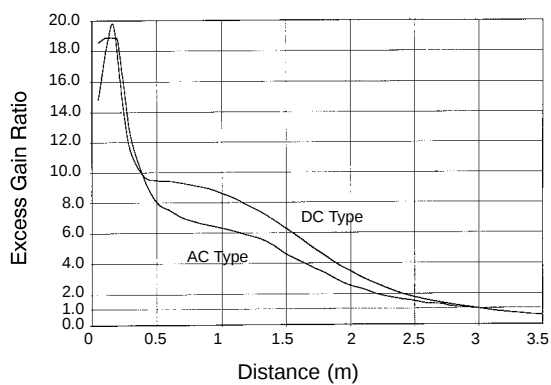

E3F2-7□4-□ (Through beam)



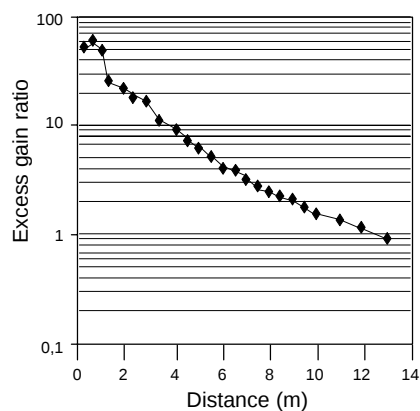


E3F2-R2R□4-□ (Polarized retroreflective)

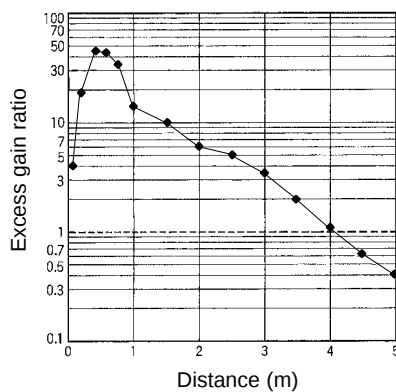

■ EXCESS GAIN VS. SET DISTANCE

E3F2-DS10Z□-N

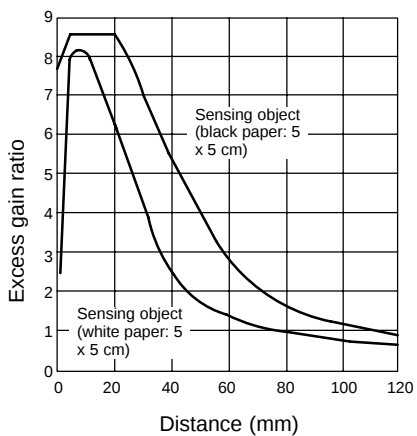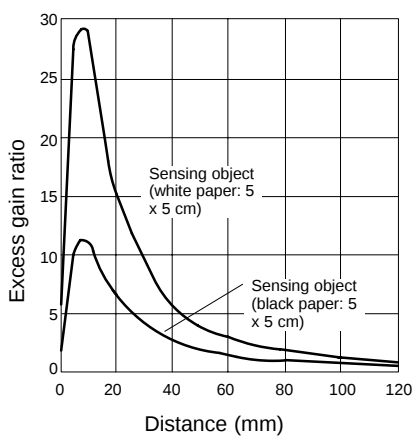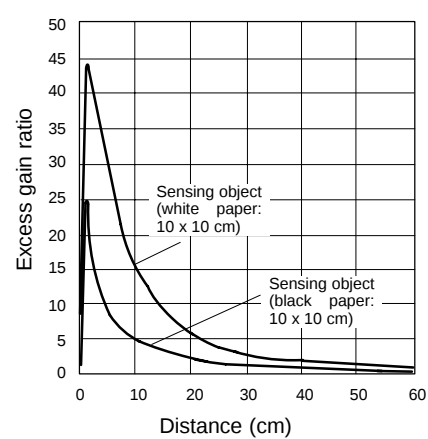E3F2-DS10□4-N
E3F2-DS10□4-P1E3F2-DS30□4
E3F2-DS30□4-P1

Operation

OUTPUT CIRCUITS

Configuration	Model	Connection method	Output transistor	Output circuit
NPN pre-wired	E3F2-7C4 E3F2-7C4-M E3F2-7C4-C E3F2-7C4-S E3F2-R2C4 E3F2-R2RC4-M E3F2-R2RC4-C E3F2-R2RC4-S E3F2-DS10C4-N E3F2-DS10C4-M E3F2-DS10C4-C E3F2-DS10C4-S E3F2-DS30C4 E3F2-DS30C4-M E3F2-DS30C4-S	Connect the pink and brown wires or open the pink wire.	ON when light is incident. (Light-ON)	
		Connect the pink and blue wires.	ON when light is interrupted. (Dark-ON)	
PNP pre-wired	E3F2-7B4 E3F2-7B4-M E3F2-7B4-C E3F2-7B4-S E3F2-R2B4 E3F2-R2RB4-M E3F2-R2RB4-C E3F2-R2RB4-S E3F2-DS10B4-N E3F2-DS10B4-M E3F2-DS10B4-C E3F2-DS10B4-S E3F2-DS30B4 E3F2-DS30B4-M E3F2-DS30B4-S	Connect the pink and brown wires or open the pink wire.	ON when light is incident. (Light-ON)	
		Connect the pink and blue wires.	ON when light is interrupted. (Dark-ON)	
NPN connector	E3F2-7C4-P1 E3F2-7C4-M1-M E3F2-7C4-M1-C E3F2-7C4-M1-S E3F2-R2C4-P1 E3F2-R2RC4-M1-M E3F2-R2RC4-M1-C E3F2-R2RC4-M1-S E3F2-DS10C4-P1 E3F2-DS10C4-M1-M E3F2-DS10C4-M1-C E3F2-DS10C4-M1-S E3F2-DS30C4-P1 E3F2-DS30C4-M1-M E3F2-DS30C4-M1-S	Connect the pink and brown wires or open the pink wire.	ON when light is incident. (Light-ON)	
		Connect the pink and blue wires.	ON when light is interrupted. (Dark-ON)	

Note: Terminal numbers are for connector types.

(This table continues on the next page.)


Operation Table – continued from previous page

Configuration	Model	Connection method	Output transistor	Output circuit
PNP connector	E3F2-7B4-P1 E3F2-7B4-M1-M E3F2-7B4-M1-C E3F2-R2B4-P1 E3F2-R2RB4-M1-M E3F2-R2RB4-M1-C E3F2-R2RB4-M1-S E3F2-DS10B4-P1 E3F2-DS10B4-M1-M E3F2-DS10B4-M1-C E3F2-DS10B4-M1-S E3F2-DS30B4-P1 E3F2-DS30B4-M1-M E3F2-DS30B4-M1-S	Connect the pink and brown wires or open the pink wire.	ON when light is incident. (Light-ON)	
		Connect the pink and blue wires.	ON when light is interrupted. (Dark-ON)	
AC switching	E3F2-3Z1 E3F2-R2Z1 E3F2-DS10Z1-N	--- (Fixed)	ON when light is incident. (Light-ON)	
	E3F2-3Z2 E3F2-R2Z2 E3F2-DS10Z2-N		ON when light is interrupted. (Dark-ON)	


Note: Terminal numbers are for connector types.

■ TIMING CHART


Light-ON Mode



Dark-ON Mode




Terminals/Connections





Dimensions

Unit: mm (inch)

PRE-LEADED DC MODELS



E3F2-7□4-□
E3F2-DS10□4-□
E3F2-DS30□4
E3F2-R2□4
E3F2-R2R□4-□

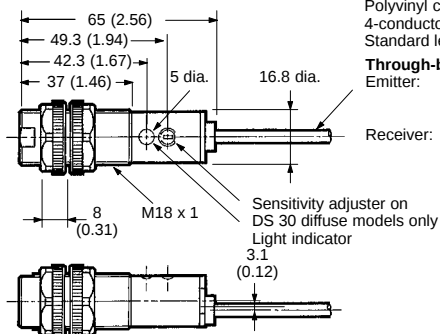

Diffuse and Retroreflective (DC)



Polyvinyl chloride-covered cord, 4-mm dia. (18/0.12), 4-conductor (brown, blue, black, and pink)
Standard length: 2 m

Through-beam (DC)

Emitter: Polyvinyl chloride-covered cord, 4-mm dia. (18/0.12), 2-conductor (brown and blue)
Standard length: 2 m
Receiver: Polyvinyl chloride-covered cord, 4-mm dia. (18/0.12), 4-conductor (brown, blue, black, and pink)
Standard length: 2 m

CONNECTOR DC MODELS


E3F2-7L-P1
E3F2-7D-P1
E3F2-7C4-P1, -M1-□
E3F2-DS10□4-P1, -M1□
E3F2-DS30□4-P1, -M1□
E3F2-R2□-P1
E3F2-R2R□-M1-□

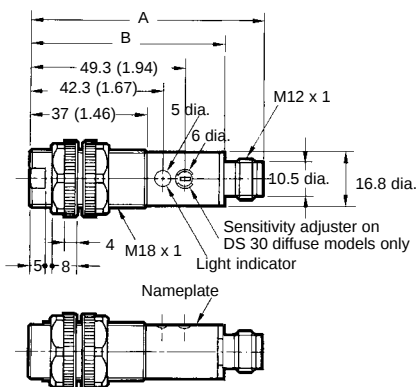

	Metal body	Plastic body
	E3F2-DS□□□□-□1	E3F2-DS30□4-P1
A	76 (2.99)	73 (2.87)
B	65.5 (2.58)	61.7 (2.43)


AC MODELS

E3F2-3Z1, E3F2-3Z2
E3F2-R2Z1, E3F2-R2Z2
E3F2-DS10Z1-N,
E3F2-DS10Z2-N

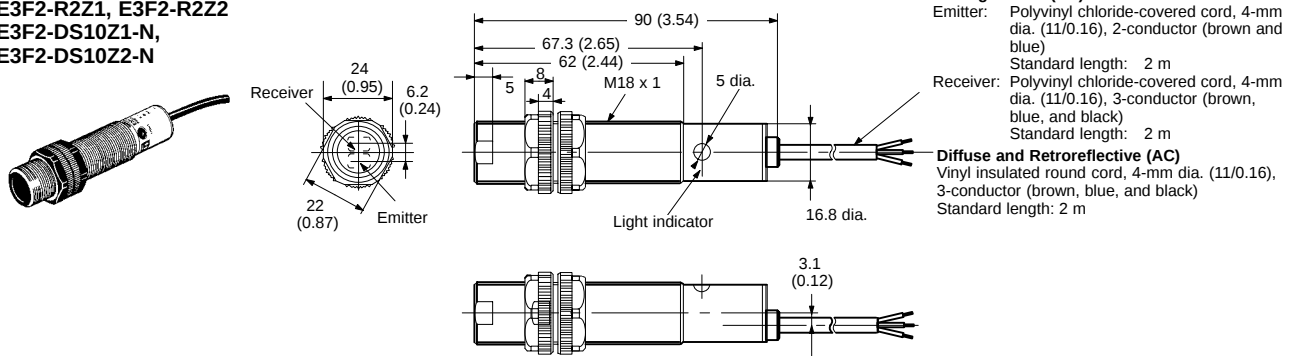


ACCESSORIES


E39-R1 Reflector (included with retroreflective units)

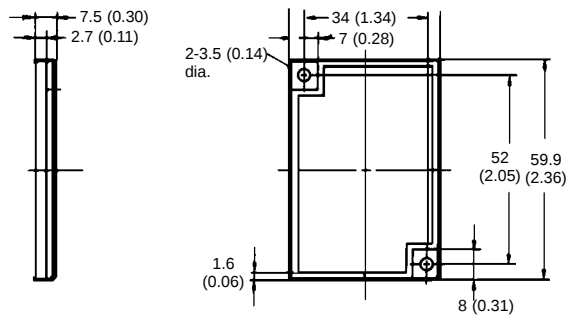


E39-L7 Reflector Adapter (order separately)



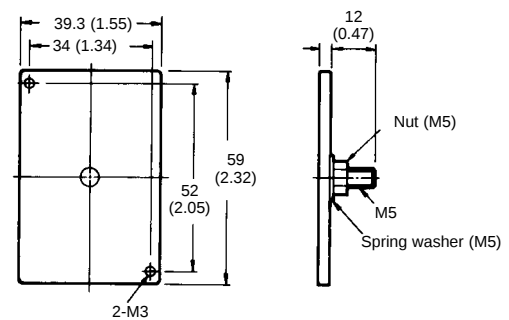


E39-R3 Reflector (order separately)

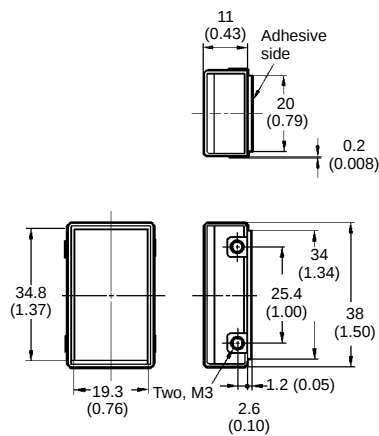

Mounting Bracket for E39-R3 (included with E39-R3)


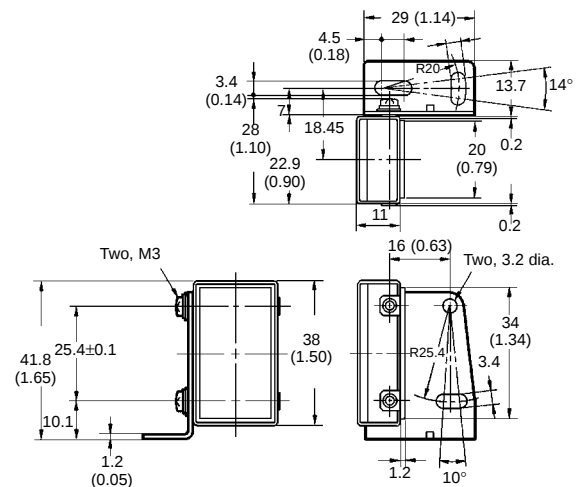


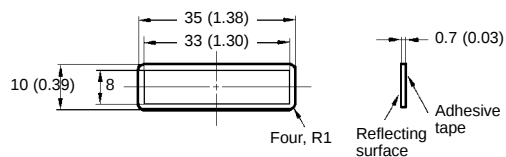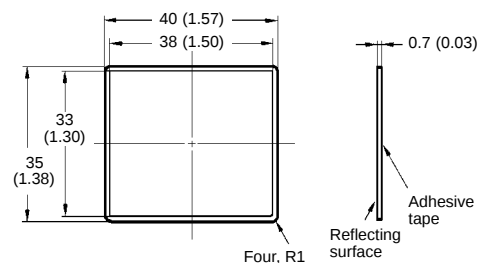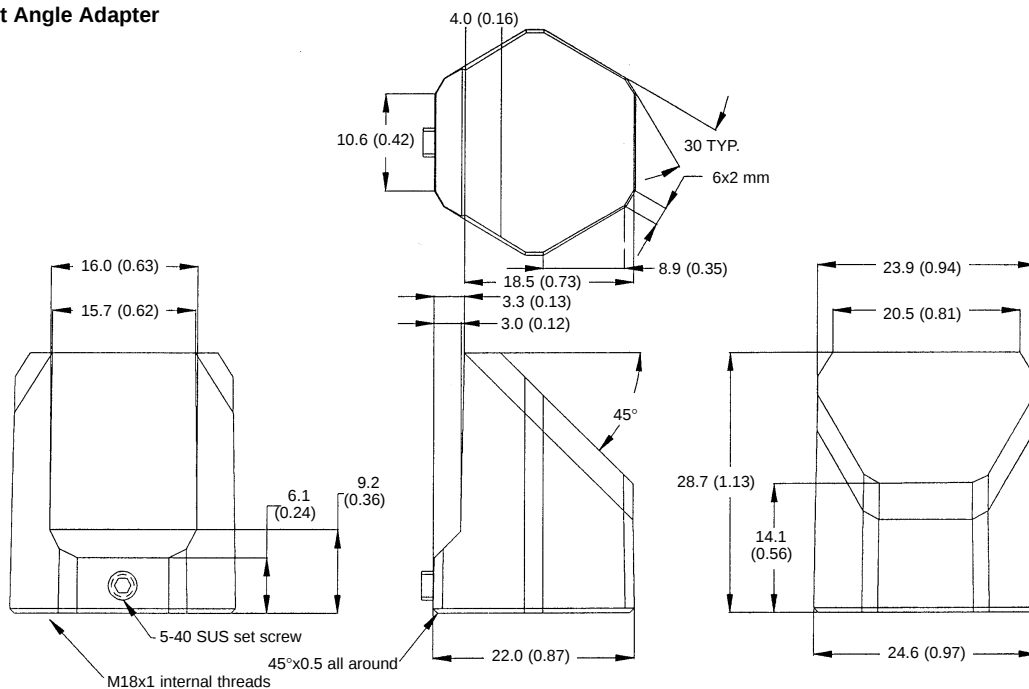E39-RSA Reflector**E39-RSB Reflector****E39-RU1 Right Angle Adapter****Mounting E39-RU1**

Do not exceed a torque value of 20 kg • cm (2.0 N • m, 17.4 in • lbs) when tightening the adapter onto the sensor.



Use a 1/16" (1.5 mm) hex key on the set screw to secure the adapter to the E3F2. Do not exceed a torque of 3.5 kg • cm (0.35 N • m, 3.0 in • lbs). When set properly, the set screw will still extend beyond the adapter wall. Make sure to loosen the set screw before removing the adapter from the sensor.

Y92E-B18 Mounting Bracket

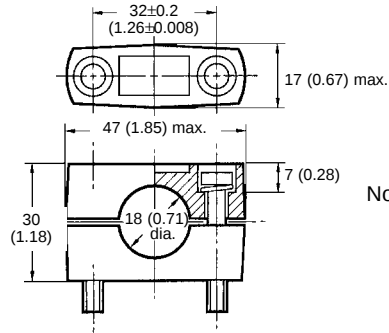

Note: Hexagonal nut: M5 x 32
Material: plastic


E39-F31 Lens Cap

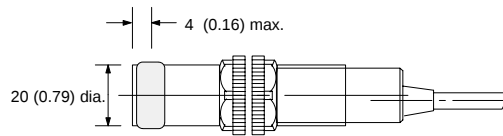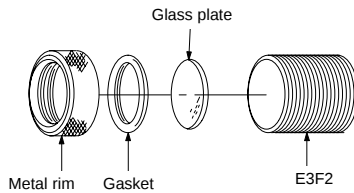

OPTIONAL CONNECTOR CABLES

Straight Connector Cable


Y96E-44SD□

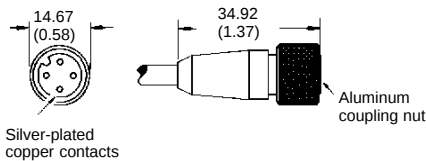

22 AWG, PVC jacketed cable rated for 300 V, 90°C:
2 m (6.56 ft) length for Y96E-44SD2
5 m (16.40 ft) length for Y96E-44SD5
10 m (32.81 ft) length for Y96E-44SD10

Right Angle Connector Cable


Y96E-44RD□

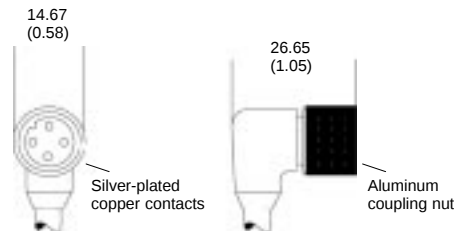

22 AWG, PVC jacketed cable rated for 300 V, 90°C:
2 m (6.56 ft) length for Y96E-44RD2
5 m (16.40 ft) length for Y96E-44RD5
10 m (32.81 ft) length for Y96E-44RD10


Note: Cable may be extended to a maximum of 200 m (656 ft.)

Terminals/Connections

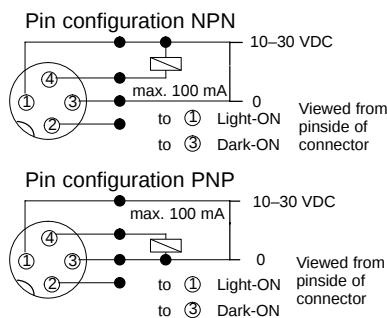

Assembly Directions

Insert the M12 threaded end of the sensor into socket of connector so that the notch correctly aligns the pins. Tighten the coupling nut by hand, not using a tool, until all the threads on the rear of the sensor are covered. This assures a positive connection, important for installations with vibration.

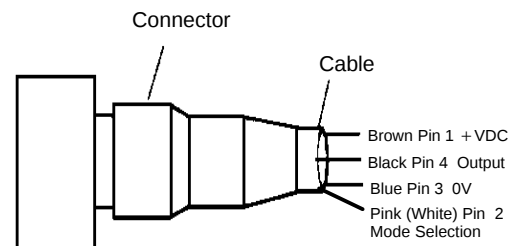


Note: Water tightness with connector is only valid when authorized connections are used. Cordset wire colors are shown in parentheses.

Precautions

If the input/output lines of the Photoelectric Sensor are placed in the same conduit or duct as power lines or high-voltage lines, the Photoelectric Sensor could be induced to malfunction, or even be damaged, by electrical noise. Separate the wiring, or use shielded lines as input/output lines to the Photoelectric Sensor.

Do not subject the Photoelectric Sensor to excessive shock when mounting, in keeping with IEC60529 IP66 standards.

Do not connect the black wire to the brown wire without a load. Direct connection of these wires may damage the Photoelectric Sensor (AC switching type).

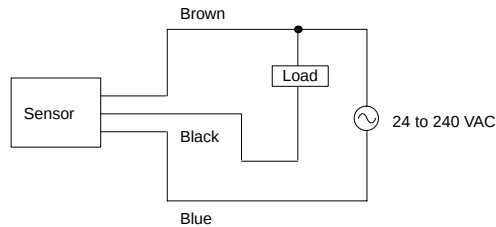


WARNING

The E3F2 Photoelectric Sensor is not a safety component for ensuring the safety of people which is defined in EC Directive (91/368/EEC) and covered by separate European standards or by any other regulations or standards.

When using the Photoelectric Sensor in the vicinity of an inverter motor, be sure to connect the ground wire of the motor to earth. Failure to ground the motor may result in malfunction of the Sensor.


When using the Photoelectric Sensor at temperatures over 45°C, the load current must be within the rated value shown in the figure below.

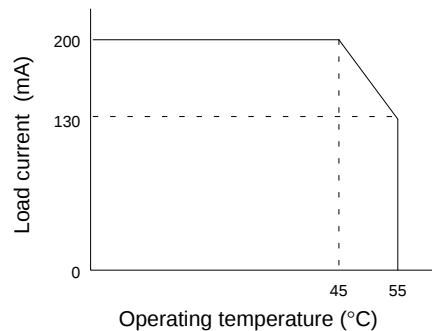

■ MOUNTING

Do not exceed a torque of

- 2.0 N • m {20 kgf • cm} 17.7 in • lb when tightening mounting nuts for plastic models.
- 20.0 N • m {200 kgf • cm} 177 in • lb when tightening mounting nuts for metal models.



NOTE: DIMENSIONS SHOWN ARE IN MILLIMETERS. To convert millimeters to inches divide by 25.4.

OMRON®

OMRON ELECTRONICS, INC.

One East Commerce Drive
Schaumburg, IL 60173

1-800-55-OMRON

OMRON CANADA, INC.

885 Milner Avenue
Scarborough, Ontario M1B 5V8

416-286-6465

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А