


NEGATIVE ADJUSTABLE VOLTAGE REGULATOR

IP137K / LM137K
IP137AK / LM137AK
IP137HVK / LM137HVK
IP137AHVK / LM137AHVK
IP337K / LM337K
IP337AK / LM337AK
IP337HVK / LM337HVK
IP337AHVK / LM337AHVK

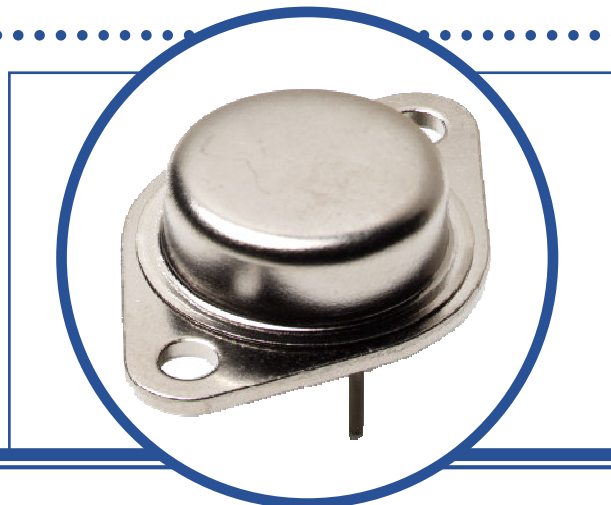

FEATURES

- 1.5A Output Current Guaranteed
- Internal Thermal Overload Protection
- Output Short Circuit Protected
- Hermetic Metal TO3 Package
- Screening Options Available

APPLICATIONS

- Adjustable Power Supplies
- System Power Supplies
- Precision Voltage / Current Regulators

DESCRIPTION

The 137/337 Series regulators are adjustable 3 terminal voltage regulators capable of supplying in excess of -1.5A over an output voltage range of -1.2V to -37V (HV Series, -47V). The regulators are exceptionally easy to apply requiring only 2 external resistors to set the output voltage and 1 output capacitor for frequency compensation.

Every effort has been made to make these devices easy to use and difficult to damage. Internal current limiting and power limiting coupled with true thermal limiting prevents damage due to overloads or shorts, even if the regulators are not fastened to a heat sink.

ABSOLUTE MAXIMUM RATINGS (T_C = 25°C unless otherwise stated)

V _I - V _O	Input – Output Voltage Differential	Standard	40V
		HV Series	50V
I _O	Output Current	Internally Limited	
P _D	Power Dissipation	Internally Limited	
T _J	Operating Junction Temperature Range	137 Series	-55 to +150°C
		337 Series	0 to +125°C
T _{stg}	Storage Temperature Range	-65 to +150°C	

THERMAL PROPERTIES

Symbols	Parameters	Min.	Typ.	Max.	Units
R _{θJC}	Thermal Resistance, Junction To Case			3	°C/W

** This datasheet supersedes document 2831

Semelab Limited reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders.

NEGATIVE ADJUSTABLE VOLTAGE REGULATOR

ELECTRICAL CHARACTERISTICS(1)(3) ($T_C = 25^\circ\text{C}$ unless otherwise stated)

LM137A, IP137A, LM137AHV, IP137AHV								
Symbols	Parameters	Test Conditions		Min.	Typ	Max.	Units	
V _{REF}	Reference Voltage	I _{OUT} = 10mA			-1.238	-1.250	-1.262	V
		10mA ≤ I _{OUT} ≤ I _{MAX} , P ≤ P _{MAX} , 3V ≤ (V _{IN} -V _{OUT}) ≤ V _{MAX}		●	-1.220	-1.250	-1.280	
$\frac{\Delta V_{OUT}}{\Delta V_{IN}}$	Line Regulation (2)	3V ≤ (V _{IN} -V _{OUT}) ≤ V _{MAX} , I _{OUT} = 10mA				0.005	0.010	%/ <i>V</i>
				●		0.010	0.030	
$\frac{\Delta V_{OUT}}{\Delta I_{OUT}}$	Load Regulation (2)(3)	10mA ≤ I _{OUT} ≤ I _{MAX}	V _{OUT} ≤ 5V			5	25	mV
			V _{OUT} ≥ 5V			0.1	0.5	%
			V _{OUT} ≤ 5V	●		10	50	mV
			V _{OUT} ≥ 5V	●		0.2	1.0	%
	Thermal Regulation	V _{IN} = -14.58V, I _{OUT} = 1.5A, P _D = 20W, T _A = 25°C, 10ms Pulse				0.002	0.02	%/ <i>W</i>
	Ripple Rejection	V _{OUT} = -10V f = 120Hz	C _{ADJ} = 0		60	66		dB
			C _{ADJ} = 10μF	●	70	80		
I _{ADJ}	Adjust Pin Current			●		65	100	μA
ΔI _{ADJ}	Adjust Pin Current Change	10mA ≤ I _{OUT} ≤ I _{MAX}		●		0.2	2	
		3V ≤ (V _{IN} -V _{OUT}) ≤ 40V		●		1.0	5	
		3V ≤ (V _{IN} -V _{OUT}) ≤ 50V (HV Series)		●		2	6	
I _{MIN}	Minimum Load Current	(V _{IN} - V _{OUT}) ≤ 40V		●		2.5	5	mA
		(V _{IN} - V _{OUT}) ≤ 10V		●		1.2	3	
I _{CL}	Current Limit	(V _{IN} - V _{OUT}) ≤ 15V		●	1.5	2.2	3.2	A
		(V _{IN} - V _{OUT}) = 40V		●	0.24	0.4	1.0	
		(V _{IN} - V _{OUT}) = 50V (HV Series)		●	0.2	0.4	0.8	
$\frac{\Delta V_{OUT}}{\Delta TEMP}$	Temperature Stability			●		0.6	1.5	%
$\frac{\Delta V_{OUT}}{\Delta TIME}$	Long Term Stability	T _A = 125°C, 1000Hrs				0.3	1.0	
e _n	RMS Output Noise (% of V _{OUT})	T _A = 25°C, 10Hz ≤ f ≤ 10KHz				0.003		

Notes

The ● denotes the specifications which apply over the full operating temperature range.

- (1) Test conditions unless otherwise stated: $V_{IN} - V_{OUT} = 5\text{V}$, $I_{OUT} = 0.5\text{A}$, $P_{MAX} = 20\text{W}$, $I_{MAX} = 1.5\text{A}$
- (2) Regulation is measured at constant junction temperature, using pulse testing at a low duty cycle. Changes in output voltage due to heating effects are covered under thermal regulation specifications. Load regulation is measured at $1/8"$ below the bottom of the package.
- (3) $V_{MAX} = 40\text{V}$ for LM137, IP137, LM137A, IP137A, LM337, IP337, LM337A, IP337A
 $V_{MAX} = 50\text{V}$ for LM137HV, IP137HV, LM137AHV, IP137AHV, LM337HV, IP337HV, LM337AHV, IP337AHV

NEGATIVE ADJUSTABLE VOLTAGE REGULATOR

ELECTRICAL CHARACTERISTICS(1)(3) ($T_C = 25^\circ\text{C}$ unless otherwise stated)

LM337, IP337, LM337HV, IP337HV								
Symbols	Parameters	Test Conditions		Min.	Typ	Max.	Units	
V _{REF}	Reference Voltage	I _{OUT} = 10mA			-1.213	-1.250	-1.287	V
		10mA ≤ I _{OUT} ≤ I _{MAX} , P ≤ P _{MAX} , 3V ≤ (V _{IN} -V _{OUT}) ≤ V _{MAX}		•	-1.200	-1.250	-1.300	
$\frac{\Delta V_{OUT}}{\Delta V_{IN}}$	Line Regulation (2)	3V ≤ (V _{IN} -V _{OUT}) ≤ V _{MAX} , I _{OUT} = 10mA				0.010	0.040	%/V
				•		0.020	0.070	
$\frac{\Delta V_{OUT}}{\Delta I_{OUT}}$	Load Regulation (2)(3)	10mA ≤ I _{OUT} ≤ I _{MAX}	V _{OUT} ≤ 5V			15	50	mV
			V _{OUT} ≥ 5V			0.3	1.0	%
			V _{OUT} ≤ 5V	•		20	70	mV
			V _{OUT} ≥ 5V	•		0.3	1.5	%
	Thermal Regulation	V _{IN} = -14.58V, I _{OUT} = 1.5A, P _D = 20W, T _A = 25°C, 10ms Pulse				0.003	0.04	%/W
	Ripple Rejection	V _{OUT} = -10V f = 120Hz	C _{ADJ} = 0			60		dB
			C _{ADJ} = 10μF	•	66	77		
I _{ADJ}	Adjust Pin Current			•		65	100	μA
ΔI _{ADJ}	Adjust Pin Current Change	10mA ≤ I _{OUT} ≤ I _{MAX}		•		0.5	5	
		3V ≤ (V _{IN} -V _{OUT}) ≤ 40V		•		2	5	
		3V ≤ (V _{IN} -V _{OUT}) ≤ 50V (HV Series)		•		3	6	
I _{MIN}	Minimum Load Current	(V _{IN} - V _{OUT}) ≤ 40V		•		2.5	10	mA
		(V _{IN} - V _{OUT}) ≤ 10V		•		1.0	6	
I _{CL}	Current Limit	(V _{IN} - V _{OUT}) ≤ 15V		•	1.5	2.2	3.5	A
		(V _{IN} - V _{OUT}) = 40V		•	0.15	0.4		
		(V _{IN} - V _{OUT}) = 50V (HV Series)		•	0.1	0.4	0.8	
$\frac{\Delta V_{OUT}}{\Delta TEMP}$	Temperature Stability			•		0.6		%
$\frac{\Delta V_{OUT}}{\Delta TIME}$	Long Term Stability	T _A = 125°C, 1000Hrs				0.3	1.0	
e _n	RMS Output Noise (% of V _{OUT})	T _A = 25°C, 10Hz ≤ f ≤ 10KHz				0.003		

Notes

The • denotes the specifications which apply over the full operating temperature range.

- (1) Test conditions unless otherwise stated: $V_{IN} - V_{OUT} = 5\text{V}$, $I_{OUT} = 0.5\text{A}$, $P_{MAX} = 20\text{W}$, $I_{MAX} = 1.5\text{A}$
- (2) Regulation is measured at constant junction temperature, using pulse testing at a low duty cycle. Changes in output voltage due to heating effects are covered under thermal regulation specifications. Load regulation is measured at $\frac{1}{8}$ " below the bottom of the package.
- (3) $V_{MAX} = 40\text{V}$ for LM137, IP137, LM137A, IP137A, LM337, IP337, LM337A, IP337A
 $V_{MAX} = 50\text{V}$ for LM137HV, IP137HV, LM137AHV, IP137AHV, LM337HV, IP337HV, LM337AHV, IP337AHV

NEGATIVE ADJUSTABLE VOLTAGE REGULATOR

ELECTRICAL CHARACTERISTICS(1)(3) ($T_C = 25^\circ\text{C}$ unless otherwise stated)

LM337A, IP337A, LM337AHV, IP337AHV								
Symbols	Parameters	Test Conditions		Min.	Typ	Max.	Units	
V _{REF}	Reference Voltage	I _{OUT} = 10mA			-1.238	-1.250	-1.262	V
		10mA ≤ I _{OUT} ≤ I _{MAX} , P ≤ P _{MAX} , 3V ≤ (V _{IN} -V _{OUT}) ≤ V _{MAX}		●	-1.220	-1.250	-1.280	
$\frac{\Delta V_{OUT}}{\Delta V_{IN}}$	Line Regulation (2)	3V ≤ (V _{IN} -V _{OUT}) ≤ V _{MAX} , I _{OUT} = 10mA				0.005	0.010	% / V
				●		0.010	0.030	
$\frac{\Delta V_{OUT}}{\Delta I_{OUT}}$	Load Regulation (2)(3)	10mA ≤ I _{OUT} ≤ I _{MAX}	V _{OUT} ≤ 5V			5	25	mV
			V _{OUT} ≥ 5V			0.1	0.5	%
			V _{OUT} ≤ 5V	●		10	50	mV
			V _{OUT} ≥ 5V	●		0.2	1.0	%
	Thermal Regulation	V _{IN} = -14.58V, I _{OUT} = 1.5A, P _D = 20W, T _A = 25°C, 10ms Pulse				0.002	0.02	% / W
	Ripple Rejection	V _{OUT} = -10V f = 120Hz	C _{ADJ} = 0		60	66		dB
			C _{ADJ} = 10μF	●	70	80		
I _{ADJ}	Adjust Pin Current			●		65	100	μA
ΔI _{ADJ}	Adjust Pin Current Change	10mA ≤ I _{OUT} ≤ I _{MAX}		●		0.2	2	
		3V ≤ (V _{IN} -V _{OUT}) ≤ 40V		●		1.0	5	
		3V ≤ (V _{IN} -V _{OUT}) ≤ 50V (HV Series)		●		2	6	
I _{MIN}	Minimum Load Current	(V _{IN} - V _{OUT}) ≤ 40V		●		2.5	5	mA
		(V _{IN} - V _{OUT}) ≤ 10V		●		1.2	3	
I _{CL}	Current Limit	(V _{IN} - V _{OUT}) ≤ 15V		●	1.5	2.2	3.5	A
		(V _{IN} - V _{OUT}) = 40V		●	0.24	0.4	1.0	
		(V _{IN} - V _{OUT}) = 50V (HV Series)		●	0.2	0.4	0.8	
$\frac{\Delta V_{OUT}}{\Delta TEMP}$	Temperature Stability			●		0.6	1.5	%
$\frac{\Delta V_{OUT}}{\Delta TIME}$	Long Term Stability	T _A = 125°C, 1000Hrs				0.3	1.0	
e _n	RMS Output Noise (% of V _{OUT})	T _A = 25°C, 10Hz ≤ f ≤ 10KHz				0.003		

Notes

The • denotes the specifications which apply over the full operating temperature range.


- (1) Test conditions unless otherwise stated: $V_{\text{IN}} - V_{\text{OUT}} = 5\text{V}, I_{\text{OUT}} = 0.5\text{A}, P_{\text{MAX}} = 20\text{W}, I_{\text{MAX}} = 1.5\text{A}$
- (2) Regulation is measured at constant junction temperature, using pulse testing at a low duty cycle. Changes in output voltage due to heating effects are covered under thermal regulation specifications. Load regulation is measured at $1/8"$ below the bottom of the package.
- (3) $V_{\text{MAX}} = 40\text{V}$ for LM137, IP137, LM137A, IP137A, LM337, IP337, LM337A, IP337A
 $V_{\text{MAX}} = 50\text{V}$ for LM137HV, IP137HV, LM137AHV, IP137AHV, LM337HV, IP337HV, LM337AHV, IP337AHV

NEGATIVE ADJUSTABLE VOLTAGE REGULATOR


APPLICATIONS INFORMATION

High Stability Regulator

The output stability, load regulation, line regulation, thermal regulation, temperature drift, long term drift, and noise, can be improved by a factor of 6.6 over the standard regulator configuration. This assumes a zener has 20PPM/°C maximum drift and about 10 times lower noise than the regulator.

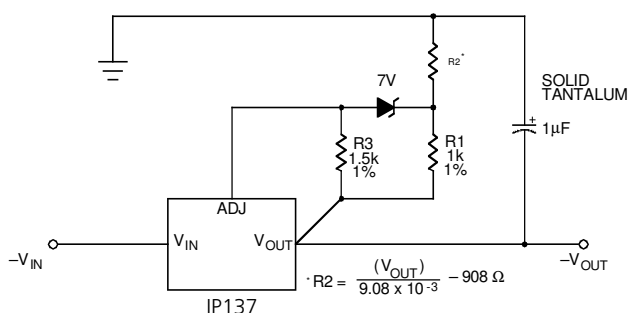

Dual Tracking Supply

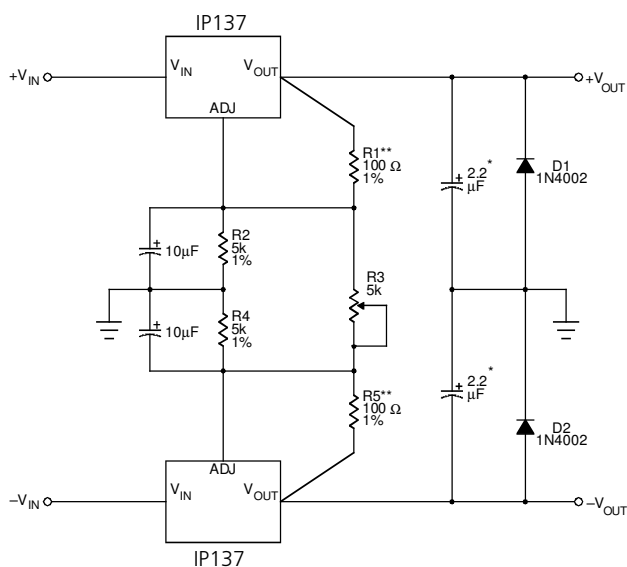


* Solid Tantalum

** R1 & R5 maybe trimmed slightly to improve tracking


Multiple Tracking Regulators

In the application shown below, regulator #2 to "N" will track regulator #1 to within $\pm 24\text{mV}$ initially, and to $\pm 60\text{mV}$ over all load line, and temperature conditions.

If any regulator output is shorted to ground, all other outputs will drop to -2V. Load regulation of regulators #2 to "N" will be improved by $V_{OUT} / 1.25\text{V}$ compared to a standard, so regulator #1 should be the one which has the lowest load current.

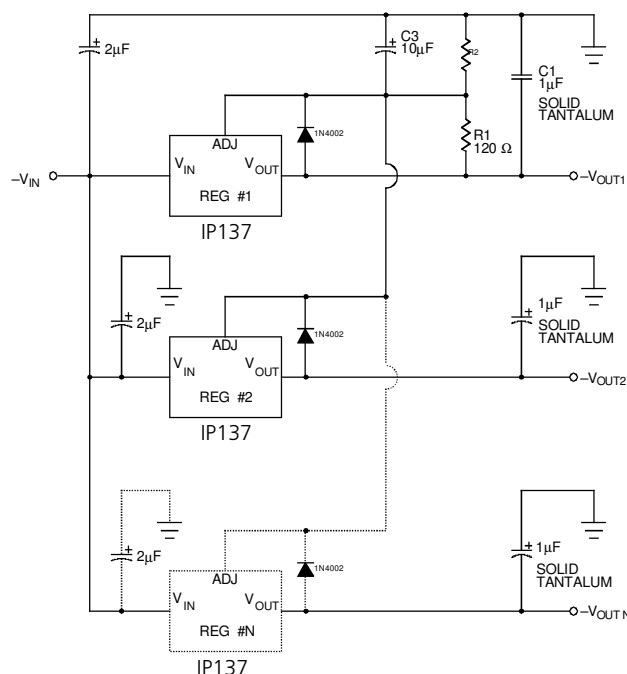


Current Regulator

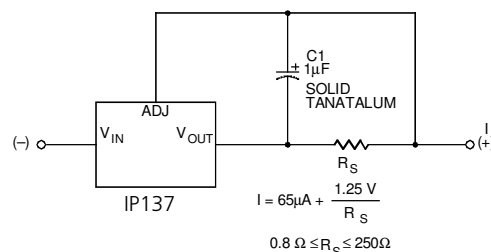

NEGATIVE ADJUSTABLE VOLTAGE REGULATOR

MECHANICAL DATA

Dimensions in mm (inches)

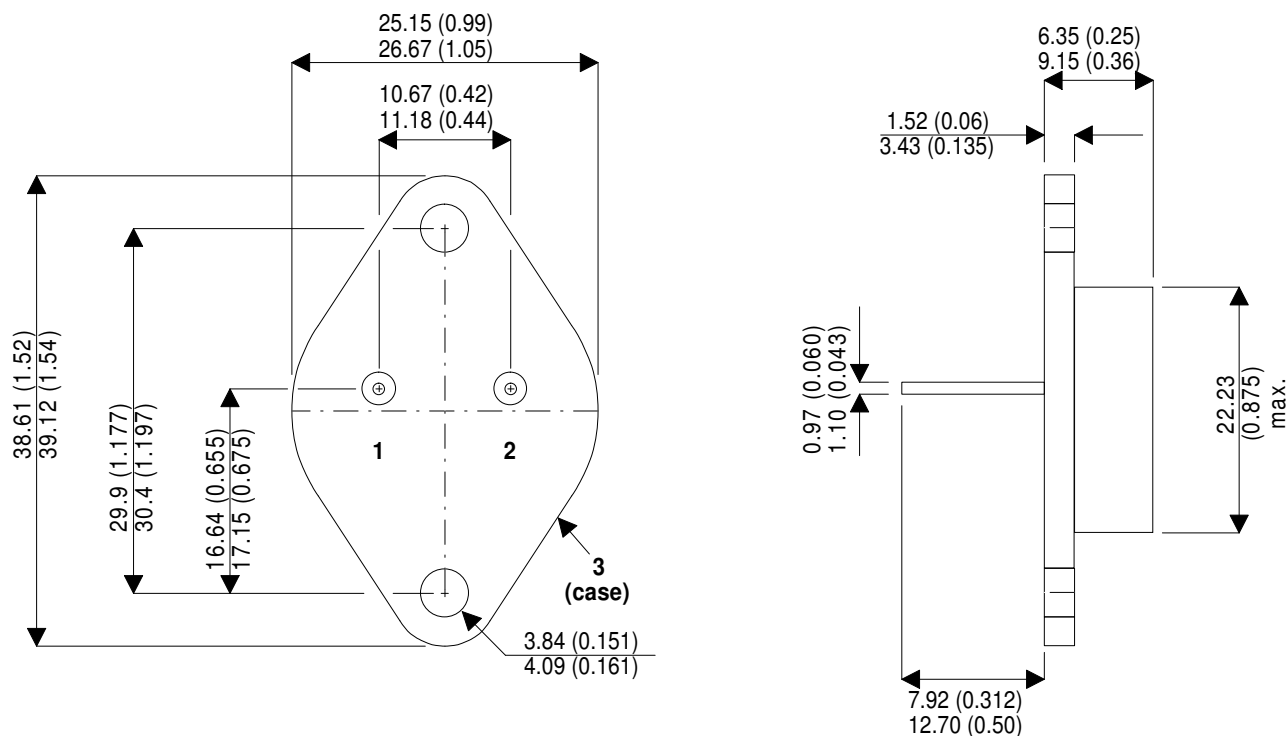

TO3 (TO-204AA)

Pin 1 = ADJ. Pin 2 = V_{OUT} Case = V_{IN}

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А