OMRON

# G-SERIES SERVO SYSTEM

Save space, save wiring, save time

» Compact size

» MECHATROLINK-II

» Enhanced performance

realizing

# Compact in size
# big in features

*Always with your application in mind, G-Series servo drives give you additional functionalities to develop your machines faster, more flexibly and more efficiently.*

*Improved speed response, a wider range of servomotors and intuitive and fast auto-tuning belong to the new features, making it suitable for many applications, and always with the expected Omron quality and support.*

### Key features and benefits:

- Pocket-size servo with smallest footprint 15 x 4 cm
- Auto-tuning for easy and quick start-up
- Built-in MECHATROLINK-II motion bus reduces cabling and allows remote servo configuration and diagnosis
- High starting torque: 300% for 3 secs.
- Positioning, speed or torque control
- Separate power and control power supply
- Fast and accurate positioning
- Servomotor range from 50 W to 1.5 kW
- Incremental and absolute encoder available
- Cylindrical and flat servo motors up to 3,000 rpm
- Compatible with SmartStep 2 servomotors
- Vibration suppression

## Save space, save wiring, save time

**From multiple cables...**



**to only one cable**




**Easy connection: single cable only!**

With their built-in MECHATROLINK-II motion bus, just a single cable is needed to connect servos together. So you not only save on wiring and installation time, you also significantly reduce the chance of connection errors. Reliability is increased since the single-cable connection is much more rugged than a multiple-wiring solution.

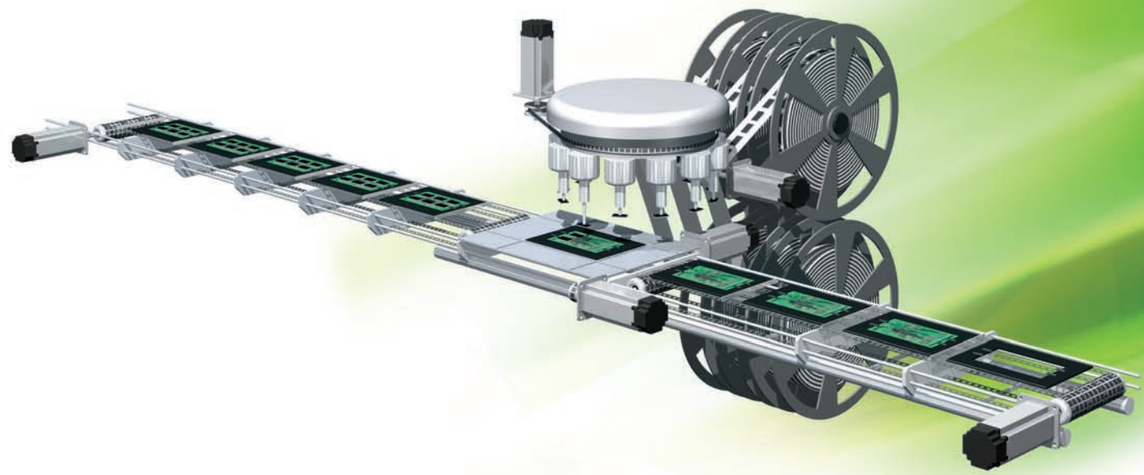

## Fast and simple auto-tuning

The graphs show a move profile with a G-series servo in an application with an inertia ratio of 16:1. Tuning is possible via the easy to use CX-Drive, and takes just 1 minute to complete.
The result is superb control, ensuring the servo and hence machine operates at its optimal point, with next to zero knowledge required from the user.

Once running, the on-board real time auto-tuning function takes care of the servo operation relative to the load inertia, again ensuring the quality of the finished produced part.

In addition, numerous suppression and notch filters are available to suppress machine vibration independent of machine direction.

Before auto-tuning

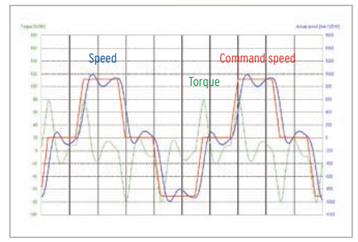


After auto-tuning

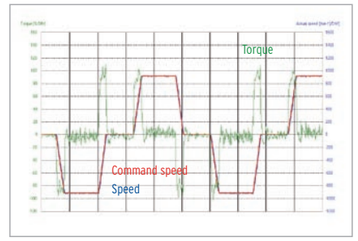

# G-Series + NCF: Optimum positioning for up to 16 axes

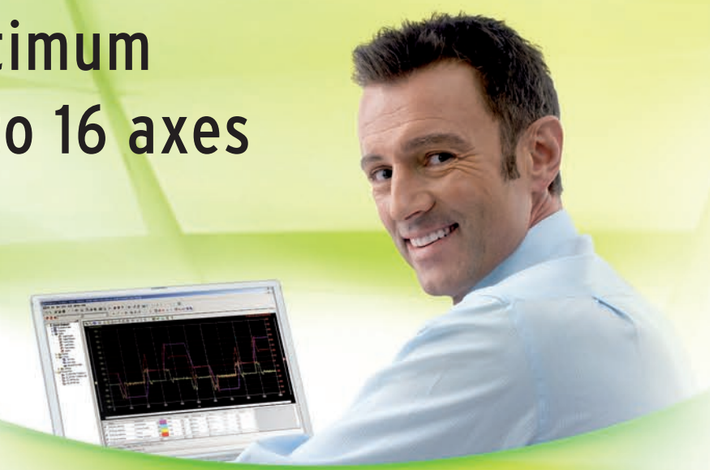

## Complete and compact positioning system

In a minimum of space you can have a complete and powerful PTP system when combining the CJ1W-NCF71 unit and the G-Series servo. This configuration offers 16-axis positioning with linear and circular interpolation, as well as interrupt feeding. The NCF and the G-Series offer the ideal solution for applications where space is tight.

## Full transparency from a remote host

When the G-Series is controlled by NCF positioning unit, the servo drive is fully transparent to a remote PC. This is achieved over MECHATROLINK-II from the G-Series to the PLC and over any serial or Ethernet link between the PLC and PC. Hence complying fully with Omron Smart Platform.

## PLCopen

A global standard for industrial control programming, PLCopen provides a standardized programming interface to harmonize the way people design and operate industrial control.

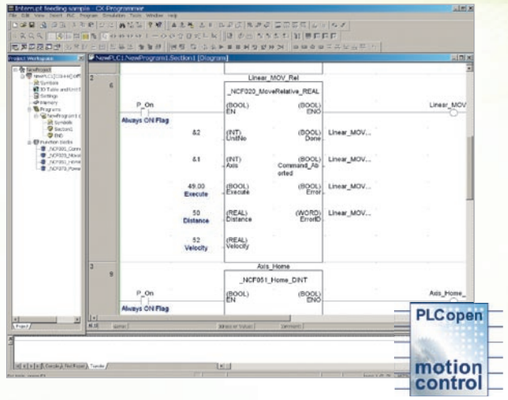


## NCF – key features and benefits

- 16 axes, point-to-point positioning over ML II
- System scalability with models for 2, 4 and 16 axes
- Easy, quick and reliable setup
- Optimized for positioning applications
- Simplified wiring to drives
- Integration with Omron Smart Platform

CJ1W-NC271 CJ1W-NC471 CJ1W-NCF71

2 axes
4 axes
16 axes

OMRON

R88D-GN□/R88M-G□

# G-Series servo system

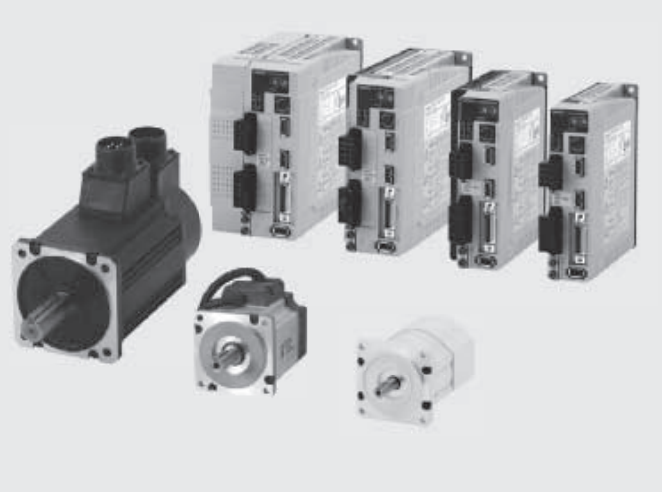

**Compact in size big in features. Save space, save wiring, save time**

- Built-in MECHATROLINK-II motion bus
- Position, speed and torque control
- High-response frequency of 1 kHZ
- Real time auto-tuning
- Vibration suppression
- Separate power and control power supply
- Available motors with absolute and incremental with 17-bit encoder for greater accuracy
- Cylindrical and flat servo motors up to 3000 rpm
- Servomotors supported by SmartStep2, G-Series and G5-Series servo drives
- Peak torque 300% of continuous torque during 3 seconds or more depending on model
- IP65 and shaft oil seal available

**Ratings**

- 230 VAC single-phase 100 W to 1.5 kW (8.62 Nm)

## System configuration

**G-Series MECHATROLINK-II Servo Drive Configuration**

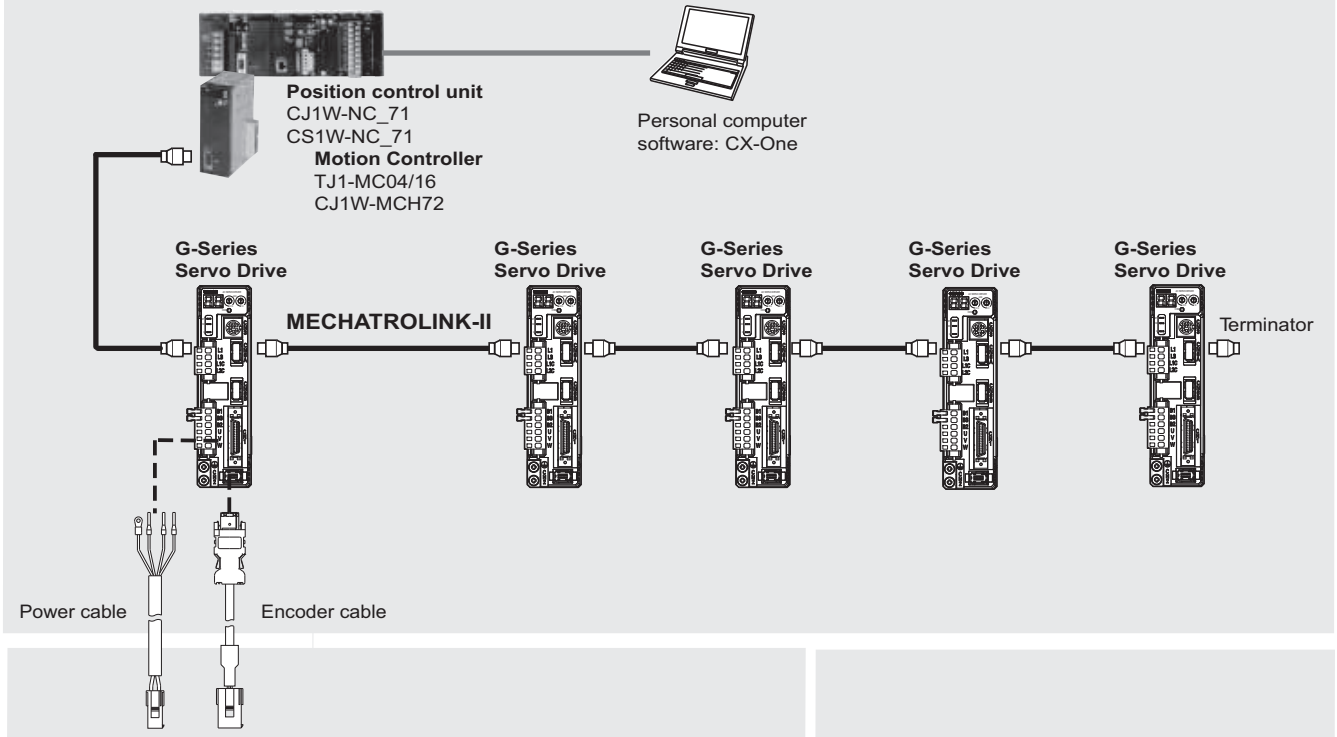


**G-Series Servo Motor**
Cylindric servo motors
(50-1500 W)

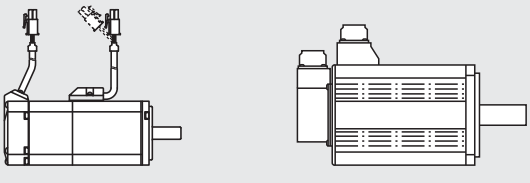

**G-Series Servo Motor**
Flat servo motors (100-400 W)



## Servo drive type designation

**Servo drive**

R88D-GN04H-ML2

- G-Series servo drive
- N: Network type
- Capacity

| | |
|---|---|
| 01 | 100 W |
| 02 | 200 W |
| 04 | 400 W |
| 08 | 750 W |
| 10 | 1.0 kW |
| 15 | 1.5 kW |

- Model
  ML2: MECHATROLINK-II communications
- Source voltage
  H: 230 V

## Servo drive specifications

### G-Series servo drive

| Servo drive type | | | R88D-GN□ | 01H-ML2 | 02H-ML2 | 04H-ML2 | 08H-ML2 | 10H-ML2 | 15H-ML2 |
|---|---|---|---|---|---|---|---|---|---|
| Applicable servomotor | | | R88M-G□ | 05030□/10030□ | 20030□ | 40030□ | 75030□ | G1K020T□ | 90010T□/1K030T□/1K5□0T□ |
| | | | R88M-GP□ | 10030□ | 20030□ | 40030□ | - | - | - |
| Basic specifications | Max. applicable motor capacity | | W | 100 | 200 | 400 | 750 | 1000 | 1500 |
| | Continuous output current | | Arms | 1.16 | 1.6 | 2.7 | 4.0 | 5.9 | 9.8 |
| | Max. output current | | Arms | 3.5 | 5.3 | 7.1 | 14.1 | 21.2 | 28.3 |
| | Input power | Main circuit | | For single-phase, 200 to 240 VAC +10 to -15% (50/60 Hz) | | | For single-phase/ three-phase, 200 to 240 VAC +10 to -15% (50/60 Hz) | | |
| | Supply | Control circuit | | For single-phase, 200 to 240 VAC +10 to -15% (50/60 Hz) | | | | | |
| | Control method | | | IGBT-driven PWM method | | | | | |
| | Feedback | | | Serial encoder (incremental/absolute) | | | | | |
| | Conditions | Usage/storage temperature | | 0 to +55 °C / -20 to 65 °C | | | | | |
| | | Usage/storage humidity | | 90% RH or less (non-condensing) | | | | | |
| | | Altitude | | 1000m or less above sea level | | | | | |
| | | Vibration/shock resistance | | 5.88 $m/s^2$ / 19.6 $m/s^2$ | | | | | |
| | Configuration | | | Base mounted | | | | | |
| | Approx. weight | | Kg | 0.8 | | 1.1 | 1.5 | 1.7 | |
| Position/Speed/torque control mode | Performance | Speed control range | | 1:5000 | | | | | |
| | | Speed variance | Load variance | During 0 to 100% load ±0.01 max. (at rated speed) | | | | | |
| | | | Voltage variance | 0% at ±10% of rated voltage (at rated speed) | | | | | |
| | | | Temperature variance | 0 to 50ºC ±0.1% max. (at rated speed) | | | | | |
| | | Frequency characteristics | | 1 kHz | | | | | |
| | | Torque control accuracy (reproducibility) | | ±3% (at 20% to 100% of rated torque) | | | | | |
| | | Soft start time setting | | 0 to 10 s (acceleration time and deceleration time can be set) | | | | | |
| | Command Input | MECHATROLINK Communication | | MECHATROLINK-II commands (for sequence, motion, data setting/reference, monitor, adjustament and other commands) | | | | | |
| I/O signal | Sequence input signal | | | Emergency stop, 3 external latch signals, forward/reverse torque limit, forward/reverse run prohibit, origin proximity, 3 general-purpose inputs | | | | | |
| | Sequence output signal | | | It is possible to output three types of signals: positioning completed, speed coincidence, rotation speed detection, servo ready, current limit, speed limit, brake release and warning signal | | | | | |

| Servo drive type | | | R88D-GN□ | 01H-ML2 | 02H-ML2 | 04H-ML2 | 08H-ML2 | 10H-ML2 | 15H-ML2 |
|---|---|---|---|---|---|---|---|---|---|
| Applicable servomotor | | | R88M-G□ | 05030□/10030□ | 20030□ | 40030□ | 75030□ | G1K020T□ | 90010T□/1K030T□/1K5□0T□ |
| | | | R88M-GP□ | 10030□ | 20030□ | 40030□ | - | - | - |
| Integrated functions | Communications | RS-232 communications | Interface | Personal computer | | | | | |
| | | | Transmission rate | From 2400 to 57600 bps | | | | | |
| | | | Functions | Parameter setting, status display, alarm display (monitor, clear, history), servo drive data tracing function, test run/autotuning operations, real time trace, absolute encoder setting, default values function | | | | | |
| | | MECHATROLINK communications | Communications protocol | MECHATROLINK-II | | | | | |
| | | | Transmission rate | 10 Mbps | | | | | |
| | | | Data length | 32 bytes | | | | | |
| | | | Functions | Parameter setting, status display, alarm display (monitor, clear, history), default values function | | | | | |
| | Automatic load inertia detection | | | Horizontal and vertical axis mode. One parameter rigidity setting. | | | | | |
| | Dynamic brake (DB) | | | Operates when main power OFF, servo alarm, overtravel or servo OFF | | | | | |
| | Regenerative processing | | | Built-in regeneration resistor in models from 750 W to 1.5 kW. External regeneration resistor optionally. | | | | | |
| | Overtravel (OT) prevention function | | | Dynamic brake, disables torque or emergency stop torque during POT and NOT operation | | | | | |
| | Emergency stop (STOP) | | | Emergency stop input | | | | | |
| | Encoder divider function | | | Optional division pulses possible | | | | | |
| | Electronic gearing | | | 0,01<Numerator/Denominator<100 | | | | | |
| | Internal speed setting function | | | 8 internal speeds | | | | | |
| | Protective functions | | | Overvoltage, undervoltage, overcurrent, overload, regeneration overload, servo drive overheat | | | | | |
| | Analog monitor Ouput | | | The actual servomotor speed, command speed, torque and number of accumulated pulses can be measured using an oscilloscope or other device. | | | | | |
| | Panel operator | | Display functions | A 2-digit 7-segment LED display shows the servo drive status, alarm codes, parameters, etc. | | | | | |
| | | | | MECHATROLINK-II communications status LED indicator (COM) | | | | | |
| | | | Switches | Rotary switch for setting the MECHATROLINK-II node address | | | | | |

### Servo drive part names

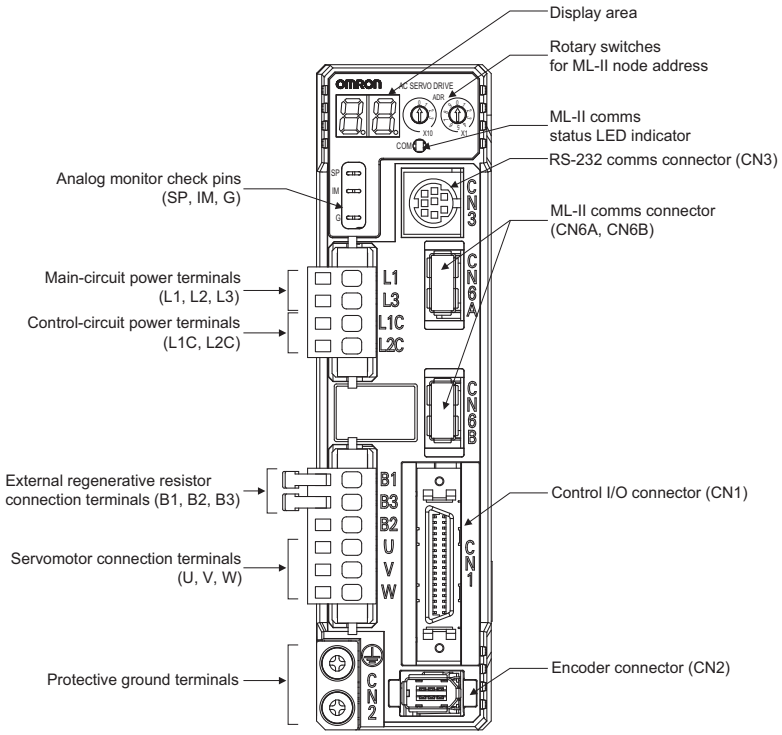

## Dimensions

### Servo drives

**R88D-GN01H-ML2 / GN02H-ML2 (200 V, 100 to 200 W)**

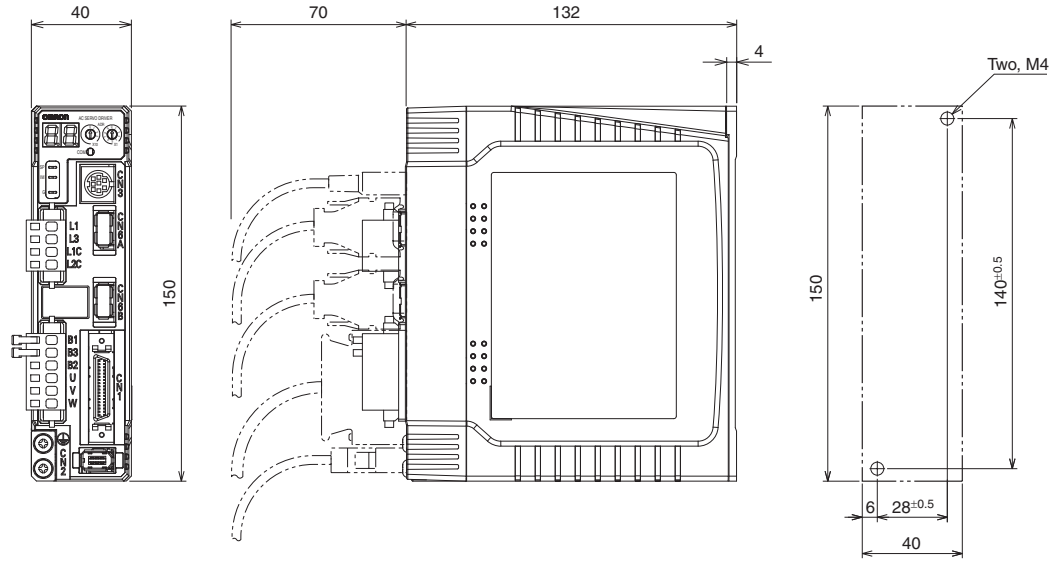


**R88D-GN04H-ML2 (200 V, 400 W)**

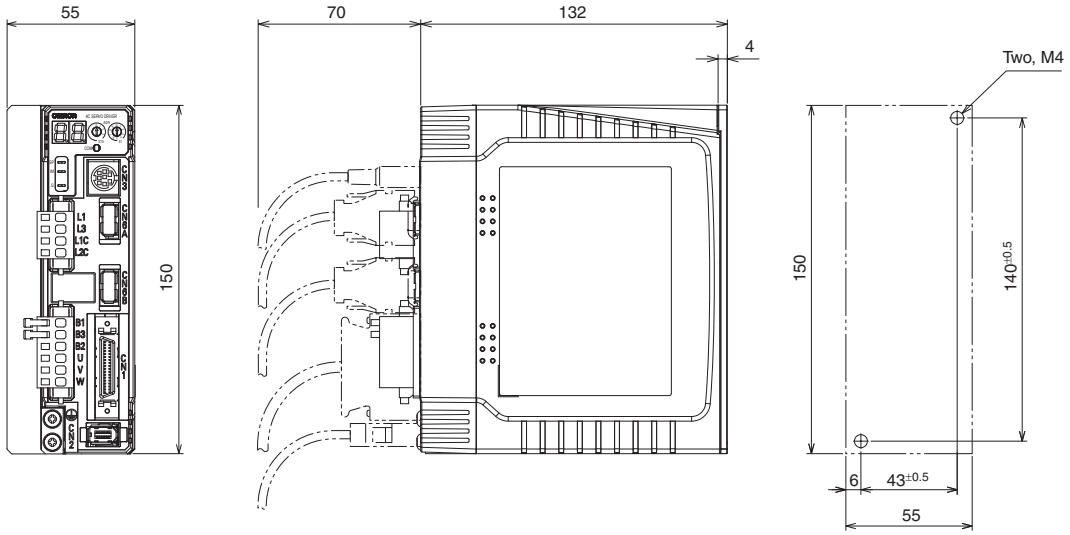


**R88D-GN08H-ML2 (200 V, 750 W)**

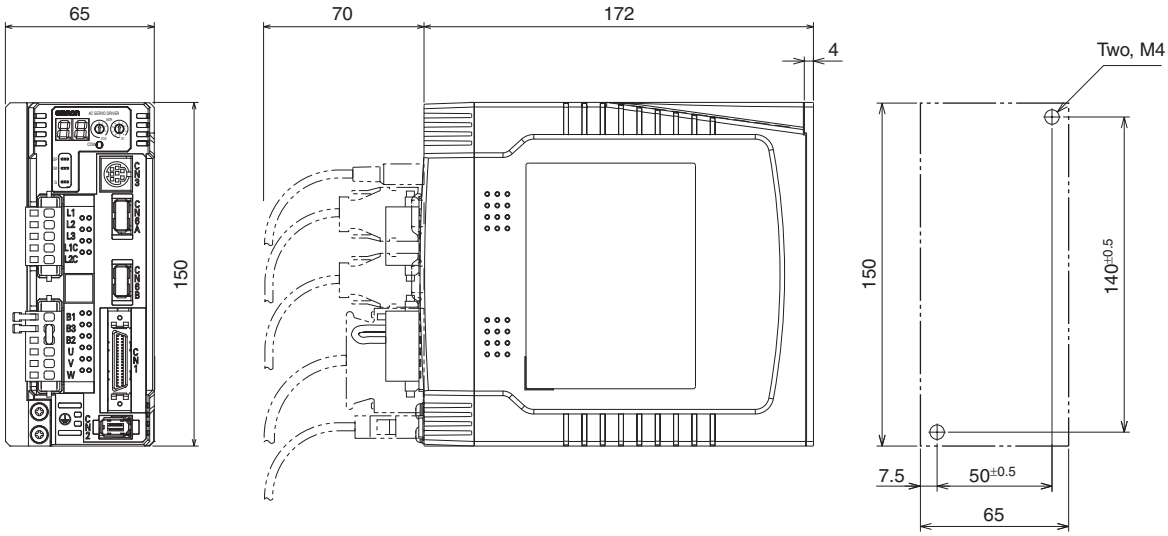

**R88D-GN10H-ML2 / GN15H-ML2 (200 V, 1 kW to 1,5 kW )**

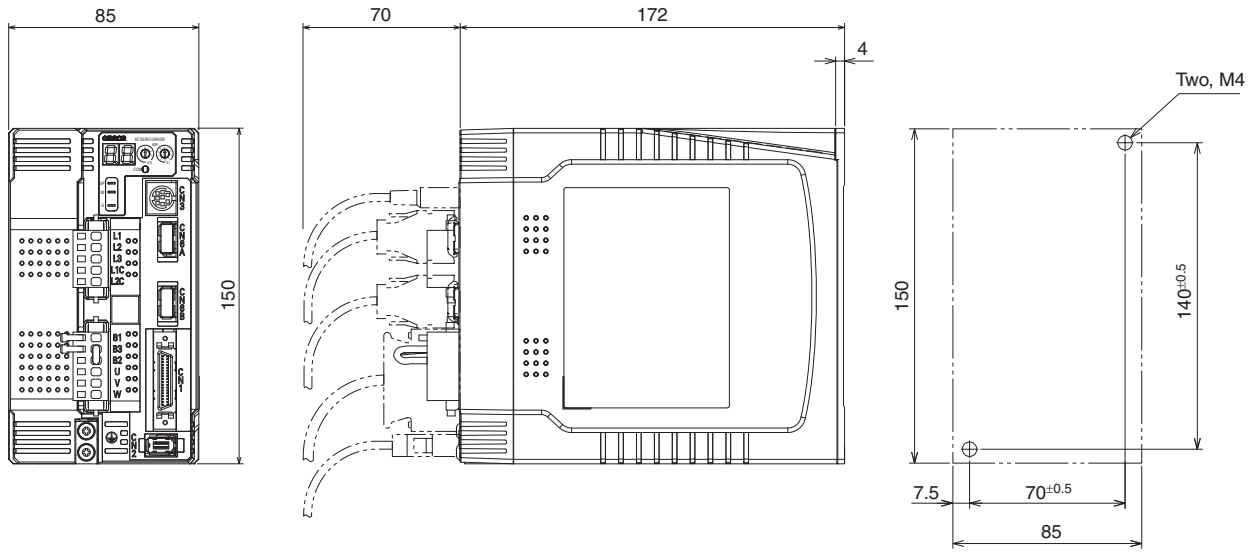


## Servo motors type designation

**Servo motor**

R88M-GP10030H-BOS2

G-Series Servomotor

Motor Type

Blank: Cylinder type

P: Flat type

Capacity

| | |
|---|---|
| 050 | 50 W |
| 100 | 100 W |
| 200 | 200 W |
| 400 | 400 W |
| 750 | 750 W |
| 900 | 900 W |
| 1K0 | 1 kW |
| 1K5 | 1.5 kW |

Rated Speed (r/min)

| | |
|---|---|
| 10 | 1000 |
| 20 | 2000 |
| 30 | 3000 |

Shaft end specifications

| | |
|---|---|
| Blank | Straigth shaft, no key |
| S2 | Straigth, key, tapped |

Oil seal specifications

| | |
|---|---|
| Blank | No oil seal |
| O | Oil seal |

Brake specifications

| | |
|---|---|
| Blank | No brake |
| B | Brake |

Voltage and encoder specifications

H: 230 V with incremental encoder

T: 230 V with absolute encoder

# Servo motor specifications

## Cylindrical servo motors 3000/2000/1000 r/min

### Ratings and specifications

| Applied voltage | | | 230 V | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Servo motor model R88M-□ | | | G05030□ | G10030□ | G20030□ | G40030□ | G75030□ | G1K030T | G1K530T | G1K020T | G1K520T | G90010T |
| Rated output | | W | 50 | 100 | 200 | 400 | 750 | 1000 | 1500 | 1000 | 1500 | 900 |
| Rated torque | | N·m | 0.16 | 0.32 | 0.64 | 1.3 | 2.4 | 3.18 | 4.77 | 4.8 | 7.15 | 8.62 |
| Instantaneous peak torque | | N·m | 0.45 | 0.90 | 1.78 | 3.67 | 7.05 | 9.1 | 12.8 | 13.5 | 19.6 | 18.4 |
| Rated current | | A (rms) | 1.1 | | 1.6 | 2.6 | 4 | 7.2 | 9.4 | 5.6 | 9.4 | 7.6 |
| Instantaneous max. current | | A (rms) | 3.4 | | 4.9 | 7.9 | 12.1 | 21.4 | 28.5 | 17.1 | 28.5 | 17.1 |
| Rated speed | | $min^{-1}$ | 3000 | | | | | | | 2000 | | 1000 |
| Max. speed | | $min^{-1}$ | 5000 | | | | 4500 | 5000 | | 3000 | | 2000 |
| Torque constant | | N·m/A (rms) | 0.14 | 0.19 | 0.41 | 0.51 | 0.64 | 0.44 | 0.51 | 0.88 | 0.76 | 1.13 |
| Rotor moment of inertia (JM) | | $kg·m^2x10^{-4}$ | 0.025 | 0.051 | 0.14 | 0.26 | 0.87 | 1.69 | 2.59 | 6.17 | 11.2 | |
| Allowable load moment of inertia (JL) | | Multiple of (JM) | 30 | | | | 20 | 15 | | 10 | | |
| Rated power rate | | kW/s | 10.4 | 20.1 | 30.3 | 62.5 | 66 | 60 | 88 | 37.3 | 45.8 | 66.3 |
| Applicable Encoder | | | Incremental encoder (10000 pulses) | | | | | - | | | | |
| | | | Incremental /Absolute encoder(17 bits) | | | | | | | | | |
| Allowable radial load | | N | 68 | | 245 | | 392 | | 490 | | | 686 |
| Allowable thrust load | | N | 58 | | 98 | | 147 | | 196 | | | |
| Approx. mass | | Kg (without brake) | 0.3 | 0.5 | 0.8 | 1.2 | 2.3 | 4.5 | 5.1 | 6.8 | 8.5 | |
| | | Kg (with brake) | 0.5 | 0.7 | 1.3 | 1.7 | 3.1 | 5.1 | 6.5 | 8.7 | 10.1 | 10 |
| Brake specifications | Rated voltage | | 24 VDC +/-5% | | | | | 24 VDC +/-10% | | | | |
| | Holding brake moment of inertia J | $kg·m^2x10^{-4}$ | 0.002 | | 0.018 | | 0.075 | 0.25 | 0.33 | 1.35 | | |
| | Power consumption (at 20°C) | W | 7 | | 9 | | 10 | 18 | 19 | 14 | 19 | |
| | Current consumption (at 20°C) | A | 0.3 | | 0.36 | | 0.42 | 0.74 | 0.81 | 0.59 | 0.79 | |
| | Static friction torque | N.m (minimum) | 0.29 | | 1.27 | | 2.45 | 4.9 | 7.8 | 4.9 | 13.7 | |
| | Rise time for holding torque | ms (max.) | 35 | | 50 | | 70 | 50 | | 80 | 100 | |
| | Release time | ms (max) | 20 | | 15 | | 20 | 15 | | 70 | 50 | |
| Basic specifications | Rating | | Continuous | | | | | | | | | |
| | Insulation grade | | Type B | | | | | Type F | | | | |
| | Ambient operating/ storage temperature | | 0 to +40°C/ -20 to 65°C | | | | | 0 to +40°C/ -20 to 80°C | | | | |
| | Ambient operating/ storage humidity | | 85% RH max. (non-condensing) | | | | | | | | | |
| | Vibration class | | V-15 | | | | | | | | | |
| | Insulation resistance | | 20 MΩ min. at 500 VDC between the power terminals and FG terminal | | | | | | | | | |
| | Enclosure | | Totally-enclosed, self-cooling, IP65 (excluding shaft opening and lead wire ends) | | | | | | | | | |
| | Vibration resistance | | Vibration acceleration 49 m/s² | | | | | Vibration acceleration 24.5 m/s² | | | | |
| | Mounting | | Flange-mounted | | | | | | | | | |

### Torque-speed charecteristics

R88M-G05030H/T (50 W)




R88M-G10030H/T (100 W)




R88M-G20030H/T (200 W)




R88M-G40030H/T (400 W)




R88M-G75030H/T (750 W)




R88M-G1K030T (1 kW)




R88M-G1K530T (1.5 kW)




R88M-G1K020T (1 kW)




R88M-G1K520T (1.5 kW)




R88M-G90010T (900 W)



## Flat servo motors 3000 r/min

### Ratings and specifications

| Applied voltage | | | 230 V | | |
|---|---|---|---|---|---|
| Servo motor model R88M-□ | | | GP10030□ | GP20030□ | GP40030□ |
| Rated output | | W | 100 | 200 | 400 |
| Rated torque | | N·m | 0.32 | 0.64 | 1.3 |
| Instantaneous peak torque | | N·m | 0.86 | 1.8 | 3.65 |
| Rated current | | A (rms) | 1 | 1.6 | 2.5 |
| Instantaneous max. current | | A (rms) | 3.1 | 4.9 | 7.5 |
| Rated speed | | $min^{-1}$ | 3000 | | |
| Max. speed | | $min^{-1}$ | 5000 | | |
| Torque constant | | N·m/A (rms) | 0.34 | 0.42 | 0.54 |
| Rotor moment of inertia (JM) | | $kg·m^2x10^{-4}$ | 0.1 | 0.35 | 0.64 |
| Allowable load moment of inertia (JL) | | Multiple of (JM) | 20 | | |
| Rated power rate | | kW/s | 10.2 | 11.5 | 25.5 |
| Applicable encoder | | | Incremental (10000 pulses) | | |
| | | | Incremental /Absolute encoder(17 bits) | | |
| Allowable radial load | | N | 68 | 245 | |
| Allowable thrust load | | N | 58 | 98 | |
| Approx. mass | | Kg (without brake) | 0.7 | 1.3 | 1.8 |
| | | Kg (with brake) | 0.9 | 2 | 2.5 |
| Brake specifications | Rated voltage | | 24VDC +/-10% | | |
| | Holding brake moment of inertia J | $kg·m^2x10^{-4}$ | 0.03 | 0.09 | |
| | Power consumption (at 20°C) | W | 7 | 10 | |
| | Current consumption (at 20°C) | A | 0.29 | 0.41 | |
| | Static friction torque | N.m (minimum) | 0.29 | 1.27 | |
| | Rise time for holding torque | ms (max.) | 50 | 60 | |
| | Release time | ms (max) | 15 | | |
| Basic specifications | Rating | | Continuous | | |
| | Insulation grade | | Type B | | |
| | Ambient operating/ storage temperature | | 0 to +40 °C/ -20 to 80°C | | |
| | Ambient operating/ storage humidity | | 85% RH max. (non-condensing) | | |
| | Vibration class | | V-15 | | |
| | Insulation resistance | | 20 MΩ min. at 500 VDC between the power terminals and FG terminal | | |
| | Enclosure | | Totally-enclosed, self-cooling, IP65 (excluding shaft opening and lead wire ends) | | |
| | Vibration resistance | | Vibration acceleration 49 m/s2 | | |
| | Mounting | | Flange-mounted | | |

### Torque-speed charecteristics

R88M-GP10030H/T (100 W)




R88M-GP20030H/T (200 W)




R88M-GP40030H/T (400 W)



## Dimensions

Servo motors

### Cylindrical type 3000 r/min (230 V, 50-100 W)

| Dimensions (mm) | Without brake | With brake | LN | Flange surface | Shaft end | | Aprox. Mass (Kg) | |
|---|---|---|---|---|---|---|---|---|
| Model | LL | LL | | D | S | B | Without brake | With brake |
| R88M-G05030□-□S2 | 72 | 102 | 26.5 | $30^{h7}$ | $8^{h6}$ | $3^{h9}$ | 0.3 | 0.5 |
| R88M-G10030□-□S2 | 92 | 122 | 46.5 | | | | 0.5 | 0.7 |

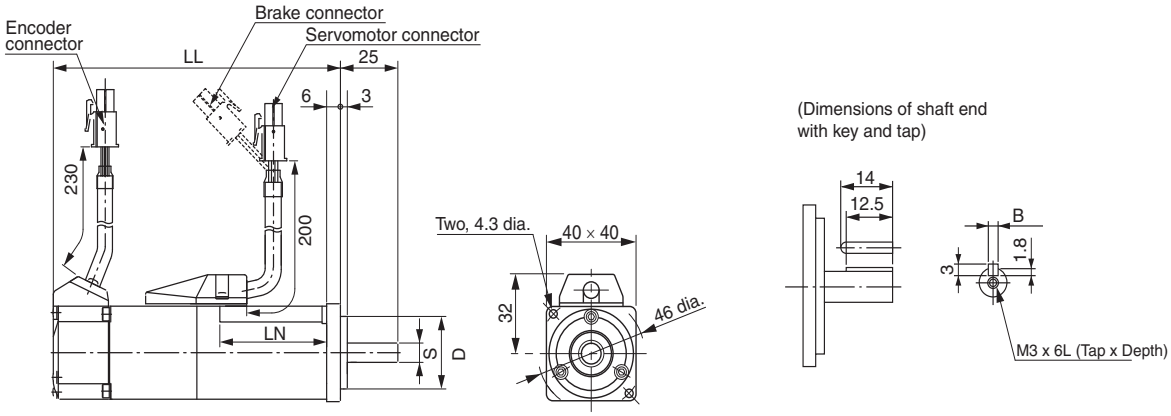


### Cylindrical type 3000 r/min (230 V, 200-750 W)

| Dimensions (mm) | Without brake | With brake | LR | KL1 | Flange surface | | | | | Shaft end | | | | | | Aprox. Mass (Kg) | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Model | LL | LL | | | D1 | D2 | C | G | Z | S | QK | B | H | T1 | Tap x depth | Without brake | With brake |
| R88M-G20030□-□S2 | 79.5 | 116 | 30 | 43 | 70 | $50^{h7}$ | 60 | 6.5 | 4.5 | $11^{h6}$ | 18 | $4^{h9}$ | 4 | 2.5 | M4x8L | 0.8 | 1.3 |
| R88M-G40030□-□S2 | 99 | 135.5 | | | | | | | | $14^{h6}$ | 22.5 | $5^{h9}$ | 5 | 3 | M5x10L | 1.2 | 1.7 |
| R88M-G75030□-□S2 | 112.2 | 149.2 | 35 | 53 | 90 | $70^{h7}$ | 80 | 8 | 6 | $19^{h6}$ | 22 | $6^{h9}$ | 6 | 3.5 | | 2.3 | 3.1 |

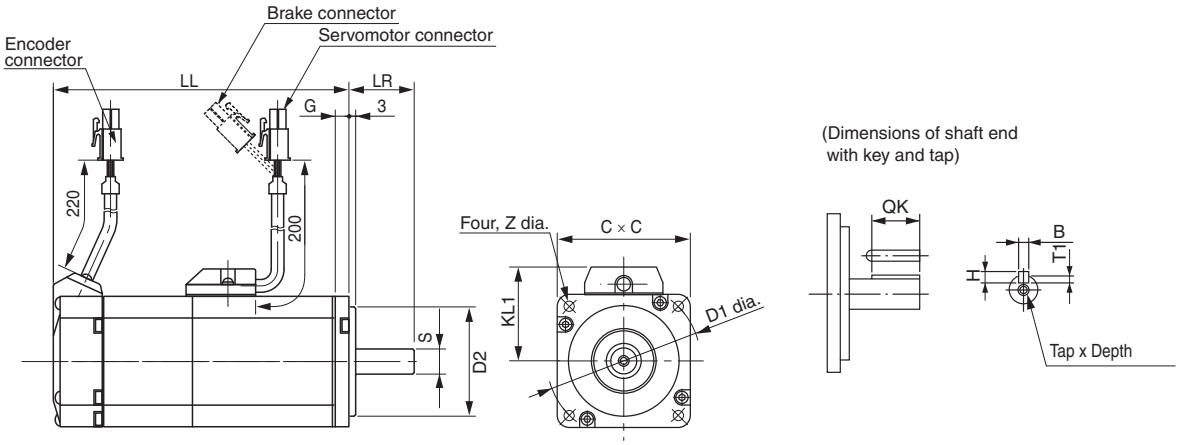

### Cylindrical type 3000, 2000 and 1000 r/min (230 V, 900 kW - 1.5 kW)

| Dimensions (mm) | Without brake | With brake | LR | KL1 | Flange surface | | | | | | | Shaft end | | | | | | Aprox. Mass (Kg) | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Model | LL | LL | | | D1 | D2 | D3 | C | G | F | Z | S | QK | B | H | T1 | Tap x depth | Without brake | With brake |
| R88M-G1K030T-□S2 | 175 | 200 | 55 | 98 | 100 | $80^{h7}$ | 120 | 90 | 7 | 3 | 6.6 | $19^{h6}$ | 42 | $6^{h9}$ | 6 | 3.5 | M5x12L | 4.5 | 5.1 |
| R88M-G1K530T-□S2 | 180 | 205 | | 103 | 115 | $95^{h7}$ | 135 | 100 | 10 | | 9 | | | | | | | 5.1 | 6.5 |
| R88M-G1K020T-□S2 | 150 | 175 | | 118 | 145 | $110^{h7}$ | 165 | 130 | 12 | 6 | | $22^{h6}$ | 41 | $8^{h9}$ | 7 | 4 | | 6.8 | 8.7 |
| R88M-G1K520T-□S2 | 175 | 200 | | | | | | | | | | | | | | | | 8.5 | 10.1 |
| R88M-G90010T-□S2 | 175 | 200 | 70 | | | | | | | | | | | | | | | | 10 |

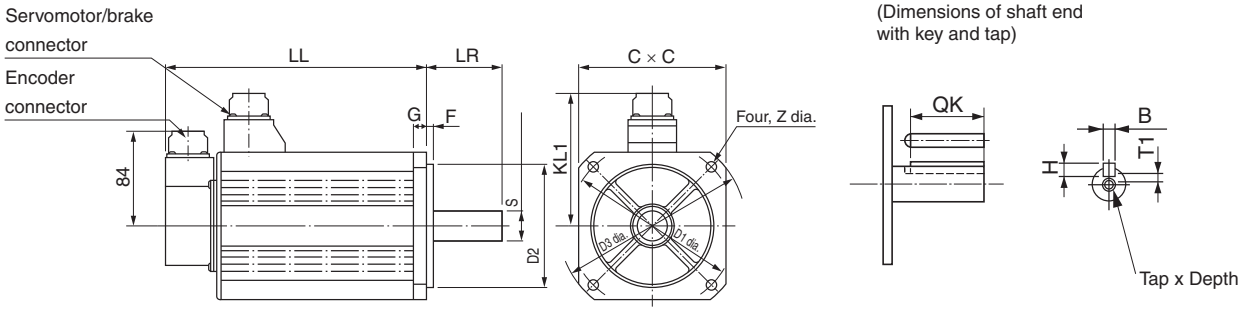


### Flat type 3000 r/min (230 V, 100 W - 400 W)

| Dimensions (mm) | Without brake | With brake | LR | KL1 | Flange surface | | | | | | Shaft end | | | | | | Aprox. Mass (Kg) | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Model | LL | LL | | | D1 | D2 | C | F | G | Z | S | QK | B | H | T1 | Tap x depth | Without brake | With brake |
| R88M-GP10030H-□S2 | 60.5 | 84.5 | 25 | 43 | 70 | $50^{h7}$ | 60 | 3 | 7 | 4.5 | $8^{h6}$ | 12.5 | $3^{h9}$ | 3 | 1.8 | M3x6L | 0.7 | 0.9 |
| R88M-GP10030T-□S2 | 87.5 | 111.5 | | | | | | | | | | | | | | | | |
| R88M-GP20030H-□S2 | 67.5 | 100 | 30 | 53 | 90 | $70^{h7}$ | 80 | 5 | 8 | 5.5 | $11^{h6}$ | 18 | $4^{h9}$ | 4 | 2.5 | M4x8L | 1.3 | 2 |
| R88M-GP20030T-□S2 | 94.5 | 127 | | | | | | | | | | | | | | | | |
| R88M-GP40030H-□S2 | 82.5 | 115 | | | | | | | | | $14^{h6}$ | 22.5 | $5^{h9}$ | 5 | 3.0 | M5x10L | 1.8 | 2.5 |
| R88M-GP40030T-□S2 | 109.5 | 142 | | | | | | | | | | | | | | | | |

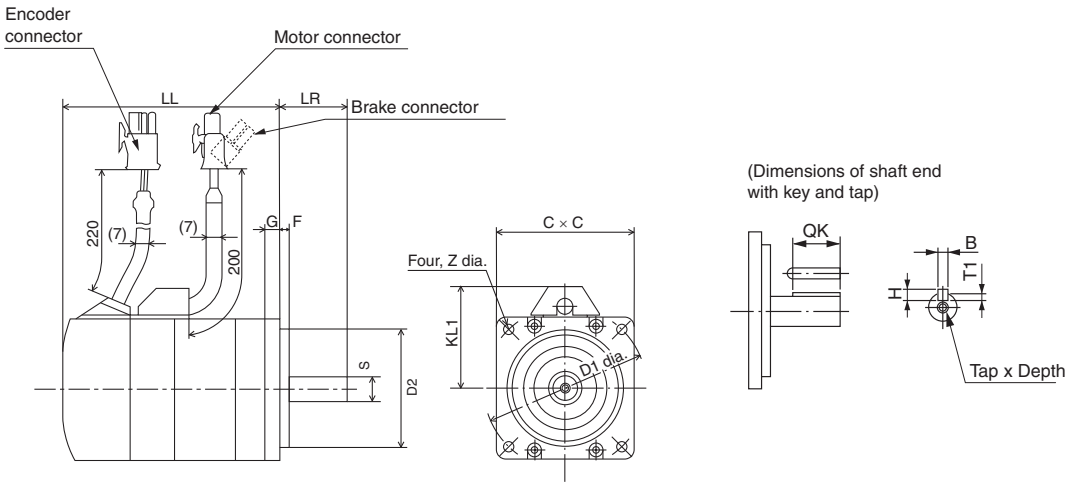

## Installation

### Single-phase, 230 VAC

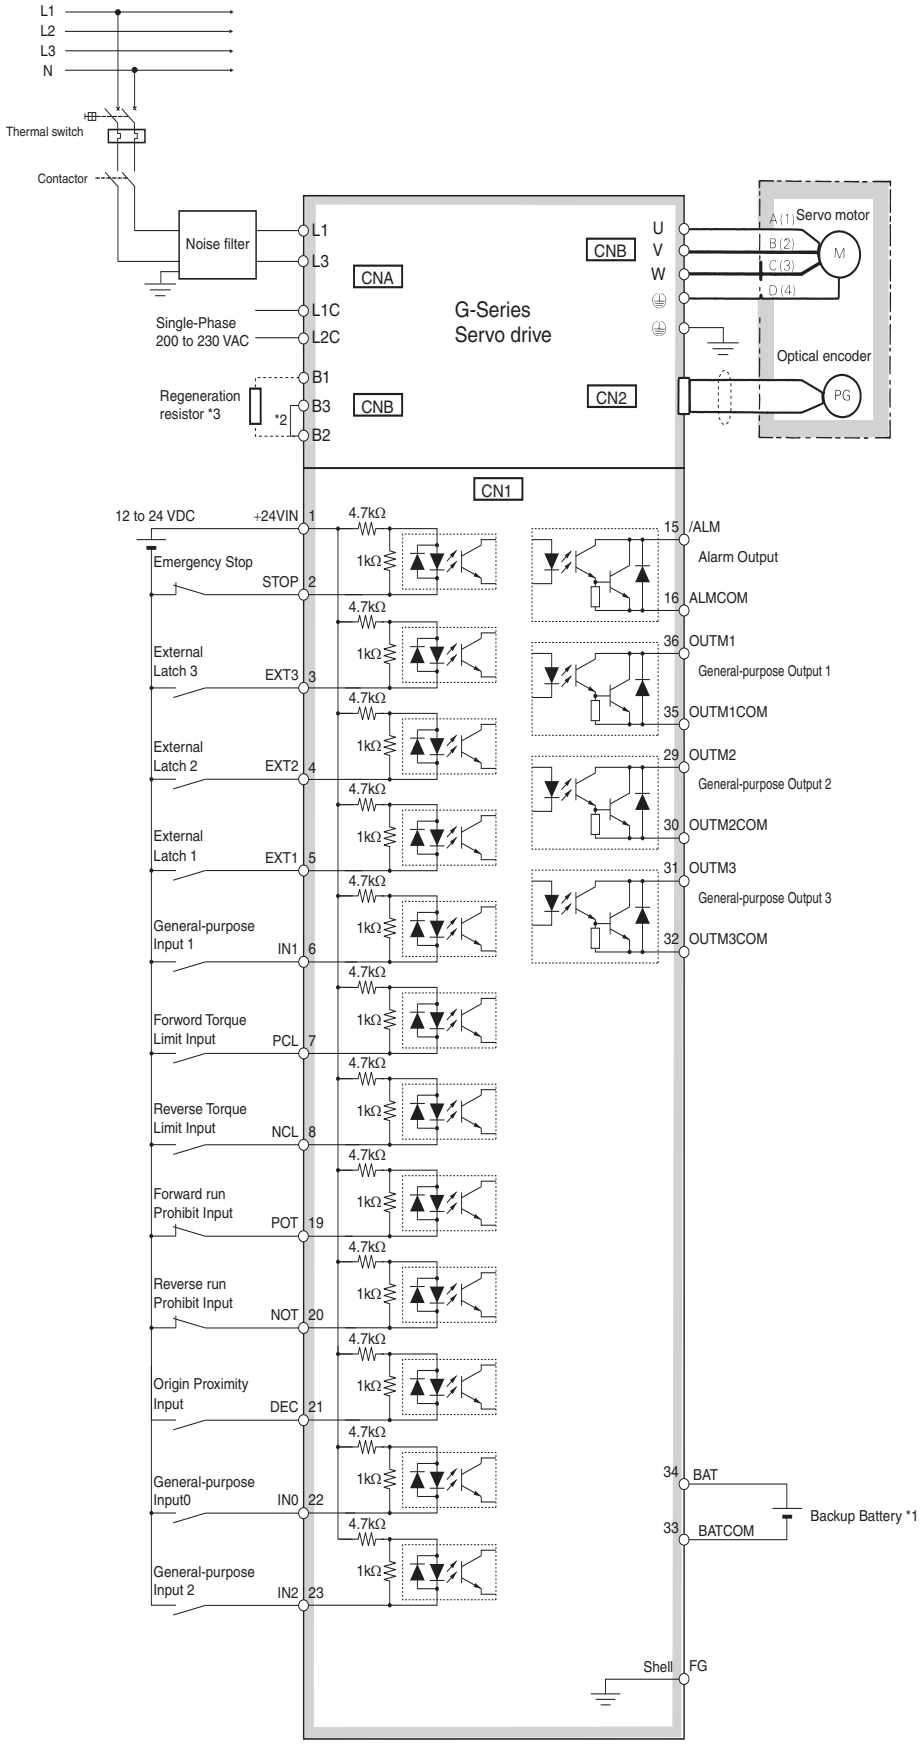


*1 Connect when using an absolute encoder. If a backup battery is connected, an encoder cable with a battery is not required.

*2 Connect B2-B3 for the models with a built-in regeneration resistor (models from 750 W).

*3 If the amount of regeneration is large, connect an external regeneration resistor to B1-B2. For the models from 750 W, disconnect B2-B3.

## Ordering information

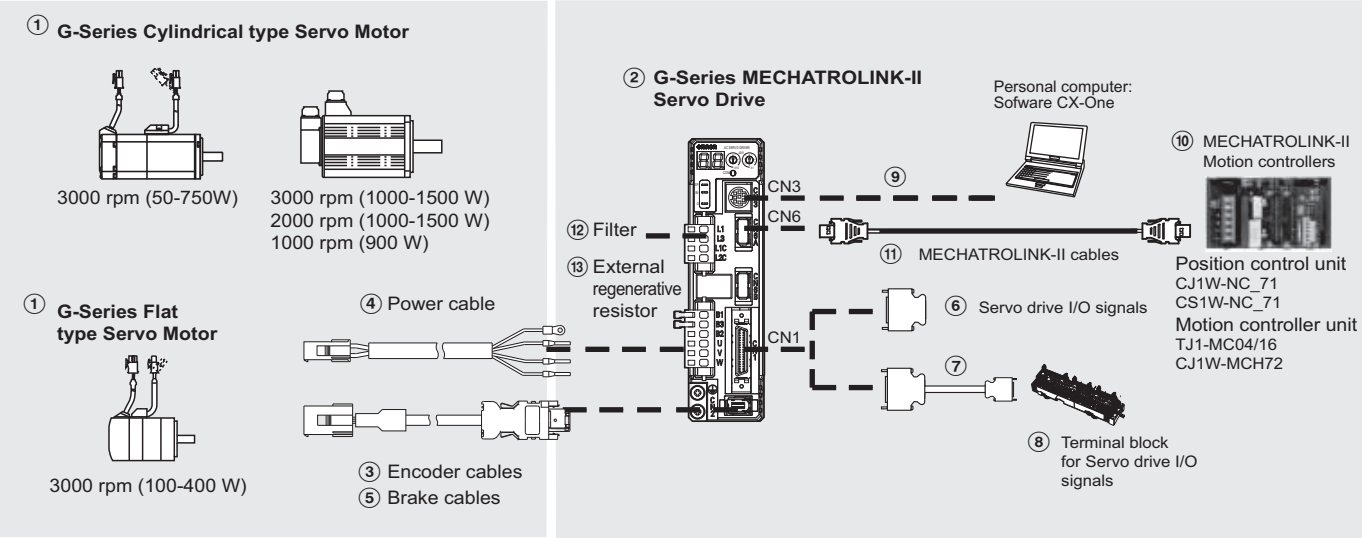


**Note:** The symbols ①②③④⑤... show the recommended sequence to select the components in a G-Series servo system

### Servo drives

| Symbol | Specifications | | Servo drive model | ① Compatible rotary servo motors | |
|---|---|---|---|---|---|
| | | | | Cylindric type | Flat type |
| ② | 1 phase 200 VAC | 100 W | R88D-GN01H-ML2 | R88M-G05030□ | R88M-GP10030□ |
| | | | | R88M-G10030□ | |
| | | 200 W | R88D-GN02H-ML2 | R88M-G20030□ | R88M-GP20030□ |
| | | 400 W | R88D-GN04H-ML2 | R88M-G40030□ | R88M-GP40030□ |
| | | 750 W | R88D-GN08H-ML2 | R88M-G75030□ | - |
| | | 1.0 kW | R88D-GN10H-ML2 | R88M-G1K020T□ | - |
| | | 1.5 kW | R88D-GN15H-ML2 | R88M-G90010T□ | - |
| | | | | R88M-G1K030T□ | - |
| | | | | R88M-G1K520T□ | - |
| | | | | R88M-G1K530T□ | - |

### Control cables (for CN1)

| Symbol | Name | Connect to | | Model |
|---|---|---|---|---|
| ⑥ | I/O connector kit | Servo drive I/O signals | - | R88A-CNU01C |
| ⑦ | Terminal block cable | | 1 m | XW2Z-100J-B33 |
| | | | 2 m | XW2Z-200J-B33 |
| ⑧ | Terminal block | | - | XW2B-20G4 |
| | | | | XW2B-20G5 |
| | | | | XW2D-20G6 |

### Computer cable (for CN3)

| Symbol | Name | | Model |
|---|---|---|---|
| ⑨ | Computer cable RS232 | 2 m | R88A-CCG002P2 |

### MECHATROLINK-II Motion controllers

| Symbol | Name | Model |
|---|---|---|
| ⑩ | Trajexia stand-alone motion controller | TJ1-MC04 (4 axes) |
| | | TJ1-MC16 (16 axes) |
| | Trajexia-PLC motion controller | CJ1W-MCH72 |
| | Position Controller Unit for CJ1 PLC | CJ1W-NCF71 (16 axes) |
| | | CJ1W-NC471 (4 axes) |
| | | CJ1W-NC271 (2 axes) |
| | Position Controller Unit for CS1 PLC | CS1W-NCF71 (16 axes) |
| | | CS1W-NC471 (4 axes) |
| | | CS1W-NC271 (2 axes) |

### Computer software

| Specifications | Model |
|---|---|
| Configuration and monitoring software tool for servo drives and inverters. (CX-drive version 1.70 or higher) | CX-drive |
| Complete OMRON software package including CX-drive. (CX-One version 3.10 or higher) | CX-One |

### MECHATROLINK-II cables (for CN6)

| Symbol | Specifications | Length | Model |
|---|---|---|---|
| ⑪ | MECHATROLINK-II Terminator resistor | - | JEPMC-W6022-E |
| | MECHATROLINK-II cables | 0.5 m | JEPMC-W6003-A5-E |
| | | 1 m | JEPMC-W6003-01-E |
| | | 3 m | JEPMC-W6003-03-E |
| | | 5 m | JEPMC-W6003-05-E |
| | | 10 m | JEPMC-W6003-10-E |
| | | 20 m | JEPMC-W6003-20-E |
| | | 30 m | JEPMC-W6003-30-E |

### Footprint filters

| Symbol | Applicable servodrive | Filter model | Rated current | Leak-age current | Rated voltage |
|---|---|---|---|---|---|
| ⑫ | R88D-GN01H□ R88D-GN02H□ | R88A-FIK102-RE | 2.4 A | 3.5 mA | 250 VAC single-phase |
| | R88D-GN04H□ | R88A-FIK104-RE | 4.1 A | 3.5 mA | |
| | R88D-GN08H□ | R88A-FIK107-RE | 6.6 A | 3.5 mA | |
| | R88D-GN10H□ R88D-GN15H□ | R88A-FIK114-RE | 14.2 A | 3.5 mA | |

### External regenerative resistor

| Symbol | Regenerative resistor unit model | Specifications |
|---|---|---|
| ⑬ | R88A-RR08050S | 50 Ω, 80 W |
| | R88A-RR080100S | 100 Ω, 80 W |
| | R88A-RR22047S | 47 Ω, 220 W |
| | R88A-RR50020S | 20 Ω, 500 W |

## Cylindrical servo motors 3000/2000/1000 r/min (50 - 1.5 kW)

| Symbol | Specifications | | | | | | Servo motor model | Compatible servo drives ② |
|---|---|---|---|---|---|---|---|---|
| | Voltage | Encoder and design | Speed | Design | Rated torque | Capacity | | |
| ① (50-750 W) | 230 V | Incremental encoder (10000 pulses) Straight shaft with key & tap | 3000 min$^{-1}$ | Without brake | 0.16 Nm | 50 W | R88M-G05030H-S2 | R88D-GN01H-ML2 |
| | | | | | 0.32 Nm | 100 W | R88M-G10030H-S2 | R88D-GN01H-ML2 |
| | | | | | 0.64 Nm | 200 W | R88M-G20030H-S2 | R88D-GN02H-ML2 |
| | | | | | 1.3 Nm | 400 W | R88M-G40030H-S2 | R88D-GN04H-ML2 |
| | | | | | 2.4 Nm | 750 W | R88M-G75030H-S2 | R88D-GN08H-ML2 |
| | | | | With brake | 0.16 Nm | 50 W | R88M-G05030H-BS2 | R88D-GN01H-ML2 |
| | | | | | 0.32 Nm | 100 W | R88M-G10030H-BS2 | R88D-GN01H-ML2 |
| | | | | | 0.64 Nm | 200 W | R88M-G20030H-BS2 | R88D-GN02H-ML2 |
| | | | | | 1.3 Nm | 400 W | R88M-G40030H-BS2 | R88D-GN04H-ML2 |
| | | | | | 2.4 Nm | 750 W | R88M-G75030H-BS2 | R88D-GN08H-ML2 |
| (900-1500 W) | | Absolute/ incremental encoder (17 bits) Straight shaft with key & tap | | Without brake | 0.16 Nm | 50 W | R88M-G05030T-S2 | R88D-GN01H-ML2 |
| | | | | | 0.32 Nm | 100 W | R88M-G10030T-S2 | R88D-GN01H-ML2 |
| | | | | | 0.64 Nm | 200 W | R88M-G20030T-S2 | R88D-GN02H-ML2 |
| | | | | | 1.3 Nm | 400 W | R88M-G40030T-S2 | R88D-GN04H-ML2 |
| | | | | | 2.4 Nm | 750 W | R88M-G75030T-S2 | R88D-GN08H-ML2 |
| | | | | | 3.18 Nm | 1 kW | R88M-G1K030T-S2 | R88D-GN15H-ML2 |
| | | | | | 4.77 Nm | 1.5 kW | R88M-G1K530T-S2 | R88D-GN15H-ML2 |
| | | | | With brake | 0.16 Nm | 50 W | R88M-G05030T-BS2 | R88D-GN01H-ML2 |
| | | | | | 0.32 Nm | 100 W | R88M-G10030T-BS2 | R88D-GN01H-ML2 |
| | | | | | 0.64 Nm | 200 W | R88M-G20030T-BS2 | R88D-GN02H-ML2 |
| | | | | | 1.3 Nm | 400 W | R88M-G40030T-BS2 | R88D-GN04H-ML2 |
| | | | | | 2.4 Nm | 750 W | R88M-G75030T-BS2 | R88D-GN08H-ML2 |
| | | | | | 3.18 Nm | 1 kW | R88M-G1K030T-BS2 | R88D-GN15H-ML2 |
| | | | | | 4.77 Nm | 1.5 kW | R88M-G1K530T-BS2 | R88D-GN15H-ML2 |
| | | | 2000 min$^{-1}$ | Without brake | 4.8 Nm | 1 kW | R88M-G1K020T-S2 | R88D-GN10H-ML2 |
| | | | | | 7.15 Nm | 1.5 kW | R88M-G1K520T-S2 | R88D-GN15H-ML2 |
| | | | | With brake | 4.8 N m | 1 kW | R88M-G1K020T-BS2 | R88D-GN10H-ML2 |
| | | | | | 7.15 Nm | 1.5 kW | R88M-G1K520T-BS2 | R88D-GN15H-ML2 |
| | | | 1000 min$^{-1}$ | Without brake | 8.62 Nm | 900 W | R88M-G90010T-S2 | R88D-GN15H-ML2 |
| | | | | With brake | | | R88M-G90010T-BS2 | R88D-GN15H-ML2 |

## Flat type servo motors 3000 r/min (100 - 400 W)

| Symbol | Specifications | | | | | Servo motor model | Compatible servo drives ② |
|---|---|---|---|---|---|---|---|
| | Voltage | Encoder and design | | Rated torque | Capacity | | |
| ① | 230 V | Incremental encoder (10000 pulses) Straight shaft with key & tap | Without brake | 0.32 Nm | 100 W | R88M-GP10030H-S2 | R88D-GN01H-ML2 |
| | | | | 0.64 Nm | 200 W | R88M-GP20030H-S2 | R88D-GN02H-ML2 |
| | | | | 1.3 Nm | 400 W | R88M-GP40030H-S2 | R88D-GN04H-ML2 |
| | | | With brake | 0.32 Nm | 100 W | R88M-GP10030H-BS2 | R88D-GN01H-ML2 |
| | | | | 0.64 Nm | 200 W | R88M-GP20030H-BS2 | R88D-GN02H-ML2 |
| | | | | 1.3 Nm | 400 W | R88M-GP40030H-BS2 | R88D-GN04H-ML2 |
| | | Absolute/ incremental encoder (17 bits) Straight shaft with key & tap | Without brake | 0.32 Nm | 100 W | R88M-GP10030T-S2 | R88D-GN01H-ML2 |
| | | | | 0.64 Nm | 200 W | R88M-GP20030T-S2 | R88D-GN02H-ML2 |
| | | | | 1.3 Nm | 400 W | R88M-GP40030T-S2 | R88D-GN04H-ML2 |
| | | | With brake | 0.32 Nm | 100 W | R88M-GP10030T-BS2 | R88D-GN01H-ML2 |
| | | | | 0.64 Nm | 200 W | R88M-GP20030T-BS2 | R88D-GN02H-ML2 |
| | | | | 1.3 Nm | 400 W | R88M-GP40030T-BS2 | R88D-GN04H-ML2 |

## Encoder Cables

| Symbol | Specifications | | Model | Appearance |
|---|---|---|---|---|
| ③ | Encoder cable for absolute encoder (50-750 W) R88M-G(050/100/200/400/750)30T-□ R88M-GP(100/200/400)30T-□ | 1.5 m | R88A-CRGA001-5CR-E | |
| | | 3 m | R88A-CRGA003CR-E | |
| | | 5 m | R88A-CRGA005CR-E | |
| | | 10 m | R88A-CRGA010CR-E | |
| | | 15 m | R88A-CRGA015CR-E | |
| | | 20 m | R88A-CRGA020CR-E | |
| | Encoder cable for Incremental encoder (50-750 W) R88M-G(050/100/200/400/750)30H-□ R88M-GP(100/200/400)30H-□ | 1.5 m | R88A-CRGB001-5CR-E |  |
| | | 3 m | R88A-CRGB003CR-E | |
| | | 5 m | R88A-CRGB005CR-E | |
| | | 10 m | R88A-CRGB010CR-E | |
| | | 15 m | R88A-CRGB015CR-E | |
| | | 20 m | R88A-CRGB020CR-E | |
| | Encoder cable for Absolute encoder (900-1500 W) R88M-G(1K0/1K5)30T-□ R88M-G(1K0/1K5)20T-□ R88M-G90010T-□ | 1.5 m | R88A-CRGC001-5NR-E | 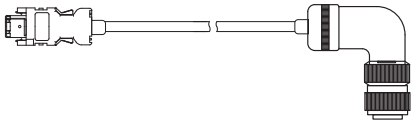 |
| | | 3 m | R88A-CRGC003NR-E | |
| | | 5 m | R88A-CRGC005NR-E | |
| | | 10 m | R88A-CRGC010NR-E | |
| | | 15 m | R88A-CRGC015NR-E | |
| | | 20 m | R88A-CRGC020NR-E | |

### Absolute Encoder Battery cable

| Symbol | Specifications | | | Model | Appearance |
|---|---|---|---|---|---|
| ③ | Absolute Encoder battery cable | Battery not included | 0.3 m | R88A-CRGD0R3C |  Battery holder |
| | | One R88A-BAT01G Battery included | 0.3 m | R88A-CRGD0R3C-BS | |
| | Absolute Encoder backup battery 2,000 mA.h 3.6V | - | - | R88A-BAT01G | |

**Note:** The absolute encoder battery cable is only an extension and must be used with an absolute encoder cable.

### Power cables

| Symbol | Specifications | | Model | Appearance |
|---|---|---|---|---|
| ④ | For servomotors from 50 to 750W<br>R88M-G(050/100/200/400/750)30□<br>R88M-GP(100/200/400)30□<br><br>For servomotors with brake, a separate cable (R88A-CAGA□BR-E) is needed | 1.5 m | R88A-CAGA001-5SR-E |  |
| | | 3 m | R88A-CAGA003SR-E | |
| | | 5 m | R88A-CAGA005SR-E | |
| | | 10 m | R88A-CAGA010SR-E | |
| | | 15 m | R88A-CAGA015SR-E | |
| | | 20 m | R88A-CAGA020SR-E | |
| | For servomotors from 900 to 1.5 kW without brake<br>R88M-G(1K0/1K5)30T-S2<br>R88M-G(1K0/1K5)20T-S2<br>R88M-G90010T-S2 | 1.5 m | R88A-CAGB001-5SR-E | 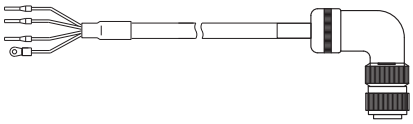 |
| | | 3 m | R88A-CAGB003SR-E | |
| | | 5 m | R88A-CAGB005SR-E | |
| | | 10 m | R88A-CAGB010SR-E | |
| | | 15 m | R88A-CAGB015SR-E | |
| | | 20 m | R88A-CAGB020SR-E | |
| | For servomotors from 900 to 1.5 kW with brake<br>R88M-G(1K0/1K5)30T-BS2<br>R88M-G(1K0/1K5)20T-BS2<br>R88M-G90010T-BS2 | 1.5 m | R88A-CAGB001-5BR-E | 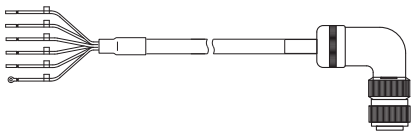 |
| | | 3 m | R88A-CAGB003BR-E | |
| | | 5 m | R88A-CAGB005BR-E | |
| | | 10 m | R88A-CAGB010BR-E | |
| | | 15 m | R88A-CAGB015BR-E | |
| | | 20 m | R88A-CAGB020BR-E | |

### Brake cable (for 50-750W servomotors)

| Symbol | Specifications | | Model | Appearance |
|---|---|---|---|---|
| ⑤ | Brake cable only.<br>For servomotors from 50 to 750W with brake<br><br>R88M-G(050/100/200/400/750)30□-BS2,<br>R88M-GP(100/200/400)30□-BS2 | 1.5 m | R88A-CAGA001-5BR-E | |
| | | 3 m | R88A-CAGA003BR-E | |
| | | 5 m | R88A-CAGA005BR-E | |
| | | 10 m | R88A-CAGA010BR-E | |
| | | 15 m | R88A-CAGA015BR-E | |
| | | 20 m | R88A-CAGA020BR-E | |

### Connectors for power, encoder and brake cables

| Specifications | | Applicable Servomotor | Model |
|---|---|---|---|
| Connectors for power cables | Motor side | R88M-G(050/100/200/400/750)30□, R88M-GP(100/200/400)30□ | R88A-CNG01A |
| | Motor side | R88M-G(1K0/1K5)30□-S2, R88M-G(1K0/1K5)20□-S2, R88M-G90010□-S2 (without brake) | MS3108E20-4S |
| | Motor side | R88M-G(1K0/1K5)30□-BS2, R88M-G(1K0/1K5)20□-BS2, R88M-G90010□-BS2 (with brake) | MS3108E20-18S |
| Connectors for encoder cables | Drive side (CN2) | - | R88A-CNW01R |
| | Motor side | R88M-G(050/100/200/400/750)30T-□, R88M-GP(100/200/400)30T-□ (Absolute encoder) | R88A-CNG01R |
| | Motor side | R88M-G(050/100/200/400/750)30H-□, R88M-GP(100/200/400)30H-□ (Incremental encoder) | R88A-CNG02R |
| | Motor side | R88M-G(1K0/1K5)30T-□, R88M-G(1K0/1K5)20T-□, R88M-G90010T-□ | MS3108E20-29S |
| Connector for brake cable | Motor side | R88M-G(050/100/200/400/750)30□-BS2, R88M-GP(100/200/400)30□-BS2 | R88A-CNG01B |

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.
To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

In the interest of product improvement, specifications are subject to change without notice.

**OMRON EUROPE B.V.** Wegalaan 67-69, NL-2132 JD, Hoofddorp, The Netherlands. Tel: +31 (0) 23 568 13 00 Fax: +31 (0) 23 568 13 88 www.industrial.omron.eu

**Austria**
Tel: +43 (0) 2236 377 800
www.industrial.omron.at

**Belgium**
Tel: +32 (0) 2 466 24 80
www.industrial.omron.be

**Czech Republic**
Tel: +420 234 602 602
www.industrial.omron.cz

**Denmark**
Tel: +45 43 44 00 11
www.industrial.omron.dk

**Finland**
Tel: +358 (0) 207 464 200
www.industrial.omron.fi

**France**
Tel: +33 (0) 1 56 63 70 00
www.industrial.omron.fr

**Germany**
Tel: +49 (0) 2173 680 00
www.industrial.omron.de

**Hungary**
Tel: +36 1 399 30 50
www.industrial.omron.hu

**Italy**
Tel: +39 02 326 81
www.industrial.omron.it

**Netherlands**
Tel: +31 (0) 23 568 11 00
www.industrial.omron.nl

**Norway**
Tel: +47 (0) 22 65 75 00
www.industrial.omron.no

**Poland**
Tel: +48 (0) 22 645 78 60
www.industrial.omron.pl

**Portugal**
Tel: +351 21 942 94 00
www.industrial.omron.pt

**Russia**
Tel: +7 495 648 94 50
www.industrial.omron.ru

**South-Africa**
Tel: +27 (0)11 579 2600
www.industrial.omron.co.za

**Spain**
Tel: +34 913 777 900
www.industrial.omron.es

**Sweden**
Tel: +46 (0) 8 632 35 00
www.industrial.omron.se

**Switzerland**
Tel: +41 (0) 41 748 13 13
www.industrial.omron.ch

**Turkey**
Tel: +90 216 474 00 40
www.industrial.omron.com.tr

**United Kingdom**
Tel: +44 (0) 870 752 08 61
www.industrial.omron.co.uk

**More Omron representatives**
www.industrial.omron.eu

**Automation Systems**
• Programmable logic controllers (PLC) • Human machine interfaces (HMI) • Remote I/O
• Industrial PC's • Software

**Motion & Drives**
• Motion controllers • Servo systems • Inverters

**Control Components**
• Temperature controllers • Power supplies • Timers • Counters • Programmable relays
• Digital panel indicators • Electromechanical relays • Monitoring products • Solid-state relays
• Limit switches • Pushbutton switches • Low voltage switch gear

**Sensing & Safety**
• Photoelectric sensors • Inductive sensors • Capacitive & pressure sensors
• Cable connectors • Displacement & width-measuring sensors • Vision systems
• Safety networks • Safety sensors • Safety units/relay units • Safety door/guard lock switches

*KPP_G-Series_EN_INT01*

*Although we strive for perfection, Omron Europe BV and/or its subsidiary and affiliated companies do not warrant or make any representations regarding the correctness or completeness of the information described in this document. We reserve the right to make any changes at any time without prior notice.*

# OCEAN CHIPS
## Океан Электроники
## Поставка электронных компонентов

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «**JONHON**», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «**FORSTAR**».

AVIC JONHON

**«JONHON»** (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

**«FORSTAR»** (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).

FORSTAR®

Телефон: 8 (812) 309-75-97 (многоканальный)
Факс: 8 (812) 320-03-32
Электронная почта: ocean@oceanchips.ru
Web: http://oceanchips.ru/
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А