Selection guide 2018.

Discretes, Logic and MOSFETs

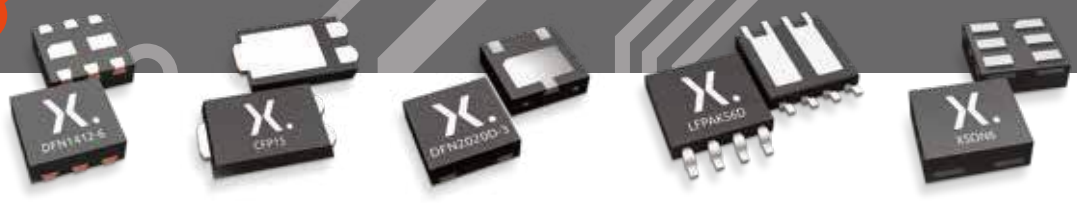

nexperia

EFFICIENCY WINS.

Introduction

Welcome to the 2018 edition of the Nexperia Selection Guide. Here we present all our Discrete, Logic and MOSFET devices in one single document to give you a complete overview of our portfolio. We hope that makes it even easier for you to find the right product for your design.

Our extensive portfolio offers a wide range of general purpose devices and those that meet the stringent standards set by the automotive industry. They are housed in some of the most advanced, industry-leading small packages that combine power and thermal efficiency with best-in-class quality levels.

Alongside quality and efficiency, Nexperia customers value reliability and a consistent supply they can trust. We produce consistently reliable semiconductor components at high volume (85 billion annually) and we work at every step to safeguard the long-term availability of our manufacturing processes and products, to ensure secure supply for all our customers.

We have a long history and broad experience. That ensures we can support you with the dedicated in-house technical support you need – from simplifying selection via quick-reference material to simple-to-use design tools and application insights. All to help drive up efficiency in your designs.

All the functionality you need in one spot

Just like on our website, you will find the selection guide is split into our five key product areas. There is also a dedicated section on packages, highlighting the latest package innovations and packing options.

Bipolar transistors
- Resistor-equipped, low V_{CEsat} and small-signal transistors
- Standard SMD, leadless and clip-bond packages

Diodes
- Broad choice of Zener, Schottky and switching diodes
- Ultra-small, low-profile surface-mount package options

ESD protection, filtering and signal conditioning
- Extensive range of protection in ultra-small form factors
- Optimized for signal integrity, robustness and system protection

MOSFETs
- Low R_{DSon} devices from < 20 V to > 200 V
- True power packages with solid wireless-clip for smart efficiency

Logic
- Comprehensive portfolio operating from 0.7 V to 15.0 V
- Unrivalled package innovation and lowest power logic solutions

Packages
- The next generation of packaging for volume production
- Package cross-reference and packing options

As an innovative company we are continually adding to our product portfolio, so to discover all our latest product information you should visit our website – www.nexperia.com

Our commitment:

quality and reliability

AEC-Q100/Q101 qualified

We qualify our products according to the automotive AEC-Q100/Q101 standard and even exceed it's requirements, for instance when doing extended lifetime testing.

Go for quality

All our processes and manufacturing plants are subject to regular international and internal audits, including the following:

- ISO9001
- ISO/TS 16949 for automotive sites
- ISO14001
- OHSAS18001

Design for excellence

Nexperia's Design for Excellence (DfX) program ensures that each new development builds on past learning and that best practices are always employed. The result is continual product improvement.

Zero defect

Zero defect is our goal. To ensure continuous improvement failure analysis and the determination to find root causes is performed at all stages of development and production by adoption of quality-analysis tools and methods (e.g. Six-Sigma, Safe-Launch).

Rigorous attention to detail and commitment to quality have yielded a very low product failure rate of a single-digit part per billion (ppb).

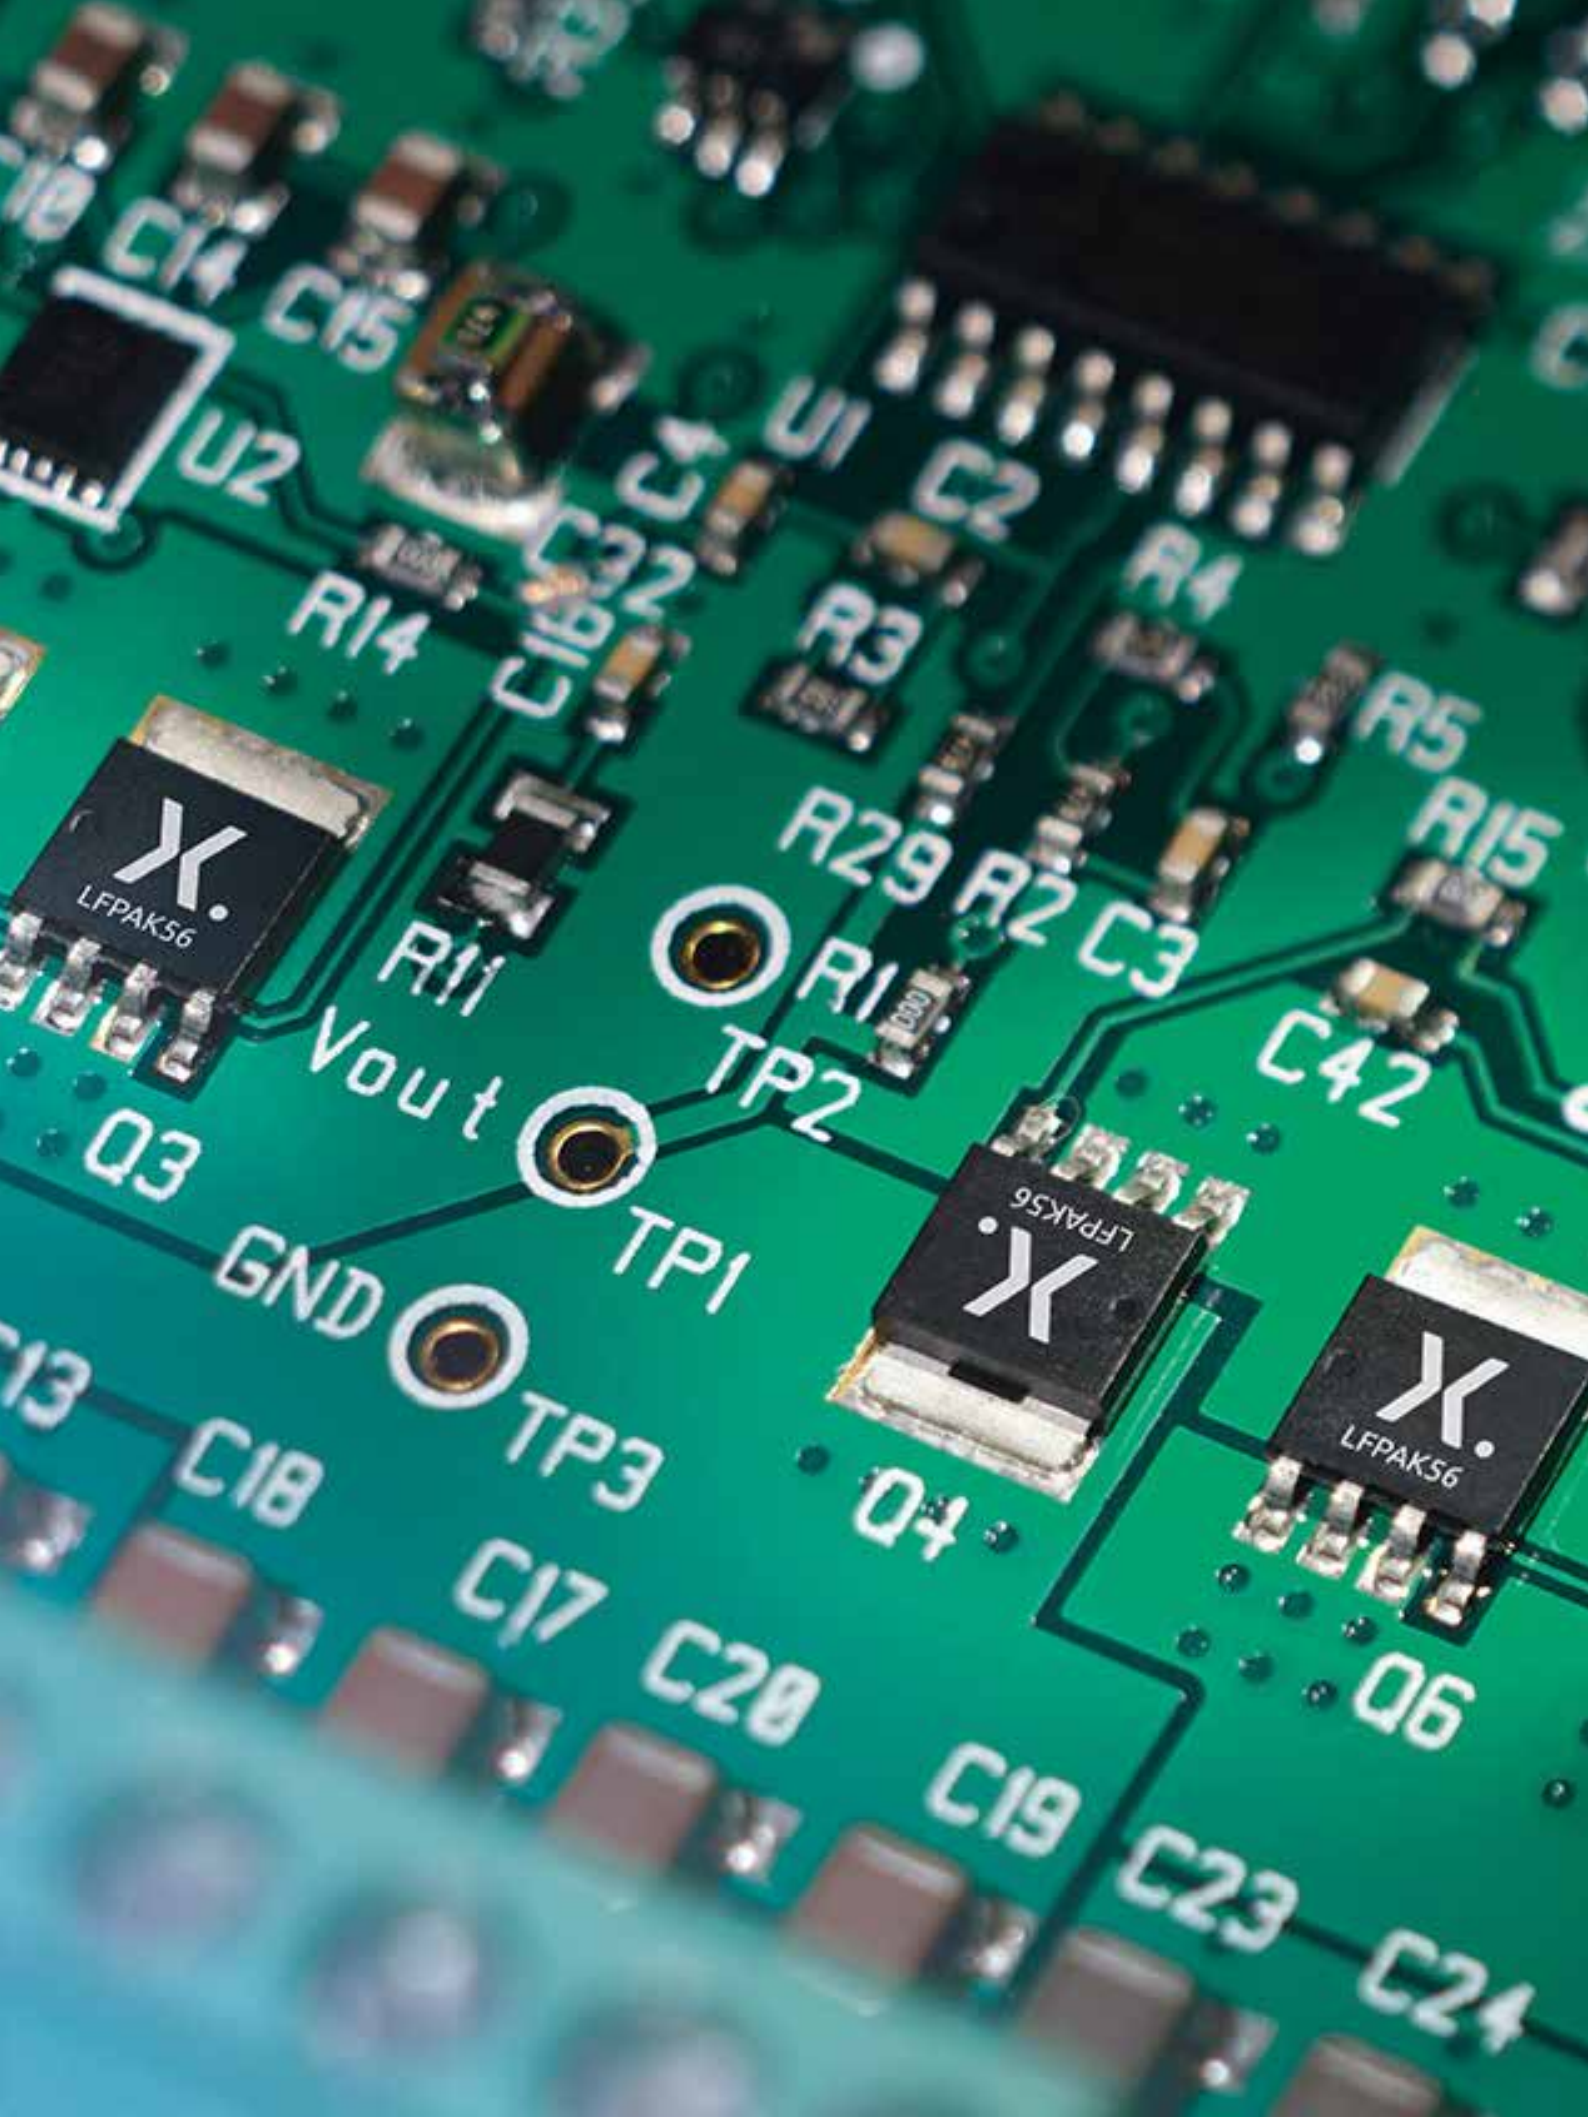
C14
C15
U2
C32
C16
U1
C2
R14
R3
R4
R5
R15
R29
R2
C3
LFPAK56
R11
R1
Vout
TP2
C42
Q3
TP1
GND
TP3
LFPAK56
LFPAK56
C13
C18
C17
C20
Q4
Q6
C19
C23
C24

Selection guide 2018.

Discretes, Logic and MOSFETs

Bipolar transistors 1

Diodes 2

ESD protection, TVS, filtering and signal conditioning 3

MOSFETs 4

Logic 5

Packages 6

New products 8
Bipolar transistors 8
Diodes 9
ESD protection, TVS, filtering and signal conditioning 9
MOSFETs 10
Logic 11

Bipolar transistors 13

General purpose bipolar transistors 14
Transistors single NPN 14
Transistors single PNP 14
High performance transistors (superior power dissipation) 15
Transistors double 15
Switching transistors single 16
Switching transistors double 16
Medium power transistors 17
Medium power transistors high performance (175 °C capable) 17
High performance transistors (175°C capable & superior power dissipation) 17
High voltage transistors 18
LED driver 18
Constant current source 18
Darlington transistors 19
Schmitt triggers 19
Low noise transistors 19
Matched pair transistors - part 1 20
Matched pair transistors - part 2 20
MOSFET driver 21
Medium frequency transistors 21
Low V_{CEsat} (BISS) transistors 22
Low V_{CEsat} (BISS) transistors single NPN up to 2000 mW 22
Low V_{CEsat} (BISS) transistors single NPN up to 750 mW 23
Low V_{CEsat} (BISS) transistors single PNP up to 2000 mW 24
Low V_{CEsat} (BISS) transistors single PNP up to 750 mW 25
Low V_{CEsat} (BISS) transistors double 26
Low V_{CEsat} (BISS) transistors load switches 27
Low V_{CEsat} (BISS) high voltage transistors 28
Low V_{CEsat} (BISS) RETs 28
Low V_{CEsat} (BISS) transistors PNP - N-channel MOSFET combination 29
Low V_{CEsat} (BISS) power transistors single 29
Low V_{CEsat} (BISS) power transistors double 29
Resistor equipped transistors (RETs) 30
RETs 100 mA single - part 1 30
RETs 100 mA single - part 2 30
RETs 100 mA double 31
RETs 500mA single / double 31
3-terminal adjustable shunt regulators 32

Diodes 35

Zener diodes 36
General purpose Zener diodes 36
Zener diodes specifications 37
Switching diodes 38
General purpose, high speed switching diodes <= 90V 38
General purpose, high speed switching diodes 100V 38
General purpose, switching diodes >= 100V 39
Controlled avalanche switching diodes 40
Low leakage current switching diodes 40
PN rectifiers 40
PN rectifiers 41
PN rectifiers - Automotive qualified 41
Nomenclature pn-rectifier consumer grade types 41
Nomenclature pn-rectifier automotive grade types 41
Schottky rectifiers 42
General purpose schottky diodes <= 250 mA 42
Low capacitance schottky diodes 43
Medium power low VF schottky rectifiers single >= 200 mA - leadless DSN / DFN packages 44
Medium power low VF schottky rectifiers single >= 200 mA 46
Medium power low VF schottky rectifiers single >= 200 mA - leaded packages 47
Medium power low VF schottky rectifiers dual >= 200 mA 48
Nomenclatures 49

ESD protection, TVS, filtering and signal conditioning 51

Low capacitance ESD protection for high-speed interfaces 52
Low capacitance ESD protection for high-speed interfaces 52
TrEOS protection devices 55
General ESD protection devices 58
General purpose ESD protection devices 58
Application-specific ESD solutions 60
Audio interface protection 60
Automotive high-speed network protection 61
Automotive in-vehicle network bus line protection 61
Battery and charger port protection 62
HDMI and display port protection 62
Antenna protection (NFC, WiFi,...) 63
USB and SATA protection 63
EMI solutions with integrated protection 64
Common mode filter for USB 2.0 64
Common mode filter for USB 3.x 64
Common mode filter for HDMI and MIPI 64
HDMI signal conditioning 65
LCD and camera RC filter with integrated protection 65
Memory and SIM card filter with integrated protection 66
USB 3.x and eSATA protection and filtering for high-speed and super-speed lines 66
Transient voltage surge suppressor (TVS) 67
TVS diodes for mobile applications 67
TVS diodes, 24 W/40 W (automotive) 67
TVS diodes, 400 W 68
TVS diodes, 600W 69
Nomenclatures 70

MOSFETs 73

Automotive MOSFETs 74
Automotive grade MOSFETs nomenclature 74
N-channel 30V automotive power MOSFETs 74
N-channel 40V automotive power MOSFETs 75
N-channel 55V-60V automotive power MOSFETs 76
N-channel 75V-80V automotive power MOSFETs 79
N-channel 100V automotive power MOSFETs 80
Small-signal automotive MOSFETs – Low $R_{DS(on)}$ 82
Small-signal automotive MOSFETs – High $R_{DS(on)}$ 84
Small-signal automotive MOSFETs – Dual 84

Contents

Power MOSFETs 86
N-channel 25V-30V MOSFETs 86
N-channel 40V-60V MOSFETs 88
N-channel 75V-200V MOSFETs 90
P-channel MOSFETs 92
Power MOSFETs nomenclature 93
Small-signal MOSFETs 94
Small-signal MOSFETs in DFN1006 and DFN1006B packages 94
Small-signal MOSFETs in DFN1010D-3 single and DFN1010B-3 dual packages 95
Small-signal low-leakage MOSFETs 95
Small-signal MOSFETs in DFN2020MD-6 single and DFN2020-6 dual packages 96
Small-signal MOSFETs in WLCSP4 and WLCSP6 packages 97
Small-signal MOSFETs single (N-channel) 98
Small-signal MOSFETs single (P-channel) 100
Small-signal MOSFET–Schottky combination 100
Small-signal MOSFETs dual 102
Small-signal MOSFETs complementary 102

Logic 105

Automotive logic 106
Analog switches 106
Buffers/Inverters 107
Buffers/Inverters 108
Counters/Frequency dividers 109
Bus switches 110
Digital decoders/Demultiplexers 110
Digital multiplexers 111
Flip-flops 111
Flip-flops 112
Flip-flops 113
Gates 114
Latches/Registered drivers 115
Gates 115
Level shifters/Translators 116
Multivibrators 116
Schmitt-triggers 117
Shift registers 118
Shift registers 119
Transceivers 120
Analog switches 121
Bus switches 121
Buffers/Inverters 122
Buffers/Inverters 123
Digital decoders/Demultiplexers 124
Digital multiplexers 124
Flip-flops 124
Gates 125
Gates 126
Latches/Registered drivers 126
Multivibrators 127
Schmitt-triggers 127
Level shifters/Translators 128
Buffers, Drivers, Transceivers 129
Buffers/Inverters/Drivers 129
Transceivers 137
Schmitt-triggers 138
Counters/Frequency dividers 141
Flip-flops, Latches, Registers 143
FIFO registers 143
Flip-flops 143
Latches/Registered drivers 146
Gates 148
AND Gates 148
Combination Gates 149
Configurable Gates 149
EXCLUSIVE-NOR Gates 150
EXCLUSIVE-OR Gates 150
NAND Gates 150
NOR Gates 152
OR Gates 153
Logic voltage translators 154
Level shifters/Translators 154
Specialty logic 155
Digital comparators 155
Multivibrators 155
Parity generators-checkers 155
Phase-locked loops 156
Printer interfaces 156
Switches, Multiplexers, Demultiplexers 157
Bus Switches 157
Decoders/Demultiplexers 158
Digital Multiplexers 159
Analog Switches 160
Nomenclatures 161

Packages 163

Package details and packing methods 164
Package details and packing methods SMD – Part 1 ..164
Package details and packing methods SMD – Part 2 ..165
Package details and packing methods SMD – Part 3 ..166
Package details and packing methods SMD – Part 4 ..167
Package details and packing methods WLCSP 168
Packing details glass diodes, single ended and through hole packages 168
Package cross reference 169
Package cross reference list – Part 1 169
Package cross reference list – Part 2 170
Package cross reference list – Part 3 171
Package cross reference list – Part 4 172
Package cross reference list – Part 5 173
Package cross reference matrix – Part 1 174
Package cross reference matrix – Part 2 175
Package cross reference matrix – Part 3 176
Competitive cross reference - Logic 176
Packing methods 177
Product orientation (tape and reel pack) 178
Minimized outline drawings and reflow soldering footprint 181
2-pin SMD packages 181
3-pin SMD packages 184
4-pin SMD packages 187
5-pin SMD packages 188
6-pin SMD packages 189
8-pin SMD packages 194
8-pin SMD packages 195
8-pin SMD packages 196
More than 8-pin SMD packages 198
Glass diodes 204
Single-ended and through-hole packages 205

Index 206

New products

As an innovative company we invest significantly in R&D, and continually expand our portfolio with the latest generation of technology and products. Here is a snapshot of our most recent releases, but don't forget to visit the website for the most up-to-date information - www.nexperia.com

Bipolar transistors

Category	Device	Description	Page
General purpose bipolar transistors	**BC817K-16**	45 V, 500 mA NPN general-purpose transistors in SOT23	15
	BC817K-25	45 V, 500 mA NPN general-purpose transistors in SOT23	15
	BC817K-40	45 V, 500 mA NPN general-purpose transistors in SOT23	15
	BC807K-16	45 V, 500 mA PNP general-purpose transistors in SOT23	15
	BC807K-25	45 V, 500 mA PNP general-purpose transistors in SOT23	15
	BC807K-40	45 V, 500 mA PNP general-purpose transistors in SOT23	15
	BCP56H	80 V, 1 A NPN medium power transistor in SOT223	17
	BCP56-10H	80 V, 1 A NPN medium power transistor in SOT223	17
	BCP56-16H	80 V, 1 A NPN medium power transistor in SOT223	17
	BCP53H	80 V, 1 A PNP medium power transistors in SOT223	17
	BCP53-10H	80 V, 1 A PNP medium power transistors in SOT223	17
	BCP53-16H	80 V, 1 A PNP medium power transistors in SOT223	17
	BC817K-16H	45 V, 500 mA NPN general-purpose transistors in SOT23	17
	BC817K-25H	45 V, 500 mA NPN general-purpose transistors in SOT23	17
	BC817K-40H	45 V, 500 mA NPN general-purpose transistors in SOT23	17
	BCM56DS	NPN/NPN matched double transistors in SOT457	20
	BCM53DS	PNP/PNP matched double transistors in SOT457	20
	BCM847QAS	NPN/NPN matched double transistors in SOT1216	20
	BCM857QAS	PNP/PNP matched double transistors in SOT1216	20
	PMP4501QAS	NPN/NPN matched double transistors in SOT1216	20
	PMP5501QAS	PNP/PNP matched double transistors in SOT1216	20
Low VCEsat (BISS) transistors	**PBSS4160X**	60 V, 1 A NPN low VCEsat BISS transistor in SOT89	22
	PBSS4360X	60 V, 3 A NPN low VCEsat BISS transistor in SOT89	22
	PBSS5360X	60 V, 3 A PNP low VCEsat (BISS) transistor in SOT89	24
	PBSS5250TH	50 V, 2 A PNP low VCEsat (BISS) transistor in SOT23	25
	PBSS5350TH	50 V, 3 A PNP low VCEsat (BISS) transistor in SOT23	25
	PBHV9540X	400 V, 0.5 A PNP high-voltage low VCEsat (BISS) transistor in SOT89	28
	PHPT61002NYCLH	100 V, 2 A NPN high power bipolar transistor in LFPAK56	29
	PHPT61002PYCLH	100 V, 2 A PNP high power bipolar transistor in LFPAK56	29
Resistor equipped transistors (RETs)	**PRMH11**	50 V, 100 mA NPN/NPN Resistor-Equipped double Transistors (RET) in ultra-small DFN1412-6	31
	PRMD3	50 V, 100 mA NPN/PNP Resistor-Equipped double Transistors (RET) in ultra-small DFN1412-6	31
	PRMB11	50 V, 100 mA PNP/PNP Resistor-Equipped double Transistors (RET) in ultra-small DFN1412-6	31
	PRMD2	50 V, 100 mA NPN/PNP Resistor-Equipped double Transistors (RET) in ultra-small DFN1412-6	31
	PRMH2	50 V, 100 mA NPN/NPN Resistor-Equipped double Transistors (RET) in ultra-small DFN1412-6	31
	PRMD12	50 V, 100 mA NPN/PNP Resistor-Equipped double Transistors (RET) in ultra-small DFN1412-6	31
	PRMH10	50 V, 100 mA NPN/NPN Resistor-Equipped double Transistors (RET) in ultra-small DFN1412-6	31
	PRMD10	50 V, 100 mA NPN/PNP Resistor-Equipped double Transistors (RET) in ultra-small DFN1412-6	31
	PRMH13	50 V, 100 mA NPN/NPN Resistor-Equipped double Transistors (RET) in ultra-small DFN1412-6	31
	PRMD13	50 V, 100 mA NPN/PNP Resistor-Equipped double Transistors (RET) in ultra-small DFN1412-6	31
	PRMH9	50 V, 100 mA NPN/NPN Resistor-Equipped double Transistors (RET) in ultra-small DFN1412-6	31
	PRMD16	50 V, 100 mA NPN/PNP Resistor-Equipped double Transistors (RET) in ultra-small DFN1412-6	31

Diodes

Category	Device	Description	Page
Switching Diodes	**BAS321J**	General purpose diode, planar technology, encapsulated in a very small plastic SOD323F (SC-90) package	39
PN Rectifiers	**ES1DVR**	200V, 1A Hyperfast PN Rectifier in CFP3 (low VF)	40
	ES1DR	200V, 1A Hyperfast PN Rectifier in CFP3	40
	ES2DVR	200V, 2A Hyperfast PN Rectifier in CFP3 (low VF)	40
	ES2DR	200V, 2A Hyperfast PN Rectifier in CFP3	40
	ES2DP	200V, 2A Hyperfast PN Rectifier in CFP5	40
	ES3DP	200V, 3A Hyperfast PN Rectifier in CFP5	40
	ES1GR	400V, 1A Hyperfast PN Rectifier in CFP3	40
PN Rectifiers - Automotive	**PNE20030EP**	200V, 3A Hyperfast PN Rectifier in CFP5 (Automotive grade)	41
	PNE20020EP	200V, 2A Hyperfast PN Rectifier in CFP5 (Automotive grade)	41
	PNE20020ER	200V, 2A Hyperfast PN Rectifier in CFP3 (Automotive grade)	41
	PNE20010ER	200V, 1A Hyperfast PN Rectifier in CFP3 (Automotive grade)	41
Schottky rectifiers	**PMEG60T20ELR**	60 V, 2 A low leakage current Trench MEGA Schottky barrier rectifier in CFP3	45
	PMEG40T10ER	40V, 1A Trench Schottky Rectifier in CFP3	46
	PMEG40T20EP	40V, 2A Trench Schottky Rectifier in CFP5	46
	PMEG40T20ER	40V, 2A Trench Schottky Rectifier in CFP3	46
	PMEG045T030EPD	45V, 3A Trench Schottky Rectifier in CFP15	46
	PMEG40T30EP	40V, 3A Trench Schottky Rectifier in CFP5	46
	PMEG40T30ER	40V, 3A Trench Schottky Rectifier in CFP3	46
	PMEG40T50EP	40V, 5A Trench Schottky Rectifier in CFP5	46
	PMEG045T050EPD	45V, 5A Trench Schottky Rectifier in CFP15	46
	PMEG045T100EPD	45V, 10A Trench Schottky Rectifier in CFP15	46
	PMEG045T150EIPD	45V, 15A Trench Schottky Rectifier in CFP15	46

ESD protection, TVS, filtering and signal conditioning

Category	Device	Description	Page
Low capacitance ESD protection for high-speed interfaces	**PHDMI2FR4**	Very low-clamping ESD protection for HDMI	55
	PHDMI2AB4	Very low capacitance ESD protection for HDMI	55
General ESD protection devices	**PESD3V3T1BL**	Ultra compact Transient Voltage Supressor in DFN1006-2	57
Application-specific ESD solutions	**PESD2ETH-D**	ESD protection for in-vehicle ultra high-speed interfaces, in SOT457 package	61
	PESD2ETH-AD	ESD protection for in-vehicle ultra high-speed interfaces, in SOT457 package	61
EMI solutions with integrated protection	**PCMF1HDMI2S**	Common Mode Filter with ESD protection for HDMI2.0	64
	PCMF2HDMI2S	Common Mode Filter with ESD protection for HDMI2.0	64
	PCMF3HDMI2S	Common Mode Filter with ESD protection for HDMI2.0	64
	PUSB3FR6	Very low-clamping ESD protection for six data lines	66
	PUSB3AB6	Very low-capacitance ESD protection for six data lines	66
	PUSB3F97	Very low-clamping ESD protection for USB3.2@ 10 Gbps	66
	PESD3V3W1BSF	Extremely low-clamping, high robustness ESD protection for USB3.2	66
	PESD4V0W1BSF	Extremely low-clamping, high robustness ESD protection for USB3.2	66
	PESD7V0R1BSF	Extremely low-capacitance ESD-protection with 7 V V_RWM	66
	PESD7V0H1BSF	Very low-capacitance ESD-protection with 7 V V_RWM	66
	PESD7V0C1BSF	Extremely low-clamping ESD-protection with 7 V V_RWM	66
	PESD6V5C1USF	Extremely low-clamping unidirectional ESD-protection with 6.5 V V_RWM	66

ESD protection, TVS, filtering and signal conditioning

Category	Device	Description	Page
Transient voltage surge suppressor (TVS)	**PTVS4V5D1BL**	Ultra compact Transient Voltage Supressor in ultra-small DFN1006-2	67
	MMBZ16VAL	High surge current unidirectional double ESD protection diodes in SOT23 (automotive grade)	67
	MMBZ16VTAL	High surge current unidirectional double ESD protection diodes in SOT23 (automotive grade)	67
	PTVS20VU1UPA	300 W unidirectional Transient Voltage Suppressor (TVS) in DFN2020-3	67
	PTVS22VU1UPA	300 W unidirectional Transient Voltage Suppressor (TVS) in DFN2020-3	67
	PTVS24VU1UPA	300 W unidirectional Transient Voltage Suppressor (TVS) in DFN2020-3	67
	PTVS5V0Z1USKP	Transient voltage suppressor in DSN1608-2 for mobile applications	67

MOSFETs

Category	Device	Description	Page
Automotive MOSFETs	**BUK7J1R4-40H**	N-channel 40 V, 1.4 mΩ standard level Q101 MOSFET in LFPAK56E	75
	BUK7Y1R7-40H	N-channel 40 V, 1.7 mΩ standard level Q101 MOSFET in LFPAK56	75
	BUK7Y2R0-40H	N-channel 40 V, 2 mΩ standard level Q101 MOSFET in LFPAK56	75
	BUK7Y2R5-40H	N-channel 40 V, 2.5 mΩ standard level Q101 MOSFET in LFPAK56	75
	BUK7Y3R0-40H	N-channel 40 V, 3 mΩ standard level Q101 MOSFET in LFPAK56	75
Power MOSFETs	**PSMN8R5-100PSF**	NextPower 100 V, 8.7 mΩ N-channel MOSFET in TO220 package	90
	PSMN018-100PSF	NextPower 100 V, 18 mΩ N-channel MOSFET in TO220 package	90
	PSMN8R5-100ESF	NextPower 100 V, 8.8 mΩ N-channel MOSFET in I2PAK package	91
	PSMN018-100ESF	NextPower 100 V, 18 mΩ N-channel MOSFET in I2PAK package	91
	PSMN5R6-100YSF	NextPower 100 V, 6 mΩ N-channel MOSFET in LFPAK56 package	92
	PSMN6R9-100YSF	NextPower 100 V, 7 mΩ N-channel MOSFET in LFPAK56 package	92
	PSMN8R7-100YSF	NextPower 100 V, 9 mΩ N-channel MOSFET in LFPAK56 package	92
Small-signal MOSFETs	**PMCM4401UNE**	20 V, N-channel Trench MOSFET in 4 bumps Wafer Level Chip-Size Package (WLCSP)	97
	PMCM4402UPE	20 V, P-channel Trench MOSFET in 4 bumps Wafer Level Chip-Size Package (WLCSP)	97
	PMCM6501UNE	20 V, N-channel Trench MOSFET in 6 bumps Wafer Level Chip-Size Package (WLCSP)	97
	PMCM6501UPE	20 V, P-channel Trench MOSFET in 6 bumps Wafer Level Chip-Size Package (WLCSP)	97
	PMCM6501CUNE	20 V, N-channel Trench MOSFET in 6 bumps Wafer Level Chip-Size Package (WLCSP)	97
	PMV280ENEA	100 V N-channel Trench MOSFET in SOT23 SMD package	99
	PMN70EPE	30 V, P-channel Trench MOSFET in SOT457 SMD package	101

Logic

Category	Device	Description	Page
Automotive Logic	**74CBTLV3125-Q100**	Quad bus switch	110
	74HC161-Q100	Presettable synchronous 4-bit binary counter; asynchronous reset	109
	74LVC4T3144-Q100	4-bit dual-supply buffer/line driver; 3-state	116
	HEF4528B-Q100	Dual monostable multivibrator	116
	74LVC1G19-Q100	1-to-2 decoder/demultiplexer	124
Buffers/inverters/drivers	**74AHC9541A**	Octal buffer/line driver; Schmitt-trigger (3-state)	129
	74AHCT07A	Hex buffer with open-drain; TTL-enabled	129
	74AHCT244A	Octal buffer/line driver (3-state)	130
	74AHCT541A	Octal buffer/line driver; TTL-enabled (3-state)	130
	74LV04AT	Hex inverter with TTL inputs	133
	74LV05A	Hex inverter; open-drain	133
	74LV07AT	Hex buffer with open-drain; TTL-enabled	133
	74LV244A	Octal buffer/line driver (3-state)	133
	74LV244AT	Octal buffer/line driver; TTL-enabled (3-state)	133
	74LV540A	Octal buffer/line driver (3-state); inverting	133
Schmitt-triggers	**74AHCV07A**	Hex buffer with open-drain outputs; Schmitt-trigger	130
	74AHCV244A	Octal buffer/line driver; Schmitt-trigger (3-state)	130
	74AHCV541A	Octal buffer/line driver; Schmitt-trigger (3-state)	130
	74LV17A	Hex buffer; Schmitt-trigger	133
	74AHCT17A	Hex buffer; Schmitt-trigger	138
Gates	**74AUP2G132**	Low-power dual 2-input NAND gate; Schmitt-trigger	139
Logic voltage translators	**74LVC8T595**	Dual-supply 8-bit serial-in/serial-out or parallel out translating shift register (3-state)	154
Bus switches	**74CB3Q3253**	Dual 1-of-4 FET multiplexer/demultiplexer with charge pump	157
	74CB3Q3257	Quad 1-of-2 FET multiplexer/demultiplexer with charge pump	157

Bipolar transistors

1

General purpose bipolar transistors 14

Transistors single NPN 14
Transistors single PNP 14
High performance transistors (superior power dissipation) 15
Transistors double 15
Switching transistors single 16
Switching transistors double 16
Medium power transistors 17
Medium power transistors high performance (175 °C capable) 17
High performance transistors (175°C capable & superior power dissipation) 17
High voltage transistors 18
LED driver 18
Constant current source 18
Darlington transistors 19
Schmitt triggers 19
Low noise transistors 19
Matched pair transistors - part 1 20
Matched pair transistors - part 2 20
MOSFET driver 21
Medium frequency transistors 21

Low V_{CEsat} (BISS) transistors 22

Low V_{CEsat} (BISS) transistors single NPN up to 2000 mW 22
Low V_{CEsat} (BISS) transistors single NPN up to 750 mW 23
Low V_{CEsat} (BISS) transistors single PNP up to 2000 mW 24
Low V_{CEsat} (BISS) transistors single PNP up to 750 mW 25
Low V_{CEsat} (BISS) transistors double 26
Low V_{CEsat} (BISS) transistors load switches 27
Low V_{CEsat} (BISS) high voltage transistors 28
Low V_{CEsat} (BISS) RETs 28
Low V_{CEsat} (BISS) transistors PNP - N-channel MOSFET combination 29
Low V_{CEsat} (BISS) power transistors single 29
Low V_{CEsat} (BISS) power transistors double 29

Resistor equipped transistors (RETs) 30

RETs 100 mA single - part 1 30
RETs 100 mA single - part 2 30
RETs 100 mA double 31
RETs 500mA single / double 31

3-terminal adjustable shunt regulators 32

Transistors single NPN

Package					SOT23	SOT323 (SC-70)	DFN1010D-3 (SOT1215)	DFN1006-3 (SOT883)	DFN1006B-3 (SOT883B)
Size (mm)					2.9 x 1.3 x 1.0	2.0 x 1.25 x 0.95	1.1 x 1.0 x 0.37	1.0 x 0.6 x 0.48	1.0 x 0.6 x 0.37
P_{tot} (mW)					250	200	750	250	250
V_{CEO} (V)	I_C (mA)	h_{FE} min/typ	h_{FE} max	f_T min (MHz)					
25	100	450	1200	100		PMST5089			
30	100	110 - 200	450 - 800	100	BC848B	BC848W			
		350	900	100		PMST5088			
32	100	110 - 420	220 - 800	100	BCW31 / 32 / 33				
		180 - 380	310 - 630	250	BCW60B / C / D				
45	100	110 - 420	220 - 800	100	BC847 / A / B / C	BC847W / AW / BW / CW	BC847AQA / BQA / CQA	BC847AM / BM / CM	BC847AMB / BMB / CMB
		120 - 380	220 - 630	100	BCX70G / H / J / K				
		110 - 200	220 - 450	100	BCW71 / 72				
		500	1250	100	PMBT6429	PMST6429			
50	100	210 - 290	340 - 460	100 - 150	2PD601ART 2PD601ARL 2PD601ASL	2PD601ARW / SW			
		250	650	100	PMBT6428	PMST6428			
60	100	110 - 200	220 - 450	100	BCV71 / 72				
65	100	110 - 200	220 - 450	100	BC846 / A / B	BC846W / AW / BW		BC846BM	BC846BMB
50	150	120 - 200	240 - 400	80	NXP3875Y / G				
	150	120 - 270	270 - 560	100		2PC4081Q / R / S		2PC4617QM / RM	2PC4617QMB / RMB
	200	210	340	100	2PD601BRL				
		290	460	100	2PD601BSL				
45	500	100 - 250	250 - 600	100	BC817 / -16 / -25 / -40	BC817W / -16W / -25W / -40W	BC817-25QA/-40QA		
		100	600	100	BCX19				
50	500	85 - 170	170 - 340	140 - 180	2PD602AQL 2PD602ARL 2PD602ASL	2PD1820AR / S			
60	500	50	-	100		PMSTA05			
45	800	100-250	250-600	100	BCW66F/G/H				

Transistors single PNP

Package					SOT23	SOT323 (SC-70)	DFN1010D-3 (SOT1215)	DFN1006-3 (SOT883)	DFN1006B-3 (SOT883B)
Size (mm)					2.9 x 1.3 x 1.0	2.0 x 1.25 x 0.95	1.1 x 1.0 x 0.37	1.0 x 0.6 x 0.48	1.0 x 0.6 x 0.37
P_{tot} (mW)					250	200	750	250	250
V_{CEO} (V)	I_C (mA)	h_{FE} min/typ	h_{FE} max	f_T min (MHz)					
30	100	125 - 220	500 - 800	100	BC858B	BC858W			
32	100	120 - 215	260 - 500	100	BCW29 / 30				
		180 - 380	310 - 630	100	BCW61B / C / D				
45	100	210 - 290	340 - 460	70 - 80	2PB709ART 2PB709ARL 2PB709ASL	2PB709ARW / SW			
		180 - 380	310 - 630	100	BCX71H / J / K				
		120 - 215	260 - 500	100	BCW69 / 70				
		125 - 420	250 - 800	100	BC857 / A / B / C	BC857W / AW / BW / CW	BC857AQA / BQA / CQA	BC857AM / BM / CM	BC857AMB / BMB / CMB
60	100	120	260	150	BCW89				
65	100	125 - 200	250 - 475	100	BC856 / A / B	BC856W / AW / BW		BC856BM	BC856BMB
100	100	30	-	50	BSS63				
50	150	120 - 270	270 - 560	100		2PA1576Q / R / S		2PA1774QM / RM / SM	2PA1774QMB / RMB / SMB
	200	210	340	100	2PB709BRL				
		290	460	100	2PB709BSL				
25	500	100	600	80	BCX18				
45	500	100 - 250	250 - 600	80	BC807 / -16 / -25 / -40	BC807W / -16W / -25W / -40W	BC807-25QA/-40QA		
		100	600	80	BCX17				
50	500	85 - 170	170 - 340	100 - 140	2PB710ARL 2PB710ASL	2PB1219AQ / R / S			
60	500	100	-	50		PMSTA55			
80	500	100	-	50	PMBTA06	PMSTA06			
		100	-	50	PMBTA56	PMSTA56			
45	800	100-250	250-600	80	BCW68F/G/H				

High performance transistors (superior power dissipation)

Types in **bold** represent new products

Package							SOT23
Size (mm)							2.9 x 1.3 x 1.0
P_{tot} (mW)							775
Polarity	V_{CEO} (V)	V_{ebo} (V)	I_C (mA)	h_{FE} min	h_{FE} max	f_T min (MHz)	
NPN	45	5	0,5	100	250	100	**BC817K-16**
				160	400	100	**BC817K-25**
				250	600	100	**BC817K-40**
PNP	45	5	0,5	100	250	80	**BC807K-16**
				160	400	80	**BC807K-25**
				250	600	80	**BC807K-40**

Transistors double

Package						SOT457 (SC-74)	SOT363 (SC-88)	SOT666	DFN1412-6 (SOT1268)	DFN1010B-6 (SOT1216)
Size (mm)						2.9 x 1.5 x 1.0	2.0 x 1.25 x 0.95	1.6 x 1.2 x 0.55	1.4 x 1.2 x 0.5	1.0 x 1.0 x 0.37
P_{tot} (mW)						750	300	300	480	350
Polarity	V_{CEO} (V)	I_C (mA)	h_{FE} min	h_{FE} max	f_T min (MHz)					
NPN	40	100	120	450	100		PUMX1	PEMX1		
	45	100	200	450	100	BC847DS	BC847BS	BC847BV	BC847RA	BC847QAS
	65	100	110	-	100		BC846S			
			200	450	100	BC846DS	BC846BS			
	50	150	120	560	100		PUMX2			
	45	500	160	400	80	BC817DS			BC817RA	
PNP	40	100	120	450	100	PIMT1	PUMT1	PEMT1		
	45	100	200	450	100		BC857BS	BC857BV	BC857RA	BC857QAS
	65	100	110	-	100		BC856S			
			200	450	100		BC856BS			
	45	500	160	400	80	BC807DS			BC807RA	
NPN / PNP	40	100	120	450	100		PUMZ1	PEMZ1		
	45	100	200	450	100		BC847BPN	BC847BVN	BC847RAPN	BC847QAPN
	50	100	120	560	100	PIMZ2	PUMZ2			
	65	100	200	450	100		BC846BPN			
	12	500	200	-	250 / 100			PEMZ7		
	45	500	160	160	100 / 800	BC817DPN			BC817RAPN	

Switching transistors single

Package							SOT223 (SC-73)	SOT89 (SC-62)	SOT23	SOT323 (SC-70)	DFN1006-3 (SOT883)	DFN1006B-3 (SOT883B)
Size (mm)							6.5 x 3.5 x 1.65	4.5 x 2.5 x 1.5	2.9 x 1.3 x 1.0	2.0 x 1.25 x 0.95	1.0 x 0.6 x 0.48	1.0 x 0.6 x 0.37
P_{tot} (mW)							1700	1300	250	200	250	250
Polarity	V_{CEO} (V)	I_C (mA)	h_{FE} min	h_{FE} max	f_T min (MHz)	t_{off} (ns)						
NPN	40	200	100	300	180	1200			PMBS3904	PMSS3904		
	15	600	40	120	500	20			PMBT2369	PMST2369		
	40	200	100	300	300	250			MMBT3904			
									PMBT3904	PMST3904	PMBT3904M	PMBT3904MB
	30	600	100	300	250	250			PMBT2222	PMST2222		
	40	600	100	300	250	250	PZT4401	PXT4401	PMBT4401	PMST4401		
					300	250			MMBT2222A			
							PZT2222A	PXT2222A	PMBT2222A	PMST2222A		
	40	800	100	300	300	250			BSR14			
PNP	40	100	100	300	150	700			PMBS3906	PMSS3906		
	40	200	100	300	250	300			MMBT3906			
									PMBT3906	PMST3906	PMBT3906M	PMBT3906MB
	40	600	100	300	200	350	PZT4403	PXT4403	PMBT4403	PMST4403		
						365			PMBT2907			
	60	600	100	300	200	300				PMST2907A		
						365			BSR16			
							PZT2907A	PXT2907A	PMBT2907A			

Switching transistors double

Package							SOT363 (SC-88)	SOT666	SOT457 (SC-74)
Size (mm)							2.0 x 1.25 x 0.95	1.6 x 1.2 x 0.55	2.9 x 1.5 x 1.0
P_{tot} (mW)							300	300	750
Polarity	V_{CEO} (V)	I_C (mA)	h_{FE} min	h_{FE} max	f_T min(MHz)	t_{off} (ns)			
NPN	40	200	100	300	300	250	PMBT3904YS	PMBT3904VS	
	40	600	100	300	250	250	PMBT4401YS		
					300	250	PMBT2222AYS		
PNP	40	200	100	300	250	300	PMBT3906YS	PMBT3906VS	
	40	600	100	300	200	350	PMBT4403YS		
	60	600	100	300	200	365	PMBT2907AYS		
NPN / PNP	40	200	100	300	300 / 250	250 / 300	PMBT3946YPN	PMBT3946VPN	
					300 / 200	250 / 365			NMB2227A

Medium power transistors

Package						SOT223 (SC-73)	SOT89 (SC-62)	DFN2020-3 (SOT1061)	DFN2020D-3 (SOT1061D)
Size (mm)						6.5 x 3.5 x 1.65	4.5 x 2.5 x 1.5	2.0 x 2.0 x 0.62	2.0 x 2.0 x 0.62
P_{tot} (mW)						1700	1300	1300	1300
Polarity	V_{CEO} (V)	I_C (A)	h_{FE} min	h_{FE} max	f_T min (MHz)				
NPN	20	2	85 - 160	375	40	BCP68 / -25	BC868 / -25	BC68PA / BC68-25PA	BC68PAS / BC68-25PAS
	45	1	63 - 100	160 - 250	100	BCP54 / -10 / -16	BCX54 / -10 / -16	BC54PA / BC54-10PA / BC54-16PA	BC54PAS / BC54-10PAS / BC54-16PAS
	60	1	63 - 100	160 - 250	100	BCP55 / -10 / -16	BCX55 / -10 / -16	BC55PA / BC55-10PA / BC55-16PA	BC55PAS / BC55-10PAS / BC55-16PAS
			100	300	100	BSP41	BSR41		
	80	1	63 - 100	160 - 250	100	BCP56 / -10 / -16	BCX56 / -10 / -16	BC56PA / BC56-10PA / BC56-16PA	BC56PAS / BC56-10PAS / BC56-16PAS
			40 - 100	120 - 300	100	BSP43	BSR43		
PNP	20	2	85 - 160	250 - 375	40	BCP69 / -16 / -25	BC869 / -16 / -25	BC69PA / BC69-16PA / BC69-25PA	BC69PAS / BC569-16PAS / BC69-25PAS
	45	1	63 - 100	160 - 250	115 [1] - 145 [1]	BCP51 / -10 / -16	BCX51 / -10 / -16	BC51PA / BC51-10PA / BC51-16PA	BC51PAS / BC51-10PAS / BC51-16PAS
	60	1	63 - 100	160 - 250	100	BCP52 / -10 / -16	BCX52 / -10 / -16	BC52PA / BC52-10PA / BC52-16PA	BC52PAS / BC52-10PAS / BC52-16PAS
			40 - 100	120 - 300	100	BSP31	BSR30 / 31		
	80	1	63 - 100	160 - 250	115 [1] - 145 [1]	BCP53 / -10 / -16	BCX53 / -10 / -16	BC53PA / BC53-10PA / BC53-16PA	BC53PAS / BC53-10PAS / BC53-16PAS
			40 - 100	120 - 300	100	BSP32 / 33	BSR33		

1) Typical value

Medium power transistors high performance (175 °C capable)

Types in **bold** represent new products

Package							SOT223 (SC-73)
Size (mm)							6.5 x 3.5 x 1.65
P_{tot} (mW)							1700
Polarity	V_{CEO} (V)	V_{EBO} (V)	I_C (A)	h_{FE} min	h_{FE} max	f_T min(MHz)	
NPN	80	7	1	63	250	100	**BCP56H**
					160	100	**BCP56-10H**
				100	250	100	**BCP56-16H**
PNP	80	7	1	63	250	100	**BCP53H**
					100	100	**BCP53-10H**
				100	250	100	**BCP53-16H**

High performance transistors (175°C capable & superior power dissipation)

Types in **bold** represent new products

Package							SOT23
Size (mm)							2.9 x 1.3 x 1.0
P_{tot} (mW)							950
Polarity	V_{CEO} (V)	V_{EBO} (V)	I_C (A)	h_{FE} min	h_{FE} max	f_T min(MHz)	
NPN	45	7	0.5	100	250	100	**BC817K-16H**
				160	400	100	**BC817K-25H**
				250	600	100	**BC817K-40H**

High voltage transistors

Package						SOT223 (SC-73)	SOT89 (SC-62)	SOT457 (SC-74)	SOT23	SOT323 (SC-70)
Size (mm)						6.5 x 3.5 x 1.65	4.5 x 2.5 x 1.5	2.9 x 1.5 x 1.0	2.9 x 1.3 x 1.0	2.0 x 1.25 x 0.95
P_{tot} (mW)						1700	1300	750	250	200
Polarity	V_{CEO} (V)	I_C (mA)	h_{FE} min	h_{FE} max	f_T min (MHz)					
NPN	140	300	60	250	100				PMBT5550	PMST5550
	160	300	80	250	100				PMBT5551 / BSR19A	PMST5551
	250	100	50	-	60	BF722	BF622		BF822	
	300	100	50	-	60	BF720	BF620		BF820	BF820W
			40	-	50	PZTA42	PXTA42		PMBTA42	PMSTA42
	350	100	40	-	70	BSP19	BST39			
	400	300	50	200	20	PZTA44			PMBTA44	
PNP	100	100	30	-	50				BSS63	
	250	100	50	-	60	BF723				
			50	-	60		BF623		BF823	
	300	100	50	-	60		BF621		BF821	
			40	-	50	PZTA92	PXTA92		PMBTA92	PMSTA92
2 x NPN	300	100	40	-	50			PMBTA42DS		

For high-voltage transistors with increased performance please refer to our high-voltage low VCEsat (BISS) transistor portfolio on page 19.

LED driver

Package		SOT457	SOT23
Size (mm)		2.9 x 1.5 x 1.0	2.9 x 1.3 x 1.0
P_{tot} (mW)		750	480
Vs supply voltage [V]	LED drive current [mA] @ Vs=10V		
18	10		NCR401T
	20		NCR402T
40	10	NCR401U	
	20	NCR402U	
	50	NCR405U	

Constant current source

Package	SOT353 (SC-88A)				
Size (mm)	2.0 x 1.25 x 0.95				
P_{tot} (mW)	335				
Type	PSSI2021SAY				
Description	Maximum supply voltage	Maximum supply current	Typical stabilized output current	Minimum stabilized output current	Maximum stabilized output current
Parameter	V_s max (V)	I_s max (mA)	I_{out} typ (µA)	I_{out} min (mA)	I_{out} max (mA)
Value	75	2.2	15	0.015	50

Darlington transistors

Package					SOT223 (SC-73)	SOT89 (SC-62)	SOT23
Size (mm)					6.5 x 3.5 x 1.65	4.5 x 2.5 x 1.5	2.9 x 1.3 x 1.0
P_{tot} (mW)					1700	1300	250
Polarity	V_{CEO} (V)	I_C (mA)	h_{FE} min	f_T min (MHz)			
NPN	30	500	10000	125			PMBTA13
			20000		PZTA14	PXTA14	PMBTA14
				220		BCV29	BCV27
	45	1000	2000	200	BSP50	BST50	
	60	500	10000	220		BCV49	BCV47
		1000	2000	200	BSP51	BST51	
	80				BSP52	BST52	
PNP	30	500	20000	125			PMBTA64
				220		BCV28	BCV26
	45	1000	2000	200	BSP60	BST60	
	60	500	10000	220		BCV48	BCV46
		1000	2000	200	BSP61	BST61	
	80				BSP62	BST62	

Schmitt triggers

Package							SOT143B
Size (mm)							2.9 x 1.3 x 1.0
P_{tot} (mW)							250
Polarity	V_{CEO} (V) TR1	V_{CEO} (V) TR2	I_C (mA)	h_{FE} min	h_{FE} max	V_{CEsat} typ (mV)	
NPN	30	6	100	110	800	250	BCV63 / B
PNP	30	6	100	220	475	250	BCV64B

Low noise transistors

Package							SOT23	SOT323 (SC-70)
Size (mm)							2.9 x 1.3 x 1.0	2.0 x 1.25 x 0.95
P_{tot} (mW)							250	200
Polarity	V_{CEO} (V)	I_C (mA)	Noise figure max (dB)	h_{FE} min	h_{FE} max	f_T min (MHz)		
NPN	30	100	4	200	450	100	BC849B	BC849BW
				420	800	100	BC849C	BC849CW
	45	100	4	200	450	100	BC850B	BC850BW
				420	800	100	BC850C	BC850CW
PNP	30	100	4	220	475	100	BC859B	BC859BW
				420	800	100	BC859C	BC859CW
	45	100	4	220	475	100	BC860B	BC860BW
				420	800	100	BC860C	BC860CW

Matched pair transistors - part 1

Types in **bold** represent new products

Package							SOT143B	SOT457 (SC-74)		LFPAK56D (SOT1205)
Size (mm)							2.9 x 1.3 x 1.0	2.9 x 1.5 x 1.0		5 x 6 x 1.1
P_{tot} (mW)							250	750		1250
Polarity	V_{CEO} (V)	I_C (mA)	h_{FE} min	h_{FE} max	h_{FE1}/h_{FE2}	V_{BE1} - V_{BE2} (mV)				
NPN	30	100	110	800	0.7 [1]	n.a.	BCV61/A/B/C			
	45	100	200	450	0.9 [1]	n.a.	BCM61B			
						2			BCM847DS	
	80	100	63	250	0.95	n.a.		**BCM56DS**		
	100	3000	150	-	0.95	n.a.				PHPT610035NK
	Configuration									
PNP	30	100	100	800	0.7 [1]	n.a.	BCV62/A/B/C			
	45	100	200	450	0.9 [1]	n.a.	BCM62B			
						2			BCM857DS	
	65	100	200	450	0.9	2			BCM856DS	
	80	100	63	250	0.95	n.a.		**BCM53DS**		
	100	3000	150	-	0.9	n.a.				PHPT610035PK
	Configuration									

[1] I_{C1} / I_{E2}

Matched pair transistors - part 2

Types in **bold** represent new products

Package							SOT353 (SC-88A)	SOT363 (SC-88)		SOT666		SOT1216 (DFN1010B-6)	
Size (mm)							2.0 x 1.25 x 0.95	2.0 x 1.25 x 0.95		1.6 x 1.2 x 0.55		1.1x 1.0 x 0.37	
P_{tot} (mW)							300	300		300		350	
Polarity	V_{CEO} (V)	I_C (mA)	h_{FE} min	h_{FE} max	h_{FE1}/h_{FE2}	V_{BE1} - V_{BE2} (mV)							
NPN	45	100	200	450	0.9 [1]	2		BCM847BS		BCM847BV			
					0.95	2	PMP4501G		PMP4501Y		PMP4501V	**BCM847QAS**	**PMP4501QAS**
					0.98	2	PMP4201G		PMP4201Y		PMP4201V		
	65	100	200	450	0.9	2		BCM846BS					
	Configuration												
PNP	45	100	200	450	0.9 [1]	2		BCM857BS		BCM857BV			
					0.95	2	PMP5501G		PMP5501Y		PMP5501V	**BCM857QAS**	**PMP5501QAS**
					0.98	2	PMP5201G		PMP5201Y		PMP5201V		
	65	100	200	450	0.9	2		BCM856BS					
	Configuration												

[1] I_{C1} / I_{E2}

MOSFET driver

Types in **bold** represent new products

V_{CEO} (V)	I_C (A)	I_{cm} [A]	Type	Package	Remark	Configuration
30	0.1	0.2	BCV65	SOT143B	General-purpose transistors	
40	0.6	1	PMD2001D	SOT457	Switching transistors with reduced storage time	
	1	2	PMD3001D		Low V_{CEsat}	

Medium frequency transistors

Package						SOT23	SOT323 (SC-70)
Size (mm)						2.9 x 1.3 x 1.0	2.0 x 1.25 x 0.95
P_{tot} (mW)						250	200
Polarity	V_{CEO} (V)	I_C (mA)	h_{FE} min	h_{FE} max	f_T typ (MHz)		
NPN	15	100	40	-	500	BF570	
	20	25		85	>275	BFS20	BFS20W
		30	65	225	260	BFS19	
	40	25	67	220	380	BF840	
PNP	30	25	25	50	250	BF824	BF824W
	40		50	-	>325	BF550	

Low V_{CEsat} (BISS) transistors single NPN up to 2000 mW

Types in **bold** represent new products

Package							SOT223 (SC-73)	SOT89 (SC-62)	SOT457 (SC-74)	DFN2020-3 (SOT1061)	DFN2020D-3 (SOT1061D)
Size (mm)							6.5 x 3.5 x 1.65	4.5 x 2.5 x 1.5	2.9 x 1.5 x 1.0	2.0 x 2.0 x 0.62	2.0 x 2.0 x 0.62
P_{tot} (mW)							1700	1650	750	1300	1300
V_{CEO} (V)	I_C (A)	I_{CM} (A)	h_{FE} min/typ	@ I_C (A)	@ V_{CE} (V)	V_{CEsat} typ (mV); I_C = 0.5 A; I_B = 0.05 A					
12	5.3	10.6	300 / 530	0.5	2	18		PBSS301NX			
	5.8	11.6	300 / 530	0.5	2	18	PBSS301NZ				
	6	7	280 / 440	0.5	2	20				PBSS4612PA	
20	3	5	220 / 390	0.5	2	40		PBSS4320X			
	4	15	300 / 450	0.5	2	30			PBSS301ND		
	5	10	300 / 450	0.5	2	35		PBSS4520X			
	5.3	10.6	300 / 570	0.5	2	20		PBSS302NX			
	5.8	10.2	300 / 570	0.5	2	20	PBSS302NZ				
	6	7	280 / 440	0.5	2	20				PBSS4620PA	
	7	15	300 / 550	0.5	2	12		PBSS4021NX			
	8	20	300 / 550	0.5	2	9	PBSS4021NZ				
30	3	5	300 / 490	0.5	2	45		PBSS4330X			
	3	5	300 / 465	0.5	2	40				PBSS4330PA	PBSS4330PAS
	3.5	6	300 / 500	0.5	2	70			PBSS4032ND [3]		
	4.7	10	300 / 500	0.5	2	57		PBSS4032NX [3]			
	5.1	10.2	300 / 480	0.5	2	20		PBSS303NX			
	5.4	10	300 / 500	0.5	2	57	PBSS4032NZ [3]				
	5.5	11	300 / 480	0.5	2	20	PBSS303NZ				
	6	7	280 / 450	0.5	2	21				PBSS4630PA	
40	2	3	300 / –	0.5	5	140		PBSS4240X			
	4	15	300 / 520	0.5	2	35			PBSS302ND		
		10	300 / 500	0.5	2	21		PBSS4540X			
	5	10	300 / 500	0.5	2	25	PBSS4540Z				
50	2	5	300 / –	0.5	2	90 [2]		PBSS4250X			
	3	5	200 / 280	0.5	2	65			PBSS4350D		
			300 / 460	0.5	2	50		PBSS4350X			
			200 / 280	0.5	2	60 [1]	PBSS4350Z				
60	1	2	170 / –	0.5	10	200 [2]		**PBSS4160X**			
	3	6	200 / 360	0.5	5	45					PBSS4360PAS
			200 / –	0.5	5	45	PBSS4360Z	**PBSS4360X**			
			345 / 570	0.5	2	40			PBSS303ND		
	4.7	9.4	300 / 520	0.5	2	25		PBSS304NX			
	5.2	10.4	300 / 520	0.5	2	25	PBSS304NZ				
	6	7	280 / 440	0.5	2	22				PBSS4560PA	
	6.2	15	300 / 500	0.5	2	17		PBSS4041NX			
	7	15	300 / 500	0.5	2	13	PBSS4041NZ				
80	3	6	240 / 360	0.5	2	40			PBSS304ND		
	4	10	250 / 400	0.5	2	25		PBSS4480X			
	4.6	9.2	300 / 470	0.5	2	25		PBSS305NX			
	5.1	10.2	300 / 470	0.5	2	25	PBSS305NZ				
	5.6	7	270 / 425	0.5	2	25				PBSS4580PA	
100	1	3	150 / 290	0.25	10	75			PBSS8110D		
			150 / 290	0.25	10	73		PBSS8110X			
			150 / 290	0.25	10	73	PBSS8110Z				
	3	4	170 / 275	0.5	2	45			PBSS305ND		
	4.5	9	200 / 330	0.5	2	27		PBSS306NX			
	5.1	10.2	200 / 330	0.5	2	27	PBSS306NZ				
	5.2	6	180 / 285	0.5	2	30				PBSS8510PA	

[1] I_C / I_B = 20 [2] V_{CEsat} (max) [3] Optimized for high-speed switching

Low V_{CEsat} (BISS) transistors single NPN up to 750 mW

Types in **bold** represent new products

Package							SOT23	SOT323 (SC-70)	SOT363 (SC-88)	DFN1006-3 (SOT883)	DFN1006B-3 (SOT883B)	DFN1010D-3 (SOT1215)
Size (mm)							2.9 x 1.3 x 1.0	2.0 x 1.25 x 0.95	2.0 x 1.25 x 0.95	1.0 x 0.6 x 0.48	1.0 x 0.6 x 0.37	1.1 x 1.0 x 0.37
P_{tot} (mW)							480	350	430	250	250	750
V_{CEO} (V)	I_C (A)	I_{CM} (A)	h_{FE} min/typ	@ I_C (A)	@ V_{CE} (V)	V_{CEsat} typ (mV); I_C = 0.5 A; I_B = 0.05 A						
15	0.5	1	200 / 325	0.01	2	-				PBSS2515M	PBSS2515MB	
20	1	3	350 / 470	0.1	2	110 [2]	PBSS4120T					
	2	5	220 / 330	0.1	2	45	PBSS4320T					
	4.3	8	300 / 550	0.5	2	21	PBSS4021NT					
30	1	1.5	230 / 380	0.5	2	90						PBSS4130QA
		3	300 / 450	0.5	2	120 [2]	PBSS4130T					
	2	3	300 / 450	0.5	2	70	PBSS4230T					
			230 / 380	0.5	2	75						PBSS4230QA
	2.6	5	300 / 500	0.5	2	80	PBSS4032NT [3]					
40	0.5	1	200 / 550	0.01	2	200 [2]				PBSS2540M	PBSS2540MB	
	1	2	300 / 440	0.5	5	130		PBSS4140U				
			300 / 510	0.5	5	120	PMMT491A					
			300 / 420	0.5	5	130	PBSS4140T					
	2	3	350 / 470	0.1	2	70			PBSS4240Y			
			300 / 450	0.5	2	70	PBSS4240T					
50	2	5	300 / 495	0.5	2	60	PBSS4350T					
60	1	1.5	150 / 240	0.5	2	90						PBSS4160QA
		2	200 / 420	0.5	5	120		PBSS4160U				
			200 / 350	0.5	5	110	PBSS4160T					
	2	3	150 / 240	0.5	2	75						PBSS4260QA
	3.8	8	300 / 500	0.5	2	29	PBSS4041NT					
100	1	3	150 / 400	0.25	10	80			PBSS8110Y			
			150 / 300	0.25	10	70	PBSS8110T					

[1] I_C / I_B = 20 [2] V_{CEsat} (max) [3] Optimized for high-speed switching

Low V_{CEsat} (BISS) transistors single PNP up to 2000 mW

Types in **bold** represent new products

Package							SOT223 (SC-73)	SOT89 (SC-62)	SOT457 (SC-74)	DFN2020-3 (SOT1061)	DFN2020D-3 (SOT1061D)
Size (mm)							6.5 x 3.5 x 1.65	4.5 x 2.5 x 1.5	2.9 x 1.5 x 1.0	2.0 x 2.0 x 0.62	2.0 x 2.0 x 0.62
P_{tot} (mW)							1700	1650	750	1300	1300
V_{CEO} (V)	I_C (A)	I_{CM} (A)	h_{FE} min/typ	@ I_C (A)	@ V_{CE} (V)	V_{CEsat} typ (mV); I_C = 0.5 A; I_B = 0.05 A					
12	5.3	10.6	250 / 400	0.5	2	20		PBSS301PX			
	5.7	11.4	250 / 400	0.5	2	20	PBSS301PZ				
	6	7	220 / 335	0.5	2	20				PBSS5612PA	
20	3	5	200 / –	0.5	2	80 [2]			PBSS5320D		
			220 / 450	0.5	2	50		PBSS5320X			
	4	15	250 / 400	0.5	2	35			PBSS301PD		
	5	10	300 / 430	0.5	2	45		PBSS5520X			
	5.1	10.2	250 / 370	0.5	2	25		PBSS302PX			
	5.5	11	250 / 370	0.5	2	25	PBSS302PZ				
	6	7	230 / 345	0.5	2	25				PBSS5620PA	
	6.2	15	250 / 400	0.5	2	18		PBSS4021PX			
	6.6	20	250 / 400	0.5	2	16	PBSS4021PZ				
30	2.7	5	200 / 350	0.5	2	87			PBSS4032PD [3]		
	3	5	200 / 380	0.5	2	50		PBSS5330X			
			200 / 320	0.5	2	45				PBSS5330PA	PBSS5330PAS
	4.2	10	200 / 350	0.5	2	70		PBSS4032PX [3]			
	4.4	10	200 / 350	0.5	2	70	PBSS4032PZ [3]				
	5.1	10.2	250 / 400	0.5	2	25		PBSS303PX			
	5.3	10.6	250 / 400	0.5	2	25	PBSS303PZ				
	6	7	200 / 335	0.5	2	25				PBSS5630PA	
40	2	3	215 / –	0.5	5	170		PBSS5240X			
	4	15	200 / 310	0.5	2	46			PBSS302PD		
		10	250 / 370	0.5	2	33		PBSS5540X			
	5		250 / 350	0.5	2	40 [1]	PBSS5540Z				
50	2	5	200 / –	0.5	2	90 [2]		PBSS5250X			
	3	5	200 / 300	0.5	2	70			PBSS5350D		
			200 / 375	0.5	2	70		PBSS5350X			
			200 / 300	0.5	2	70	PBSS5350Z				
60	3	6	130 / 220	0.5	5	55					PBSS5360PAS
			130 / –	0.5	5	55	PBSS5360Z	**PBSS5360X**			
			180 / 265	0.5	2	55			PBSS303PD		
	4.2	8.4	200 / 295	0.5	2	35		PBSS304PX			
	4.5	9	200 / 295	0.5	2	35	PBSS304PZ				
	5	6	170 / 260	0.5	2	35				PBSS5560PA	
	5	15	200 / 300	0.5	2	30		PBSS4041PX			
	5.7		200 / 300	0.5	2	22	PBSS4041PZ				
80	3	5	155 / 225	0.5	2	55			PBSS304PD		
	4		180 / 265	0.5	2	40				PBSS5580PA	
		10	200 / 300	0.5	2	35		PBSS5480X			
		8	200 / 280	0.5	2	36		PBSS305PX			
	4.5	9	200 / 280	0.5	2	36	PBSS305PZ				
100	1	3	150 / 350	0.5	5	100			PBSS9110D		
			150 / 350	0.5	5	90		PBSS9110X			
			150 / –	0.5	5	90	PBSS9110Z				
	2	3	175 / 275	0.5	2	65			PBSS305PD		
	2.7	4	180 / 295	0.5	2	45				PBSS9410PA	
	3.7	7.4	200 / 300	0.5	2	45		PBSS306PX			
	4.1	8.2	200 / 300	0.5	5	45	PBSS306PZ				

[1] $I_C / I_B = 20$ [2] V_{CEsat} (max) [3] Optimized for high-speed switching

Low V_{CEsat} (BISS) transistors single PNP up to 750 mW

Types in **bold** represent new products

Package							SOT23	SOT323 (SC-70)	SOT363 (SC-88)	DFN1006-3 (SOT883)	DFN1006B-3 (SOT883B)	DFN1010D-3 (SOT1215)
Size (mm)							2.9 x 1.3 x 1.0	2.0 x 1.25 x 0.95	2.0 x 1.25 x 0.95	1.0 x 0.6 x 0.48	1.0 x 0.6 x 0.37	1.1 x 1.0 x 0.37
P_{tot} (mW)							480	350	430	250	250	750
V_{CEO} (V)	I_C (A)	I_{CM} (A)	h_{FE} min/typ	@ I_C (A)	@ V_{CE} (V)	V_{CEsat} typ (mV); I_C = 0.5 A; I_B = 0.05 A						
15	0.5	1	200 / 260	0.01	2	150				PBSS3515M	PBSS3515MB	
20	1	2	300 / 450	0.1	2	125 [2]	PBSS5120T					
	2	3	225 / –	0.5	2	80 [2]	PBSS5220T					
		5	220 / 420	0.5	2	50	PBSS5320T					
	3.5	8	250 / 400	0.5	2	35	PBSS4021PT					
30	1	1.5	180 / 295	0.5	2	85						PBSS5130QA
		3	260 / 350	0.5	2	110	PBSS5130T					
	2		300 / 450	0.1	2	70	PBSS5230T					
			180 / 295	0.5	2	70						PBSS5230QA
	2.4	5	200 / 320	0.5	2	95	PBSS4032PT [3]					
40	0.5	1	200 / 380	0.01	2	220				PBSS3540M	PBSS3540MB	
	1	2	300 / 520	0.1	5	130		PBSS5140U				
			300 / 800	0.1	5	130	PMMT591A					
			300 / 510	0.1	5	130	PBSS5140T					
	2	3	300 / –	0.1	2	110 [2]			PBSS5240Y			
			300 / 450	0.1	2	70	PBSS5240T					
50	2	3	200 / –	0.5	2	90 [2]	PBSS5250T					
							PBSS5250TH					
	2	3	200 / –	0.5	2	90 [2]	**PBSS5350TH**					
		5	200 / 360	0.5	2	55	PBSS5350T					
60	1	1.5	120 / 185	0.5	2	125						PBSS5160QA
		2	150 / 250	0.5	5	135		PBSS5160U				
			150 / 250	0.5	5	120	PBSS5160T					
	1.7	2.5	120 / 185	0.5	2	105						PBSS5260QA
	2.7	8	200 / 300	0.5	2	49	PBSS4041PT					
100	1	3	150 / –	0.25	5	93			PBSS9110Y			
			150 / 350	0.5	5	95	PBSS9110T					

[1] IC / IB = 20 [2] V_{CEsat} (max) [3] Optimized for high-speed switching

Low V_{CEsat} (BISS) transistors double

Package										SOT96 (SO8)	SOT457 (SC-74)	SOT666	DFN2020-6 (SOT1118)	DFN2020D-6 (SOT1118D)
Size (mm)										4.9 x 3.9 x 1.75	2.9 x 1.5 x 1.0	1.6 x 1.2 x 0.55	2.0 x 2.0 x 0.62	2.0 x 2.0 x 0.62
P_{tot} (mW)										2000 [2]	750	500	1300	1300
V_{CEO} (V)	I_C (A)	Polarity	h_{FE} min/ typ	@ I_C (A)	@ V_{CE} (V)	V_{CEsat} typ (mV); I_C = 0.5 A; I_B = 0.05 A	V_{CEsat} max (mV)	@ I_C (A)	@ I_B (A)					
15	0.5	2 x NPN	200	0.01	2	170 [1]	250	0.5	0.05			PBSS2515VS		
		2 x PNP	200	0.01	2	170 [1]	250	0.5	0.05			PBSS3515VS		
		NPN / PNP	200	0.01	2	170 [1]	250	0.5	0.05			PBSS2515VPN		
		NPN / PNP	200	0.01	2	170 [1]	250	0.5	0.05					
20	2	NPN / NPN	230	0.5	2	60	90	0.5	0.05					PBSS4220PANS
	2	PNP / PNP	210	0.5	2	70	110	0.5	0.05					PBSS5220PAPS
	7.5	NPN / NPN	300	0.5	2	15	150	4	0.2	PBSS4021SN				
	6.3	PNP / PNP	250	0.5	2	24	225	4	0.2	PBSS4021SP				
	7.5 / 6.3	NPN / PNP	300 / 250	0.5	2	15 / 24	150 / 225	4	0.2	PBSS4021SPN				
30	1	NPN / NPN	210	0.5	2	75	100	0.5	0.05				PBSS4130PAN	
		PNP / PNP	170	0.5	2	85	140	0.5	0.05				PBSS5130PAP	
		NPN / PNP	210 / 170	0.5	2	75 / 85	100 / 140	0.5	0.05				PBSS4130PANP	
	2	NPN / NPN	230	0.5	2	60	80	0.5	0.05				PBSS4230PAN	
		PNP / PNP	210	0.5	2	75	110	0.5	0.05				PBSS5230PAP	
		NPN / PNP	230 / 210	0.5	2	60 / 75	80 / 100	0.5	0.05				PBSS4230PANP	
	5.7	NPN / NPN	300	0.5	2	57	250	4	0.4	PBSS4032SN [3]				
	4.8	PNP / PNP	200	0.5	2	70	390	4	0.4	PBSS4032SP [3]				
	5.7 / 4.8	NPN / PNP	300 / 200	0.5	2	57 / 70	250 / 390	4	0.4	PBSS4032SPN [3]				
40	1	NPN / PNP	300 / 250	0.5	5	130 / 150	500	1	0.1		PBSS4140DPN			
	2	NPN / PNP	300 / 250	0.5	5	80 / 100	400 / 530	2	0.2		PBSS4240DPN			
50	2.7	2 x NPN	300	0.5	2	50	340	2.7	0.27	PBSS4350SS				
		2 x PNP	200	0.5	2	60	370	2.7	0.27	PBSS5350SS				
		NPN / PNP	300 / 200	0.5	2	50 / 60	340 / 370	2.7	0.27	PBSS4350SPN				
60	1	2 x NPN	200	0.5	5	115	250	1	0.1		PBSS4160DS			
		2 x PNP	150	0.5	5	120	330	1	0.1		PBSS5160DS			
		NPN / PNP	200 / 150	0.5	5	115 / 120	250 / 330	1	0.1		PBSS4160DPN			
	1	NPN / NPN	150	0.5	2	90	120	0.5	0.05				PBSS4160PAN	PBSS4160PANS
		PNP / PNP	120	0.5	2	125	180	0.5	0.05				PBSS5160PAP	PBSS5160PAPS
		NPN / PNP	150 / 120	0.5	2	90 / 125	120 / 180	0.5	0.05				PBSS4160PANP	PBSS4160PANPS
	2	NPN / NPN	210	0.5	2	70	90	0.5	0.05				PBSS4260PAN	PBSS4260PANS
		PNP / PNP	140	0.5	2	100	140	0.5	0.05				PBSS5260PAP	PBSS5260PAPS
		NPN / PNP	210 / 140	0.5	2	70 / 100	90 / 140	0.5	0.05				PBSS4260PANP	PBSS4260PANPS
	6.7	NPN / NPN	300	0.5	2	20	190	4	0.2	PBSS4041SN				
	5.9	PNP / PNP	200	0.5	2	35	330	4	0.2	PBSS4041SP				
	6.7 / 5.9	NPN / PNP	300 / 200	0.5	2	20 / 35	190 / 330	4	0.2	PBSS4041SPN				
120	1	NPN / NPN	240	0.1	2	90	120	0.5	0.05				PBSS4112PAN	
		PNP / PNP	190	0.1	2	150	220	0.5	0.05				PBSS5112PAP	
		NPN / PNP	240 / 190	0.1	2	90 / 150	120 / 220	0.5	0.05				PBSS4112PANP	

[1] I_c / I_b=20 [2] Device mounted on a ceramic PCB, Al2O3, standard footprint [3] Optimized for high-speed switching

Low V_{CEsat} (BISS) transistors load switches

Package				SOT457 (SC-74)		SOT363 (SC-88)
Size (mm)				2.9 x 1.5 x 1.0		2.0 x 1.25 x 0.95
P_{tot} (mW)				750 [1]	600 [1]	300 [2]
V_{CEO} (V)	I_C (A)	V_{CEsat} max (mV); I_C = 0.5 A; I_B = 0.05 A	R1, R2 (kΩ)			
15	0.5	250	2.2			PBLS1501Y
			4.7			PBLS1502Y
			10			PBLS1503Y
			22			PBLS1504Y
20	1	150	2.2		PBLS2001D	
			4.7		PBLS2002D	
			10		PBLS2003D	
			22		PBLS2004D	
	1.8	70	2.2	PBLS2021D		
			4.7	PBLS2022D		
			10	PBLS2023D		
			22	PBLS2024D		
40	0.5	350	2.2			PBLS4001Y
			4.7			PBLS4002Y
			10			PBLS4003Y
			22			PBLS4004Y
			47			PBLS4005Y
	1	170	2.2		PBLS4001D	
			4.7		PBLS4002D	
			10		PBLS4003D	
			22		PBLS4004D	
			47		PBLS4005D	
60	1	180	2.2		PBLS6001D	
			4.7		PBLS6002D	
			10		PBLS6003D	
			22		PBLS6004D	
			47		PBLS6005D	
	1.5	100	2.2	PBLS6021D		
			4.7	PBLS6022D		
			10	PBLS6023D		
			22	PBLS6024D		

[1] Device mounted on a ceramic PCB, Al2O3, standard footprint
[2] Device mounted on an FR4 PCB, single-sided copper, tin-plated, and standard footprint

Low V_{CEsat} (BISS) high voltage transistors

Types in **bold** represent new products

Package				SOT223 (SC-73)	SOT89 (SC-62)	SOT1215	SOT23
Size (mm)				6.5 x 3.5 x 1.65	4.5 x 2.5 x 1.5	1.1 x 1.0 x 0.37	2.9 x 1.3 x 1.0
P_{tot} (mW)				1700	1300	750	250
Polarity	V_{CEO} [max] (V)	I_C (A)	hFE [min]				
NPN	150	0.5	100			PBHV8515QA	
		1	70				PBHV8115TLH
			100				PBHV8115T
					PBHV8115X		
				PBHV8115Z			
		2	100	PBHV8215Z			
	180	1	100				PBHV8118T
	400	0.5	100	PBHV8540Z	PBHV8540X		PBHV8540T
		1	100	PBHV8140Z			
	500	0.15	50				PMBTA45
	600	0.1	70	PBHV2160Z			
		0.5	70	PBHV8560Z			
PNP	140	4	100	PBHV9414Z			
	150	0.5	100			PBHV9515QA	
		1	70				PBHV9115TLH
			100				PBHV9115T
					PBHV9115X		
				PBHV9115Z			
		2	100	PBHV9215Z			
	400	0.25	100				PBHV9040T
					PBHV9040X		
				PBHV9040Z			
		0.5	100	PBHV9540Z	**PBHV9540X**		
	500	0.15	100				PBHV9050T
		0.25	100	PBHV9050Z			
	600	0.1	70	PBHV3160Z			
		0.5	70	PBHV9560Z			

Low V_{CEsat} (BISS) RETs

Package					SOT23	
Size (mm)					2.9 x 1.3 x 1.0	
P_{tot} (mW)					250	
V_{CEO} (V)	I_C (mA)		R1 (kΩ)	R2 (kΩ)	NPN	PNP
40	600	R1 = R2	1	1	PBRN113ET	PBRP113ET
			2.2	2.2	PBRN123ET	PBRP123ET
		R1 ≠ R2	1	10	PBRN113ZT	PBRP113ZT
			2.2	10	PBRN123YT	PBRP123YT

Low V_{CEsat} (BISS) transistors PNP - N-channel MOSFET combination

Package											DFN2020-6 (SOT1118)
											
Size (mm)											2.0 x 2.0 x 0.62
P_{tot} (mW)											1300
V_{CEO} (V)	I_C (A)	h_{FE} min	h_{FE} max	@ I_C (mA)	@ V_{CE} (V)	R_{CEsat} typ (mΩ)	V_{DS} (V)	V_{GS} (V)	I_D (A)	R_{Dson} typ (mΩ)	
40	2	300	800	100	5	240	30	0.7	0.66	390	PBSM5240PF
		100	-	100	5	240	30	0.7	0.66	390	PBSM5240PFH

Low V_{CEsat} (BISS) power transistors single

Types in **bold** represent new products

Package						LFPAK56 (SOT669)
Size (mm)						5 x 6 x 1.1
P_{tot} (mW)						1250
V_{CEO} (V)	I_C (A)	h_{FE} min/typ	@ I_C (A)	@ V_{CE} (V)	Polarity	
40	6	200 / 400	0.5	2	NPN	PHPT60406NY
			0.5	2	PNP	PHPT60406PY
	10	200 / 400	0.5	2	NPN	PHPT60410NY
			0.5	2	PNP	PHPT60410PY
	15	200 / 400	0.5	2	NPN	PHPT60415NY
			0.5	2	PNP	PHPT60415PY
60	3	200 / 400	0.5	2	NPN	PHPT60603NY
			0.5	2	PNP	PHPT60603PY
	6	200 / 400	0.5	2	NPN	PHPT60606NY
		150 / 250	0.5	2	PNP	PHPT60606PY
	10	200 / 400	0.5	2	NPN	PHPT60610NY
		150 / 250	0.5	2	PNP	PHPT60610PY
100	2	150 / 250	0.5	10	NPN	PHPT61002NYC
		150 / 220	0.5	10	PNP	PHPT61002PYC
		120/220	0.5	10	NPN	**PHPT61002NYCLH**
		100/180	0.5	10	PNP	**PHPT61002PYCLH**
	3	150 / 250	0.5	10	NPN	PHPT61003NY
		150 / 220	0.5	10	PNP	PHPT61003PY
	6	150 / 250	0.5	10	NPN	PHPT61006NY
		150 / 220	0.5	10	PNP	PHPT61006PY
	10	150 / 250	0.5	10	NPN	PHPT61010NY
		150 / 220	0.5	10	PNP	PHPT61010PY

Low V_{CEsat} (BISS) power transistors double

Package												LFPAK56D (SOT1205)
Size (mm)												5 x 6 x 1.1
P_{tot} (mW)												1250
V_{CEO} (V)	I_C (A)	I_{CM} (A)	h_{FE} typ	@ I_C (A)	@ V_{CE} (V)	V_{CEsat} typ (mV); I_C = 0.5 A; I_B = 0.05 A	V_{CEsat} max (mV)	@ I_C (A)	@ I_B (A)	Polarity	h_{FE1}/h_{FE2}	
100	3	6	150	0.5	10	50	300	3	0.2	2XNPN	-	PHPT610030NK
						70	400	3	0.2	2XPNP	-	PHPT610030PK
						50 / 70	300 / 400	3	0.2	NPN/PNP	-	PHPT61003NPK
						50	300	3	0.2	2XNPN	0.95	PHPT610035NK
						70	400	3	0.2	2XPNP	0.9	PHPT610035PK

RETs 100 mA single - part 1

Package					SOT23		SOT323 (SC-70)	
Size (mm)					2.9 x 1.3 x 1.0		2.0 x 1.25 x 0.95	
P_{tot} (mW)					250		200	
V_{CEO} (V)	I_C (mA)	Configuration	R1 (kΩ)	R2 (kΩ)	NPN	PNP	NPN	PNP
50	100		1	1		PDTA113ET		PDTA113EU
			2.2	2.2	PDTC123ET	PDTA123ET	PDTC123EU	PDTA123EU
			4.7	4.7	PDTC143ET	PDTA143ET	PDTC143EU	PDTA143EU
			10	10	PDTC114ET	PDTA114ET	PDTC114EU	PDTA114EU
			22	22	PDTC124ET	PDTA124ET	PDTC124EU	PDTA124EU
			47	47	PDTC144ET	PDTA144ET	PDTC144EU	PDTA144EU
			100	100	PDTC115ET	PDTA115ET	PDTC115EU	PDTA115EU
			1	10		PDTA113ZT		PDTA113ZU
			2.2	10	PDTC123YT	PDTA123YT	PDTC123YU	PDTA123YU
			2.2	47	PDTC123JT	PDTA123JT	PDTC123JU	PDTA123JU
			4.7	10	PDTC143XT	PDTA143XT	PDTC143XU	PDTA143XU
			4.7	47	PDTC143ZT	PDTA143ZT	PDTC143ZU	PDTA143ZU
			10	47	PDTC114YT	PDTA114YT	PDTC114YU	PDTA114YU
			22	47	PDTC124XT	PDTA124XT	PDTC124XU	PDTA124XU
			47	10	PDTC144VT	PDTA144VT	PDTC144VU	PDTA144VU
			47	22	PDTC144WT	PDTA144WT	PDTC144WU	PDTA144WU
			2.2	-	PDTC123TT	PDTA123TT	PDTC123TU	PDTA123TU
			4.7	-	PDTC143TT	PDTA143TT	PDTC143TU	PDTA143TU
			10	-	PDTC114TT	PDTA114TT	PDTC114TU	PDTA114TU
			22	-	PDTC124TT	PDTA124TT	PDTC124TU	PDTA124TU
			47	-	PDTC144TT	PDTA144TT	PDTC144TU	PDTA144TU
			100	-	PDTC115TT	PDTA115TT	PDTC115TU	PDTA115TU

RETs 100 mA single - part 2

Package					DFN1006-3 (SOT883)		DFN1006B-3 (SOT883B)		SOT1215	
Size (mm)					1.0 x 0.6 x 0.48		1.0 x 0.6 x 0.37		1.1 x 1.0 x 0.37	
P_{tot} (mW)					250		250		750	
V_{CEO} (V)	I_C (mA)	Configuration	R1 (kΩ)	R2 (kΩ)	NPN	PNP	NPN	PNP	NPN	PNP
50	100		1	1		PDTA113EM		PDTA113EMB		
			2.2	2.2	PDTC123EM	PDTA123EM	PDTC123EMB	PDTA123EMB		
			4.7	4.7	PDTC143EM	PDTA143EM	PDTC143EMB	PDTA143EMB	PDTC143EQA	PDTA143EQA
			10	10	PDTC114EM	PDTA114EM	PDTC114EMB	PDTA114EMB	PDTC114EQA	PDTA114EQA
			22	22	PDTC124EM	PDTA124EM	PDTC124EMB	PDTA124EMB	PDTC124EQA	PDTA124EQA
			47	47	PDTC144EM	PDTA144EM	PDTC144EMB	PDTA144EMB	PDTC144EQA	PDTA144EQA
			100	100	PDTC115EM	PDTA115EM	PDTC115EMB	PDTA115EMB		
			1	10		PDTA113ZM		PDTA113ZMB		
			2.2	10	PDTC123YM	PDTA123YM	PDTC123YMB	PDTA123YMB		
			2.2	47	PDTC123JM	PDTA123JM	PDTC123JMB	PDTA123JMB	PDTC123XQA	PDTA123XQA
			4.7	10	PDTC143XM	PDTA143XM	PDTC143XMB	PDTA143XMB	PDTC143XQA	PDTA143XQA
			4.7	47	PDTC143ZM	PDTA143ZM	PDTC143ZMB	PDTA143ZMB	PDTC143ZQA	PDTA143ZQA
			10	47	PDTC114YM	PDTA114YM	PDTC114YMB	PDTA114YMB	PDTC114YQA	PDTA114YQA
			22	47	PDTC124XM	PDTA124XM	PDTC124XMB	PDTA124XMB		
			47	10	PDTC144VM	PDTA144VM	PDTC144VMB	PDTA144VMB		
			47	22	PDTC144WM	PDTA144WM	PDTC144WMB	PDTA144WMB		
			2.2	-	PDTC123TM	PDTA123TM	PDTC123TMB	PDTA123TMB		
			4.7	-	PDTC143TM	PDTA143TM	PDTC143TMB	PDTA143TMB		
			10	-	PDTC114TM	PDTA114TM	PDTC114TMB	PDTA114TMB		
			22	-	PDTC124TM	PDTA124TM	PDTC124TMB	PDTA124TMB		
			47	-	PDTC144TM	PDTA144TM	PDTC144TMB	PDTA144TMB		
			100	-	PDTC115TM	PDTA115TM	PDTC115TMB	PDTA115TMB		

RETs 100 mA double

Types in **bold** represent new products

Package					DFN1010B-6 (SOT1216)			DFN1412-6 (SOT1268)			SOT363 (SC-88)			SOT666		
Size (mm)					1.1 x 1.0 x 0.37			1.4 X 1.2 X 0.5			2.0 x 1.25 x 0.95			1.6 x 1.2 x 0.55		
P_{tot} (mW)					350			480			300			300		
V_{CEO} (V)	I_C (mA)	Configuration	R1 (kΩ)	R2 (kΩ)	NPN / NPN	NPN / PNP	PNP / PNP	NPN / NPN	NPN / PNP	PNP / PNP	NPN / NPN	NPN / PNP	PNP / PNP	NPN / NPN	NPN / PNP	PNP / PNP
50	100	R1 = R2	2.2	2.2							PUMH20	PUMD20	PUMB20	PEMH20	PEMD20	PEMB20
			4.7	4.7							PUMH15	PUMD15	PUMB15	PEMH15	PEMD15	PEMB15
			10	10	PQMH11	PQMD3	PQMB11	**PRMH11**	**PRMD3**	**PRMB11**	PUMH11	PUMD3	PUMB11	PEMH11	PEMD3	PEMB11
			22	22		PQMD2			**PRMD2**		PUMH1	PUMD2	PUMB1	PEMH1	PEMD2	PEMB1
			47	47	PQMH2	PQMD12		**PRMH2**	**PRMD12**		PUMH2	PUMD12	PUMB2	PEMH2	PEMD12	PEMB2
			100	100							PUMH24	PUMD24	PUMB24	PEMH24	PEMD24	PEMB24
		R1 ≠ R2	2.2	47	PQMH10	PQMD10		**PRMH10**	**PRMD10**		PUMH10	PUMD10	PUMB10	PEMH10	PEMD10	PEMB10
			4.7	10							PUMH18	PUMD18	PUMB18	PEMH18	PEMD18	PEMB18
			4.7	47	PQMH13	PQMD13		**PRMH13**	**PRMD13**		PUMH13	PUMD13	PUMB13	PEMH13	PEMD13	PEMB13
			10	47	PQMH9			**PRMH9**			PUMH9	PUMD9	PUMB9	PEMH9	PEMD9	PEMB9
			22	47		PQMD16			**PRMD16**		PUMH16	PUMD16	PUMB16	PEMH16	PEMD16	PEMB16
			47	22							PUMH17	PUMD17	PUMB17	PEMH17	PEMD17	PEMB17
			47 / 2.2	47 / 47								PUMD48			PEMD48	
		Only R1	2.2	-							PUMH30	PUMD30	PUMB30	PEMH30	PEMD30	PEMB30
			4.7	-							PUMH7	PUMD6	PUMB3	PEMH7	PEMD6	PEMB3
			10	-							PUMH4	PUMD4	PUMB4	PEMH4	PEMD4	PEMB4
			22	-							PUMH19	PUMD19	PUMB19	PEMH19	PEMD19	PEMB19
			47	-							PUMH14	PUMD14	PUMB14	PEMH14	PEMD14	PEMB14

RETs 500mA single / double

Package					SOT457 (SC-74)		SOT23		SOT323 (SC-70)		SOT1215	
Size (mm)					2.9 x 1.5 x 1.0		2.9 x 1.3 x 1.0		2.0 x 1.25 x 0.95		1.1 x 1.0 x 0.37	
P_{tot} (mW)					750		250		200		750	
V_{CEO} (V)	I_C (mA)	Configuration	R1 (kΩ)	R2 (kΩ)	NPN / NPN	NPN / PNP	NPN	PNP	NPN	PNP	NPN	PNP
50	500	R1 = R2	1	1			PDTD113ET	PDTB113ET	PDTD113EU	PDTB113EU	PDTD113EQA	PDTB113EQA
			2.2	2.2			PDTD123ET	PDTB123ET	PDTD123EU	PDTB123EU	PDTD123EQA	PDTB123EQA
			4.7	4.7			PDTD143ET	PDTB143ET	PDTD143EU	PDTB143EU	PDTD143EQA	PDTB143EQA
			10	10			PDTD114ET	PDTB114ET	PDTD114EU	PDTB114EU	PDTD114EQA	PDTB114EQA
		R1 ≠ R2	1	10	PIMN31	PIMC31	PDTD113ZT	PDTB113ZT	PDTD113ZU	PDTB113ZU	PDTD113ZQA	PDTB113ZQA
			2.2	10			PDTD123YT	PDTB123YT	PDTD123YU	PDTB123YU	PDTD123YQA	PDTB123YQA
			4.7	10			PDTD143XT	PDTB143XT	PDTD143XU	PDTB143XU	PDTD143XQA	PDTB143XQA
		Only R1	2.2	-			PDTD123TT	PDTB123TT				

3-terminal adjustable shunt regulators

Type name	Pinning configuration	Tamb(C°)	Vref		Package	Size(mm)	Ptot(mW)	VKA(V)	IK(mA)
TLVH431NCDBZR	Normal pinning	0 to 70	1.5%	1,24	SOT23	2.9 x 1.3 x 1.0	480	20	80
TLVH431NIDBZR	Normal pinning	-40 to 85							
TLVH431NQDBZR	Normal pinning	-40 to 125							
TLVH431NMQDBZR	Mirrored pinning								
TLVH431NACDBZR	Normal pinning	0 to 70	1%						
TLVH431NAIDBZR	Normal pinning	-40 to 85							
TLVH431NAQDBZR	Normal pinning	-40 to 125							
TLVH431NAMQDBZR	Mirrored pinning								
TL431CDBZR	Normal pinning	0 to 70	2%	2,495			580	36	100
TL431IDBZR	Normal pinning	-40 to 85							
TL431QDBZR	Normal pinning	-40 to 125							
TL431FDT	Normal pinning								
TL431MFDT	Mirrored pinning								
TL431ACDBZR	Normal pinning	0 to 70	1%						
TL431AIDBZR	Normal pinning	-40 to 85							
TL431AQDBZR	Normal pinning	-40 to 125							
TL431AFDT	Normal pinning								
TL431AMFDT	Mirrored pinning								
TL431BCDBZR	Normal pinning	0 to 70	0.5%						
TL431BIDBZR	Normal pinning	-40 to 85							
TL431BQDBZR	Normal pinning	-40 to 125							
TL431BFDT	Normal pinning								
TL431BMFDT	Mirrored pinning								

Products in **bold red** are under development

Diodes 2

Zener diodes 36

General purpose Zener diodes 36
Zener diodes specifications 37

Switching diodes 38

General purpose, high speed switching diodes <= 90V 38
General purpose, high speed switching diodes 100V 38
General purpose, switching diodes >= 100V 39
Controlled avalanche switching diodes 40
Low leakage current switching diodes 40
PN rectifiers 40

PN rectifiers 41

PN rectifiers - Automotive qualified 41
Nomenclature pn-rectifier consumer grade types 41
Nomenclature pn-rectifier automotive grade types 41

Schottky rectifiers 42

General purpose schottky diodes <= 250 mA 42
Low capacitance schottky diodes 43
Medium power low VF schottky rectifiers single >= 200 mA - leadless DSN / DFN packages 44
Medium power low VF schottky rectifiers single >= 200 mA 46
Medium power low VF schottky rectifiers single >= 200 mA - leaded packages 47
Medium power low VF schottky rectifiers dual >= 200 mA 48

Nomenclatures 49

General purpose Zener diodes

I_F max (mA)	P_{ZSM} (W)	V_Z nom (V)	V_Z tolerance	Note	Configuration		Series	Package	Size (mm)	P_{tot} (mW)
500	-	3.3~24	C	Europe	Single		1N47xxA series	SOD66 (DO-41)	4.8 x 2.6 x 0.81	1000
	60	3.6~75					BZV85 series			
250	-	2.1~36	About 2%	Special	Single		NZX series	SOD27 (DO-35)	4.25 x 1.85 x 0.56	400
	40	2.4~75	B, C	Europe			BZX79 series			
400	40	2.4~75	C	Europe	Single		BZV90 series	SOT223 (SC-73)	6.5 x 3.5 x 1.65	1500
250	40	2.4~75	C	Europe	Single		BZV49 series	SOT89 (SC-62)	4.5 x 2.5 x 1.5	1000
250	40	2.4~75	B, C	Europe	Single		BZV55 series	SOD80C (MiniMelf)	3.5 x 1.5 x 1.5	400
200	40	2.4~75	B, C	Europe	Dual c.a.		BZB84 series	SOT23	2.9 x 1.3 x 1.0	250
			A, B, C		Single		BZX84 series			
250	30	5~6.8	0.2 V	Ave			PLVA600A series			
250	40	2.4~75	B, C	Europe	Single		BZT52 series	SOD123 	2.7 x 1.6 x 1.2	550
200		2.4~36	B	Japan			PDZ-GW series			
250	-	3.0~30	About 2.5%	Special	Single		NZH series	SOD123F	2.6 x 1.6 x 1.1	830
	40	2.4~75	B, C	Europe			BZT52H series			
200	40	10	B2	Japan	Dual isolated		PZU10DB2 series	SOT353 (SC-88A)	2.0 x 1.25 x 0.95	300
200	40	2.4~15	C	Europe	Dual c.a.		BZB784 series	SOT323 (SC-70)	2.0 x 1.25 x 0.95	350
200	30	100	C	Europe	Back-to-back		BZB100A	SOD323 (SC-76)	1.7 x 1.25 x 0.95	300
	40	2.4~36	B2	Japan	Single		PDZ-B series			
250	40	2.4~75	B, C	Europe			BZX384 series			
200	40	2.4~36	B, B1, B2, B3	Japan			PZUxBA series			
200	60	100	C	Europe	Single		BZX100A	SOD323F (SC-90)	1.7 x 1.25 x 0.7	550
200	40	2.4~36	B, B1, B2, B3	Japan			PZUxB series			
250	40	2.4~75	B, C	Europe			BZX84J series			
200	40	2.4~15	C	Europe	Dual c.a.		BZB984 series	SOT663	1.6 x 1.2 x 0.55	350
200	40	2.4~75	B, C	Europe	Single		BZX585 series	SOD523 (SC-79)	1.2 x 0.8 x 0.6	300
200	40	2.4~75	B, C	Europe	Single		BZX884 series	DFN1006-2 (SOD882)	1.0 x 0.6 x 0.48	250
		2.4~36	B, B2	Japan			PZUxBL series			
250	40	2.4~30	B	Europe	Single		TDZxJ series	SOD323F	1.7 x 1.25 x 0.7	500

Notes:
Japan: B selection: app. 5% Vz tolerance, B1, B2, B3 selections: app. 2% Vz tolerance in sequential intervals
Europe: A selection: app. 1% Vz tolerance, B selection: app. 2% Vz tolerance, C selection: app. 5% Vz tolerance; the selections are in overlapping intervals

Ave: low-voltage avalanche regulator diodes
Dual c.a.: dual common anode

Zener diodes specifications

Differences in Zener specifications

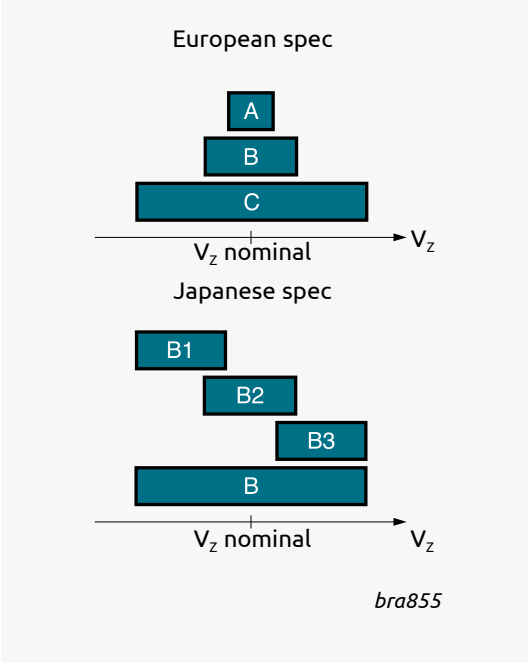

Japanese spec (PZU, PDZ)

y =	B-series	B1-series	B2-series	B3-series
	± 5%	± 2%	± 2%	± 2%
	V_z (V)	V_z (V)	V_z (V)	V_z (V)
PZU2.4y	2.3 - 2.6	-	-	-
PZU2.7y	2.5 - 2.9	2.5 - 2.75	2.65 - 2.9	-
PZU3.0y	2.8 - 3.2	2.8 - 3.05	2.95 - 3.2	-
PZU3.3y	3.1 - 3.5	3.1 - 3.35	3.25 - 3.5	-
PZU3.6y	3.4 - 3.8	3.4 - 3.65	3.55 - 3.8	-
PZU3.9y	3.7 - 4.1	3.7 - 3.97	3.87 - 4.1	-
PZU4.3y	4.01 - 4.48	4.01 - 4.21	4.15 - 4.34	4.28 - 4.48
PZU4.7y	4.42 - 4.9	4.42 - 4.61	4.55 - 4.75	4.69 - 4.9
PZU5.1y	4.84 - 5.37	4.84 - 5.04	4.98 - 5.2	5.14 - 5.37
PZU5.6y	5.31 - 5.92	5.31 - 5.55	5.49 - 5.73	5.67 - 5.92
PZU6.2y	5.86 - 6.53	5.86 - 6.12	6.06 - 6.33	6.26 - 6.53
PZU6.8y	6.47 - 7.14	6.47 - 6.73	6.65 - 6.93	6.86 - 7.14
PZU7.5y	7.06 - 7.84	7.06 - 7.36	7.28 - 7.6	7.52 - 7.84
PZU8.2y	7.76 - 8.64	7.76 - 8.1	8.02 - 8.36	8.28 - 8.64
PZU9.1y	8.56 - 9.55	8.56 - 8.93	8.85 - 9.23	9.15 - 9.55
PZU10y	9.45 - 10.55	9.45 - 9.87	9.77 - 10.21	10.11 - 10.55
PZU11y	10.44 - 11.56	10.44 - 10.88	10.76 - 11.22	11.1 - 11.56
PZU12y	11.42 - 12.6	11.42 - 11.9	11.74 - 12.24	12.08 - 12.6
PZU13y	12.47 - 13.96	12.47 - 13.03	12.91 - 13.49	13.37 - 13.96
PZU14y	-	-	13.7 - 14.3	-
PZU15y	13.84 - 15.52	13.84 - 14.46	14.34 - 14.98	14.85 - 15.52
PZU16y	15.37 - 17.09	15.37 - 16.01	15.85 - 16.51	16.35 - 17.09
PZU18y	16.94 - 19.03	16.94 - 17.7	17.56 - 18.35	18.21 - 19.03
PZU20y	18.86 - 21.08	18.86 - 19.7	19.52 - 20.39	20.21 - 21.08
PZU22y	20.88 - 23.17	20.88 - 21.77	21.54 - 22.47	22.23 - 23.17
PZU24y	22.93 - 25.57	22.93 - 23.96	23.72 - 24.78	24.54 - 25.57
PZU27y	25.1 - 28.9	-	-	-
PZU30y	28 - 32	-	-	-
PZU33y	31 - 35	-	-	-
PZU36y	34 - 38	-	-	-

European spec (BZV, BZX, BZB, 1N47)

y =	C-series	B-series	A-series
	±5%	±2%	±1%
	V_z (V)	V_z (V)	V_z (V)
BZX84-y2V4	2.2 - 2.6	2.35 - 2.45	2.37 - 2.43
BZX84-y2V7	2.5 - 2.9	2.65 - 2.75	2.67 - 2.73
BZX84-y3V0	2.8 - 3.2	2.94 - 3.06	2.97 - 3.03
BZX84-y3V3	3.1 - 3.5	3.23 - 3.37	3.26 - 3.34
BZX84-y3V6	3.4 - 3.8	3.53 - 3.67	3.56 - 3.64
BZX84-y3V9	3.7 - 4.1	3.82 - 3.98	3.86 - 3.94
BZX84-y4V3	4 - 4.6	4.21 - 4.39	4.25 - 4.35
BZX84-y4V7	4.4 - 5	4.61 - 4.79	4.65 - 4.75
BZX84-y5V1	4.8 - 5.4	5 - 5.2	5.04 - 5.16
BZX84-y5V6	5.2 - 6	5.49 - 5.71	5.54 - 5.66
BZX84-y6V2	5.8 - 6.6	6.08 - 6.32	6.13 - 6.27
BZX84-y6V8	6.4 - 7.2	6.66 - 6.94	6.73 - 6.87
BZX84-y7V5	7 - 7.9	7.35 - 7.65	7.42 - 7.58
BZX84-y8V2	7.7 - 8.7	8.04 - 8.36	8.11 - 8.29
BZX84-y9V1	8.5 - 9.6	8.92 - 9.28	9 - 9.2
BZX84-y10	9.4 - 10.6	9.8 - 10.2	9.9 - 10.1
BZX84-y11	10.4 - 11.6	10.8 - 11.2	10.8 - 11.11
BZX84-y12	11.4 - 12.7	11.8 - 12.2	11.88 - 12.12
BZX84-y13	12.4 - 14.1	12.7 - 13.3	12.87 - 13.13
BZX84-y15	13.8 - 15.6	14.7 - 15.3	14.85 - 15.15
BZX84-y16	15.3 - 17.1	15.7 - 16.3	15.84 - 16.16
BZX84-y18	16.8 - 19.1	17.6 - 18.4	17.82 - 18.18
BZX84-y20	18.8 - 21.2	19.6 - 20.4	19.8 - 20.2
BZX84-y22	20.8 - 23.3	21.6 - 22.4	21.78 - 22.22
BZX84-y24	22.8 - 25.6	23.5 - 24.5	23.76 - 24.24
BZX84-y27	25.1 - 28.9	26.5 - 27.5	26.73 - 27.27
BZX84-y30	28 - 32	29.4 - 30.6	29.70 - 30.30
BZX84-y33	31 - 35	32.3 - 33.7	32.67 - 33.33
BZX84-y36	34 - 38	35.3 - 36.7	35.64 - 36.36
BZX84-y39	37 - 41	38.2 - 39.8	38.61 - 39.39
BZX84-y43	40 - 46	42.1 - 43.9	42.57 - 43.43
BZX84-y47	44 - 50	46.1 - 47.9	-
BZX84-y51	48 - 54	50 - 52	50.49 - 51.51
BZX84-y56	52 - 60	54.9 - 57.1	-
BZX84-y62	58 - 66	60.8 - 63.2	-
BZX84-y68	64 - 72	66.6 - 69.4	-
BZX84-y75	70 - 79	73.5 - 76.5	74.25 - 75.75

NZX-series in SOD27

	V_z (V)		V_z (V)		V_z (V)
NZX2V1B	2.0 - 2.2	NZX6V2D	6.1 - 6.4	NZX14C	13.8 - 14.3
NZX2V4A	2.3 - 2.5	NZX6V2E	6.3 - 6.6	NZX15A	14.1 - 14.7
NZX2V4B	2.4 - 2.6	NZX6V8A	6.4 - 6.7	NZX15B	14.5 - 15.1
NZX2V7A	2.5 - 2.7	NZX6V8B	6.6 - 6.9	NZX15C	14.9 - 15.5
NZX2V7B	2.6 - 2.8	NZX6V8C	6.7 - 7	NZX15X	14.35 - 15.09
NZX2V7C	2.7 - 2.9	NZX6V8D	6.9 - 7.2	NZX16A	15.3 - 15.9
NZX3V0A	2.8 - 3	NZX7V5A	7 - 7.3	NZX16B	15.7 - 16.5
NZX3V0B	2.9 - 3.1	NZX7V5B	7.2 - 7.6	NZX16C	16.3 - 17.1
NZX3V0C	3 - 3.2	NZX7V5C	7.3 - 7.7	NZX18A	16.9 - 17.7
NZX3V3A	3.1 - 3.3	NZX7V5D	7.5 - 7.9	NZX18B	17.5 - 18.3
NZX3V3B	3.2 - 3.4	NZX7V5X	7.07 - 7.45	NZX18C	18.1 - 19
NZX3V3C	3.3 - 3.5	NZX8V2A	7.7 - 8.1	NZX20A	18.8 - 19.7
NZX3V6A	3.4 - 3.6	NZX8V2B	7.9 - 8.3	NZX20B	19.5 - 20.4
NZX3V6B	3.5 - 3.7	NZX8V2C	8.1 - 8.5	NZX20C	20.2 - 21.2
NZX3V6C	3.6 - 3.8	NZX8V2D	8.3 - 8.7	NZX22A	20.9 - 21.9
NZX3V9A	3.7 - 3.9	NZX9V1A	8.5 - 8.9	NZX22B	21.6 - 22.6
NZX3V9B	3.8 - 4	NZX9V1B	8.7 - 9.1	NZX22C	22.3 - 23.3
NZX3V9C	3.9 - 4.1	NZX9V1C	8.9 - 9.3	NZX24A	22.9 - 24
NZX4V3A	4 - 4.2	NZX9V1D	9.1 - 9.5	NZX24B	23.6 - 24.7
NZX4V3B	4.1 - 4.3	NZX9V1E	9.3 - 9.7	NZX24C	24.3 - 25.5
NZX4V3C	4.2 - 4.4	NZX10A	9.5 - 9.9	NZX24X	22.61 - 23.77
NZX4V3D	4.3 - 4.5	NZX10B	9.7 - 10.1	NZX27A	25.2 - 26.6
NZX4V7A	4.4 - 4.6	NZX10C	9.9 - 10.3	NZX27B	26.2 - 27.6
NZX4V7B	4.5 - 4.7	NZX10D	10.2 - 10.6	NZX27C	27.2 - 28.6
NZX4V7C	4.6 - 4.8	NZX11A	10.4 - 10.8	NZX27X	26.99 - 28.39
NZX4V7D	4.7 - 4.9	NZX11B	10.7 - 11.1	NZX30A	28.2 - 29.6
NZX5V1A	4.8 - 5	NZX11C	10.9 - 11.3	NZX30B	29.2 - 30.6
NZX5V1B	4.9 - 5.1	NZX11D	11.1 - 11.6	NZX30C	30.2 - 31.6
NZX5V1C	5 - 5.2	NZX12A	11.4 - 11.9	NZX30X	29.02 - 30.51
NZX5V1D	5.1 - 5.3	NZX12B	11.6 - 12.1	NZX33A	31.2 - 32.6
NZX5V6A	5.2 - 5.5	NZX12C	11.9 - 12.4	NZX33B	32.2 - 33.6
NZX5V6B	5.3 - 5.6	NZX12D	12.2 - 12.7	NZX33C	33.2 - 34.5
NZX5V6C	5.4 - 5.7	NZX12X	11.44 - 12.03	NZX36A	34.2 - 35.7
NZX5V6D	5.5 - 5.8	NZX13A	12.4 - 12.9	NZX36B	35.3 - 36.8
NZX5V6E	5.6 - 5.9	NZX13B	12.6 - 13.1	NZX36C	36.4 - 38
NZX6V2A	5.7 - 6	NZX13C	12.9 - 13.4	NZX36X	35.36 - 37.19
NZX6V2B	5.8 - 6.1	NZX14A	13.2 - 13.7		
NZX6V2C	6 - 6.3	NZX14B	13.5 - 14		

General purpose, high speed switching diodes <= 90V

V_R max (V)	V_F max (V)	@ I_F (mA)	I_R max (nA)	@ V_R (V)	t_{rr} max (ns)	Package	SOD80C (MiniMelf)	SOT23	SOT143B	SOT323 (SC-70)	SOT363 (SC-88)	DFN1412-6 (SOT1268)	DFN1010D-3 (SOT1215)	DFN1006-3 (SOT883)
						Size (mm)	3.5 x 1.5 x 1.5	2.9 x 1.3 x 1.0	2.9 x 1.3 x 1.0	2.0 x 1.25 x 0.95	2.0 x 1.25 x 0.95	1.4 x 1.2 x 0.5	1.1 x 1.0 x 0.37	1.0 x 0.6 x 0.48
						P_{tot} (mW)	**400**	**250**	**250**	**200**	**350**	**480**	**325**	**250**
50	1	50	100	50	4			BAL74						
								BAV74						
70	1	50	1000	70	4			BAL99						
75	1	50	1000	75	4				BAS28					
		100	5000	75	4		BAS32L							
80	1	50	500	80	4					1PS300				
										1PS301				
										1PS302				
90	1	50	500	80	4			BAW56		BAW56W			BAW56QA	BAW56M
											BAW56S	BAW56SRA		
											BAV756S			

General purpose, high speed switching diodes 100V

V_R max (V)	V_F max (V)	@ I_F (mA)	I_R max (nA)	@ V_R (V)	t_{rr} max (ns)	Package	SOT23	SOD123	SOD123F	SOT323 (SC-70)	SOT363 (SC-88)	SOD323 (SC-76)	SOD323F (SC-90)	SOT666	DFN1412-6 (SOT1268)	SOD523 (SC-79)	DFN1010D-3 (SOT1215)	DFN1006-2 (SOD882)	DFN1006-3 (SOT883)	DFN1006D-2 (SOD882D)
						Size (mm)	2.9 x 1.3 x 1.0	2.7 x 1.6 x 1.2	2.6 x 1.6 x 1.1	2.0 x 1.25 x 0.95	2.0 x 1.25 x 0.95	1.7 x 1.25 x 0.95	1.7 x 1.25 x 0.7	1.6 x 1.2 x 0.55	1.4 x 1.2 x 0.5	1.2 x 0.8 x 0.6	1.1 x 1.0 x 0.37	1.0 x 0.6 x 0.48	1.0 x 0.6 x 0.48	1.0 x 0.6 x 0.37
						P_{tot} (mW)	**250**	**380**	**375**	**200**	**300**	**300**	**300**	**180**	**480**	**250**	**325**	**250**	**250**	**250**
100	1	50	500	80	4			BAS16GW	BAS16H			BAS316	BAS16J			BAS516		BAS16L		BAS16LD
							BAS16			BAS16W							BAS16QA			
											BAS-16VY			BAS-16VV						
							BAV70			BAV70W							BAV70QA		BAV70M	
											BAV70S				BAV70SRA					
							BAV99			BAV99W							BAV99QA			
											BAV99S									

General purpose, switching diodes >= 100V

Types in **bold** represent new products

V_R max (V)	V_F max (V)	@ I_F (mA)	I_R max (nA)	@ V_R (V)	t_{rr} max (ns)	Package	SOD80C (MiniMelf)	SOT457 (SC-74)	SOT23	SOT143B	SOD123	SOD123F	SOT323 (SC-70)	SOT353 (SC-88A)	SOT363 (SC-88)	SOD323 (SC-76)	SOD323F (SC-90)	SOD523 (SC-79)	DFN1006D-2 (SOD882(D))
						Size (mm)	3.5 x 1.5 x 1.5	2.9 x 1.5 x 1.0	2.9 x 1.3 x 1.0	2.9 x 1.3 x 1.0	2.7 x 1.6 x 1.2	2.6 x 1.6 x 1.1	2.0 x 1.25 x 0.95	2.0 x 1.25 x 0.95	2.0 x 1.25 x 0.95	1.7 x 1.25 x 0.95	1.7 x 1.25 x 0.7	1.2 x 0.8 x 0.6	1.0 x 0.6 x 0.48 (1.0 x 0.6 x 0.37)
						P_{tot} (mW)	**400**	**250**	**250**	**250**	**380**	**375**	**200**	**255**	**300**	**300**	**300**	**250**	**250**
100	1	100	100	100	50				BAS19										
150	1	100	100	150	50		BAV102												
									BAS20										
≥200	1	100	100	150	50		BAV103				BAS21GW	BAS21H				BAS321	**BAS321J**		BAS21L(D)
				200					BAS21				BAS21W						
										BAV23									
														BAS21PG					
									BAV23A				BAS21AW						
									BAV23C										
									BAV23S				BAS21SW						
								BA-S21AVD											
								BAS21VD											
300	1.1	100	150	250	50												BAS21J	BAS521	
									BAS101										
									BAS101S										
										BAW101									
															BAW101S				

Controlled avalanche switching diodes

V_R max (V)	V_F max (V)	@ I_F (mA)	I_R max (nA) @ V_R max	I_{FSM} max (A)	I_{FRM} max (mA)	C_d max (pF)	t_{rr} max (ns)	Package	SOT23	SOT143B
								Size (mm)	2.9 x 1.3 x 1.0	2.9 x 1.3 x 1.0
								P_{tot} (mW)	250	250
60	1	200	100	9	600	2.5	6			BAS56
90	1	200	100	10	600	35	50		BAS29	
									BAS31	
									BAS35	

Low leakage current switching diodes

V_R max (V)	V_F max (V)	@ I_F (mA)	I_R max (nA) @ V_R max	t_{rr} max (µs)	Package	SOD80C (MiniMelf)	SOD68 (DO-34)	SOT23	SOD123	SOD123F	SOT323 (SC-70)	SOD323 (SC-76)	SOD523 (SC-79)	DFN1010D-3 (SOT1215)	DFN1006-3 (SOT883)	DFN1006-2 (SOD882)
					Size (mm)	3.5 x 1.5 x 1.5	3.04 x 1.6 x 0.55	2.9 x 1.3 x 1.0	2.7 x 1.6 x 1.2	2.6 x 1.6 x 1.1	2.0 x 1.25 x 0.95	1.7 x 1.25 x 0.95	1.2 x 0.8 x 0.6	1.1 x 1.0 x 0.37	1.0 x 0.6 x 0.48	1.0 x 0.6 x 0.48
					P_{tot} (mW)	400	300	250	380	375	250	250	250	305	250	250
75	1	10	5	3					BAS116GW	BAS116H		BAS416	BAS716			BAS116L
								BAS116						BAS116QA		
								BAV199			BAV199W					
								BAW156								
								BAV170						BAV170QA	BAV170M	
125	1	100	1	1.5 typ		BAS45AL	BAS45A									

PN rectifiers

Types in **bold** represent new products

V_R max (V)	V_F max (V)	(@) I_F (A)	I_R max (µA)	(@) V_R (V)	trr max (ns)	Package	CFP5 (SOD128)	CFP3 (SOD123W)
						Size (mm)	3.8 x 2.5 x 1.0	2.6 x 1.7 x 1.0
						P_{tot} (mW) @ 1cm²	1050	950
200	0.875	1	0.2	200	25	 bra036		**ES1DVR**
	0.93	1	0.2	200	25			**ES1DR**
	0.95	2	0.2	200	25			**ES2DVR**
	0.98	2	0.2	200	25			**ES2DR**
	0.95	2	0.2	200	25		**ES2DP**	
	0.98	3	0.2	200	30		**ES3DP**	
	1.1	1	3	200	3000		**S1DR**	
400	1.25	1	0.4	400	25			**ES1GR**

PN rectifiers - Automotive qualified

Types in **bold** represent new products

V_R max (V)	V_F max (V)	(@) I_F (A)	I_R max (µA)	(@) V_R (V)	trr max (ns)	Package	CFP5 (SOD128)	CFP3 (SOD123W)
						Size (mm)	3.8 x 2.5 x 1.0	2.6 x 1.7 x 1.0
						P_{tot} (mW) @ 1cm²	1050	950
200	0.93	1	0.2	200	25	 bra036		**PNE20010ER**
	0.98	2	0.2	200	25			**PNE20020ER**
	0.95	2	0.2	200	25		**PNE20020EP**	
	0.98	3	0.2	200	30		**PNE20030EP**	
400	1.1	1	1	400	1800			PNS40010ER

Nomenclature pn-rectifier consumer grade types

ES 1 D V R

Recovery time indicator:
ES - hyperfast recovery time
US – ultrafast recovery time
S - standard recovery time

Cont. forward current in A:
1 = 1 A
2 = 2 A
3 = 3 A

Max. reverse voltage:
D = 200 V
G = 400 V
J = 600 V

Package indicator:
R = CFP3 (SOD123W)
P = CFP5 (SOD128)

Variant letter (optional):
V = lowV level

Nomenclature pn-rectifier automotive grade types

PNE 200 10 E R

Recovery time indicator:
PNE - hyperfast recovery time
PNU – ultrafast recovery time
PNS - standard recovery time

Max. reverse voltage:
200 = 200 V
400 = 400 V
600 = 600 V

Cont. Forward current:
10 = 1.0 A
20 = 2.0 A
30 = 3.0 A

Package indicator:
R = CFP3 (SOD123W)
P = CFP5 (SOD128)

configuration:
E = single die

General purpose schottky diodes <= 250 mA

IF max (mA)	VR max (V)	VF max (mV)	@ IF (mA)	IR max (µA)	@ VR (V)	Package	SOD80C (MiniMelf)	SOD68 (DO-34)	SOT23	SOT143B	SOD123
						Size (mm)	3.5 x 1.5 x 1.5	3.04 x 1.6 x 0.55	2.9 x 1.3 x 1.0	2.9 x 1.3 x 1.0	2.7 x 1.6 x 1.2
						P_{tot} (mW)	300	500	250	250	357
70	70	750	10	0.1	50	Single			BAS70		
						Dual series			BAS70-04		
						Dual c.c.			BAS70-05		
						Dual c.a.			BAS70-06		
						Dual isolated				BAS70-07	
						Triple isolated					
						Quad 2x series					
120	40	370	1	0.5	30	Single					
		500	10	1	30	Single			BAS40		
						Dual series			BAS40-04		
						Dual c.c.			BAS40-05		
						Dual c.a.			BAS40-06		
						Dual isolated				BAS40-07	
						Quad c.c./c.c.					
						Quad 2x series					
200	30	300	10	30	10	Single					
		340	10	2	25	Single			BAT754		
						Dual series			BAT754S		
						Dual c.c.			BAT754C		
						Dual c.a.			BAT754A		
						Triple isolated					
		400	10	2	25	Single	BAS85	BAT85	BAT54		BAT54GW
						Dual series			BAT54S		
						Dual c.c.			BAT54C		
						Dual c.a.			BAT54A		
						Dual isolated				BAT74	
						Triple isolated					
						Quad c.c./c.c.					
						Quad 2x series					
		500	200	30	10	Single					
		600	200	1	10	Single					
	40	300	10	15	30	Single			BAT721		
						Dual series			BAT721S		
						Dual c.c.			BAT721C		
						Dual c.a .			BAT721A		
		360	10	0.5	25	Single					
		420	30	0.5	25	Single					
						Dual series					
						Dual c.c.					
						Dual c.a.					
	50	450	10	5	40	Single	BAS86	BAT86			
250	100	850	250	4	75	Single					BAT46GW

Single	Dual series	Dual c.c.	Dual c.a.	Dual isolated	Triple isolated	Quad c.c./c.c.	Quad 2x series
 brb122	 brb124	 brb125	 brb126	 brb127	 brb129	 brb130	 brb131
 brb123				 brb128			
 aaa-001765							

	SOD123F	SOT323 (SC-70)	SOT363 (SC-88)	SOD323F (SC-90)	SOD323 (SC-76)	SOT666	SOD523 (SC-79)	DFN1006-2 (SOD882)/ DFN1006-3 (SOT883)
	2.6 x 1.6 x 1.1	2.0 x 1.25 x 0.95	2.0 x 1.25 x 0.95	1.7 x 1.25 x 0.7	1.7 x 1.25 x 0.95	1.6 x 1.2 x 0.55	1.2 x 0.8 x 0.6	1.0 x 0.6 x 0.48
	375	250	300	385	400	300	275	250
	BAS70H	BAS70W			1PS76SB70		1PS79SB70	BAS70L
		BAS70-04W						
		BAS70-05W						
		BAS70-06W						
			BAS70-07S			BAS70-07V		
						BAS70VV		
			BAS70XY					
					RB751V40		RB751S40	RB751CS40
	BAS40H	BAS40W			1PS76SB40		1PS79SB40	BAS40L
		BAS40-04W						
		BAS40-05W						
		BAS40-06W						
						BAS40-07V		
			1PS88SB48			BAS40-05V		
			BAS40XY					
							1PS79SB31	
			BAT754L					
	BAT54H	BAT54W		BAT54J	1PS76SB10		1PS79SB10	BAT54L
		BAT54SW						
		BAT54CW						BAT54CM
		BAT54AW						
			BAT74S			BAT74V		
						BAT54VV		
						BAT54CV		
			BAT54XY					
							RB521S30	RB521CS30L
							RB520S30	RB520CS30L
					1PS76SB21			
							1PS79SB30	
		BAT854W						
		BAT854SW						
		BAT854CW						
		BAT854AW						
	BAT46WH			BAT46WJ				

Low capacitance schottky diodes

I_F max (mA)	V_R max (V)	V_F max (mV) @ I_F (mA)		C_d max (pF) @ V_R = 0 V	Package	SOT23	SOT323 (SC-70)	SOT363 (SC-88)	SOD323 (SC-76)	SOT666	SOD523 (SC-79)	DFN1006-2 (SOD882)
					Size (mm)	2.9 x 1.3 x 1.0	2.0 x 1.25 x 0.95	2.0 x 1.25 x 0.95	1.7 x 1.25 x 0.95	1.6 x 1.2 x 0.55	1.2 x 0.8 x 0.6	1.0 x 0.6 x 0.48
					P_{tot} (mW)	250	250	300	400	300	500	250
30	4	450	1	1	Single	BAT17			1PS76SB17		1PS79SB17	
					Triple isolated					1PS66SB17		
					Dual series	PMBD353 PMBD354 [1]						
	15	340	1	1	Single		1PS70SB82					1PS10SB82
					Triple isolated			1PS88SB82		1PS66SB82		
					Dual series		1PS70SB84					
					Dual c.c.		1PS70SB85					
					Dual c.a.		1PS70SB86					

[1] Diodes have matched capacitance

Medium power low VF schottky rectifiers single >= 200 mA - leadless DSN / DFN packages

I_F max (A)	V_R max (V)	V_F max (mV) @ IF max	I_R max (mA) @ V_R max	Package	DSN0603-2 (SOD962)	DSN0603B-2 (SOD962B)	DSN1006-2 (SOD993)	
				Size (mm)	0.6 x 0.3 x 0.3	0.6 x 0.3 x 0.2	1.0 x 0.6 x 0.28	
				P_{tot} (mW) @ 1 cm²	525	525	1.000	
				Optimization				
0.2	20	420	0.045	Low V_F	PMEG2002AESF	PMEG2002AESFB		
		490	0.0035	Low I_R	PMEG2002ESF			
	30	470	0.08	Low V_F	PMEG3002AESF			
		480	0.05	low V_F				
		535	0.009	Low I_R	PMEG3002ESF			
	40	525	0.08	Low V_F	PMEG4002AESF			
		600	0.0065	Low I_R	PMEG4002ESF			
		600	0.01	low I_R				
	60	600	0.1	low V_F				
0.5	20	390	0.2	low V_F				
		410	0.3	low V_F				
		440	1.5	low V_F				
		500	0.03	low I_R				
		550	0.045	Low V_F	PMEG2005AESF			
		620	0.0035	Low I_R	PMEG2005ESF			
	30	500	0.5	low V_F				
		630	0.08	Low V_F	PMEG3005AESF			
		720	0.009	Low I_R	PMEG3005ESF			
	40	590	0.01	low I_R				
		820	0.08	Low V_F	PMEG4005AESF			
		880	0.0065	Low I_R	PMEG4005ESF			
1	20	375	1.9	low V_F				
		415	0.6	low V_F				
		490	0.2	low V_F				
	30	480	1.25	Low V_F			PMEG3010AESB	
		565	0.045	Low I_R			PMEG3010ESB	
	40	505	0.115	Low V_F			PMEG4010AESB	
		600	0.02	low I_R				
		610	0.04	Low I_R			PMEG4010ESB	
	60	625	0.65	Low V_F			PMEG6010AESB	
		730	0.03	Low I_R			PMEG6010ESB	
1.5	20	420	0.9	low V_F				
	40	610	0.03	low I_R				
2	20	420	1.9	low V_F				
		450	0.9	low V_F				
	30	470	2.5	low V_F				
	40	535	0.1	low V_F				
	60	530	0.2	low V_F				
		575	0.25	low V_F				

	DSN1006U-2 (SOD995)	DFN2020-3 (SOT1061)	DFN2020D-3 (SOT1061D)	DFN1608D-2 (SOD1608)	DFN1006-2 (SOD882)	DFN1006D-2 (SOD882D)
	1.0 x 0.6 x 0.28	2.0 x 2.0 x 0.62	2.0 x 2.0 x 0.62	1.6 x 0.8 x 0.37	1.0 x 0.6 x 0.48	1.0 x 0.6 x 0.37
	1.190	960	960	780	565	660
					PMEG3002AEL	PMEG3002AELD
					PMEG4002EL	PMEG4002ELD
					PMEG6002EL	PMEG6002ELD
						PMEG2005BELD
				PMEG2005EPK		
					PMEG2005AEL	PMEG2005AELD
					PMEG2005EL	PMEG2005ELD
					PMEG3005EL	PMEG3005ELD
				PMEG4005EPK		
		PMEG2010EPA	PMEG2010EPAS			
				PMEG2010EPK		
						PMEG2010BELD
	PMEG3010AESA					
				PMEG4010EPK		
				PMEG2015EPK		
				PMEG4015EPK		
		PMEG2020EPA	PMEG2020EPAS			
				PMEG2020EPK		
		PMEG3020EPA	PMEG3020EPAS			
		PMEG4020EPA	PMEG4020EPAS			
				PMEG4020EPK		
		PMEG6020EPA	PMEG6020EPAS			

Medium power low VF schottky rectifiers single >= 200 mA

Types in **bold** represent new products

I_F max (A)	V^R max (V)	V_F max (mV) @ I_F max	I_R max (mA) @ V_R max	Package	CFP15 (SOT1289)	CFP5 (SOD128)	CFP3 (SOD123W)
				Size (mm)	5.8 x 4.3 x 0.78	3.8 x 2.5 x 1.0	2.6 x 1.7 x 1.0
				P_{tot} (mW) @ 1 cm²	2150	1050	950
				Optimization			
1	20	340	1	Low V_F			PMEG2010ER
		450	0.05	Low I_R			PMEG2010BER
	30	360	1.5	Low V_F		PMEG3010EP	PMEG3010ER
		450	0.05	Low I_R		PMEG3010BEP	PMEG3010BER
	40	490	0.05	Low V_F		PMEG4010EP	PMEG4010ER
				Low V_F		PMEG4010ETP	PMEG4010ETR
		460	0.022	Low V_F/Low I_R			**PMEG40T10ER**[1]
	60	530	0.06	Low V_F		PMEG6010EP	PMEG6010ER
				Low V_F			PMEG6010ETR
		660	0.0003	Low I_R			PMEG6010ELR
	100	770	0.00015	Low I_R			PMEG10010ELR
2	30	360	3	Low V_F		PMEG3020EP	
		420	1.5	Low V_F		PMEG3020CEP	PMEG3020ER
		450	0.1	Low I_R		PMEG3020BEP	
		520	0.05	Low I_R		PMEG3020DEP	PMEG3020BER
	40	490	0.1	Low V_F		PMEG4020EP	PMEG4020ER
				Low V_F		PMEG4020ETP	PMEG4020ETR
		515	0.022	Low V_F/Low I_R		**PMEG40T20EP**[1]	**PMEG40T20ER**[1]
	60	530	0.2	Low V_F		PMEG6020EP	PMEG6020ER
				Low V_F		PMEG6020ETP	PMEG6020ETR
		620	0.0012	Low V_F/Low I_R			**PMEG60T20ELR**[1]
		680	0.0007	Low I_R		PMEG6020AELP	PMEG6020AELR
		760	0.0003	Low I_R			PMEG6020ELR
	100	770	0.0003	Low I_R		PMEG10020AELP	PMEG10020AELR
		830	0.00015	Low I_R			PMEG10020ELR
3	30	360	5	Low V_F		PMEG3030EP	
		450	0.15	Low I_R	PMEG030V030EPD	PMEG3030BEP	
	40	490	0.12	Low V_F	PMEG040V030EPD		
			0.2	Low V_F		PMEG4030EP	
				Low V_F		PMEG4030ETP	
		525	0.028	Low V_F/Low I_R		**PMEG40T30EP**[1]	**PMEG40T30ER**[1]
		540	0.1	Low I_R			PMEG4030ER
	45	480	0.044	Low V_F/Low I_R	**PMEG045T030EPD**[1]		
	50	530	0.1	Low V_F	PMEG050V030EPD		
	60	475	0.4	Low V_F		PMEG6030EVP	
		530	0.2	Low V_F	PMEG060V030EPD	PMEG6030EP	
				Low V_F		PMEG6030ETP	
		690	0.001	Low I_R		PMEG6030ELP	
	100	770	0.00045	Low I_R		PMEG10030ELP	
4.5	60	530	0.4	Low V_F		PMEG6045ETP	
5	30	360	8	Low V_F		PMEG3050EP	
		450	0.25	Low I_R		PMEG3050BEP	
		500	0.15	Low V_F	PMEG030V050EPD		
	40	490	0.3	Low V_F		PMEG4050EP	
			0.3	Low V_F		PMEG4050ETP	
		520	0.12	Low V_F	PMEG040V050EPD		
		525	0.041	Low V_F/Low I_R		**PMEG40T50EP**[1]	
	45	490	0.3	Low V_F	PMEG045V050EPD		
		525	0.044	Low V_F/Low I_R	**PMEG045T050EPD**[1]		
	60	560	0.4	Low V_F	PMEG060V050EPD		
6	100	840	0.00045	Low I_R	PMEG100V060ELPD		
8	100	850	0.0005	Low I_R	PMEG100V080ELPD		
10	45	490	0.6	Low V_F	PMEG045V100EPD		
		540	0.5	Low V_F	PMEG45A10EPD		
		545	0.08	Low V_F/Low I_R	**PMEG045T100EPD**[1]		
	60	560	0.7	Low V_F	PMEG060V100EPD		
	100	850	0.0008	Low I_R	PMEG100V100ELPD		
15	45	490	1	Low V_F	PMEG045V150EPD		
		550	0.1	Low V_F/Low I_R	PMEG045T150EPD[1]		
		580		Low V_F/Low I_R	PMEG45T15EPD[1]		
		570	0.098	Low V_F/Low I_R	**PMEG045T150EIPD**[1]		
	50	500	1	Low V_F	PMEG050V150EPD		
		550	0.1	Low I_R	PMEG050T150EPD[1]		

[1] Trench process

Medium power low VF schottky rectifiers single >= 200 mA - leaded packages

I_F max (A)	V_R max (V)	V_F max (mV) @ I_F max	I_R max (mA) @ V_R max	Package	SOT457 (SC-74)	SOT23	SOD123	SOD123F	SOT323 (SC-70)	SOD323F (SC-90)	SOD323 (SC-76)	SOT666	SOD523 (SC-79)
				Size (mm)	2.9 x 1.5 x 1.0	2.9 x 1.3 x 1.0	2.7 x 1.6 x 1.2	2.6 x 1.6 x 1.1	2.0 x 1.25 x 0.95	1.7 x 1.25 x 0.7	1.7 x 1.25 x 0.95	1.6 x 1.2 x 0.55	1.2 x 0.8 x 0.6
				P_{tot} (mW) @ 1 cm²	540	420	660	830	400	830	570	570	500
				Optimization									
0.2	30	480	0.05	Low V_f						PMEG3002EJ			PMEG3002AEB
	40	600	0.01	Low I_r						PMEG4002EJ			PMEG4002EB
	60	600	0.1	Low V_f						PMEG6002EJ			PMEG6002EB
0.5	20	390	0.2	Low V_f		PMEG2005ET	PMEG2005EGW	PMEG2005EH		PMEG2005EJ	PMEG2005AEA	PMEG2005AEV	
		480	0.03	Low I_r									PMEG2005EB
	30	430	0.15	Low V_f		PMEG3005ET	PMEG3005EGW	PMEG3005EH		PMEG3005EJ	PMEG3005AEA	PMEG3005AEV	
		500	0.5	Low V_f									PMEG3005EB
	40	470	0.1	Low V_f		PMEG4005ET	PMEG4005EGW	PMEG4005EH		PMEG4005EJ	PMEG4005AEA	PMEG4005AEV	
		550	1.1	Low V_f		BAT720			1PS70SB20				
		640	0.008	Low I_r						PMEG4005CEJ	PMEG4005CEA		
0.75	40	740	0.008	Low I_r							BAT165A		
1	20	430	0.2	Low V_f		PMEG2010AET		PMEG2010AEH					
		500	0.2	Low V_f		PMEG2010ET		PMEG2010EH		PMEG2010EJ	PMEG2010BEA	PMEG2010BEV	
		550	0.07	Low I_r						PMEG2010AEJ	PMEG2010EA BAT760	PMEG2010EV BAT960	
		620	1.5	Low V_f									PMEG2010AEB
	30	450	1	Low V_f	1PS74SB23								
		520	0.1	Low I_r				PMEG3010CEH		PMEG3010CEJ			
		560	0.15	Low V_f		PMEG3010ET	PMEG3010EGW	PMEG3010EH		PMEG3010EJ	PMEG3010BEA	PMEG3010BEV	
		680	0.5	Low V_f									PMEG3010EB
	40	570	0.05	Low I_r			PMEG4010CEGW	PMEG4010CEH		PMEG4010CEJ			
		640	0.05	Low V_f		PMEG4010ET	PMEG4010EGW	PMEG4010EH		PMEG4010EJ	PMEG4010BEA	PMEG4010BEV	
		840	0.008	Low I_r							PMEG4010CEA		
	60	660	0.05	Low I_r			PMEG6010CEGW	PMEG6010CEH		PMEG6010CEJ			
1.5	20	660	0.2	Low I_r				PMEG2015EH		PMEG2015EJ	PMEG2015EA	PMEG2015EV	
	30	500	1	Low V_f				PMEG3015EH		PMEG3015EJ		PMEG3015EV	
2	10	460	3	Low V_f				PMEG1020EH		PMEG1020EJ	PMEG1020EA	PMEG1020EV	
	20	525	0.2	Low V_f				PMEG2020EH		PMEG2020EJ	PMEG2020AEA		
	30	620	1	Low V_f			PMEG3020EGW	PMEG3020EH		PMEG3020EJ			
3	10	530	3	Low V_f				PMEG1030EH		PMEG1030EJ			

Medium power low VF schottky rectifiers dual >= 200 mA

I_F max (A)	V_R max (V)	V_F max (mV) @ I_F max	I_R max (mA) @ V_R max	Optimization	Package	SOT223 (SC-73)	SOT23	DFN2020-3 (SOT1061)	DFN2020D-3 (SOT1061D)	SOT666
					Size (mm)	6.5 x 3.5 x 1.65	2.9 x 1.3 x 1.0	2.0 x 2.0 x 0.62	2.0 x 2.0 x 0.63	1.6 x 1.2 x 0.55
					P_{tot} (mW) @ 1 cm²	1500	400	1000	1000	400
0.2	30	480	0.03	Low V_f						PMEG3002TV
	60	600	0.1	Low V_f						PMEG6002TV
0.5	20	390	0.2	Low V_f			PMEG2005CT			
	30	430	0.15	Low V_f			PMEG3005CT			
	40	470	0.1	Low V_f			PMEG4005CT			
1.0	25	450	1.0	Low V_f		BAT120S				
				Low V_f		BAT120C				
				Low V_f		BAT120A				
	40	500	0.05	Low V_f				PMEG4010CPA	PMEG4010CPAS	
	60	540	0.06	Low V_f				PMEG6010CPA	PMEG6010CPAS	
		650	0.35	Low V_f		BAT160S				
				Low V_f		BAT160C				
				Low V_f		BAT160A				
2.0	20	420	1.0	Low V_f				PMEG2020CPA	PMEG2020CPAS	
	30	440	2.0	Low V_f				PMEG3020CPA	PMEG3020CPAS	

Nomenclature of automotive grade Schottky rectifier in medium-power packages

PMEG 40 10 A E T P

- **NEXPERIA MEGA** Schottky rectifier
- **Max. reverse voltage in V** e.g. 40 = 40 V
- **Cont. forward current in A** e.g. 10 = 1.0 A
- **Variant number (optional)**
- **Internal configuration:**
  - A = CA
  - B = CC
  - E = single
  - P = double, parallel
  - R = tripple, antiparallel
  - S = series
  - V = tripple
  - W = CA and CC
  - X = 2 x series
  - Y = 2 x CC
  - Z = 2 x CA
- **Variant letter (optional):** T = high temperature
- **Package indicator:**

A	SOD323
B	SOD523
D	SOT457
GW	SOD123
H	SOD123F
L	SOD882
LD	SOD882D
ML	SOD923
P	SOD128
PA	SOT1061
PD	SOT1289
PK	SOD1608
R	SOD123W
T	SOT23
V	SOT666

Nomenclature of automotive grade Schottky rectifier in CFP15 (SOT1289) power package

PMEG 100 V 080 E L PD

- **NEXPERIA MEGA** Schottky rectifier
- **Max. reverse voltage in V** e.g. 100 = 100 V
- **Variant letter (design)** V = planar design T = trench design
- **Cont. forward current in A** e.g. 080 = 8.0 A
- **International configuration:** E = single die
- **Variant letter (optional):** L = low leakage current
- **Package indicator:** PD = SOT1289

3

ESD protection, TVS, filtering and signal conditioning

Low capacitance ESD protection for high-speed interfaces 52

Low capacitance ESD protection for high-speed interfaces 52
TrEOS protection devices 55

General ESD protection devices 58

General purpose ESD protection devices 58

Application-specific ESD solutions 60

Audio interface protection 60
Automotive high-speed network protection 61
Automotive in-vehicle network bus line protection 61
Battery and charger port protection 62
HDMI and display port protection 62
Antenna protection (NFC, WiFi,…) 63
USB and SATA protection 63

EMI solutions with integrated protection 64

Common mode filter for USB 2.0 64
Common mode filter for USB 3.x 64
Common mode filter for HDMI and MIPI 64
HDMI signal conditioning 65
LCD and camera RC filter with integrated protection 65
Memory and SIM card filter with integrated protection 66
USB 3.x and eSATA protection and filtering for high-speed and super-speed lines 66

Transient voltage surge suppressor (TVS) 67

TVS diodes for mobile applications 67
TVS diodes, 24 W/40 W (automotive) 67
TVS diodes, 400 W 68
TVS diodes, 600W 69

Nomenclatures 70

Low capacitance ESD protection for high-speed interfaces

Number of protected lines		V_{RWM} (V)	C_{line} typ (pF)	C_{line} max (pF)	ESD rating max (kV) [1]	Surge robustness 8/20 µs (A)	Configuration	Type	Package	Size (mm)
Unidirectional	Bidirectional									
1	0	5	0.45	0.5	20	9		PESD5V0C1USF	DSN0603-2 (SOD962)	0.6 x 0.3 x 0.3
		6.5	**0.45**	**0.5**	**20**	**9**		**PESD6V5C1USF**		
		5	0.6	0.75	10			PESD5V0F1USF		
		5	0.95	1.15	8			PESD5V0X1ULD	DFN1006D-2 (SOD882D)	1.0 x 0.6 x 0.37
			1.55	1.75	15			PESD5V0X1UALD		
		16	0.83	0.98	8			PESD16VX1UL	DFN1006-2 (SOD882)	1.0 x 0.6 x 0.48
		5	0.95	1.15	8			PESD5V0X1UB	SOD523 (SC-79)	1.2 x 0.8 x 0.6
			1.55	1.75	15			PESD5V0X1UAB		
		3.3	0.6	1.5	30	5		PESD3V3U1UT	SOT23	2.9 x 1.3 x 1.0
		5	0.6	1.5	30	5		PESD5V0U1UT		
		12	0.6	1.5	30	5		PESD12VU1UT		
		15	0.6	1.5	30	5		PESD15VU1UT		
		24	0.6	1.5	23	5		PESD24VU1UT		
0	1	5	0.2	0.3	8			PESD5V0F1BSH	DSN0402-2 (SOD992)	0.4 x 0.2 x 0.12
		3.3	0.2	0.25	20	9		PESD3V3C1BSF	DSN0603-2 (SOD962)	0.6 x 0.3 x 0.3
			0.28	0.35	20	9.5		PESD3V3Z1BSF		
			0.45	**0.6**	**25**	**15**		**PESD3V3W1BSF**		
		4.0	**0.45**	**0.6**	**25**	**15**		**PESD4V0W1BSF**		
		5	0.1	0.15	10	4.5		PESD5V0R1BSF		
			0.15	0.19	15	7		PESD5V0H1BSF		
			0.2	0.25	20	9		PESD5V0C1BSF		
		7	**0.1**	**0.15**	**10**	**4.5**		**PESD7V0R1BSF**		
			0.15	**0.19**	**15**	**7**		**PESD7V0H1BSF**		
			0.2	**0.25**	**20**	**9**		**PESD7V0C1BSF**		
		5.5	0.25	0.3	10			PESD5V0F1BSF		
								PESD5V0F1BRSF		
		3.3	–	1.1	20	9		PESD3V3X1BCSF		
		5.0	–	1.1				PESD5V0X1BCSF		
		18	0.28	0.45	10			PESD18VF1BSF		
		24	0.25	0.4				PESD24VF1BSF		
		5	0.4	0.55	10			PESD5V0F1BLD	DFN1006D-2 (SOD882D)	1.0 x 0.6 x 0.37
								PESD5V0F1BRLD		
		3.3	1.3	1.6	9			PESD3V3X1BL	DFN1006-2 (SOD882)	1.0 x 0.6 x 0.48
		5.5	0.4	0.55	10			PESD5V0F1BL		
		5	0.49	0.6	8			PESD5V0X1BCL		
			0.85	0.95	15			PESD5V0X1BCAL		
			0.9	1.3	9			PESD5V0X1BL		
		18	0.35	0.5	10			PESD18VF1BL		
		24	0.3	0.45	10			PESD24VF1BL		

[1] according to IEC 61000-4-2 (contact discharge)

Products in **bold red** are under development

Low capacitance ESD protection for high-speed interfaces

Number of protected lines		V_{RWM} (V)	C_{line} typ (pF)	C_{line} max (pF)	ESD rating max (kV) [1]	Configuration	Type	Package	Size (mm)
Unidirectional	Bidirectional								
2	1	5	0.5	0.65	10		PESD5V0X2UMB	DFN1006B-3 (SOT883B)	1.0 x 0.6 x 0.37
							PESD5V0X2UM	DFN1006-3 (SOT883)	1.0 x 0.6 x 0.48
			0.8	0.95	15		PESD5V0X2UAMB	DFN1006B-3 (SOT883B)	1.0 x 0.6 x 0.37
							PESD5V0X2UAM	DFN1006-3 (SOT883)	1.0 x 0.6 x 0.48
			0.9	1.3	9		PESD5V0X1BQ	SOT663	1.6 x 1.2 x 0.55
							PESD5V0X1BT	SOT23	2.9 x 1.3 x 1.0
	0	80	0.6	0.75	30		NUP1301U	SOT323	2.0 x 1.25 x 0.95
							NUP1301	SOT23	2.9 x 1.3 x 1.0
							NUP1301QA	SOT1215	1.0 x 1.0 x 0.4
3	0	5.5	1	1.5	8		PRTR5V0U2X	SOT143B	2.9 x 1.3 x 1.0
			1.8	-	12		PRTR5V0U2AX		
			1	1.5	8		PRTR5V0U2F	DFN1410-6 (SOT886)	1.45 x 1.0 x 0.48

[1] according to IEC 61000-4-5 (contact discharge)

Low capacitance ESD protection for high-speed interfaces

Number of protected lines		V_{RWM} (V)	C_{line} typ (pF)	C_{line} max (pF)	ESD rating max (kV) [1]	Configuration	Type	Package	Size (mm)
Unidirectional	Bidirectional								
4	0	5.5	1	-	8		IP4220CZ6	SOT457 (SC-74) 	2.9 x 1.5 x 1.0
							PRTR5V0U4D		
			0.7	0.85	12		PUSB2X4D	SOT457 (SC-74)	2.9 x 1.5 x 1.0
							PUSB2X4Y	SOT363 (SC-88)	2.0 x 1.25 x 0.95
			0.6	0.8	8		IP4283CZ10-TBR	DFN2510A-10 (SOT1176) 	2.5 x 1.0 x 0.48

[1] according to IEC 61000-4-5 (contact discharge)

Low capacitance ESD protection for high-speed interfaces - HDMI2.0, DisplayPort

Types in **bold** represent new products

Number of protected lines		V_{RWM} (V)	C_{line} typ (pF)	C_{line} max (pF)	ESD rating [1] max (kV)	I_R max (µA) @ V_{RWM}	Configuration	Type	Package	Size (mm)
Unidirectional	Bidirectional									
4	0	5.5	0.5	0.6	10	-		IP4294CZ10-TBR	DFN2510A-10 (SOT1176) 	2.5 x 1.0 x 0.48
								PUSB3F96		
								PHDMI2F4		
		3.3	0.27	0.34	15	0.1		PUSB3FR4		
								PHDMI2FR4		
0	4	3.3	0.17	0.2				PUSB3AB4		
								PHDMI2AB4		
6	0	3.3	0.35	0.4	15	-		PUSB3FR6	DFN2111-7 (SOT1358) 	2.1 x 1.1 x 0.48
0	6	5.5	0.27	0.35	10	0.1		PUSB3TB6		
		3.3	0.15	0.2	15			PUSB3AB6		

[1] according to IEC 61000-4-2 (contact discharge)

TrEOS protection devices

Unique combination of low capacitance, low clamping and high robustness for very fast, sensitive data lines

Type	device	V_{RWM} (V)	Uni- or bidirectional	C_d typ (pF)	ESD rating max (kV) (Ω)	R_{dyn} TLP (Ω)	Number of protected lines	Package	Size (mm)
PUSB3FR4	ESD protection	3.3	uni	0.29	15	0.27	4	DFN2510A-10	2.5 x 1.0 x 0.48
PUSB3FR6				0.35	15	0.29	6	DFN2111-7	2.1 x 1.1 x 0.48
PUSB3AB4			bi	0.17	15	0.4	4	DFN2510A-10	2.5 x 1.0 x 0.48
PUSB3AB6				0.15	15	0.4	6	DFN2111-7	2.1 x 1.1 x 0.48
PCMF1USB3S	Common Mode Filter with ESD protection	5	uni	0.3	15	0.14	2	WLCSP5	0.8 x 1.2 x 0.5
PCMF2USB3S							4	WLCSP10	1.6 x 1.2 x 0.5
PCMF3USB3S							6	WLCSP15	2.4 x 1.2 x 0.5
PESD1USB3S	ESD protection in PCMF footprint	5	uni	0.45	15	0.14	2	WLCSP5	0.8 x 1.2 x 0.5
PESD2USB3S							4	WLCSP10	1.6 x 1.2 x 0.5
PESD3USB3S							6	WLCSP15	2.4 x 1.2 x 0.5
PESD3V3Z1BSF	ESD protection	3.3	bi	0.28	20	0.19	1	DSN0603-2	0.6 x 0.3 x 0.3
PESD3V3W1BSF				**0.45**	**25**	**0.11**			
PESD3V3C1BSF				0.2	20	0.23			
PESD4V0W1BSF		4.0		**0.45**	**25**	**0.11**			
PESD5V0R1BSF		5		0.1	10	0.45			
PESD5V0H1BSF				0.15	15	0.25			
PESD5V0C1BSF				0.2	20	0.23			
PESD5V0C1USF			uni	0.45	20	0.1			

Products in **bold red** are under development

General purpose ESD protection devices

Number of protected lines		V_{RWM} (V)	C_{line} typ (pF)	C_{line} max (pF)	P_{PP} max (W) [1]	ESD rating max (kV) [2]	I_R max (µA) @ V_{RWM}	Configuration	Type	Package	Size (mm)
Unidirectional	Bidirectional										
1	0	5	35	42	40	30	0.1		PESD5V0S1USF	DSN0603-2 (SOD962)	0.6 x 0.3 x 0.3
		5.5	12	15.4	10	30	0.1		PESD5V0L1USF		
		3.3	2.6	3.1	-	9	0.1 (@ 3 V)		PESD3V3U1UL	DFN1006-2 (SOD882)	1.0 x 0.6 x 0.5
			34	40	45	30	0.3		PESD3V3L1UL		
			207	300	150	30	2		PESD3V3S1UL		
		5	2	2.6	-	9	0.1		PESD5V0U1UL		
			25	30	42	26	0.1		PESD5V0L1UL		
		5	152	200	150	30	1		PESD5V0S1UL		
		12	38	75	150	30	0.05		PESD12VS1UL		
		15	32	70	150	30	0.05		PESD15VS1UL		
		24	23	50	150	23	0.05		PESD24VS1UL		
		36	18	30	150	30	0.01		PESD36VS1UL		
		5	25	30	42	26	0.1		PESD5V0L1ULD	DFN1006D-2 (SOD882D)	1.0 x 0.6 x 0.4
			152	200	150	30	1		PESD5V0S1ULD		
		12	38	75	150	30	0.05		PESD12VS1ULD		
		15	32	70	150	30	0.05		PESD15VS1ULD		
		24	23	50	150	23	0.05		PESD24VS1ULD		
		2.5	229	300	260	30	6		PESD5Z2.5	SOD523 (SC-79)	1.2 x 0.8 x 0.6
		3.3	2.6	3.1	-	9	0.1 (@ 3 V)		PESD3V3U1UB		
			34	40	45	30	0.3		PESD3V3L1UB		
			172	200	260	30	0.05		PESD5Z3.3		
			207	300	330	30	2		PESD3V3S1UB		
		5	2	2.6	-	9	0.1		PESD5V0U1UB		
			25	30	42	26	0.1		PESD5V0L1UB		
			89	150	180	30	0.05		PESD5Z5.0		
			152	200	260	30	1		PESD5V0S1UB		
		6	78	150	180	30	0.01		PESD5Z6.0		
		7	69	150	180	30	0.01		PESD5Z7.0		
		12	35	75	200	30	0.01		PESD5Z12		
			38	75	180	30	0.05		PESD12VS1UB		
		15	32	70	160	30	0.05		PESD15VS1UB		
		24	23	50	160	23	0.05		PESD24VS1UB		
		3.3	2.6	3.1	-	9	0.1 (@ 3 V)		PESD3V3U1UA	SOD323 (SC-76)	1.7 x 1.25 x 0.95
		5	2	2.6	-	9	0.1		PESD5V0U1UA		
			25	30	42	26	0.1		PESD5V0L1UA		
			480	530	890	30	4		PESD5V0S1UA		
		12	160	180	600	30	0.1		PESD12VS1UA		
		24	23	50	160	23	0.05		PESD24VS1UA		
		5	480	530	890	30	4		PESD5V0S1UJ	SOD323F (SC-90)	1.7 x 1.25 x 0.7
		12	160	180	600	30	0.1		PESD12VS1UJ		
		36	18	30	150	30	0.01		PESD36VS1UJ		

[1] 8 / 20 µs exponential decay waveform according to IEC 61000-4-5 [2] according to IEC 61000-4-5 (contact discharge)

General purpose ESD protection devices

Number of protected lines		V_{RWM} (V)	C_{line} typ (pF)	C_{line} max (pF)	P_{PP} max (W) [1]	ESD rating max (kV) [2]	I_R max (µA) @ V_{RWM}	Configuration	Type	Package	Size (mm)
Unidirectional	Bidirectional										
0	1	3.3	5.5	6	-	20	0.1	 mse211	PESD3V3U1BCSF	DSN0603-2 (SOD962)	0.6 x 0.3 x 0.3
			8.5	10	-	30	0.1		PESD3V3V1BCSF		
		5.5	5.3	6	5.5	20	0.1		PESD5V0V1BCSF		
					20	20	0.1		PESD5V0V1BDSF		
				4.5	8	15	0.1		PESD5V0V1BSF		
			12	15.4	35	30	0.1		PESD5V0L1BSF		
			35	45	100	30	0.1		PESD5V0S1BSF		
		3.3	101	-	500	30	2		PESD3V3L1BA	SOD323 (SC-76)	1.7 x 1.25 x 0.95
		5	75	-	500	30	1		PESD5V0L1BA		
		12	19	-	200	30	0.05		PESD12VL1BA		
		15	16	-	200	30	0.05		PESD15VL1BA		
		24	11	-	200	23	0.05		PESD24VL1BA		
		3.3	22	30	-	30	0.05		PESD3V3T1BL	DFN1006-2 (SOD882)	
		4.5	65	78	-	30	0.05		PTVS4V5D1BL		
		5	11	13	45	30	0.01		PESD5V0V1BL		
			35	45	130	30	0.1		PESD5V0S1BL		
			17	25	290	15	0.01		PESD12VV1BL		
			11	13	45	30	0.01		PESD5V0V1BLD	DFN1006D-2 (SOD882D)	
			35	45	130	30	0.1		PESD5V0S1BLD		
			11	13	45	30	0.01		PESD5V0V1BB	SOD523 (SC-79)	1.2 x 0.8 x 0.6
			35	45	130	30	0.1		PESD5V0S1BB		
			11	13	45	30	0.01		PESD5V0V1BA	SOD323 (SC-76)	1.7 x 1.25 x 0.95
			35	45		30	0.1		PESD5V0S1BA		
			2.9	3.5	-	10	0.1		PESD5V0U1BL	DFN1006-2 (SOD882)	
									PESD5V0U1BLD	DFN1006D-2 (SOD882D)	
									PESD5V0U1BB	SOD523 (SC-79)	
									PESD5V0U1BA	SOD323 (SC-76)	

[1] 8 / 20 µs exponential decay waveform according to IEC 61000-4-5

[2] according to IEC 61000-4-5 (contact discharge)

General purpose ESD protection devices

Number of protected lines											
Unidirectional	Bidirectional	V_{RWM} (V)	C_{line} typ (pF)	C_{line} max (pF)	P_{PP} max (W) [1]	ESD rating max (kV) [2]	I_R max (µA) @ V_{RWM}	Configuration	Type	Package	Size (mm)
2	1	3.3	22	28	30	15	0.3		PESD3V3L2UM	DFN1006-3 (SOT883)	1.0 x 0.6 x 0.5
		5	16	19	30	15	0.025		PESD5V0L2UM		
					-	15	0.025		PESD5V0L2UMB	DFN1006B-3 (SOT883B)	1 x 0.6 x 0.37
		3.3	200	275	150	30	3		PESD3V3S2UQ	SOT663	1.6 x 1.2 x 0.55
		5	150	215	150	30	0.3		PESD5V0S2UQ		
		12	38	100	150	30	0.03		PESD12VS2UQ		
		15	32	70	150	30	0.05		PESD15VS2UQ		
		24	23	50	150	23	0.05		PESD24VS2UQ		
		3.3	207	300	330	30	2		PESD3V3S2UT	SOT23	2.9 x 1.3 x 1
		5.2	152	200	260	30	1		PESD5V2S2UT		
		12	38	75	180	30	1		PESD12VS2UT		
		15	32	70	160	30	1		PESD15VS2UT		
		24	23	50	160	23	1		PESD24VS2UT		
		36	17	35	160	30	1 (@ 30 V)		PESD36VS2UT		
		3.3	207	300	330	30	2		PESD3V3S2UAT		
		5	152	200	260	30	1		PESD5VOS2UAT		
		15	32	70	160	30	0.05		PESD15VS2UAT		
		24	23	50	160	23	0.05		PESD24VS2UAT		
		5	38	46	70	30	0.09 (@ 4 V)		PESD5V0L2UU	SOT323 (SC-70)	2 x 1.25 x 0.95
		6	34	40	60	30	0.018 (@ 4.3 V)		PESD6V0L2UU		
0	2	3.3	101	-	350	30	2		PESD3V3L2BT	SOT23	2.9 x 1.3 x 1
		5	75	-		30	1		PESD5V0L2BT		
		12	19	-	200	30	0.05		PESD12VL2BT		
		15	16	-		30	0.05		PESD15VL2BT		
		24	11	-		23	0.05		PESD24VL2BT		
		5	35	45	130	30	0.1		PESD5V0S2BT		
			2.9	3.5	-	10	0.1		PESD5V0U2BT		
									PESD5V0U2BM	DFN1006-3 (SOT883)	1.0 x 0.6 x 0.5
			18	20	110	30	0.01		PESD5V0V2BM		
			2.9	3.5	-	10	0.1		PESD5V0U2BMB	DFN1006B-3 (SOT883B)	1 x 0.6 x 0.37
			18	20	110	30	0.01		PESD5V0V2BMB		
			35	45	130	30	0.1		PESD5V0S2BQA	DFN1010D-3 (SOT1215)	1.1 x 1.0 x 0.37

[1] 8 / 20 µs exponential decay waveform according to IEC 61000-4-5

[2] according to IEC 61000-4-2 (contact discharge)

General purpose ESD protection devices

Number of protected lines		V_{RWM} (V)	C_{line} typ (pF)	C_{line} max (pF)	P_{PP} max (W) [1]	ESD rating max (kV) [2]	I_R max (µA) @ V_{RWM}	Configuration	Type	Package	Size (mm)
Unidirectional	Bidirectional										
4	3	3.3	22	28	30	20	0.3		PESD3V3L4UF	DFN1410-6 (SOT886)	1.45 x 1 x 0.5
			110	300	110	30	1 (@ 3 V)		PESD3V3S4UF		
		5	16	19	30	20	0.025		PESD5V0L4UF		
			85	220	110	30	0.1 (@ 4.3 V)		PESD5V0S4UF		
		3.3	22	28	30	20	0.3		PESD3V3L4UW	SOT665	1.6 x 1.2 x 0.55
		5	16	19	30	20	0.025		PESD5V0L4UW		
		3.3	15	18	16	12	0.3		PESD3V3V4UW		
		5	12	15	16	12	0.025		PESD5V0V4UW		
		3	200	240	-	8	2		BZA856A	SOT353 (SC-88A)	2 x 1.25 x 0.95
		3.3	22	28	30	20	0.3		PESD3V3L4UG		
		5	16	19	30	20	0.025		PESD5V0L4UG		
		3	200	240	-	8	2		BZA456A	SOT457 (SC-74)	2.9 x 1.5 x 1
		3.3	215	300	200	30	0.8		PESD3V3S4UD		
		5	165	220	200	30	0.2		PESD5V0S4UD		
		15	37	48	-	8	0.1		BZA420A		
		24	40	70	200	23	0.01		PESD24VS4UD		
0	4	5	2.9	3.5	-	10	0.1		PESD5V0U4BF	DFN1410-6 (SOT886)	1.45 x 1 x 0.5
			45	75	-	15	0.1		BZA408B	SOT457 (SC-74)	2.9 x 1.5 x 1.0
			2.9	3.5	-	10	0.1		PESD5V0U4BW	SOT665	1.6 x 1.2 x 0.55
5	4	3.3	20	24	28	15	2		PESD3V3L5UK	DFN1010-6 (SOT891)	1 x 1 x 0.5
		5	18.5	22	30	20	0.5		PESD5VOL5UK		
		3.3	22	28	25	20	0.3		PESD3V3L5UF	DFN1410-6 (SOT886)	1.45 x 1 x 0.5
		5	16	19	25	20	0.025		PESD5V0L5UF		
		3.3	22	28	25	20	0.3		PESD3V3L5UV	SOT666	1.6 x 1.2 x 0.55
		5	16	19	25	20	0.025		PESD5V0L5UV		
		3.3	22	28	25	20	0.3		PESD3V3L5UY	SOT363 (SC-88)	2 x 1.25 x 0.95
		5	16	19	25	20	0.025		PESD5V0L5UY		
		3.3	215	300	200	30	0.8		PESD3V3S5UD	SOT457 (SC-74)	2.9 x 1.5 x 1.0
		5	165	220	200	30	0.2		PESD5V0S5UD		
		24	45	70	200	23	0.015		PESD24VS5UD		
0	5	5	2.9	3.5	-	10	0.1		PESD5V0U5BF	DFN1410-6 (SOT886)	1.45 x 1 x 0.5
									PESD5V0U5BV	SOT666	1.6 x 1.2 x 0.55

[1] 8 / 20 µs exponential decay waveform according to IEC 61000-4-5 [2] according to IEC 61000-4-5 (contact discharge)

Audio interface protection

Types in **bold** represent new products

Lines	V_{RWM}(V)	V_{BR} min (V)	V_{BR} max (V)	C_D typ (pF)	C_D max (pF)	I_{PPM} 8/20µs (A)	V_{CL} 8/20µs @ I_{ppm} (V)	V_{ESD} (hV)	Configuration	Type	Package
1	3.3	4.7		22	30	-	-	30		**PESD3V3T1BL**	DFN1006-2 (SOD882)
	4.5	4.7		65	78	34	13.2	30		PTVS4V5D1BL	
	5	5.5	9.5	35	45	12	14	30		PESD5V0S1BL	
				70	90	28	11.5	30		PESD5V0S2BQA	DFN1010D-3 (SOT1215)
				35	45	12	14	30		PESD5V0S1BLD	DFN1006D-2 (SOD882D)
		5.8	7.8	11	13	4.8	12.5	30		PESD5V0V1BL	DFN1006-2 (SOD882)
				11	13	4.8	12.5	30		PESD5V0V1BLD	DFN1006D-2 (SOD882D)
	12	14.6	16.8	17	25	7.8	38	30		PESD12VV1BL	DFN1006-2 (SOD882)
2	5	5.8	7.8	18	20	9	12.5	30		PESD5V0V2BM	DFN1006-3 (SOT883)
				18	20	9	12.5	30		PESD5V0V2BMB	DFN1006B-3 (SOT883B)

Automotive high-speed network protection

Number of protected lines	V_{RWM} (V)	C_{line} typ (pF)	I_{RM} max (µA)	ESD rating max (kV) [1]	Configuration	Type	Package	Size (mm)
2	5	1	0.1	8		PESD2ETH-X	SOT143B	2.9 x 1.3 x 1.0
		1.8	0.1	12		PESD2ETH-AX		
2	5	1.3	0.1	8		**PESD2ETH-D**	SOT457	2.9 x 1.5 x 1.0
		2	0.1	12		**PESD2ETH-AD**		
4	5.5	0.6	1 @ 3 V	8		PESD1LVDS	DFN2510-10 (SOT1165) 	2.5 x 1.0 x 0.48
		0.6	1 @ 3 V	8		PRTR5V0U4D	SOT457	2.9 x 1.5 x 1.0

[1] according to IEC 61000-4-2 (contact discharge)

Automotive in-vehicle network bus line protection

Number of protected lines bidirectional	V_{RWM} (V)	C_{line} typ (pF)	C_{line} max (pF)	I_{PPM} 8/20µs (A)	V_{CL} 8/20µs @ I_{ppm} (V)	ESD rating max (kV) [2]	I_r max [µA] @ V_{RWM}	Configuration	Type	Package	Size (mm)
1	24	14	17	3.5	42	30	0.05		PESD1IVN24-A	SOD323 (SC-76)	1.7 x 1.25 x 0.95
	27	14	17	3	45	30	0.05		PESD1IVN27-A		
2	24	14	17	3.5	42	30	0.05		PESD2IVN24-T	SOT23	2.0 x 1.25 x 0.95
	27	14	17	3	45	30	0.05		PESD2IVN27-T		
1	27	14	17	3	45	30	0.05		PESD1IVN27-U	SOT323	2.0 x 1.25 x 0.95
2	24	14	17	3.5	42	30	0.05		PESD2IVN24-U		
	27	14	17	3	45	30	0.05		PESD2IVN27-U		
1	15 (diode 1) 24 (diode 2)	13	17	3 (diode 1) 5 (diode 2)	70 (diode 1) 44 (diode 2)	23	0.05		PESD1LIN	SOD323 (SC-76)	1.7 x 1.25 x 0.95
2	24	11	17	3	70	23	0.05		PESD1CAN	SOT23	2.9 x 1.3 x 1.0
		25	30	5	41	30	0.01		PESD2CAN		
		11	17	3	70	23	0.05		PESD1FLEX	SOT323	2.0 x 1.25 x 0.95
		9.3	12	3	50	23	0.05		PESD1CAN-U		
1	26.5	8.5	11	3	53	23	0.05		PESD1IVN-U	SOT323	2.0 x 1.25 x 0.95
2									PESD2IVN-U		

[1] 8 / 20 µs surge pulse according to IEC 61000-4-5

[2] according to IEC 61000-4-2 (contact discharge)

Battery and charger port protection

Number of protected lines	C_{line} (pF)	V_{RWM} (V)	I_{PPM} 8/20µs (A)	Type	Package	Size (mm)
1 x bi	65	4.5	34	PTVS4V5D1BL	DFN1006-2	1.0 x 0.6 x 0.48
1 x uni	160	12	22.5	PESD12VS1UJ	SOD323F (SC-90)	1.7 x 1.25 x 0.7
	480	5	22.5	PESD5V0S1UJ		
	160	12	47	PESD12VS1UA	SOD323 (SC-76)	1.7 x 1.25 x 0.95
	480	5	47	PESD5V0S1UA		
2 x bi	18	5	9	PESD5V0V2BM	DFN1006-3 (SOT883)	1.0 x 0.6 x 0.48
	18	5	9	PESD5V0V2BMB	DFN1006-3 (SOT883)	1.0 x 0.6 x 0.37
	35	5	15	PESD5V0S2BQA	DFN1010D-3 (SOT1215)	1.1 x 1.0 x 0.37

HDMI and display port protection

Interface	Number of protected lines	C_{line} (pF)	Remark	Type	Package	Size (mm)
Display port	4	0.6	ESD protection for ultra high-speed interfaces	IP4283CZ10-TBR	DFN2510A-10 (SOT1176) 	2.5 x 1.0 x 0.48
		0.55	ESD protection for ultra high-speed interfaces	IP4292CZ10-TBR		
		0.5	ESD protection for ultra high-speed interfaces	IP4294CZ10-TBR		
			ESD protection for ultra high-speed interfaces	PHDMI2F4		
		0.27	ESD protection for ultra high-speed interfaces	PHDMI2FR4		
		0.17	ESD protection for ultra high-speed interfaces	PHDMI2AB4		
HDMI	4	0.6	ESD protection for ultra high-speed interfaces	IP4283CZ10-TBR	DFN2510A-10 (SOT1176)	2.5 x 1.0 x 0.48
		0.55	ESD protection for ultra high-speed interfaces	IP4292CZ10-TBR		
		0.5	ESD protection for HDMI 2.0	PHDMI2F4		
			ESD protection for ultra high-speed interfaces	IP4294CZ10-TBR		
		0.27	ESD protection for ultra high-speed interfaces	PHDMI2FR4		
		0.17	ESD protection for ultra high-speed interfaces	PHDMI2AB4		
LVDS	4	0.8	Very low clamp ESD protection with 12 kV IEC rug-gedness	PUSB2X4D	SOT457 (SC-74)	2.9 x 1.5 x 1.0
		0.8	Very low clamp ESD protection with 12 kV IEC rug-gedness	PUSB2X4Y	SOT363 (SC-88)	2.0 x 1.25 x 0.95

Antenna protection (NFC, WiFi,…)

Number of protected lines (Bidirectional)	V_{RWM} [V]	C_{line} typ [pF]	C_{line} max [pF]	ESD rating [1] max [kV]	Configuration	Type	Package	Size
1	18	0.28	0.45	10		PESD18VF1BSF	DSN0603-2 (SOD962)	0.6 x 0.3 x 0.3
						PESD1NFC-SF		
		0.35	0.5	10		PESD18VF1BL	DFN1006-2 (SOD882)	1.0 x 0.6 x 0.48
						PESD1NFC-L		
	24	0.25	0.4	10		PESD24VF1BSF	DSN0603-2 (SOD962)	0.6 x 0.3 x 0.3
						PESD2NFC-SF		
		0.3	0.45	10		PESD24VF1BL	DFN1006-2 (SOD882)	1.0 x 0.6 x 0.48
						PESD2NFC-L		

[1] according to IEC 61000-4-2 (contact discharge)

USB and SATA protection

Interface	Number of protected lines	R_{line}	C_{line} (pF)	Remark	Type	Package	Size (mm)
USB2.0 (Plastic package)	2	-	1.0	ESD protection for up to 2 ultra high-speed datalines	PRTR5V0U2X	SOT143B	2.9 x 1.3 x 1.0
			1.8	ESD protection for up to 2 ultra high-speed datalines with 12 kV ESD robustness	PRTR5V0U2AX		
				ESD protection for up to 2 ultra high-speed datalines	PRTR5V0U2F	DFN1410-6 (SOT886)	1.45 x 1.0 x 0.48
	3 + 1			USB protection for USB OTG with 5.5 V Vbat protection	PUSBM5V5X4-TL	DFN1616-6 (SOT1189)	1.6 x 1.6 x 0.48
				USB protection for USB OTG with 12 V Vbat protection	PUSBM12VX4-TL		
	4		0.8	Very low clamp ESD protection for USB2.0 high-speed with 12 kV IEC ESD protection	PUSB2X4Y	SOT363 (SC-88)	2.0 x 1.25 x 0.95
			1	Very low clamp ESD protection for USB2.0 high-speed with 12 kV IEC ESD protection	PUSB2X4D	SOT457 (SC-74)	2.9 x 1.5 x 1.0
				Dual ESD protection for USB2.0 high-speed, SD-card, SIM card	IP4220CZ6		
				Dual ESD protection for USB2.0 high-speed, SD-card, SIM card	PRTR5V0U4D		

Common mode filter for USB 2.0

Interface	Number of protected lines	C_{line} (pF)	ESD rating max (kV) [1]	Remark	Type	Package	Size (mm)
USB2.0	2	1.5	15	Common Mode filter with ESD protection for high-speed interfaces such as USB 2.0	IP3319CX6	WLCSP6	1.34 x 0.95 x 0.57

[1] according to IEC 61000-4-2 (contact discharge)

Common mode filter for USB 3.x

Interface	Number of protected line pairs	Type	Differential Mode 3dB frequency	Common Mode rejection 800 MHz - 10 GHz	C_d typical	V_{RWM}	ESD rating	Channel series resistance	Package	Size (mm)
USB3.x	1	PCMF1USB3S	6 GHz	>12	0.3	5	15	3	WLCSP5	0.8 x 1.2 x 0.5
	2	PCMF2USB3S							WLCSP10	1.6 x 1.2 x 0.5
	3	PCMF3USB3S							WLCSP15	2.4 x 1.2 x 0.5
	1	PESD1USB3S	17 GHz	ESD protection only	0.5			-	WLCSP5	0.8 x 1.2 x 0.5
	2	PESD2USB3S							WLCSP10	1.6 x 1.2 x 0.5
	3	PESD3USB3S							WLCSP15	2.4 x 1.2 x 0.5

[1] according to IEC 61000-4-2 (contact discharge)

Common mode filter for HDMI and MIPI

Interface	Number of protected line pairs unidirectional	Type	Differential Mode 3 dB frequency (typ.)	C_d pF typical	V_{rwm}	ESD rating [1] max (kV)	Channel series resistance	Package	Size (mm)
HDMI2.0	1	**PCMF1HDMI2S**	>6 GHz	0.3	5	15	3 Ω	WLCSP5	0.8 x 1.2 x 0.5
	2	**PCMF2HDMI2S**						WLCSP10	1.6 x 1.2 x 0.5
	3	**PCMF3HDMI2S**						WLCSP15	2.4 x 1.2 x 0.5

[1] according to IEC 61000-4-2 (contact discharge)

HDMI signal conditioning

Interface	Number of protected lines	Buffer	Level shifer	C_{line} (pF)	Resistor (Ω)	LDO	Remark	Type	Package	Size (mm)
HDMI2.0 Tx	13	yes	yes	100 Ω differential impedance	integrated	-	Fully integrated HDMI source solution with current limiter, buffer, and level shifter for DDC, CEC, and Hot Plug	IP4786CZ32	DFN5050-32 (SOT617)	5.0 x 5.0 x 0.85
							Fully integrated HDMI source solution with enhanced ESD protection, current limiter, buffer, and level shifter for DDC, CEC, and Hot Plug	IP4788CZ32		
SD3.0	6	yes	yes	-	internal	LDO	SD 3.0-compliant memory card with integrated dual voltage- level translator with EMI filter and ESD protection	IP4856CX25/C	WLCSP25	2.4 x 2.4 x 0.4

LCD and camera RC filter with integrated protection

Number of protected lines	Line small-signal equivalents			Digital interface clock speed (MHz)	Insertion loss S21 ~ -3 dB (MHz)	Type	Package	Size (mm)
	R_{line} (Ω)	C_{line} (pF)	L_{line} (nH)					
4	40	18	-	~100	300	IP4252CZ8-4 -TTL	DFN1714-8 (SOT1166)	1.7 x 1.35 x 0.52
	100	45	-	~40	130	IP4254CZ8-4-TTL		
8	40	18	-	~100	300	IP4252CZ16-8-TTL	DFN3314-16 (SOT1168) 	3.3 x 1.35 x 0.53
	100	45	-	~40	130	IP4254CZ16-8-TTL		
		15	-	~110	330	IP4251CZ16-8-TTL		

Memory and SIM card filter with integrated protection

Types in **bold** represent new products

Interface	Number of protected lines	Line small-signal equivalents		Digital interface clock speed (MHz)	Remark	Type	Package	Size (mm)
		R_{line}	C_{line} (pF)					
SIM card	3	47 Ω / 100 Ω	20	~20	Integrated SIM-card EMI filter and ESD protection	IP4264CZ8-20-TTL	DFN1714-8 (SOT1166)	1.7 x 1.35 x 0.52
SD 3.0	6	-	0.27	5000	6-line bidirectional ESD protection for ultra high-speed interfaces	PUSB3TB6	DFN2111-7 (SOT1358)	2.1 x 1.1 x 0.5
			0.35			**PUSB3FR6**		
			0.15			**PUSB3AB6**		

USB 3.x and eSATA protection and filtering for high-speed and super-speed lines

Types in **bold** represent new products

Baseband interface	Number of protected lines	C_d (pF)	ESD rating max (kV)	R_{dyn} (Ω)	Remark	Type	Package	Size (mm)
USB3.0 - 5 Gbps	4	0.55	8	0.3 / 0.4	ESD Protection for high-speed interfaces	IP4292CZ10-TBR	DFN2510A-10 (SOT1176)	2.5 x. 1.0 x 0.48
		0.5	10			IP4294CZ10-TBR		
						PUSB3F96		
USB3.1 - 10 Gbps		0.5	10			**PUSB3F97**		
		0.5	10			**PUSB3F99**		
		0.5	10			**PUSB3FA0**		
		0.29	15	0.27	TrEOS Protection	PUSB3FR4		
		0.17	15	0.4		PUSB3AB4		
	6	0.29	15	0.27		PUSB3FR6	DFN2111-7 (SOT1358)	2.1 x 1.1 x 0.48
		0.27	15	0.5		PUSB3TB6		
		0.15	15	0.4		PUSB3AB6		
	1	0.1	10	0.45		PESD5V0R1BSF	DSN0603-2 (SOD962)	0.6 x 0.3 x 0.3
		0.15	15	0.25		PESD5V0H1BSF		
		0.2	20	0.23		PESD5V0C1BSF		
		0.2	20	0.23		PESD3V3C1BSF		
		0.28	20	0.19		PESD5V0C1USF		
		0.45	25	0.11		**PESD3V3W1BSF**		
		0.45	25	0.11		**PESD4V0W1BSF**		
		0.45	20	0.1		PESD3V3Z1BSF		
		0.1	10	0.45		**PESD7V0R1BSF**		
		0.15	15	0.25		**PESD7V0H1BSF**		
		0.2	20	0.23		**PESD7V0C1BSF**		
		0.45	20	0.1		**PESD6V5C1USF**		
	2	0.25	15	0.16		PESD1USB3S	WLCSP5	1.2 x 0.8 x 0.6
		0.25	15	0.14	Common Mode Filter with TrEOS Protection for ultra high-speed interfaces	PCMF1USB3S		

TVS diodes for mobile applications

Types in **bold** represent new products

P_{PPM} 10/1000µs	V_{RWM}	V_{BR} min	V_{BR} max	I_{PPM} 8/20µs	V_{CL} 8/20µs	I_{PPM} 10/1000µs	V_{CL} 10/1000µs	Type	Package	Size
300	4.5	4.7	-	34	13.2	-	-	**PTVS4V5D1BL**	DFN1006-2 (SOD882)	1.0 x 0.6 x 0.48
	7.5	8.33	9.21	178	19.7	23.3	12.9	PTVS7V5U1UPA	DFN2020-3 (SOT1061)	2.0 x 2.0 x 0.62
	10	11.1	12.3	148	23	17.6	17	PTVS10VU1UPA		
	12	13.3	14.7	131	25.2	15.1	19.9	PTVS12VU1UPA		
	15	16.7	18.5	111	28.8	12.3	24.4	PTVS15VU1UPA		
	18	20	22.1	97	32	10.3	29.2	PTVS18VU1UPA		
	20	22.2	24.5	98.5	38.7	9.2	32.5	**PTVS20VU1UPA**		
	22	24.4	26.9	88.5	41	8.4	35.5	**PTVS22VU1UPA**		
	24	26.7	29.5	79	44.2	7.7	38.8	**PTVS24VU1UPA**		
	26	28.9	31.9	69	43.5	7	43	PTVS26VU1UPA		

TVS diodes for mobile applications

Types in **bold** represent new products

V_{RWM} (V)	V_{br} min (V)	V_{br} max (V)	8/20µs pulse		10/1000µs pulse		I_{rm} typ @ V_{rwm} (nA)	I_{rm} max @ V_{rwm} (nA)	R_{dyn} (TLP) - 8/20µs	Type	Package	Size
			V_{cl} @ I_{ppm} 8/20µs (V) max	I_{ppm} 8/20µs (A)	V_{cl} @ I_{ppm} 10/1000µs (V) max	I_{ppm} 10/1000µs (A)						
5	6.4	7.8	19,4	100	12	20	25	1000	0.1	**PTVS5V0Z1USKP**	DSN1608-2 (SOD964)	**1.6 x 0.8 x 0.27**
			18	80	12	20	25	1000	0.06	PTVS5V0Z1USK		
7.5	8.33	9.65	22	100	13.5	17	1	200	0.08	PTVS7V5Z1USK		
10	11.1	12.9	27	75	18.2	12.5	0.1	200	0.11	PTVS10VZ1USK		
12	13.3	15.4	29	65	21.8	10.5	0.1	200	0.11	PTVS12VZ1USK		
15	16.7	19.4	36	52	27.4	7.5	0.1	200	0.13	PTVS15VZ1USK		
18	20	23.2	44	41	32.8	6.4	0.1	200	0.17	PTVS18VZ1USK		
20	22.2	25.4	48.3	41	36.9	6	1	200	0.2	PTVS20VZ1USK		
22	24.4	26.9	51	39	40	5	0.1	200	0.2	PTVS22VZ1USK		
26	28.9	33.4	57.5	32	46	4.5	0.1	200	0.15	PTVS26VZ1USK		

TVS diodes, 24 W/40 W (automotive)

Types in **bold** represent new products

Power (W) (10 / 1000 µs waveform) [1]	V_{RWM} (V)	V_{BR} min (V) @ I_R	V_{BR} typ (V) @ I_R	V_{BR} max (V) @ I_R	I_R (mA)	ESD rating max (kV) [1]	C_{line} typ (pF)	V_{CL} max (V) @ I_{PP} [1]	I_{PP} (A) [1]	I_{RM} max (µA) @ V_{RWM}	Configuration	Type	Package	Size (mm)
24	3	5.32	5.6	5.88	20	30	210	8	3	5	 mse212	MMBZ5V6AL	SOT23	2.9 x 1.3 x 1.0
		5.89	6.2	6.51	1	30	175	8.7	2.76	0.2		MMBZ6V2AL		
	4.5	6.48	6.8	7.14	1	30	150	9.6	2.5	0.3		MMBZ6V8AL		
	6	8.65	9.1	9.56	1	30	155	14	1.7	0.1		MMBZ9V1AL		
	6.5	9.5	10	10.5	1	30	130	14.2	1.7	0.02		MMBZ10VAL		
40	8.5	11.4	12	12.6	1	30	110	17	2.35	0.005		MMBZ12VAL		
	12	14.25	15	15.75	1	30	85	21	1.9	0.005		MMBZ15VAL		
	13	15.2	16	16.8	1	30	76	23	1.9	0.005		**MMBZ16VAL**		
	13	15.68	16	16.32	1	30	76	23	1.9	0.005		**MMBZ16VTAL**		
	14.5	17.1	18	18.9	1	30	70	25	1.6	0.005		MMBZ18VAL		
	17	19	20	21	1	30	65	28	1.4	0.005		MMBZ20VAL		
	22	25.65	27	28.35	1	30	48	40	1	0.005		MMBZ27VAL		
	26	31.35	33	34.65	1	30	45	46	0.87	0.005		MMBZ33VAL		
	8.5	11.4	12	12.6	1	30	110	17	2.35	0.005	 bra004	MMBZ12VDL		
	12.8	14.3	15	15.8	1	30	85	21.2	1.9	0.005		MMBZ15VDL		
	14.5	17.1	18	18.9	1	30	70	25	1.6	0.005		MMBZ18VCL		
	17	19	20	21	1	30	65	28	1.4	0.005		MMBZ20VCL		
	22	25.65	27	28.35	1	30	48	38	1	0.005		MMBZ27VCL		
	26	31.35	33	34.65	1	30	45	46	0.87	0.005		MMBZ33VCL		

TVS diodes, 400 W

Power (W) (10/1000 µs waveform) [1]	V_{RWM} (V)	V_{BR} min (V) @ I_R	V_{BR} typ (V) @ I_R	V_{BR} max (V) @ I_R	I_R (mA)	V_{CL} max (V) @ I_{PP} [1]	I_{PP} (A) [1]	I_{RM} typ (µA) @ V_{RWM}	I_{RM} max (µA) @ V_{RWM}	Type (T_j max = 150 °C)	Type (T_j max = 185 °C)	Package	Size (mm)
350	3.5	5.20	5.60	6.00	10	8.0	43.8	5	600	PTVS3V3S1UR	PTVS3V3S1UTR	SOD123W 	2.6 x 1.7 x 1.0
400	5.0	6.40	6.70	7.00	10	9.2	43.5	5	400	PTVS5V0S1UR	PTVS5V0S1UTR		
	6.0	6.67	7.02	7.37	10	10.3	38.8	5	400	PTVS6V0S1UR	PTVS6V0S1UTR		
	6.5	7.22	7.60	7.98	10	11.2	35.7	5	250	PTVS6V5S1UR	PTVS6V5S1UTR		
	7.0	7.78	8.20	8.60	10	12.0	33.3	3	100	PTVS7V0S1UR	PTVS7V0S1UTR		
	7.5	8.33	8.77	9.21	1	12.9	31.0	0.2	50	PTVS7V5S1UR	PTVS7V5S1UTR		
	8.0	8.89	9.36	9.83	1	13.6	29.4	0.03	25	PTVS8V0S1UR	PTVS8V0S1UTR		
	8.5	9.44	9.92	10.40	1	14.4	27.8	0.01	10	PTVS8V5S1UR	PTVS8V5S1UTR		
	9.0	10.00	10.55	11.10	1	15.4	26.0	0.005	5	PTVS9V0S1UR	PTVS9V0S1UTR		
	10	11.10	11.70	12.30	1	17.0	23.5	0.005	2.5	PTVS10VS1UR	PTVS10VS1UTR		
	11	12.20	12.85	13.50	1	18.2	22.0	0.005	2.5	PTVS11VS1UR	PTVS11VS1UTR		
	12	13.30	14.00	14.70	1	19.9	20.1	0.005	2.5	PTVS12VS1UR	PTVS12VS1UTR		
	13	14.40	15.15	15.90	1	21.5	18.6	0.001	0.1	PTVS13VS1UR	PTVS13VS1UTR		
	14	15.60	16.40	17.20	1	23.2	17.2	0.001	0.1	PTVS14VS1UR	PTVS14VS1UTR		
	15	16.70	17.60	18.50	1	24.4	16.4	0.001	0.1	PTVS15VS1UR	PTVS15VS1UTR		
	16	17.80	18.75	19.70	1	26.0	15.4	0.001	0.1	PTVS16VS1UR	PTVS16VS1UTR		
	17	18.90	19.90	20.90	1	27.6	14.5	0.001	0.1	PTVS17VS1UR	PTVS17VS1UTR		
	18	20.00	21.00	22.10	1	29.2	13.7	0.001	0.1	PTVS18VS1UR	PTVS18VS1UTR		
	20	22.20	23.35	24.50	1	32.4	12.3	0.001	0.1	PTVS20VS1UR	PTVS20VS1UTR		
	22	24.40	25.60	26.90	1	35.5	11.3	0.001	0.1	PTVS22VS1UR	PTVS22VS1UTR		
	24	26.70	28.10	29.50	1	38.9	10.3	0.001	0.1	PTVS24VS1UR	PTVS24VS1UTR		
	26	28.90	30.40	31.90	1	42.1	9.5	0.001	0.1	PTVS26VS1UR	PTVS26VS1UTR		
	28	31.10	32.80	34.40	1	45.4	8.8	0.001	0.1	PTVS28VS1UR	PTVS28VS1UTR		
	30	33.30	35.10	36.80	1	48.4	8.3	0.001	0.1	PTVS30VS1UR	PTVS30VS1UTR		
	33	36.70	38.70	40.60	1	53.3	7.5	0.001	0.1	PTVS33VS1UR	PTVS33VS1UTR		
	36	40.00	42.10	44.20	1	58.1	6.9	0.001	0.1	PTVS36VS1UR	PTVS36VS1UTR		
	40	44.40	46.80	49.10	1	64.5	6.2	0.001	0.1	PTVS40VS1UR	PTVS40VS1UTR		
	43	47.80	50.30	52.80	1	69.4	5.8	0.001	0.1	PTVS43VS1UR	PTVS43VS1UTR		
	45	50.00	52.65	55.30	1	72.7	5.5	0.001	0.1	PTVS45VS1UR	PTVS45VS1UTR		
	48	53.30	56.10	58.90	1	77.4	5.2	0.001	0.1	PTVS48VS1UR	PTVS48VS1UTR		
	51	56.70	59.70	62.70	1	82.4	4.9	0.001	0.1	PTVS51VS1UR	PTVS51VS1UTR		
	54	60.00	63.15	66.30	1	87.1	4.6	0.001	0.1	PTVS54VS1UR	PTVS54VS1UTR		
	58	64.40	67.80	71.20	1	93.6	4.3	0.001	0.1	PTVS58VS1UR	PTVS58VS1UTR		
	60	66.70	70.20	73.70	1	96.8	4.1	0.001	0.1	PTVS60VS1UR	PTVS60VS1UTR		
	64	71.10	74.85	78.60	1	103.0	3.9	0.001	0.1	PTVS64VS1UR	PTVS64VS1UTR		

[1] 10 / 1000 µs according to IEC 61643-321

TVS diodes, 600W

Power (W) (10 / 1000 µs waveform) [1]	V_{RWM} (V)	V_{BR} min (V) @ I_R	V_{BR} typ (V) @ I_R	V_{BR} max (V) @ I_R	I_R (mA)	V_{CL} max (V) @ I_{PP} [1]	I_{PP} (A) [1]	I_{RM} typ (µA) @ V_{RWM}	I_{RM} max (µA) @ V_{RWM}	Type (T_j max = 150 °C)	Type (T_j max = 185 °C)	Package	Size (mm)
600	3.5	5.20	5.60	6.00	10	8	75	5	600	PTVS3V3P1UP	PTVS3V3P1UTP	SOD128 	3.8 x 2.6 x 1.0
	5	6.40	6.70	7.00	10	9.2	65.2	5	400	PTVS5V0P1UP	PTVS5V0P1UTP		
	6	6.67	7.02	7.37	10	10.3	58.3	5	400	PTVS6V0P1UP	PTVS6V0P1UTP		
	6.5	7.22	7.60	7.98	10	11.2	53.6	5	250	PTVS6V5P1UP	PTVS6V5P1UTP		
	7	7.78	8.20	8.60	10	12	50	3	100	PTVS7V0P1UP	PTVS7V0P1UTP		
	7.5	8.33	8.77	9.21	1	12.9	46.5	0.2	50	PTVS7V5P1UP	PTVS7V5P1UTP		
	8	8.89	9.36	9.83	1	13.6	44.1	0.03	25	PTVS8V0P1UP	PTVS8V0P1UTP		
	8.5	9.44	9.92	10.40	1	14.4	41.7	0.01	10	PTVS8V5P1UP	PTVS8V5P1UTP		
	9	10.00	10.55	11.10	1	15.4	39	0.005	5	PTVS9V0P1UP	PTVS9V0P1UTP		
	10	11.10	11.70	12.30	1	17	35.3	0.005	2.5	PTVS10VP1UP	PTVS10VP1UTP		
	11	12.20	12.85	13.50	1	18.2	33	0.005	2.5	PTVS11VP1UP	PTVS11VP1UTP		
	12	13.30	14.00	14.70	1	19.9	30.2	0.005	2.5	PTVS12VP1UP	PTVS12VP1UTP		
	13	14.40	15.15	15.90	1	21.5	27.9	0.001	0.1	PTVS13VP1UP	PTVS13VP1UTP		
	14	15.60	16.40	17.20	1	23.2	25.9	0.001	0.1	PTVS14VP1UP	PTVS14VP1UTP		
	15	16.70	17.60	18.50	1	24.4	24.6	0.001	0.1	PTVS15VP1UP	PTVS15VP1UTP		
	16	17.80	18.75	19.70	1	26	23.1	0.001	0.1	PTVS16VP1UP	PTVS16VP1UTP		
	17	18.90	19.90	20.90	1	27.6	21.7	0.001	0.1	PTVS17VP1UP	PTVS17VP1UTP		
	18	20.00	21.00	22.10	1	29.2	20.5	0.001	0.1	PTVS18VP1UP	PTVS18VP1UTP		
	20	22.20	23.35	24.50	1	32.4	18.5	0.001	0.1	PTVS20VP1UP	PTVS20VP1UTP		
	22	24.40	25.60	26.90	1	35.5	16.9	0.001	0.1	PTVS22VP1UP	PTVS22VP1UTP		
	24	26.70	28.10	29.50	1	38.9	15.4	0.001	0.1	PTVS24VP1UP	PTVS24VP1UTP		
	26	28.90	30.40	31.90	1	42.1	14.2	0.001	0.1	PTVS26VP1UP	PTVS26VP1UTP		
	28	31.10	32.80	34.40	1	45.4	13.2	0.001	0.1	PTVS28VP1UP	PTVS28VP1UTP		
	30	33.30	35.10	36.80	1	48.4	12.4	0.001	0.1	PTVS30VP1UP	PTVS30VP1UTP		
	33	36.70	38.70	40.60	1	53.3	11.3	0.001	0.1	PTVS33VP1UP	PTVS33VP1UTP		
	36	40.00	42.10	44.20	1	58.1	10.3	0.001	0.1	PTVS36VP1UP	PTVS36VP1UTP		
	40	44.40	46.80	49.10	1	64.5	9.3	0.001	0.1	PTVS40VP1UP	PTVS40VP1UTP		
	43	47.80	50.30	52.80	1	69.4	8.6	0.001	0.1	PTVS43VP1UP	PTVS43VP1UTP		
	45	50.00	52.65	55.30	1	72.7	8.3	0.001	0.1	PTVS45VP1UP	PTVS45VP1UTP		
	48	53.30	56.10	58.90	1	77.4	7.8	0.001	0.1	PTVS48VP1UP	PTVS48VP1UTP		
	51	56.70	59.70	62.70	1	82.4	7.3	0.001	0.1	PTVS51VP1UP	PTVS51VP1UTP		
	54	60.00	63.15	66.30	1	87.1	6.9	0.001	0.1	PTVS54VP1UP	PTVS54VP1UTP		
	58	64.40	67.80	71.20	1	93.6	6.4	0.001	0.1	PTVS58VP1UP	PTVS58VP1UTP		
	60	66.70	70.20	73.70	1	96.8	6.2	0.001	0.1	PTVS60VP1UP	PTVS60VP1UTP		
	64	71.10	74.85	78.60	1	103	5.8	0.001	0.1	PTVS64VP1UP	PTVS64VP1UTP		

[1] 10 / 1000 µs according to IEC 61643-321

Nomenclature - protection devices

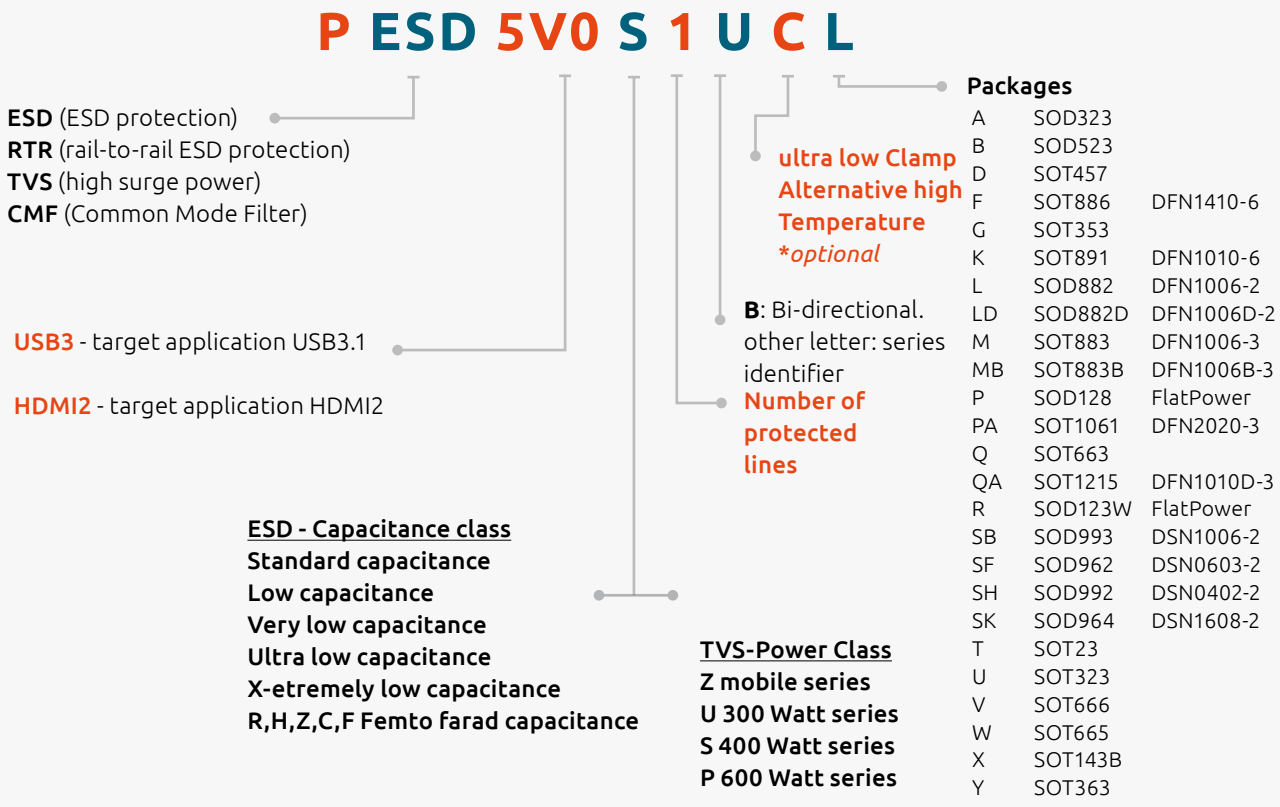

Nomenclature - application specific ESD protection

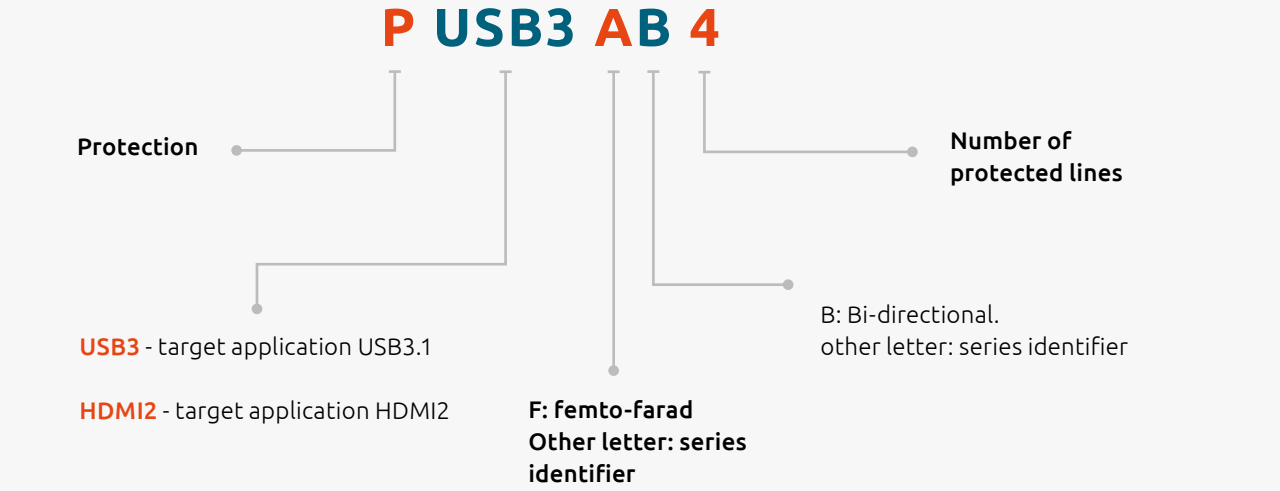

Nomenclature - common mode filter with ESD protection

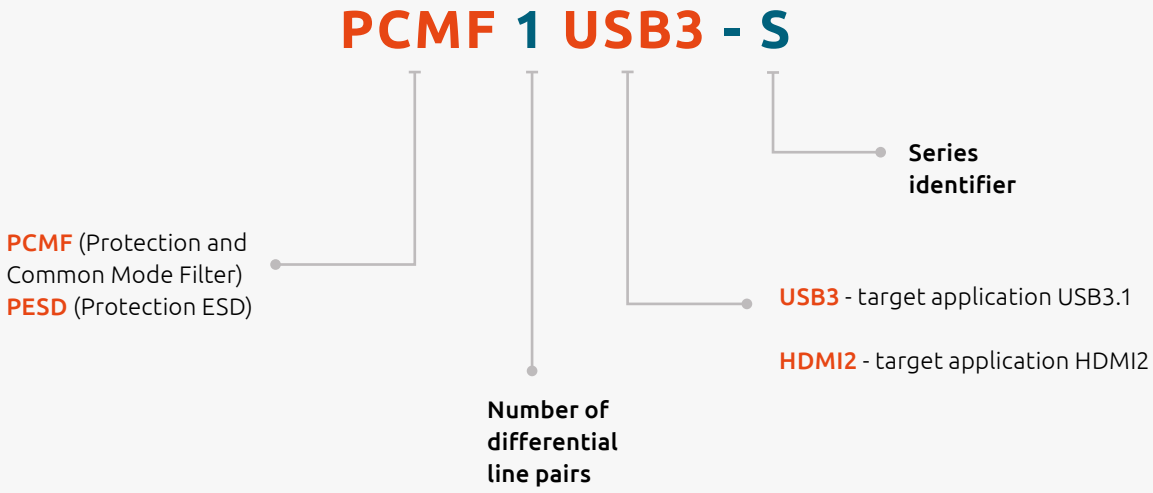

MOSFETs 4

Automotive MOSFETs 74

Automotive grade MOSFETs nomenclature 74
N-channel 30V automotive power MOSFETs 74
N-channel 40V automotive power MOSFETs 75
N-channel 55V-60V automotive power MOSFETs 76
N-channel 75V-80V automotive power MOSFETs 79
N-channel 100V automotive power MOSFETs 80
Small-signal automotive MOSFETs – Low $R_{DS(on)}$ 82
Small-signal automotive MOSFETs – High $R_{DS(on)}$ 84
Small-signal automotive MOSFETs – Dual 84

Power MOSFETs 86

N-channel 25V-30V MOSFETs 86
N-channel 40V-60V MOSFETs 88
N-channel 75V-200V MOSFETs 90
P-channel MOSFETs 92
Power MOSFETs nomenclature 93

Small-signal MOSFETs 94

Small-signal MOSFETs in DFN1006 and DFN1006B packages 94
Small-signal MOSFETs in DFN1010D-3 single and DFN1010B-3 dual packages 95
Small-signal low-leakage MOSFETs 95
Small-signal MOSFETs in DFN2020MD-6 single and DFN2020-6 dual packages 96
Small-signal MOSFETs in WLCSP4 and WLCSP6 packages 97
Small-signal MOSFETs single (N-channel) 98
Small-signal MOSFETs single (P-channel) 100
Small-signal MOSFET–Schottky combination 100
Small-signal MOSFETs dual 102
Small-signal MOSFETs complementary 102

Automotive grade MOSFETs nomenclature

BUK 7 Y 3R0 - 40 H

Segment
'BUK' for automotive grade

Gate drive
7 = Standard level
6 = Intermediate level
9 = Logic level

Package
6 = D²PAK
2 = DPAK
E = I²PAK
5 = TO-220
M = LFPAK33
Y = LFPAK56
K = LFPAK56D
J = LFPAK56E

TrenchMOS technology
A = Generation 2
B = Generation 3
C = Generation 4
E = Generation 6
H = Generation 9

Voltage rating
BV_{DSS} rating

3R0 = $R_{DS(on)}$ <3mΩ max at 25°C

N-channel 30V automotive power MOSFETs

Package name	Type number	V_{DS} [max] (V)	$R_{DS(on)}$ [max] @ 10 V (mΩ)	$R_{DS(on)}$ [max] @ 5 V (mΩ)	I_D [max] @ 25 °C (A)	$R_{th(j-mb)}$ [max] (K/W)
D²PAK (SOT404)	BUK962R8-30B	30	2.4	2.8	75	0.5
	BUK762R7-30B	30	2.7		75	0.5
	BUK763R4-30B	30	3.4		75	0.59
	BUK9607-30B	30	5	7	75	0.95
	BUK7607-30B	30	7		75	0.95
LFPAK56; Power-SO8 (SOT669)	BUK9Y07-30B	30	6	7	75	1.42
	BUK7Y07-30B	30	7		75	1.42
	BUK9Y11-30B	30	9	11	59	2
	BUK7Y10-30B	30	10		67	1.76
	BUK9Y22-30B	30	19	22	37.7	2.53
	BUK7Y20-30B	30	20		39.5	2.53
LFPAK56D (SOT1205)	BUK9K5R1-30E	30	4.4	5.3	40	2.21
	BUK9K5R6-30E	30	4.7	5.8	40	2.36
	BUK7K5R1-30E	30	5.1		40	2.21
	BUK7K5R6-30E	30	5.6		40	2.36
LFPAK33 (SOT1210)	BUK9M5R2-30E	30	4.1	5.2	70	1.89
	BUK9M6R6-30E	30	5.3	6.6	70	2
	BUK9M10-30E	30	7.8	10	54	2.75
	BUK9M17-30E	30	14	17	37	3.4

N-channel 40V automotive power MOSFETs

Types in **bold** represent new products

Package name	Type number	V_{DS} [max] (V)	$R_{DS(on)}$ [max] @ 10 V (mΩ)	$R_{DS(on)}$ [max] @ 5 V (mΩ)	I_D [max] @ 25 °C (A)	$R_{th(j-mb)}$ [max] (K/W)
TO-220AB (SOT78)	BUK751R8-40E	40	1.8		120	0.43
	BUK752R3-40E	40	2.3		120	0.51
	BUK753R1-40E	40	3.1		100	0.64
	BUK758R3-40E	40	7.4		75	1.56
D²PAK (SOT404)	BUK961R6-40E	40	1.4	1.6	120	0.43
	BUK761R6-40E	40	1.6		120	0.43
	BUK761R7-40E	40	1.6		120	0.46
	BUK762R0-40E	40	2		120	0.51
	BUK962R6-40E	40	2.4	2.8	100	0.57
	BUK762R6-40E	40	2.6		100	0.57
	BUK963R1-40E	40	2.7	3.1	100	0.64
	BUK762R9-40E	40	2.9		100	0.64
	BUK964R1-40E	40	3.5	4.1	75	0.82
	BUK764R0-40E	40	4		75	0.82
	BUK965R4-40E	40	4.4	5.4	75	1.09
	BUK765R3-40E	40	4.9		75	1.09
	BUK768R1-40E	40	7.2		75	1.56
DPAK (SOT428)	BUK9209-40B	40	7	9	75	0.95
	BUK7208-40B	40	8		75	0.95
I²PAK (SOT226)	BUK7E1R8-40E	40	1.8		120	0.43
	BUK7E1R9-40E	40	1.9		120	0.46
	BUK7E2R3-40E	40	2.3		120	0.51
	BUK7E3R1-40E	40	3.1		100	0.64
	BUK7E8R3-40E	40	7.4		75	1.56
LFPAK56E (SOT1023)	**BUK7J1R4-40H**	40	1,4		120	0,38
LFPAK56; Power-SO8 (SOT669)	**BUK7Y1R7-40H**	40	1,7		120	0,51
	BUK7Y2R0-40H	40	2		120	0,69
	BUK7Y2R5-40H	40	2,5		120	0,79
	BUK7Y3R0-40H	40	3		120	0,87
	BUK9Y3R0-40E	40	2.5	3	100	0.77
	BUK7Y3R5-40E	40	3.5		100	0.9
	BUK9Y3R5-40E	40	3.6	3.8	100	0.9
	BUK9Y4R4-40E	40	3.7	4.4	100	1.02
	BUK7Y4R4-40E	40	4.4		100	1.02
	BUK9Y7R6-40E	40	6	7.6	79	1.58
	BUK7Y7R6-40E	40	7.6		79	1.58
	BUK9Y12-40E	40	10	12	52	2.31
	BUK7Y12-40E	40	12		52	2.31
	BUK9Y21-40E	40	17	21	33	3.33
	BUK7Y21-40E	40	21		33	3.33
	BUK9Y29-40E	40	25	29	25	4.03
	BUK7Y29-40E	40	29		26	4.03
LFPAK56D (SOT1205)	BUK7K6R2-40E	40	5.8		40	2.21
	BUK9K6R2-40E	40	6	6.2	40	2.21
	BUK9K6R8-40E	40	6.1	7.2	40	2.36
	BUK7K6R8-40E	40	6.8			2.36
	BUK9K8R7-40E	40	8	9.4	30	2.84
	BUK7K8R7-40E	40	8.5			2.84
	BUK9K18-40E	40	16	20	30	3.96
	BUK7K18-40E	40	19		24.2	3.96
	BUK9K25-40E	40	24	29	18.2	4.68
	BUK7K25-40E	40	25			4.68

N-channel 40V automotive power MOSFETs

Package name	Type number	V_{DS} [max] (V)	$R_{DS(on)}$ [max] @ 10 V (mΩ)	$R_{DS(on)}$ [max] @ 5 V (mΩ)	I_D [max] @ 25 °C (A)	$R_{th(j-mb)}$ [max] (K/W)
LFPAK33 (SOT1210)	BUK7M6R3-40E	40	6.3		70	1.89
	BUK7M8R0-40E	40	8		69	2
	BUK7M10-40E	40	10		56	2.43
	BUK7M12-40E	40	12		48	2.75
	BUK7M21-40E	40	21		33	3.4
	BUK7M45-40E	40	45		19	4.8
	BUK9M14-40E	40	11	14	44	2.75
	BUK9M24-40E	40	20	24	30	3.4
	BUK9M52-40E	40	40	52	17.6	4.8
	BUK9M7R2-40E	40	5.8	7.2	70	1.89
	BUK9M9R1-40E	40	7.3	9.1	64	2
	BUK9M11-40E	40	9	11	53	2.43

N-channel 55V-60V automotive power MOSFETs

Package name	Type number	V_{DS} [max] (V)	$R_{DS(on)}$ [max] @ 10 V (mΩ)	$R_{DS(on)}$ [max] @ 5 V (mΩ)	I_D [max] @ 25 °C (A)	$R_{th(j-mb)}$ [max] (K/W)
TO-220AB (SOT78)	BUK953R5-60E	60	3.4	3.7	120	0.51
	BUK954R8-60E	60	4.5	4.9	100	0.64
D2PAK (SOT404)	BUK7610-55AL	55	10		75	0.5
	BUK9620-55A	55	18	20	54	1.2
	BUK7620-55A	55	20		54	1.2
	BUK9624-55A	55	22	24	46	1.4
	BUK7624-55A	55	24		47	1.4
	BUK9628-55A	55	25	28	42	1.5
	BUK7628-55A	55	28		42	1.5
	BUK9635-55A	55	32	35	34	1.8
	BUK7635-55A	55	35		35	1.7
	BUK9675-55A	55	68	75	20	2.4
	BUK7675-55A	55	75		20.3	2.4
D^2PAK (SOT404)	BUK962R5-60E	60	2.3	2.5	120	0.43
	BUK762R4-60E	60	2.4		120	0.43
	BUK962R8-60E	60	2.5	2.8	120	0.46
	BUK762R6-60E	60	2.6		120	0.46
	BUK963R3-60E	60	3	3.3	120	0.51
	BUK763R1-60E	60	3.1		120	0.51
	BUK964R2-60E	60	3.9	4.2	100	0.57
	BUK763R9-60E	60	3.9		100	0.57
	BUK964R8-60E	60	4.4	4.8	100	0.64
	BUK764R4-60E	60	4.5		100	0.64
	BUK966R5-60E	60	5.9	6.5	75	0.82
	BUK766R0-60E	60	6		75	0.82
	BUK969R0-60E	60	8	9	75	1.09
	BUK768R3-60E	60	8.3		75	1.09
	BUK9614-60E	60	13	14	56	1.56
	BUK7613-60E	60	13		58	1.56

N-channel 55V-60V automotive power MOSFETs

Package name	Type number	V_{DS} [max] (V)	$R_{DS(on)}$ [max] @ 10 V (mΩ)	$R_{DS(on)}$ [max] @ 5 V (mΩ)	I_D [max] @ 25 °C (A)	$R_{th(j-mb)}$ [max] (K/W)
DPAK (SOT428)	BUK9212-55B	55	10	12	75	0.95
	BUK7210-55B	55	10		75	0.95
	BUK7212-55B	55	12		75	0.95
	BUK9215-55A	55	14	15	62	1.3
	BUK7215-55A	55	15		62	1.3
	BUK9219-55A	55	18	19	55	1.3
	BUK7219-55A	55	19		55	1.3
	BUK9222-55A	55	20	22	48	1.5
	BUK9225-55A	55	22	25	43	1.6
DPAK (SOT428)	BUK7222-55A	55	22		48	1.5
	BUK7225-55A	55	25		43	1.6
	BUK9230-55A	55	27	30	38	1.7
	BUK7230-55A	55	30		38	1.7
	BUK9237-55A	55	33	37	32	1.94
	BUK7237-55A	55	37		32.3	1.9
	BUK9245-55A	55	40	45	28	2.1
	BUK9277-55A	55	69	77	18	2.93
	BUK7277-55A	55	77		18	2.9
	BUK92150-55A	55	125	140	11	4.1
	BUK72150-55A	55	150		11	4.1
I²PAK (SOT226)	BUK7E2R6-60E	60	2.6		120	0.43
	BUK7E3R5-60E	60	3.5		120	0.51
	BUK7E4R6-60E	60	4.6		100	0.64
	BUK7E13-60E	60	13		58	1.56
LFPAK56; Power-SO8 (SOT669)	BUK9Y4R8-60E	60	4.1	4.8	100	0.63
	BUK7Y4R8-60E	60	4.8		100	0.63
	BUK9Y6R0-60E	60	5.2	6	100	0.77
	BUK9Y7R2-60E	60	5.6	7.2	100	0.9
	BUK7Y6R0-60E	60	6		100	0.77
	BUK7Y7R2-60E	60	7.2		100	0.9
	BUK9Y8R7-60E	60	7.5	8.7	86	1.02
	BUK7Y8R7-60E	60	8.7		87	1.02
	BUK9Y15-60E	60	13	15	53	1.58
	BUK7Y15-60E	60	15		53	1.59
	BUK9Y25-60E	60	22	25	34	2.31
	BUK7Y25-60E	60	25		34	2.31
	BUK9Y43-60E	60	38	43	22	3.33
	BUK7Y43-60E	60	43		22	3.33
	BUK9Y59-60E	60	52	59	16.7	4.03
	BUK7Y59-60E	60	59		17	4.03

N-channel 55V-60V automotive power MOSFETs

Package name	Type number	V_{DS} [max] (V)	$R_{DS(on)}$ [max] @ 10 V (mΩ)	$R_{DS(on)}$ [max] @ 5 V (mΩ)	I_D [max] @ 25 °C (A)	$R_{th(j-mb)}$ [max] (K/W)
LFPAK56D (SOT1205)	BUK7K12-60E	60	9.3			2.21
	BUK7K13-60E	60	10		40	2.36
	BUK9K12-60E	60	11	12	35	2.21
	BUK9K13-60E	60	12	13	40	2.36
	BUK7K17-60E	60	14		30	2.84
	BUK9K17-60E	60	16	17	26	2.84
	BUK7K35-60E	60	30		20.7	3.96
	BUK9K35-60E	60	32	35	22	3.96
	BUK7K52-60E	60	45		15.4	4.68
	BUK9K52-60E	60	49	55	16	4.68
LFPAK33 (SOT1210)	BUK7M9R9-60E	60	9.9		60	1.89
	BUK9M12-60E	60	11	12	54	1.89
	BUK7M12-60E	60	12		53	2
	BUK9M15-60E	60	13	15	47	2
	BUK7M15-60E	60	15		43	2.43
	BUK9M19-60E	60	17	19	38	2.43
	BUK7M19-60E	60	19		36	2.75
	BUK9M24-60E	60	21	24	32	2.75
	BUK7M33-60E	60	33			3.4
	BUK9M42-60E	60	37	42	22	3.4
	BUK7M42-60E	60	42		20	4.17
	BUK9M53-60E	60	46	53	17	4.17
	BUK7M67-60E	60	67		14	4.8
	BUK9M85-60E	60	73	85	12.8	4.8
SOT223	BUK9832-55A/CU	55	29	32		
	BUK9880-55A/CU	55	73	80		
	BUK7880-55A/CU	55	80			
	BUK98150-55A/CU	55	137	150		
	BUK78150-55A/CU	55	150			

N-channel 75V-80V automotive power MOSFETs

Package name	Type number	V_{DS} [max] (V)	$R_{DS(on)}$ [max] @ 10 V (mΩ)	$R_{DS(on)}$ [max] @ 5 V (mΩ)	I_D [max] @ 25 °C (A)	$R_{th(j-mb)}$ [max] (K/W)
TO-220AB (SOT78)	BUK753R8-80E	80	4		120	0.43
D²PAK (SOT404)	BUK7613-75B	75	13		75	0.95
	BUK9616-75B	75	14	16	67	0.95
	BUK7623-75A	75	23		53	1.1
	BUK763R8-80E	80	3.8		120	0.43
	BUK964R2-80E	80	4	4.2	120	0.43
	BUK764R2-80E	80	4.2		120	0.46
	BUK964R7-80E	80	4.5	4.7	120	0.46
	BUK769R6-80E	80	9.6		75	0.82
	BUK9611-80E	80	10	11	75	0.82
DPAK (SOT428)	BUK7214-75B	75	14		69	0.95
	BUK9217-75B	75	15	17	64	0.95
	BUK9226-75A	75	25	26	45	1.3
	BUK7226-75A	75	26		45	1
LFPAK56; Power-SO8 (SOT669)	BUK7Y7R8-80E	80	7.8		100	0.63
	BUK9Y8R5-80E	80	8	8.5	100	0.63
	BUK7Y9R9-80E	80	9.9		89	0.77
	BUK9Y11-80E	80	10	11	84	0.77
	BUK9Y14-80E	80	14	15	62	1.02
	BUK7Y14-80E	80	14		65	1.02
	BUK9Y25-80E	80	25	27	37	1.58
	BUK7Y25-80E	80	25		39	1.58
	BUK9Y41-80E	80	41	45	24	2.33
	BUK7Y41-80E	80	41		25	2.31
	BUK9Y72-80E	80	72	78	15	3.33
	BUK7Y72-80E	80	72		16	3.33
	BUK9Y107-80E	80	98	107	11.8	4.03
	BUK7Y98-80E	80	98		12.3	4.03
LFPAK56D (SOT1205)	BUK7K15-80E	80	15		23	2.21
	BUK7K17-80E	80	17		21	2.36
	BUK7K23-80E	80	23		17	2.21
	BUK9K20-80E	80	17	19	23	2.84
	BUK9K22-80E	80	19	22	21	2.36
	BUK9K30-80E	80	26	30	17	2.84
LFPAK33 (SOT1210	BUK7M17-80E	80	17		43	1.89
	BUK9M23-80E	80	20	23	37	1.89
	BUK7M22-80E	80	22		37	2
	BUK7M27-80E	80	27		30	2.43
	BUK9M28-80E	80	28	28	33	2
	BUK9M35-80E	80	35	35	26	2.43

N-channel 100V automotive power MOSFETs

Package name	Type number	V_{DS} [max] (V)	$R_{DS(on)}$ [max] @ 10 V (mΩ)	$R_{DS(on)}$ [max] @ 5 V (mΩ)	I_D [max] @ 25 °C (A)	$R_{th(j-mb)}$ [max] (K/W)
TO-220AB (SOT78)	BUK755R4-100E	100	5.2		120	0.43
D²PAK (SOT404)	BUK765R0-100E	100	5		120	0.43
	BUK965R8-100E	100	5.6	5.8	120	0.43
	BUK768R1-100E	100	8.1		100	0.57
	BUK969R3-100E	100	8.9	9.3	100	0.57
	BUK7613-100E	100	13		72	0.82
	BUK9615-100E	100	14	15	66	0.82
	BUK7631-100E	100	31		34	1.56
	BUK9637-100E	100	36	37	31	1.56
	BUK9660-100A	100	58	60	26	1.4
	BUK7660-100A	100	60		26	1.4
	BUK9675-100A	100	72	75	23	1.5
	BUK7675-100A	100	75		23	1.5
	BUK96180-100A	100	173	180	11	2.8
DPAK (SOT428)	BUK7227-100B	100	27		48	0.95
	BUK9230-100B	100	28	30	47	0.95
	BUK9240-100A	100	39	40	33	1.3
	BUK7240-100A	100	40		34	1.3
	BUK9275-100A	100	72	75	21.7	1.7
	BUK7275-100A	100	75		21.7	1.7
I²PAK (SOT226)	BUK7E5R2-100E	100	5.2		120	0.43
LFPAK56; Power-SO8 (SOT669)	BUK9Y12-100E	100	12	12	85	0.63
	BUK7Y12-100E	100	12		85	0.63
	BUK9Y15-100E	100	15	15	69	0.77
	BUK7Y15-100E	100	15		68	0.77
	BUK9Y19-100E	100	18	19	56	0.9
	BUK7Y19-100E	100	19		56	0.9
	BUK9Y22-100E	100	22	22	49	1.02
	BUK7Y22-100E	100	22		49	1.02
	BUK9Y38-100E	100	38	38	30	1.58
	BUK7Y38-100E	100	38		30	1.58
	BUK9Y65-100E	100	64	65	19	2.31
	BUK7Y65-100E	100	65		19	2.31
	BUK9Y113-100E	100	110	113	12	3.33
	BUK7Y113-100E	100	113		12	3.33
	BUK9Y153-100E	100	146	153	9.4	4.03
	BUK7Y153-100E	100	153		9.4	4.03

N-channel 100V automotive power MOSFETs

Package name	Type number	V_{DS} [max] (V)	$R_{DS(on)}$ [max] @ 10 V (mΩ)	$R_{DS(on)}$ [max] @ 5 V (mΩ)	I_D [max] @ 25 °C (A)	$R_{th(j-mb)}$ [max] (K/W)
LFPAK56D (SOT1205)	BUK7K29-100E	100	25		29.5	2.21
	BUK9K29-100E	100	27	29	30	2.21
	BUK7K32-100E	100	28		29	2.36
	BUK9K32-100E	100	31	33	26	2.36
	BUK7K45-100E	100	38		21.4	2.84
	BUK9K45-100E	100	42	45	21	2.84
	BUK7K89-100E	100	83		13	3.96
	BUK9K89-100E	100	85	89	12.5	3.96
	BUK7K134-100E	100	121		9.8	4.68
	BUK9K134-100E	100	154	159	8.5	4.68
LFPAK33 (SOT1210)	BUK9M34-100E	100	34	34	29	1.89
	BUK9M43-100E	100	43	44	26	1.88
	BUK9M120-100E	100	119	120	11.5	3.4
	BUK9M156-100E	100	150	156	9.3	4.17
SOT223	BUK98180-100A/CU	100	173	180	4.6	
	BUK9875-100A/CU	101	72	75	7	

P-channel 30V-60V automotive power MOSFETs

Types in **bold red** are in development

Package name	Type number	V_{DS} [max] (V)	$R_{DS(on)}$ [max] @ 10 V (mΩ)	I_D [max] @ 25 °C (A)	$R_{th(j-mb)}$ [max] (K/W)
LFPAK56	**BUK6Y12-30P**	**30**	**12**	**67.3**	**1.4**
	BUK6Y20-30P	**30**	**20**	**41.1**	**2.3**
	BUK6Y15-40P	**40**	**15**	**63.1**	**1.4**
	BUK6Y25-40P	**40**	**25**	**39.4**	**2.3**
	BUK6Y32-60P	**60**	**32**	**38.7**	**1.4**
	BUK6Y57-60P	**60**	**57**	**22.7**	**2.3**

Small-signal automotive MOSFETs – Low $R_{DS(on)}$

Package										
Size (mm)										
P_{tot} (mW)										
Polarity	V_{DS} (V)	V_{GS} (V)	I_D (A)	$V_{GS(th)}$ min (V)	$V_{GS(th)}$ max (V)	ESD protection (kV)	$R_{DS(on)}$ typ (mΩ) @ V_{GS} =			
							10 V	4.5 V	2.5 V	1.8 V
N-channel	20	8	4.7	0.45	1	2	-	24	29	40
			2	0.45	1	2	-	57	64	78
			2.8	0.4	1	2	-	64	78	110
		12	12.9	0.4	0.9	2	-	10	12	16
			11.4	0.4	0.9	2	-	12	15	20
			6.3	0.75	1.25	2	-	16	24	-
	30	12	11.3	0.4	0.9	2	-	13	14	17
			5	0.4	0.9	2	-	28	32	37
			4	0.75	1.25	2	-	55	72	-
			0.9	0.75	1.25	2	-	212	269	-
		20	5.5	1	2.5	2	17	22	-	-
			3.9	1	2.5	2	30	39	-	-
			3.7	1	2.5	2	54	70	-	-
	40	15	7	1.4	2.1	0.5	-	18	22	-
			19	1	2	-	-	23	-	-
		20	7	2.4	4	0.5	19	-	-	-
			2.7	1	2.5	1	64	79	-	-
			2.5	1	2.5	1	95	120	-	-
			19	1.3	2.7	-	23	30		
			19	2.4	4	-	25	-		
	60	20	5	1.3	2.7	0.5	32	38	-	-
			4	1.3	2.7	2	42	49	-	-
			3.1	1.3	2.7	2	46	52	-	-
			3	1.3	2.7	2	72	85	-	-
			2.1	1.3	2.7	2	96	108	-	-
			1.5	1.3	2.7	2	176	196	-	-
			0.8	1.3	2.7	2	300	332	-	-
			13	1.3	2.7	-	43	53	-	-
	80	20	2.8	1.3	2.7	2	80	92	-	-
			1.9	1.3	2.7	2	175	195	-	-
			1.1	1.3	2.7	2	345	390	-	-
	100	20	1.5	1.3	2.7	2	285	301	-	-
			1.1	1.3	2.7	2	527	555	-	-
P-channel	12	12	11.8	0.47	0.9	-	-	15	17	21
	20	8	5.6	0.45	0.95	2	-	27	38	50
			6	0.45	0.95	2	-	37	45	59
			2	0.5	1.1	-	-	100	155	210
			2.3	0.45	0.95	-	-	120	150	200
		12	10.3	0.47	0.9	2	-	19	22	28
			5.7	0.75	1.25	2	-	27	39	-
			5	0,47	0,9	2,3	-	28	31	36
			5.3	0.75	1.25	2	-	28	42	-
			5	0.47	0.9	2	-	39	45	56
			5.7	0.75	1.25	2	-	41	56	-
			3.5	0.75	1.25	-	-	48	71	-
			3.3	0.75	1.25	2	-	67	99	-
			4.1	0.75	1.25	2	-	70	101	-
			2.4	1	2.5	2	-	97	147	-
	30	20	8,8	1	2,5	-	24	32	-	-
			4.2	1	3	2	35	47	-	-
	40	20	1.5	1	2.5	1	180	220	-	-
			5	1.5	3	1	32	42	-	-
			14	1.4	2.7	-	43	70		
	70	20	2.3	1	3	2	156	177	-	-

Types in **bold** represent new products

	SOT223	SOT457 (SC-74)	SOT23	SOT323 (SC-70)	DFN2020MD-6 (SOT1220)	DFN2020D-6 (SOT1118D)	DFN1010D-3 (SOT1215)
							
	6.5 x 3.5 x 1.65	2.9 x 1.5 x 1.0	2.9 x 1.3 x 1.0	2.0 x 1.25 x 0.95	2.0 x 2.0 x 0.65	2.0 x 2.0 x 0.65	1.1 x 1.0 x 0.37
	1700	600	250	200	1250	1250	1000
			PMV28UNEA				
				PMF63UNEA			
			PMV65UNEA				
					PMPB10XNEA		
					PMPB12UNEA		
			PMV20XNEA		PMPB20XNEA		
					PMPB13XNEA		
					PMPB29XNEA		
						PMDPB56XNEA	
				PMF250XNEA			
			PMV25ENEA				
			PMV50ENEA				
			PMV100ENEA				
					BUK9D23-40E		
			PMV65ENEA				
			PMV130ENEA				
					BUK6D23-40E		
					BUK7D25-40E		
					PMPB55ENEA		
			PMV55ENEA				
					PMPB85ENEA		
			PMV120ENEA				
			PMV230ENEA				
			PMV450ENEA				
					BUK6D43-60E		
					PMPB95ENEA		
					PMPB215ENEA		
							PMXB360ENEA
	PMT280ENEA		PMV280ENEA				
	PMT560ENEA						
					PMPB15XPA		
			PMV27UPEA				
		PMN40UPEA					
			NX2301P				
			BSH205G2				
					PMPB20XPEA		
		PMN27XPEA					
					PMPB29XPEA		
			PMV30XPEA				
					PMPB43XPEA		
		PMN42XPEA					
			PMV48XPA				
			PMV65XPEA				
		PMN70XPEA					
			PMV100XPEA				
					PMPB27EPA		
			PMV50EPEA		PMPB50EPEA		
			PMV250EPEA				
					PMPB45EPA		
					BUK6D43-40P		
	PMT200EPEA						

Small-signal automotive MOSFETs – High $R_{DS(on)}$

Package											
Size (mm)											
P_{tot} (mW)											
Polarity	V_{DS} (V)	V_{GS} (V)	I_D (A)	$V_{GS(th)}$ min (V)	$V_{GS(th)}$ max (V)	ESD protection (kV)	$R_{DS(on)}$ typ (mΩ) @ V_{GS} =				
							10 V	4.5 V	2.5 V	1.8 V	
N	30	8	0.4	0.6	1.1	2	-	1000	1400	2000	
	60	20	0.36	0.9	1.5	-	900	1000	-	-	
			0.36	0.48	1.6	1.5	1000	1100	1400	-	
			0.3	1	2.5	2	1000	1300	-	-	
			0.3	1	2.5	3	1100	1300	-	-	
			0.2	0.8	1.5	yes	2700	3000	4000	-	
P	30	8	0.23	0.6	1.1	2		2800	5300	-	
	50	20	0.2	1.1	2.1	1	5300	6000	-	-	

Small-signal automotive MOSFETs – Dual

Package											
Size (mm)											
P_{tot} (mW)											
Polarity	V_{DS} (V)	V_{GS} (V)	I_D (A)	$V_{GS(th)}$ min (V)	$V_{GS(th)}$ max (V)	ESD protection (kV)	$R_{DS(on)}$ typ (mΩ) @ V_{GS} =				
							10 V	4.5 V	2.5 V	1.8 V	
N	20	8	0.8	0.5	0.95	2	-	380	620	1100	
	30	12	4	0.75	1.25	2	-	55	72	-	
			0.95	0.75	1.25	2	-	211	267	-	
P	20	8	0.55	0.5	1.3	2	-	670	1200	1800	
N	20	8	0.73	0.5	0.95	2	-	290	420	600	
P			0.5	0.5	1.3	2	-	670	1200	1800	

	SOT23	SOT363 (SC-88)	SOT323 (SC-70)	SOT666	DFN1006 (SOT883)
	2.9 x 1.3 x 1.0	2.0 x 1.25 x 0.95	2.0 x 1.25 x 0.95	1.6 x 1.2 x 0.55	1.0 x 0.6 x 0.5
	250	300	200	300	250
	NX3008NBK	NX3008NBKS	NX3008NBKW	NX3008NBKV	
	BSS138P	BSS138PS	BSS138PW		
	BSS138BK	BSS138BKS	BSS138BKW		
	2N7002BK	2N7002BKS	2N7002BKW		2N7002BKM
	2N7002CK				
	BSS138AKA				
	NX3008PBK	NX3008PBKS	NX3008PBKW	NX3008PBKV	
	BSS84AK	BSS84AKS	BSS84AKW	BSS84AKV	BSS84AKM

	SOT363 (SC-88)	SOT666	DFN2020D-6 (SOT1118D)
	2.0 x 1.25 x 0.95	1.6 x 1.2 x 0.55	2.0 x 2.0 x 0.65
	300	300	1250
		PMDT290UNE	
			PMDPB56XNEA
	PMGD175XNEA		
		PMDT670UPE	
	PMGD290UCEA		

N-channel 25V-30V MOSFETs

Types in **bold red** are in development

Package	Type number	V_{DS} [max] (V)	$R_{DS(on)}$ [max] @ V_{GS} = 10 V (mΩ)	$R_{DS(on)}$ [max] @ V_{GS} = 4.5 V or 5 V (mΩ)	I_D [max] (A)	$Q_{G(tot)}$ [typ] (nC)
TO-220 (SOT78)	PSMN1R1-30PL	30	1.3	1.6	120	118
	PSMN1R6-30PL	30	1.7	2.1	100	101
	PSMN1R8-30PL	30	1.8	2.3	100	83
	PSMN2R0-30PL	30	2.1	2.8	100	55
	PSMN2R7-30PL	30	2.7	3.6	100	32
	PSMN3R4-30PL	30	3.4	4.1	100	31
	PSMN4R3-30PL	30	4.3	6.2	100	19
	PSMN017-30PL	30	17	23	32	5.1
	PSMN022-30PL	30	22	34	30	4.4
D^2PAK (SOT404) 	PSMNR90-30BL	30	1	1.4	120	118
	PSMN1R5-30BLE	30	1.5	1.85	120	108
	PSMN1R8-30BL	30	1.8	2.1	100	83
	PSMN1R6-30BL	30	1.9	2.2	100	101
	PSMN2R0-30BL	30	2.1	2.9	100	55
	PSMN2R7-30BL	30	3	3.7	100	32
	PSMN3R4-30BL	30	3.3	3.8	100	31
	PSMN3R4-30BLE	30	3.4	5	120	37
	PSMN4R3-30BL	30	4.1	5.2	100	19
	PSMN017-30BL	30	17	23	32	5.1
	PSMN022-30BL	30	22	30	30	4.4
I^2PAK (SOT226) 	PSMN1R1-30EL	30	1.3	1.6	120	118
	PSMN017-30EL	30	17	23	32	5.1
LFPAK56 (Power-SO8)	**PSMNR51-25YLH**	**25**	**0.51**	**0.75**	**300**	**52**
	PSMNR60-25YLH	**25**	**0.6**	**0.89**	**300**	**40.9**
	PSMN0R7-25YLD	25	0.74	0.92	300	50.9
	PSMN0R9-25YLD	25	0.86	1.2	300	41.5
	PSMN1R0-25YLD	25	1.02	1.4	100	33.2
	PSMN1R1-25YLC	25	1.15	1.5	100	39
	PSMN1R2-25YLD	25	1.15	1.7	100	28
	PSMN1R2-25YL	25	1.2	1.9	100	50.6
	PSMN1R2-25YLC	25	1.3	1.7	100	31
	PSMN1R5-25YL	25	1.5	2.2	100	36
	PSMN1R7-25YLD	25	1.68	2.4	100	21.5
	PSMN2R0-25YLD	25	2	2.9	100	15.7
	PSMN2R9-25YLC	25	3.15	4.1	100	16
	PSMN4R0-25YLC	25	4.5	5.8	84	10.9
	PSMN5R4-25YLD	25	5.4	8.4	70	5.7
	PSMN6R0-25YLD	25	6.03	10	61	4.9
	PSMN6R0-25YLB	25	6.1	7.9	73	9

N-channel 25V-30V MOSFETs

Types in **bold red** are in development

Package	Type number	V_{DS} [max] (V)	$R_{DS(on)}$ [max] @ V_{GS} = 10 V (mΩ)	$R_{DS(on)}$ [max] @ V_{GS} = 4.5 V or 5 V (mΩ)	I_D [max] (A)	$Q_{G(tot)}$ [typ] (nC)
LFPAK56 (Power-SO8)	**PSMNR58-30YLH**	**30**	**0.58**	**0.86**	**300**	**48**
	PSMNR70-30YLH	**30**	**0.7**	**0.98**	**300**	**40**
	PSMN0R9-30YLD	30	0.87	1.1	300	51
	PSMN1R0-30YLD	30	1.02	1.3	300	38.2
	PSMN1R0-30YLC	30	1.15	1.4	100	50
	PSMN1R2-30YLD	30	1.24	1.6	100	32
	PSMN1R2-30YLC	30	1.25	1.7	100	38
	PSMN1R3-30YL	30	1.3	2	100	46.6
	PSMN1R4-30YLD	30	1.42	1.9	100	27.6
	PSMN1R5-30YL	30	1.5	1.9	100	36.2
	PSMN1R5-30YLC	30	1.55	2.1	100	30
	PSMN1R7-30YL	30	1.7	2.1	100	36.2
	PSMN2R0-30YLD	30	2	2.5	100	21.8
	PSMN2R0-30YL	30	2	2.6	100	30
	PSMN2R0-30YLE	30	2	3.5	100	41
	PSMN2R2-30YLC	30	2.15	2.8	100	26
	PSMN2R4-30YLD	30	2.4	3.1	100	18
	PSMN2R5-30YL	30	2.4	3.2	100	27
	PSMN2R6-30YLC	30	2.8	3.7	100	18
	PSMN3R0-30YL	30	3	4	100	21
	PSMN3R0-30YLD	30	3	4	100	14.5
	PSMN3R5-30YL	30	3.5	4.6	100	19
	PSMN4R0-30YL	30	4	5.3	100	17.6
	PSMN4R0-30YLD	30	4	5.5	95	9.6
	PSMN4R1-30YLC	30	4.35	5.7	92	11
	PSMN5R0-30YL	30	5	6.7	91	14.1
	PSMN6R0-30YL	30	6	7.9	79	11
	PSMN6R0-30YLD	30	6	8.4	66	6.7
	PSMN6R1-30YLD	30	6.1	8.4	66	6.4
	PSMN6R0-30YLB	30	6.5	8.1	71	9
	PSMN7R0-30YL	30	7	9.1	76	10
	PSMN7R0-30YLC	30	7.1	8.9	61	7.9
	PSMN7R5-30YLD	30	7.5	10	51	5.8
	PSMN9R1-30YL	30	9.1	14	57	8.4
	PSMN9R5-30YLC	30	9.8	12	44	5
	PSMN013-30YLC	30	13	17	32	4
	PSMN011-30YLC	30	11.6	15	37	4.9
	PSMN3R2-30YLC	30	3.5	4.6	100	14.2
	PSMN4R5-30YLC	30	4.8	6.1	84	9.6

N-channel 25V-30V MOSFETs

Types in **bold red** are in development

Package	Type number	V_{DS} [max] (V)	$R_{DS(on)}$ [max] @ V_{GS} = 10 V (mΩ)	$R_{DS(on)}$ [max] @ V_{GS} = 4.5 V or 5 V (mΩ)	I_D [max] (A)	$Q_{G(tot)}$ [typ] (nC)
LFPAK33 (SOT1210)	PSMN2R0-25MLD	25	2	3.1	70	15.9
	PSMN2R8-25MLC	25	2.8	3.8	70	16.3
	PSMN3R5-25MLD	25	3.51	5.4	70	8.7
	PSMN3R9-25MLC	25	4.15	5.6	70	9.7
	PSMN5R3-25MLD	25	5.3	8.4	70	5.9
	PSMN6R1-25MLD	25	6.13	10	60	4.9
	PSMN9R0-25MLC	25	8.65	11	55	5.4
	PSMN1R6-30MLH	**30**	**1.6**	**2.2**	**100**	**16**
	PSMN2R4-30MLD	30	2.4	3.2	70	16
	PSMN3R0-30MLC	30	3.15	4.1	70	16.1
	PSMN4R2-30MLD	30	4.3	5.7	70	9.2
	PSMN4R4-30MLC	30	4.65	6	70	10.6
	PSMN6R4-30MLD	30	6.4	8.3	66	6.5
	PSMN6R5-30MLD	30	6.5	8.6	65	6.4
	PSMN7R0-30MLC	30	7	9	67	8.2
	PSMN7R5-30MLD	30	7.6	10	57	5.8
	PSMN9R8-30MLC	30	9.8	12	50	5
	PSMN013-30MLC	30	13	17	39	3.7
	PSMN020-30MLC	30	18	27	31.8	4.6

N-channel 40V-60V MOSFETs

Package	Type number	V_{DS} [max] (V)	$R_{DS(on)}$ [max] @ V_{GS} = 10 V (mΩ)	$R_{DS(on)}$ [max] @ V_{GS} = 4.5 V or 5 V (mΩ)	I_D [max] (A)	$Q_{G(tot)}$ [typ] (nC)
TO-220 (SOT78)	PSMN1R5-40PS	40	1.6		150	136
	PSMN1R9-40PL	40	1.7	1.9	150	230
	PSMN2R2-40PS	40	2.1		100	110
	PSMN2R1-40PL	40	2.2	2.6	150	168.9
	PSMN2R8-40PS	40	2.8		100	71
	PSMN4R5-40PS	40	4.6		100	35
	PSMN8R0-40PS	40	7.6		77	17
	PSMN2R0-60PSR	60	2		120	137
	PSMN2R0-60PS	60	2.2		120	137
	PSMN2R5-60PL	60	2.6	3.1	150	223
	PSMN2R6-60PS	60	2.6		150	140
	PSMN3R0-60PS	60	3		100	130
	PSMN3R3-60PL	60	3.4	3.8	130	175
	PSMN4R2-60PL	60	3.9	4.3	130	151
	PSMN3R9-60PS	60	3.9		130	103
	PSMN4R6-60PS	60	4.6		100	70.8
	PSMN7R6-60PS	60	7.8		92	38.7
	PSMN015-60PS	60	15		50	20.9

N-channel 40V-60V MOSFETs

Package	Type number	V_{DS} [max] (V)	$R_{DS(on)}$ [max] @ V_{GS} = 10 V (mΩ)	$R_{DS(on)}$ [max] @ V_{GS} = 4.5 V or 5 V (mΩ)	I_D [max] (A)	$Q_{G(tot)}$ [typ] (nC)
D²PAK (SOT404) 	PSMN1R1-40BS	40	1.3		120	136
	PSMN2R2-40BS	40	2.2		100	130
	PSMN2R8-40BS	40	2.9		100	71
	PSMN4R5-40BS	40	4.5		100	35
	PSMN8R0-40BS	40	7.6		77	21
	PSMN1R7-60BS	60	2		120	137
	PSMN3R0-60BS	60	3.2		100	130
	PSMN4R6-60BS	60	4.4		100	70.8
	PSMN7R6-60BS	60	7.8		92	38.7
	PSMN015-60BS	60	15		50	20.9
I²PAK (SOT226) 	PSMN1R5-40ES	40	1.6		120	136
	PSMN2R0-60ES	60	2.2		120	137
	PSMN3R0-60ES	60	3		100	130
LFPAK56 (Power-SO8)	PSMN1R0-40YLD	40	1.1	1.4	280	127
	PSMN1R4-40YLD	40	1.4	1.9	240	96
	PSMN1R8-40YLC	40	1.8	2.1	100	96
	PSMN2R6-40YS	40	2.8		100	63
	PSMN3R3-40YS	40	3.3		100	49
	PSMN4R0-40YS	40	4.2		100	38
	PSMN5R8-40YS	40	5.7		90	28.8
	PSMN8R3-40YS	40	8.6		70	20
	PSMN014-40YS	40	14		46	12
	PSMN4R0-60YS	60	4		100	56
	PSMN4R1-60YL	60	4.1	4.8	100	103
	PSMN5R2-60YL	60	5.2	6	100	78.4
	PSMN5R5-60YS	60	5.2		100	56
	PSMN5R6-60YL	60	5.6	7.2	100	66.8
	PSMN7R0-60YS	60	6.4		89	45
	PSMN7R5-60YL	60	7.5	8.7	86	60.6
	PSMN8R5-60YS	60	8		76	39
	PSMN012-60YS	60	11		59	28.4
	PSMN013-60YL	60	13	15	53	33.2
	PSMN030-60YS	60	15		29	13
	PSMN017-60YS	60	16		44	20
LFPAK33 (SOT1210)	PSMN011-60ML	60	11	13	61	37.2
	PSMN011-60MS	60	11		61	23

N-channel 75V-200V MOSFETs

Types in **bold** represent new products

Package	Type number	V_{DS} [max] (V)	$R_{DS(on)}$ [max] @ V_{GS} = 10 V (mΩ)	$R_{DS(on)}$ [max] @ V_{GS} = 4.5 V or 5 V (mΩ)	I_D [max] (A)	$Q_{G(tot)}$ [typ] (nC)
TO-220 (SOT78)	PSMN3R3-80PS	80	3.3		120	139
	PSMN3R5-80PS	80	3.5		120	139
	PSMN4R4-80PS	80	4.1		100	112
	PSMN4R3-80PS	80	4.3		120	111
	PSMN5R0-80PS	80	4.7		100	87
	PSMN6R5-80PS	80	6.9		100	71
	PSMN8R7-80PS	80	8.7		90	52
	PSMN012-80PS	80	11		74	36
	PSMN017-80PS	80	17		50	26
	PSMN4R3-100PS	100	4.3		120	170
	PSMN4R8-100PSE	100	4.8		120	196
	PSMN5R0-100PS	100	5		120	170
	PSMN5R6-100PS	100	5.6		100	141
	PSMN7R0-100PS	100	6.8		100	125
	PSMN7R8-100PSE	100	7.8		100	128
	PSMN8R5-100PS	100	8.5		100	111
	PSMN8R5-100PSF	**100**	**8.5**		**98**	**44.5**
	PSMN9R5-100PS	100	9.6		98	45
	PSMN013-100PS	100	13		68	59
	PSMN016-100PS	100	16		57	49
	PSMN018-100PSF	**100**	**18**		**57**	**21.3**
	PSMN027-100PS	100	27		53	21
	PSMN034-100PS	100	35		32	23.8
	PSMN015-110P	110	15		75	90
	PHP27NQ11T	110	50		27.6	30
	PHP23NQ11T	110	70		23	22
	PHP18NQ11T	110	90		18	21
	PSMN6R3-120PS	120	6.7		70	207.1
	PSMN7R8-120PS	120	7.9		70	167
	PSMN030-150P	150	30		55.5	98
	PHP30NQ15T	150	63		29	55
	PHP28NQ15T	150	65		28.5	24
	PSMN057-200P	200	57		39	96
	PHP33NQ20T	200	77		32.7	32.2
	PHP20NQ20T	200	130		20	65
	PHP9NQ20T	200	400		8.7	24
D^2PAK (SOT404) 	PSMN2R8-80BS	80	3		120	139
	PSMN3R3-80BS	80	3.5		120	111
	PSMN4R4-80BS	80	4.5		100	125
	PSMN5R0-80BS	80	5.1		100	101

N-channel 75V-200V MOSFETs

Types in **bold** represent new products

Package	Type number	V_{DS} [max] (V)	$R_{DS(on)}$ [max] @ V_{GS} = 10 V (mΩ)	$R_{DS(on)}$ [max] @ V_{GS} = 4.5 V or 5 V (mΩ)	I_D [max] (A)	$Q_{G(tot)}$ [typ] (nC)
D²PAK (SOT404) 	PSMN6R5-80BS	80	6.9		100	71
	PSMN8R7-80BS	80	8.7		90	52
	PSMN012-80BS	80	11		74	36
	PSMN017-80BS	80	17		50	26
	PSMN050-80BS	80	46		22	11
	PSMN3R8-100BS	100	3.9		120	170
	PSMN4R8-100BSE	100	4.8		120	196
	PSMN5R6-100BS	100	5.6		100	141
	PSMN7R0-100BS	100	6.8		100	125
	PSMN7R0-100BSF	**100**	**7**			
	PSMN7R6-100BSE	100	7.6		75	128
	PSMN9R5-100BS	100	9.6		89	82
	PSMN013-100BS	100	14		68	59
	PSMN016-100BS	100	16		57	49
	PSMN018-100BSF	**100**	**18**			
	PSMN027-100BS	100	27		37	30
	PSMN034-100BS	100	35		32	23.8
	PHB45NQ15T	150	42		45.1	32
	PSMN057-200B	200	57		39	96
	PHB33NQ20T	200	77		32.7	32.2
	PHB20NQ20T	200	130		20	65
DPAK (SOT428)	PSMN063-150D	150	63		29	55
	PSMN130-200D	200	130		20	65
	PHD9NQ20T	200	400		8.7	24
I²PAK (SOT226) 	PSMN3R3-80ES	80	3.3		120	139
	PSMN3R5-80ES	80	3.5		120	139
	PSMN4R3-80ES	80	4.3		120	111
	PSMN4R3-100ES	100	4.3		120	170
	PSMN5R0-100ES	100	5		120	170
	PSMN7R0-100ES	100	6.8		100	125
	PSMN8R5-100ES	100	8.5		100	111
	PSMN8R5-100ESF	**100**	**8.5**		**97**	**45**
	PSMN013-100ES	100	14		68	59
	PSMN018-100ESF	**100**	**18**		**53**	**21**
	PSMN6R3-120ES	120	6.7		70	207.1
	PSMN7R8-120ES	120	7.9		70	167

Types in **bold red** are in development

N-channel 75V-200V MOSFETs

Types in **bold** represent new products

Package	Type number	V_{DS} [max] (V)	$R_{DS(on)}$ [max] @ V_{GS} = 10 V (mΩ)	$R_{DS(on)}$ [max] @ V_{GS} = 4.5 V or 5 V (mΩ)	I_D [max] (A)	$Q_{G(tot)}$ [typ] (nC)
LFPAK56 (Power-SO8)	PSMN8R0-80YL	80	8	8.5	100	104
	PSMN8R2-80YS	80	8.5		82	55
	PSMN010-80YL	80	10	11	84	84.7
	PSMN011-80YS	80	11		67	45
	PSMN013-80YS	80	12.9		60	37
	PSMN014-80YL	80	14	15	62	56.9
	PSMN018-80YS	80	18		45	26
	PSMN025-80YL	80	25	27	37	34.3
	PSMN026-80YS	80	28		34	20
	PSMN041-80YL	80	41	45	25	21.9
	PSMN045-80YS	80	45		24	12.5
	PSMN5R6-100YSF	**100**	**5.6**		**158**	**63**
	PSMN6R9-100YSF	**100**	**6.9**		**128**	**51**
	PSMN8R7-100YSF	**100**	**8.7**		**100**	**39**
	PSMN012-100YL	100	12	12	85	118
	PSMN012-100YS	100	12		60	64
	PSMN013-100YSE	100	13		82	75
	PSMN015-100YL	100	15	15	69	86.3
	PSMN016-100YS	100	16		51	54
	PSMN019-100YL	100	19	19	56	72.4
	PSMN021-100YL	100	21	22	49	65.6
	PSMN020-100YS	100	21		43	41
	PSMN028-100YS	100	28		42	33
	PSMN038-100YL	100	38	38	30	39.2
	PSMN039-100YS	100	39		28.1	23
	PSMN069-100YS	100	72		17	14
	PSMN059-150Y	150	59		43	27.9
	PSMN102-200Y	200	102		21.5	30.7
LFPAK33 (SOT1210)	PSMN040-100MSE	100	37		30	30
	PSMN075-100MSE	100	71		18	16.4
SOT873	PML260SN	200	294		8.8	13.3
	PML340SN	220	386		7.3	13.2

P-channel MOSFETs

Package	Type number	V_{DS} [max] (V)	$R_{DS(on)}$ [max] @ V_{GS} = 10 V (mΩ)	I_D [max] (A)	$Q_{G(tot)}$ [typ] (nC)
LFPAK56	**PSMP012-30YE**	**30**	**12**	**67.3**	**52**
	PSMP020-30YE	**30**	**20**	**41.1**	**24**
	PSMP015-40YE	**40**	**15**	**63.1**	**43.5**
	PSMP025-40YE	**40**	**25**	**39.4**	**28**
	PSMP032-60YE	**60**	**32**	**38.7**	**46**
	PSMP057-60YE	**60**	**57**	**22.7**	**21**

Types in **bold red** are in development

Power MOSFETs nomenclature

PSM N 4R0 - 30 Y L D

Segment
Power silicon max

Channel
N = N-channel
P = P-channel
X = Dual

$R_{DS(on)}$ in mΩ
4R0 means 4mΩ max at 25 °C

Voltage rating
BV_{DSS} rating

Package type
- B = D^2PAK
- D = DPAK
- E = I^2PAK
- K = S08
- L = DFN56AD
- P = TO220
- Y = LFPAK56
- M = LFPAK33

Gate threshold voltage
- L = Logic level
- S = Standard level
- U = Ultra low gate
- X = Extremely low gate
- E = Enhanced logic

Technology family, e.g.
- C = NextPower
- D = NextPowerS3 (Super-fast Switching with Soft Recovery)
- E = NextPower Live (optimized for hot-swap applications)
- F = NextPower 80/100 V

Small-signal MOSFETs in DFN1006 and DFN1006B packages

Package																DFN1006-3 (SOT883)	DFN1006B-3 (SOT883B)
Size (mm)																1.0 x 0.6 x 0.48	1.0 x 0.6 x 0.37
Ptot (mW)																250	250
Polarity	V_{DS} (V)	V_{GS} (V)	I_D (A)	$V_{GS(th)}$ min (V)	$V_{GS(th)}$ max (V)	t_{on} typ (ns)	t_{off} typ (ns)	Q_G typ (nC)	ESD protec-tion (kV)	$R_{DS(on)}$ typ (mΩ) @ V_{GS} =							
										10 V	4.5 V	2.5 V	1.8 V	1.5 V	1.2 V		
N-channel	20	8	1.9	0.45	0.95	5.3	16	1.6	2	-	120	160	210	270	-	PMZ130UNE	
			1.6	0.45	0.95	5.3	16	1.6	2	-	170	200	240	300	-		PMZB150UNE
			1	0.5	0.95	6	86	0.45	2	-	270	360	470	600	-	PMZ290UNE2	PMZB290UNE2
			0.6	0.45	0.95	5.6	19	0.4	1	-	470	620	845	1125	2210	PMZ600UNE	PMZB600UNE
	30	8	1.5	0.45	0.95	5	17	1.6	2	-	210	240	270	300	-	PMZ200UNE	PMZB200UNE
			1	0.45	0.95	4	12	0.8	2	-	390	460	30	610	-	PMZ390UNE	PMZB390UNE
			0.59	0.45	0.95	4	12	0.6	2	-	550	660	770	890	-	PMZ550UNE	PMZB550UNE
	60	20	0.45	1.1	2.1	5	12	0.5	2	1000	1300	-	-	-	-	2N700BKM	2N7002BKMB
			0.35	1.1	2.1	4.7	6.9	1	2	2200	2500	-	-	-	-	NX7002BKM	NX7002BKMB
P-channel	20	8	1.4	0.45	0.95	4	26	1.3	1.8	-	330	420	520	-	-	PMZ350UPE	PMZB350UPE
			0.5	0.45	0.95	2.3	13.5	1.19	1	-	1020	1270	1700	2300	3500	PMZ950UPE	PMZB950UPE
	30	8	1	0.45	0.95	2.9	22	1.45	2	-	430	470	750	950	-	PMZ320UPE	PMZB320UPE
			0.41	0.45	0.95	3	14	0.7	2	-	1200	1700	2100	3000	-	PMZ1200UPE	PMZB1200UPE
	50	20	0.23	1.1	2.1	13	48	0.26	1	4500	5700	-	-	-	-	BSS84AKM	BSS84AKMB

Small-signal MOSFETs in DFN1010D-3 single and DFN1010B-3 dual packages

Package																	DFN1010D-3 (SOT1215)	DFN1010B-6 (SOT1216)
Size (mm)																	1.1 x 1.0 x 0.37	1.1 x 1.0 x 0.37
P_{tot} (mW)																	1000	350
Configuration	Polarity	V_{DS} (V)	V_{GS} (V)	I_D (A)	$V_{GS(th)}$ min (V)	$V_{GS(th)}$ max (V)	t_{on} typ (ns)	t_{off} typ (ns)	Q_G typ (nC)	ESD protection (kV)	$R_{DS(on)}$ typ (mΩ) @ V_{GS} =							
											10 V	4.5 V	2.5 V	1.8 V	1.5 V	1.2 V		
Single	N-channel	12	8	3.2	0.4	0.9	6	18	6.6	1	-	34	39	46	50	121	PMXB40UNE	
		20	8	3.2	0.5	0.9	6	17	5.7	1	-	42	48	56	64	-	PMXB43UNE	
		30	20	3.2	1	2	3	11	3.6	-	49	56	-	-	-	-	PMXB56EN	
				3.2	1	2.5	3	11	6	1	44	56	-	-	-	-	PMXB65ENE	
		80	20	1.1	1.3	2.7	2	9	3	2	345	390	-	-	-	-	PMXB360ENEA	
	P-channel	12	8	3.2	0.4	1	6.2	27	6.7	1.5	-	59	78	120	198	880	PMXB65UPE	
		20	8	2.9	0.4	1	6	29	6.8	1	-	69	86	130	205	950	PMXB75UPE	
				1.2	0.45	0.95	3	18	1.25	1.5	-	350	450	600	760	1200	PMXB350UPE	
		30	20	2.4	1	2.5	4	16	6.2	1	100	125	-	-	-	-	PMXB120EPE	
Dual	N-ch	20	8	0.6	0.45	0.95	5.6	19	0.4	1	-	470	620	845	1125	2210		PMDXB600UNE
		30	8	0.59	0.45	0.95	4	12	0.6	2	-	550	660	770	890	-		PMDXB550UNE
		60	20	0.26	1.1	2.1	4.7	6.9	1	2	2200	2500	-	-	-	-		NX7002BKXB
	P-ch	20	8	0.5	0.45	0.95	2.3	13.5	1.19	1	-	1020	1270	1700	2300	3500		PMDXB950UPE
		30	8	0.41	0.45	0.95	3	14	0.7	2	-	1200	1700	2100	3000	-		PMDXB1200UPE
Complementary	N	20	8	0.6	0.45	0.95	5.6	19	0.4	1	-	470	620	845	1125	2210		PMCXB900UE
	P	20	8	0.5	0.45	0.95	2.3	13.5	1.19	1	-	1020	1270	1700	2300	3500		
	N	30	8	0.59	0.45	0.95	4	12	0.6	2	-	550	660	770	890	-		PMCXB1000UE
	P	30	8	0.41	0.45	0.95	3	14	0.7	2	-	1200	1700	2100	3000	-		

Small-signal low-leakage MOSFETs

Package															DFN1006-3 (SOT883)	DFN1006B-3 (SOT883B)	DFN1010B-6 (SOT1216)
Size (mm)															1.0 x 0.6 x 0.48	1.0 x 0.6 x 0.37	1.1 x 1.0 x 0.37
Ptot (mW)															250	250	350
Config.	Polarity	V_{DS} (V)	V_{GS} (V)	I_D (A)	$V_{GS(th)}$ min (V)	$V_{GS(th)}$ max (V)	I_{DSS} max (nA)	I_{GSS} max (nA)	ESD Protection (kV)	$R_{DS(on)}$ typ (mΩ) @ V_{GS} =							
										4.5 V	2.5 V	1.8 V	1.5 V	1.2 V			
Single	N	20	8	0.6	0.45	0.95	25	50	1	470	620	845	1125	2210	PMZ600UNEL	PMZB600UNEL	
	P	20	8	0.5	0.45	0.95	25	50	1	1020	1270	1700	2300	3500	PMZ950UPEL	PMZB950UPEL	
Dual	N	20	8	0.6	0.45	0.95	25	50	1	470	620	845	1125	2210			PMDXB600UNEL
	P	20	8	0.5	0.45	0.95	25	50	1	1020	1270	1700	2300	3500			PMDXB950UPEL
Compl.	N	20	8	0.6	0.45	0.95	25	50	1	470	620	845	1125	2210			PMCXB900UEL
	P	20	8	0.5	0.45	0.95	25	50	1	1020	1270	1700	2300	3500			

Small-signal MOSFETs in DFN2020MD-6 single and DFN2020-6 dual packages

Package															DFN2020MD-6 (SOT1220)	DFN2020-6 (SOT1118)
Size (mm)															2.0 x 2.0 x 0.65	2.0 x 2.0 x 0.65
P_{tot} (mW)															1250	1250
Configuration	Polarity	V_{DS} (V)	V_{GS} (V)	I_D (A)	$V_{GS(th)}$ min (V)	$V_{GS(th)}$ max (V)	t_{on} typ (ns)	t_{off} typ (ns)	Q_G typ (nC)	ESD protec-tion (kV)	$R_{DS(on)}$ typ (mΩ) @ V_{GS} =					
											10 V	4.5 V	2.5 V	1.8 V		
Single	N-channel		8	11.3	0.4	1	9	26	8.8	2	-	14	17	21	PMPB12UNE	
		20	12	12.9	0.4	0.9	13	54	23	2.2	-	10	12	16	PMPB10XNE	
				5.9	0.75	1.25	16	49	31	2	-	14	20	-	PMPB20XNEA	
				10.4	0.4	0.9	9	31	13.4	-	-	18	21	23	PMPB15XN	
				10.1	0.4	0.9	9	31	11.6	2.1	-	19	23	31	PMPB23XNE	
		30	12	11.3	0.4	0.9	12	54	24	2.2	-	13	14	17	PMPB13XNE	
				5	0.4	0.9	8	33	12.4	2.1	-	28	32	37	PMPB29XNE	
				5.5	0.45	1.2	6	21	5.1	-	-	37	55	-	PMPB33XN	
			20	13	1	2	9	17	13.7	-	12	14	-	-	PMPB11EN	
				10.4	1	2	9	9	7.2	-	16.5	20.5	-	-	PMPB20EN	
		60	20	4	1.3	2.7	4.5	13.5	7.5	1	42	48	-	-	PMPB55ENEA	
				3	1.3	2.7	4	10.5	6.2	2.7	72	85	-	-	PMPB85ENEA	
		80	20	2.8	1.3	2.7	5	15	9.9	2.8	80	92	-	-	PMPB95ENEA	
				1.9	1.3	2.7	3.5	9.5	4.8	2	175	195	-	-	PMPB215ENEA	
	P-channel	12	12	11.8	0.47	0.9	18	85	67	-	-	15	17	21	PMPB15XP	
		20	12	10.3	0.47	0.9	16	43	28.8	-	-	19	21	27	PMPB19XP	
				10.3	0.47	0.9	13	92	30	2.4	-	19	22	28	PMPB20XPE	
				5	0.47	0.9	12	91	30	2.3	-	28	31	36	PMPB29XPE	
				7.9	0.47	0.9	12	62	15	-	-	30	35	45	PMPB33XP	
				5	0.47	0.9	9	57	15.6	2.3	-	39	45	56	PMPB43XPE	
		30	12	5	0.47	0.9	15	28	14	-	-	47	54	74	PMPB47XP	
			20	8.8	1	2.5	10	28	30	-	24	32	-	-	PMPB27EP	
				6.8	1	2.5	7.4	27	17	-	40	55	-	-	PMPB48EP	
Dual	N-ch	20	12	5.3	0.4	0.9	4	40	14.4	-	-	32	40	60		PMDPB30XN
		30	12	3.1	0.75	1.25	9	19	2.9	2	-	55	72	-		PMDPB56XNEA
				3.1	0.5	1.5	6	18	1.65	1.8	-	95	130	-		PMDPB95XNE2
	P-channel	20	8	4.5	0.45	0.95	7	41	6.3	2	-	58	74	97		PMDPB58UPE
				3.7	0.45	0.95	6	47	5.4	2	-	82	107	142		PMDPB85UPE
			12	4.5	0.47	0.9	4	135	16.5	-	-	55	75	110		PMDPB55XP
				4.2	0.75	1.25	7	33	5	2	-	66	98			PMDPB70XPE
				3.7	0.4	1	6	120	5.7	-	-	80	95	120		PMDPB80XP
		30	12	3.8	0.45	1	3	112	5.2	-	-	70	89	-		PMDPB70XP
MOSFET-Schottky	P-channel	20	12	3.7	0.4	1	6	120	5.7	-	-	80	95	120		PMFPB8032XP
Pre-biased NPN	P	30	12	3.4	0.45	1	3	112	5.2	-	-	85	105	-		PMC85XP
Complementary	N	20	12	5.3	0.4	0.9	4	40	14.4	-	-	26	33	50		PMCPB5530X
	P	20	12	4.5	0.4	0.9	4	40	8.1	-	-	55	75	110		

Small-signal MOSFETs in WLCSP4 and WLCSP6 packages

Types in **bold** represent new products

Package											WLCSP4	WLCSP6
Size (mm)											0.78 x 0.78 x 0.35	1.48 x 0.98 x 0.35
P_{tot} (mW)											1300	1300
Configuration	Polarity	V_{DS} (V)	V_{GS} (V)	I_D (A)	$V_{GS(th)}$ min (V)	$V_{GS(th)}$ max (V)	t_{on} typ (ns)	t_{off} typ (ns)	Q_G typ (nC)	ESD protec-tion (kV)	$R_{DS(on)}$ typ (mΩ) @ V_{GS} =					
											4.5 V	2.5 V	1.8 V	1.5 V		
	N	12	8	6	0.4	0.9	6.3	30	6	2	36	46	60	86	PMCM4401VNE	
		20	8	5.4	0.4	0.9	4	27	6	2	43	55	65	75	**PMCM4401UNE**	
	P	12	8	4.9	0.4	0.9	4.8	25.1	6.8	2	55	77	110	-	PMCM4401VPE	
		20	8	4	0.4	0.9	4	31	5.9	2	75	95	130	-	PMCM4401UPE	
				4.2	0.4	0.9	4	26	6	2	65	88	120	-	**PMCM4402UPE**	
	N	12	8	9.6	0.4	0.9	10.8	97.5	16.1	2	15	18	22	30		PMCM6501VNE
		20	8	8.7	0.4	0.9	7	100	19	2	17	20	22	30		**PMCM6501UNE**
	P	12	8	8.2	0.4	0.9	8	72	19.6	2	19	25	37	-		PMCM6501VPE
		20	8	7.3	0.4	0.9	6	105	19	2	22	28	38	-		**PMCM6501UPE**
Common drain	N	20	8	4.1	0.4	0.9	6	39	9	2	40	50	63	-		**PMCM6501CUNE**

Small-signal MOSFETs single (N-channel)

Package												
Size (mm)												
P_{tot} (mW)												
V_{DS} (V)	V_{GS} (V)	I_D (A)	$V_{GS(th)}$ min (V)	$V_{GS(th)}$ max (V)	t_{on} typ (ns)	t_{off} typ (ns)	Q_G typ (nC)	ESD protection (kV)	$R_{DS(on)}$ typ (mΩ) @ V_{GS} =			
									10 V	4.5 V	2.5 V	1.8 V
20	8	4.7	0.45	1	8.2	39.5	6.2	2	-	24	29	40
		1.9	0.4	1	8	31	2.2	2	-	63	77	114
		2.2	0.4	1	6	21	2.6	2	-	64	78	110
		1.9	0.45	0.95	5.3	16	1.6	2	-	120	155	195
		1.6	0.45	0.95	5.3	16	1.6	2	-	155	190	235
		1	0.5	0.95	6	86	0.45	2	-	270	360	470
		0.6	0.45	0.95	5.6	19	0.4	1	-	470	620	845
	12	6.3	0.75	1.25	16	44	9.9	2	-	16	24	-
		8.6	0.47	0.9	7	135	7.7	-	-	15	18	22
		9.1	0.4	0.9	9	31	12	1	-	15	19	22
		5.4	0.4	0.9	7	35	6.2	-	-	24	30	40
		6	0.4	0.9	5.5	22	5.1	1	-	28	38	42
30	8	1.5	0.45	0.95	5	17	1.6	2	-	210	240	270
		1	0.45	0.95	4	12	0.8	2	-	390	460	530
		0.59	0.45	0.95	4	12	0.6	2	-	550	660	770
		0.4	0.6	1.1	26	88	0.52	2	-	1000	1400	2000
	12	7.2	0.4	0.9	8	33	12.4	2	-	19	22	17
		5.7	0.4	0.9	9	34	7	-	-	33	42	54
		4.4	0.4	0.9	9	34	7	-	-	36	43	56
		0.9	0.5	1.5	8	11	0.74	2	-	234	324	-
	20	7.6	1	2	9	9	7.2	-	17	21	-	-
		5.5	1	2.5	8	33	12.6	2	17	22	-	-
		3.9	1	2.5	6.3	14.1	6	2	30	39	-	-
		3.1	1	2.5	18	78	6.5	-	28	37	-	-
		4.5	1	2.5	3	11	6	1	30	44	-	-
		5.1	1	2	3	11	3.6	-	35	43	-	-
		2.1	1	2.5	3	15	2.6	2	70	90	-	-
		0.18	0.8	1.5	10	51	0.34	-	2700	3000	4000	-
40	20	2.7	1	2.5	6	12	4.1	1	64	79	-	-
		2.5	1	2.5	14	14	2.4	1	95	120	-	-
55	10	0.3	0.4	1.3	4	11	1	3	-	2300	2400	3100
60	20	3.1	1.3	2.7	9	33	12.7	2	46	52		-
		2.1	1.3	2.7	6.4	15.9	5.9	2	96	108	-	-
		1.5	1.3	2.7	6.3	13	3.9	2	176	196	-	-
		0.8	1.3	2.7	5.3	10.2	2.4	2	300	332	-	-
		0.19	0.8	1.5	6	11	0.33	yes	2800	3500	4500	-
		0.27	0.5	1.5	7.9	12.5	0.49	2	2100	2200	2600	-
		0.1	0.6	1.4	2	5		2	2800	3800	-	-
		0.19	1.1	2.1	12	34	0.33	yes	3000	3700	-	-
		0.27	1.1	2.1	4.7	6.9	1	2	2200	2500	-	-
100	20	1.5	1.3	2.7	4.8	9.3	4.5	1	285	300	-	-
		1.1	1.3	2.7	5.7	10.2	2.9	1	527	555	-	-

Types in **bold** represent new products

	SOT223	SOT457 (SC-74)	SOT23	SOT323 (SC-70)	DFN1006 (SOT883)	DFN1006B (SOT883B)
						
	6.5 x 3.5 x 1.65	2.9 x 1.5 x 1.0	2.9 x 1.3 x 1.0	2.0 x 1.25 x 0.95	1.0 x 0.6 x 0.48	1.0 x 0.6 x 0.37
	1700	600	250	200	250	250
			PMV28UNEA			
				PMF63UNE		
			PMV65UNE			
					PMZ130UNE	
						PMZB150UNE
					PMZ290UNE2	PMZB290UNE2
					PMZ600UNE	PMZB600UNE
			PMV20XNEA			
			PMV16XN			
		PMN16XNE				
			PMV30UN2			
		PMN30UNE				
					PMZ200UNE	PMZB200UNE
					PMZ390UNE	PMZB390UNE
					PMZ550UNE	PMZB550UNE
			NX3008NBK	NX3008NBKW		
			PMV20XNE			
		PMN30UN				
			PMV40UN2			
				PMF250XNE		
			PMV20EN			
			PMV25ENEA			
			PMV50ENEA			
			PMV37EN2			
		PMN40ENE	PMV42ENE			
			PMV45EN2			
			PMV90ENE			
			NX3020NAK	NX3020NAKW		
			PMV65ENEA			
			PMV130ENEA			
			BSH111BK			
			PMV55ENEA			
			PMV120ENEA			
			PMV230ENEA			
			PMV450ENEA			
			NX138AK	NX138AKW		
			NX138BK	NX138BKW		
			BSN20BK			
			NX7002AK	NX7002AKW		
			NX7002BK	NX7002BKW	NX7002BKM	NX7002BKMB
	PMT280ENEA		**PMV280ENEA**			
	PMT560ENEA					

Small-signal MOSFETs single (P-channel)

Package												
Size (mm)												
P_{tot} (mW)												
V_{DS} (V)	V_{GS} (V)	I_D (A)	$V_{GS(th)}$ min (V)	$V_{GS(th)}$ max (V)	t_{on} typ (ns)	t_{off} typ (ns)	Q_G typ (nC)	ESD protection (kV)	$R_{DS(on)}$ typ (mΩ) @ V_{GS} =			
									10 V	4.5 V	2.5 V	1.8 V
20	8	5.6	0.45	0.95	11	83	14.7	2	-	27	38	50
		5.3	0.45	0.95	41	122	14.7	2	-	30	38	51
		5.4	0.45	0.95	34	128	15.5	-	-	34	42	57
		4	0.47	0.9	400	2180	10.5	3	-	50	57	70
		2	0.5	1.1	7	50	6	-	-	100	155	210
		1.2	0.45	0.95	33	52	3.3	-	-	170	210	280
		2.3	0.45	0.95	5	43	3.7	-	-	120	150	200
		1.4	0.45	0.95	9	35	1.3	1.8	-	330	420	520
		0.5	0.45	0.95	2.3	13.5	1.19	1	-	1020	1270	1700
	12	4.5	0.75	1.25	7.9	59	11	2	-	28	42	-
		6.8	0.47	0.9	12	62	15	-	-	30	35	48
		5.7	0.75	1.25	44	60	11.5	2	-	41	56	-
		4.1 / 3.5	0.75	1.25	24	84	8.5	-	-	48	71	-
		4.4	0.47	0.9	7	135	7.7	-	-	48	60	82
		4.7	0.47	0.9	5.1	141	8.5	-	-	50	64	88
		3.9	0.55	0.95	28	101	7.6	-	-	65	90	-
		3.3	0.75	1.25	7	36	5	2	-	67	99	-
		4.1	0.75	1.25	20	57	5.2	2	-	70	101	-
		3.9	0.47	0.9	6	120	5	-	-	72	88	110
		3.2	0.47	0.9	6	120	5	-	-	77	95	120
		2	0.65	1.15	48	64	4.8	-	-	90	125	-
		2.3	0.7	1.3	5.3	36	3.4	2	-	100	155	-
		1	0.65	1.15	26	44	2.6	-	-	175	240	-
30	8	1	0.45	0.95	2.9	22	1.45	2	-	400	480	600
		0.41	0.45	0.95	3	14	0.7	2	-	1200	1700	2100
		0.23	0.6	1.1	49	103	0.55	2	-	2800	5300	-
	20	5.3	1	3	6	36	12.8	2	35	49	-	-
		4.2	1	3	6	36	12.8	2	35	49	-	-
		4.4	1	3	5	19	6.5	2	60	96	-	-
40	20	1.8	1	2.5	10	40	4.7	1	180	220	-	-
50	20	0.2	1.1	2.1	24	73	0.26	1	5300	6000	-	-
70	20	2.4	1	3	6	42	10.6	2	130	150	-	-

Small-signal MOSFET–Schottky combination

Package														DFN2020-6 (SOT1118)
Size (mm)														2.0 x 2.0 x 0.65
P_{tot} (mW)														1250
Configuration	V_{DS} (V)	V_{GS} (V)	I_D (A)	$V_{GS(th)}$ min (V)	$V_{GS(th)}$ max (V)	t_{on} typ (ns)	t_{off} typ (ns)	Q_G typ (nC)	I_F (A)	V_R (V)	V_F typ. (mV)	$R_{DS(on)}$ typ (mΩ) @ V_{GS} =			
												4.5 V	2.5 V	1.8 V	
Single + schottky	20	8	3.7	0.4	1	20	170	5.7	2	30	455	80	95	120	PMFPB8040XP

Types in **bold** represent new products

	SOT223	SOT457 (SC-74)	SOT23	SOT363 (SC-88)	SOT323 (SC-70)	DFN1006-3 (SOT883)	DFN1006B-3 (SOT883B)
							
	6.5 x 3.5 x 1.65	2.9 x 1.5 x 1.0	2.9 x 1.3 x 1.0	2.0 x 1.25 x 0.95	2.0 x 1.25 x 0.95	1.0 x 0.6 x 0.48	1.0 x 0.6 x 0.37
	1700	600	250	300	200	250	250
			PMV27UPE				
			PMV33UPE				
			PMV32UP				
			PMV50UPE				
			NX2301P				
			PMV160UP				
			BSH205G2				
						PMZ350UPE	PMZB350UPE
						PMZ950UPE	PMZB950UPE
			PMV30XPEA				
		PMN30XP					
		PMN48XP	PMV48XP				
			PMV50XP				
		PMN52XP					
			PMV65XP				
			PMV65XPE				
		PMN70XPE					
		PMN70XP					
			PMV75UP				
				PMG85XP			
			PMV100XPEA				
					PMF170XP		
						PMZ320UPE	PMZB320UPE
						PMZ1200UPE	PMZB1200UPE
			NX3008PBK		NX3008PBKW		
			PMV35EPE				
		PMN70EPE					
			PMV250EPEA				
			BSS84AK		BSS84AKW	BSS84AKM	BSS84AKMB
	PMT200EPEA						

Small-signal MOSFETs dual

Package										
Size (mm)										
P_{tot} (mW)										
Polarity	V_{DS} (V)	V_{GS} (V)	I_D (A)	$V_{GS(th)}$ min (V)	$V_{GS(th)}$ max (V)	t_{on} typ (ns)	t_{off} typ (ns)	Q_G typ (nC)	ESD protection (kV)	
N-channel	20	8	0.8	0.5	0.95	10	117	0.45	2	
			0.6	0.45	0.95	5.6	19	0.4	1	
		12	5.3	0.4	0.9	4	40	14.4	-	
	30	8	0.59	0.45	0.95	4	12	0.6	2	
			0.35	0.6	1.1	26	88	0.52	2	
		12	3.1	0.75	1.25	9	19	2.9	2	
			3.1	0.5	1.5	6	18	1.65	1.8	
			1	0.5	1.5	6.5	14	0.7	2	
		20	0.18	0.8	1.5	10	51	0.34	yes	
	60	20	0.18	0.8	1.5	6	11	0.33	yes	
			0.26	0.5	1.5	7.9	12.5	0.49	2	
			0.17	1.1	2.1	12	34	0.33	yes	
			0.26	1.1	2.1	4.7	6.9	1	2	
P-channel	20	8	0.55	0.5	1.3	48	152	0.76	2	
			4.5	0.45	0.95	7	41	6.3	2	
			0.5	0.45	0.95	2.3	13.5	1.19	1	
			3.7	0.45	0.95	6	47	5.4	2	
		12	4.5	0.47	0.9	4	135	16.5	-	
			4.2	0.75	1	7	33	5	2	
			3.7	0.4	1	6	120	5.7	-	
	30	8	0.41	0.45	0.95	3	14	0.7	2	
			0.2	0.6	1.1	49	103	0.55	2	
		12	3.8	0.45	1	3	112	5.2	-	
	50	20	0.16	1.1	2.1	24	73	0.26	1	

Small-signal MOSFETs complementary

Package	Type	Polarity	V_{DS} (V)	V_{GS} (V)	I_D (A)	V_{GSth} min (V)	V_{GSth} max (V)	
SOT666 (1.6 x 1.2 x 0.55)	NX1029X	N	60	20	0.33	1.1	2.1	
		P	50	20	0.17	1.1	2.1	
	NX3008CBKV	N	30	8	0.4	0.6	1.1	
		P	30	8	0.22	0.6	1.1	
	PMDT290UCE	N	20	8	0.8	0.5	0.95	
		P	20	8	0.55	0.5	1.3	
SOT363 (SC-88) (2.0 x 1.25 x 0.95)	NX3008CBKS	N	30	8	0.35	0.6	1.1	
		P	30	8	0.2	0.6	1.1	
DFN1010B-6 (1.1 x 1.0 x 0.37)	PMCXB900UE	N	20	8	0.6	0.45	0.95	
		P	20	8	0.5	0.45	0.95	
	PMCXB1000UE	N	30	8	0.59	0.45	0.95	
		P	30	8	0.41	0.45	0.95	
DFN2020-6 (2.0 x 2.0 x 0.65)	PMCPB5530X	N	20	12	5.3	0.4	0.9	
		P	20	12	4.5	0.47	0.9	

				SOT363 (SC-88)	SOT666	DFN2020-6 (SOT1118)	DFN1010B-6 (SOT1216)
				2.0 x 1.25 x 0.95	1.6 x 1.2 x 0.55	2.0 x 2.0 x 0.65	1.0 x 1.0 x 0.37
				300	300	1250	350
	$R_{DS(on)}$ typ (mΩ) @ V_{GS} =						
	10 V	4.5 V	2.5 V	1.8 V			
	-	290	420	600		PMDT290UNE		
	-	470	620	845				PMDXB600UNE
	-	32	40	60			PMDPB30XN	
	-	550	660	770				PMDXB550UNE
	-	1000	1400	2000	NX3008NBKS	NX3008NBKV		
	-	55	72	-			PMDPB56XNEA	
	-	95	130	-			PMDPB95XNE2	
	-	170	240	-	PMGD175XNE			
	2700	3000	4000	-	NX3020NAKS	NX3020NAKV		
	2800	3500	4500	-	NX138AKS			
	2100	2200	2600	-	NX138BKS			
	3000	3700	-	-	NX7002AKS			
	2200	2500	-	-	NX7002BKS			NX7002BKXB
	-	670	1200	1800		PMDT670UPE		
	-	58	74	97			PMDPB58UPE	
	-	1020	1270	1700				PMDXB950UPE
	-	82	107	142			PMDPB85UPE	
	-	55	75	110			PMDPB55XP	
	-	66	98	-			PMDPB70XPE	
	-	80	95	120			PMDPB80XP	
	-	1200	1700	2100				PMDXB1200UPE
	-	2800	5300	-	NX3008PBKS	NX3008PBKV		
	-	70	89	-			PMDPB70XP	
	4500	5700	-	-	BSS84AKS	BSS84AKV		

	t_{on} typ (ns)	t_{off} typ (ns)	Q_G typ (nC)	ESD protection (kV)	$R_{DS(on)}$ typ (mΩ) @ V_{GS} =					
					10 V	4.5 V	2.5 V	1.8 V	1.5 V	1.2 V
	11	19	0.5	2	1000	1300	-	-	-	-
	24	73	0.26	1	4500	5100	-	-	-	-
	26	88	0.52	2	-	1000	1400	2000	-	-
	49	103	0.55	2	-	2800	5300	-	-	-
	10	117	0.45	2	-	290	420	600	-	-
	48	152	0.76	2	-	670	1200	1800	-	-
	26	88	0.52	2	-	1000	1400	2000	-	-
	49	103	0.55	2	-	2800	5300	-	-	-
	5.6	19	0.4	1	-	470	620	845	1125	2210
	2.3	13.5	1.19	1	-	1020	1270	1700	2300	3500
	4	12	0.6	2	-	550	660	770	890	-
	3	14	0.7	2	-	1200	1700	2100	3000	-
	19	56	14.4	-	-	26	33	50	-	-
	18	56	16.5	-	-	55	75	110	-	-

AIRBAG

Logic 5

Automotive logic **106**

Buffers, Drivers, Transceivers **129**

Buffers/Inverters/Drivers 129
Transceivers 137
Schmitt-triggers 138

Counters/Frequency dividers **141**

Flip-flops, Latches, Registers **143**

FIFO registers 143
Flip-flops 143
Latches/Registered drivers 146

Gates **148**

AND Gates 148
Combination Gates 149
Configurable Gates 149
EXCLUSIVE-NOR Gates 150
EXCLUSIVE-OR Gates 150
NAND Gates 150
NOR Gates 152
OR Gates 153

Logic voltage translators **154**

Level shifters/Translators 154

Specialty logic **155**

Digital comparators 155
Multivibrators 155
Parity generators-checkers 155
Phase-locked loops 156
Printer interfaces 156

Switches, Multiplexers, Demultiplexers **157**

Bus Switches 157
Decoders/Demultiplexers 158
Digital Multiplexers 159
Analog Switches 160

Nomenclatures **161**

Q100 Standard logic functions and packages

Analog switches

Type number	Description	Features					Package (suffix)								
		Configuration	V_{CC} (V)	R_{ON} (Ω)	R_{ON} (FLAT) (Ω)	T_{amb} (°C)	SOT108-1 (D)	SOT402-1 (PW)	SOT762-1 (BQ)	SOT109-1 (D)	SOT403-1 (PW)	SOT763-1 (BQ)	SOT137-1 (D)	SOT355-1 (PW)	SOT815-1 (BQ)
74HC4051-Q100	Single-pole, octal-throw analog switch	SP8T-Z	2.0 - 10.0	200	20	-40~125				•	•	•			
74HCT4051-Q100	Single-pole, octal-throw analog switch; TTL-enabled	SP8T-Z	4.5 - 5.5	225	20	-40~125				•	•	•			
74HC4052-Q100	Dual single-pole, quad-throw analog switch	SP4T-Z	2.0 - 10.0	200	20	-40~125				•	•	•			
74HCT4052-Q100	Dual single-pole, quad-throw analog switch; TTL-enabled	SP4T-Z	4.5 - 5.5	200	20	-40~125				•	•	•			
74HC4053-Q100	Triple single-pole, double-throw analog switch	SP8T-Z	2.0 - 10.0	200	20	-40~125				•	•	•			
74HCT4053-Q100	Triple single-pole, double-throw analog switch; TTL-enabled	SP8T-Z	4.5 - 5.5	200	20	-40~125				•	•	•			
74HC4066-Q100	Quad single-pole, single-throw analog switch	SPST-NO	2.0 - 10.0	105	23	-40~125	•	•	•						
74HCT4066-Q100	Quad single-pole, single-throw analog switch; TTL-enabled	SPST-NO	4.5 - 5.5	118	23	-40~125	•	•	•						
74HC4067-Q100	Single-pole, 16-throw analog switch	SP16T-Z	2.0 - 10.0	200	25	-40~125							•	•	•
74HCT4067-Q100	Single-pole, 16-throw analog switch; TTL-enabled	SP16T-Z	4.5 - 5.5	225	25	-40~125							•	•	•
74HC4851-Q100	Single-pole, octal-throw analog switch	SP8T-Z	2.0 - 10.0	220	-	-40~125				•	•	•			
74HCT4851-Q100	Single-pole, octal-throw analog switch; TTL-enabled	SP8T-Z	4.5 - 5.5	240	-	-40~125				•	•	•			
74HC4852-Q100	Dual single-pole, quad-throw analog switch	SP4T-Z	2.0 - 10.0	220	-	-40~125				•	•	•			
74HCT4852-Q100	Dual single-pole, quad-throw analog switch; TTL-enabled	SP4T-Z	4.5 - 5.5	240	-	-40~125				•	•	•			
74LV4052-Q100	Dual single-pole, quad-throw analog switch	SP4T-Z	1.0 - 6.0	125	15	-40~125				•	•				
74LV4053-Q100	Triple single-pole, double-throw analog switch	SPDT-Z	1.0 - 6.0	150	30	-40~125				•	•	•			
74LVC4066-Q100	Quad single-pole, single-throw analog switch	SPST-NO	1.65 - 5.5	15	1.5	-40~125	•	•	•						
HEF4051B-Q100	Single-pole, octal-throw analog switch	SP8T-Z	3.0 - 15	175	30	-40~85				•	•				
HEF4052B-Q100	Dual single-pole, quad-throw analog switch	SP4T-Z	3.0 - 15	175	30	-40~85				•	•				
HEF4053B-Q100	Triple single-pole, double-throw analog switch	SPDT-Z	3.0 - 15	175	30	-40~85				•	•				
HEF4066B-Q100	Quad single-pole, single-throw analog switch	SPST-NO	3.0 - 15	175	20	-40~85	•								
HEF4067B-Q100	Single-pole, 16-throw analog switch	SP16T-Z	3.0 - 15	175	20	-40~85							•		

Buffers/Inverters

Type number	Description	Features				Package (suffix)								
		V_{CC} (V)	I_O (mA)	t_{pd} (ns)	T_{amb} (°C)	SOT108-1 (D)	SOT402-1 (PW)	SOT762-1 (BQ)	SOT109-1 (D)	SOT403-1 (PW)	SOT163-1 (D)	SOT360-1 (PW)	SOT764-1 (BQ)	SOT362-1 (DGG)
74AHC04-Q100	Hex inverter	2.0 - 5.5	± 8	3.0	-40~125	•	•	•						
74AHCT04-Q100	Hex inverter; TTL-enabled	4.5 - 5.5	± 8	3.0	-40~125	•	•	•						
74AHC125-Q100	Quad buffer/line driver (3-state)	2.0 - 5.5	± 8	3.0	-40~125	•	•	•						
74AHCT125-Q100	Quad buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	± 8	3.0	-40~125	•	•	•						
74AHC126-Q100	Quad buffer/line driver (3-state)	2.0 - 5.5	± 8	3.3	-40~125	•	•	•						
74AHCT126-Q100	Quad buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	± 8	3.0	-40~125	•	•	•						
74AHC240-Q100	Octal inverter/line driver (3-state)	2.0 - 5.5	± 8	2.8	-40~125						•	•	•	
74AHCT240-Q100	Octal inverter/line driver; TTL-enabled (3-state)	4.5 - 5.5	± 8	3.0	-40~125						•	•	•	
74AHC244-Q100	Octal buffer/line driver (3-state)	2.0 - 5.5	± 8	3.5	-40~125						•	•	•	
74AHCT244-Q100	Octal buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	± 8	3.5	-40~125						•	•	•	
74AHC541-Q100	Octal buffer/line driver (3-state)	2.0 - 5.5	± 8	3.5	-40~125						•	•	•	
74AHCT541-Q100	Octal buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	± 8	3.5	-40~125						•	•	•	
74AHCU04-Q100	Hex inverter; unbuffered	2.0 - 5.5	± 8	2.4	-40~125	•	•	•						
74ALVC125-Q100	Quad buffer/line driver (3-state)	1.65 - 3.6	± 24	1.8	-40~85	•	•	•						
74ALVC541-Q100	Octal buffer/line driver (3-state)	1.65 - 3.6	± 24	2.3	-40~85						•	•	•	
74HC05-Q100	Hex inverter; open-drain	2.0 - 6.0	5.2	11	-40~125	•	•	•						
74HC04-Q100	Hex inverter	2.0 - 6.0	± 5.2	7.0	-40~125	•	•	•						
74HCT04-Q100	Hex inverter; TTL-enabled	4.5 - 5.5	± 4.0	8.0	-40~125	•	•	•						
74HC125-Q100	Quad buffer/line driver (3-state)	2.0 - 6.0	± 7.8	9.0	-40~125	•	•							
74HCT125-Q100	Quad buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	± 6	12	-40~125	•	•							
74HC126-Q100	Quad buffer/line driver (3-state)	2.0 - 6.0	± 7.8	9.0	-40~125	•	•							
74HCT126-Q100	Quad buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	± 6	11	-40~125	•	•							
74HC240-Q100	Octal inverter/line driver (3-state)	2.0 - 6.0	± 7.8	9.0	-40~125						•	•	•	
74HCT240-Q100	Octal inverter/line driver; TTL-enabled (3-state)	4.5 - 5.5	± 6	9.0	-40~125						•	•	•	
74HC244-Q100	Octal buffer/line driver (3-state)	2.0 - 6.0	± 7.8	9.0	-40~125						•	•	•	
74HCT244-Q100	Octal buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	± 6	11	-40~125						•	•	•	
74HC365-Q100	Hex buffer/line driver (3-state)	2.0 - 6.0	± 7.8	9.0	-40~125				•	•				
74HCT365-Q100	Hex buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	± 6	11	-40~125				•	•				
74HC366-Q100	Hex inverter/line driver (3-state)	2.0 - 6.0	± 7.8	10	-40~125				•	•				
74HCT366-Q100	Hex inverter/line driver; TTL-enabled (3-state)	4.5 - 5.5	± 6	11	-40~125				•	•				
74HC540-Q100	Octal inverter/line driver (3-state)	2.0 - 6.0	± 7.8	9.0	-40~125						•			
74HCT540-Q100	Octal inverter/line driver; TTL-enabled (3-state)	4.5 - 5.5	± 6	11	-40~125						•			
74HC541-Q100	Octal buffer/line driver (3-state)	2.0 - 6.0	± 7.8	10	-40~125						•	•		

Buffers/Inverters

Type number	Description	Features				Package (suffix)								
		V_{CC} (V)	I_O (mA)	t_{pd} (ns)	T_{amb} (°C)	SOT108-1 (D)	SOT402-1 (PW)	SOT762-1 (BQ)	SOT109-1 (D)	SOT403-1 (PW)	SOT163-1 (D)	SOT360-1 (PW)	SOT764-1 (BQ)	SOT362-1 (DGG)
74HCT541-Q100	Octal buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	± 6	12	-40~125						•	•		
74HCU04-Q100	Hex inverter; unbuffered	2.0 - 6.0	± 5.2	5.0	-40~125	•	•	•						
74LV244-Q100	Octal buffer/line driver (3-state)	1.0 - 5.5	± 16	8.0	-40~125						•	•		
74LVC04A-Q100	Hex inverter	1.65 - 5.5	± 24	2.0	-40~125	•	•	•						
74LVC06A-Q100	Hex inverter; open-drain	1.65 - 5.5	32	2.2	-40~125	•	•	•						
74LVC07A-Q100	Hex buffer; open-drain	1.65 - 5.5	32	2.2	-40~125	•	•	•						
74LVC125A-Q100	Quad buffer/line driver (3-state)	1.2 - 3.6	± 24	2.4	-40~125	•	•	•						
74LVC126A-Q100	Quad buffer/line driver (3-state)	1.2 - 3.6	± 24	2.4	-40~125	•	•	•						
74LVC541A-Q100	Octal buffer/line driver (3-state)	1.2 - 3.6	± 24	3.3	-40~125						•	•	•	
74LVC16240A-Q100	16-bit inverter/line driver (3-state)	1.2 - 3.6	± 24	2.7	-40~125									•
74LVC244A-Q100	Octal buffer/line driver (3-state)	1.2 - 3.6	± 24	2.8	-40~125						•	•	•	
74LVCH244A-Q100	Octal buffer/line driver with bus hold (3-state)	1.2 - 3.6	± 24	2.8	-40~125						•	•	•	
74LVC16244A-Q100	16-bit buffer/line driver (3-state)	1.2 - 3.6	± 24	3.0	-40~125									•
74LVCH16244A-Q100	16-bit buffer/line driver with bus hold (3-state)	1.2 - 3.6	± 24	3.0	-40~125									•
74LVCU04A-Q100	Hex inverter; unbuffered	1.2 - 3.6	± 24	2.0	-40~125	•	•							
74LVT04-Q100	Hex inverter	2.7 - 3.6	-20 / +32	2.6	-40~85	•	•							
74LVT244A-Q100	Octal buffer/line driver with bus hold (3-state)	2.7 - 3.6	-32 / +64	2.6	-40~85						•	•		
74LVTH244A-Q100	Octal buffer/line driver with bus hold (3-state)	2.7 - 3.6	-32 / +64	2.6	-40~85						•	•		
74VHC126-Q100	Quad buffer/line driver (3-state)	2.0 - 5.5	± 8	3.3	-40~125	•	•	•						
74VHCT126-Q100	Quad buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	± 8	3.0	-40~125	•	•	•						
74VHC541-Q100	Octal buffer/line driver (3-state)	2.0 - 5.5	± 8	3.5	-40~125						•	•	•	
74VHCT541-Q100	Octal buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	± 8	3.5	-40~125						•	•	•	
HEF4049B-Q100	Hex inverter/line driver	3.0 - 15.0	-3 / +20	20	-40~85				•					
HEF4050B-Q100	Hex buffer/line driver	3.0 - 15.0	-3 / +20	40	-40~85				•					
HEF4069UB-Q100	Hex inverter; unbuffered	3.0 - 15.0	± 3.4	15	-40~85	•	•							

Counters/Frequency dividers

Types in **bold** represent new products

Type number	Description	Features				Package (suffix)					
		V_{CC} (V)	I_O (mA)	t_{pd} (ns)	T_{amb} (°C)	SOT108-1 (D)	SOT402-1 (PW)	SOT762-1 (BQ)	SOT109-1 (D)	SOT403-1 (PW)	SOT763-1 (BQ)
74HC161-Q100	Presettable synchronous 4-bit binary counter; asynchronous reset	2.0 - 6.0	± 5.2	19	-40~125				•	•	
74HC163-Q100	Presettable synchronous 4-bit binary counter; synchronous reset	2.0 - 6.0	± 5.2	17	-40~125				•	•	
74HCT163-Q100	Presettable synchronous 4-bit binary counter; synchronous reset; TTL-enabled	4.5 - 5.5	± 4.0	20	-40~125				•	•	
74HC193-Q100	Presettable synchronous 4-bit binary up/down counter	2.0 - 6.0	± 5.2	20	-40~125				•	•	
74HCT193-Q100	Presettable synchronous 4-bit binary up/down counter; TTL-enabled	4.5 - 5.5	± 4.0	20	-40~125				•	•	
74HC393-Q100	Dual 4-bit binary ripple counter	2.0 - 6.0	± 5.2	12	-40~125	•	•	•			
74HCT393-Q100	Dual 4-bit binary ripple counter; TTL-enabled	4.5 - 5.5	± 4.0	20	-40~125	•	•	•			
74HC4017-Q100	Johnson decade counter with 10 decoded outputs	2.0 - 6.0	± 5.2	18	-40~125				•	•	•
74HCT4017-Q100	Johnson decade counter with 10 decoded outputs; TTL-enabled	4.5 - 5.5	± 4.0	21	-40~125				•		•
74HC4020-Q100	14-stage binary ripple counter	2.0 - 6.0	± 5.2	11	-40~125				•	•	•
74HCT4020-Q100	14-stage binary ripple counter; TTL-enabled	4.5 - 5.5	± 4.0	15	-40~125				•	•	•
74HC4024-Q100	7-stage binary ripple counter	2.0 - 6.0	± 5.2	14	-40~125	•	•				
74HC4040-Q100	12-stage binary ripple counter	2.0 - 6.0	± 5.2	14	-40~125				•	•	•
74HCT4040-Q100	12-stage binary ripple counter; TTL-enabled	4.5 - 5.5	± 4.0	16	-40~125				•	•	•
74HC4060-Q100	14-stage binary ripple counter with oscillator	2.0 - 6.0	± 5.2	31	-40~125				•	•	•
74HCT4060-Q100	14-stage binary ripple counter with oscillator; TTL-enabled	4.5 - 5.5	± 4.0	31	-40~125				•		•
74HC4520-Q100	Dual 4-bit synchronous binary counter	2.0 - 6.0	± 5.2	24	-40~125				•		
74HCT4520-Q100	Dual 4-bit synchronous binary counter; TTL-enabled	4.5 - 5.5	± 4.0	24	-40~125				•		
74LV393-Q100	Dual 4-bit binary ripple counter	1.0 - 3.6	± 6	12	-40~125	•	•				
HEF4017B-Q100	5-stage Johnson decade counter	3.0 - 15	± 2.4	40	-40~85				•		
HEF4020B-Q100	14-stage binary ripple counter	3.0 - 15	± 2.4	30	-40~85				•		
HEF4040B-Q100	12-stage binary ripple counter	3.0 - 15	± 2.4	35	-40~85				•		
HEF4060B-Q100	14-stage binary ripple counter with oscillator	3.0 - 15	± 2.4	50	-40~85				•		
HEF4541B-Q100	Programmable timer	3.0 - 15	- 4/ + 2.7	38	-40~85	•					
HEF4520B-Q100	Dual 4-bit synchronous binary counter	3.0 - 15	± 2.4	15	-40~85				•		

Bus switches

Types in **bold** represent new products

Type number	Description	Features				Package (suffix)							
		V_{CC} (V)	V_{PASS} (V)	R_{ON} (Ω)	T_{amb} (°C)	SOT402-1 (PW)	SOT762-1 (BQ)	SOT109-1 (D)	SOT403-1 (PW)	SOT763-1 (BQ)	SOT163-1 (D)	SOT360-1 (PW)	SOT764-1 (BQ)
74CBTLV3125-Q100	Quad bus switch	2.3 - 3.6	3.3	7	-40~125	•							
74CBTLV3126-Q100	Quad bus switch	2.3 - 3.6	3.3	7	-40~125	•	•						
74CBTLV3253-Q100	Dual 4:1 mux/demux	2.3 - 3.6	3.3	7	-40~125			•	•	•			
74CBTLV3257-Q100	Quad 2:1 mux/demux	2.3 - 3.6	3.3	7	-40~125			•	•	•			
74CBTLV3245-Q100	Octal bus switch	2.3 - 3.6	3.3	7	-40~125							•	•
74CBTLVD3245-Q100	Octal bus switch level translator	3.0 - 3.6	1.8	7	-40~125							•	•
CBT3245A-Q100	Octal bus switch	4.5 - 5.5	3.9	7	-40~85						•	•	•

Digital decoders/Demultiplexers

Type number	Description	Features				Package (suffix)		
		V_{CC} (V)	I_O (mA)	t_{pd} (ns)	T_{amb} (°C)	SOT109-1 (D)	SOT403-1 (PW)	SOT763-1 (BQ)
74AHC138-Q100	3-to-8 line decoder/demultiplexer; inverting	2.0 - 5.5	± 8	4.4	-40~125	•	•	•
74AHCT138-Q100	3-to-8 line decoder/demultiplexer; inverting; TTL-enabled	4.5 - 5.5	± 8	4.4	-40~125	•	•	•
74AHC139-Q100	Dual 2-to-4 line decoder/demultiplexer	2.0 - 5.5	± 8	3.9	-40~125	•	•	
74AHCT139-Q100	Dual 2-to-4 line decoder/demultiplexer; TTL-enabled	4.5 - 5.5	± 8	3.6	-40~125	•	•	
74HC237-Q100	3-to-8 decoder/demultiplexer with address latches	2.0 - 6.0	± 5.2	18	-40~125	•		
74HC138-Q100	3-to-8 line decoder/demultiplexer; inverting	2.0 - 6.0	± 5.2	12	-40~125	•	•	•
74HCT138-Q100	3-to-8 line decoder/demultiplexer; inverting; TTL-enabled	4.5 - 5.5	± 4	19	-40~125	•	•	•
74HC139-Q100	Dual 2-to-4 line decoder/demultiplexer	2.0 - 6.0	± 5.2	14	-40~125	•	•	
74HCT139-Q100	Dual 2-to-4 line decoder/demultiplexer; TTL-enabled	4.5 - 5.5	± 4	16	-40~125	•	•	
74HC238-Q100	3-to-8 decoder/demultiplexer	2.0 - 6.0	± 5.2	14	-40~125	•	•	•
74HCT238-Q100	3-to-8 decoder/demultiplexer; TTL-enabled	4.5 - 5.5	± 4	18	-40~125	•	•	•
74LVC138A-Q100	3-to-8 line decoder/demultiplexer; inverting	1.2 - 3.6	± 24	2.7	-40~125	•	•	•
HEF4555B-Q100	Dual 1-to-4 line decoder/demultiplexer	3.0 - 15	± 2.4	30	-40~85	•		

Digital multiplexers

Type number	Description	Features				Package (suffix)		
		V_{CC} (V)	I_O (mA)	t_{pd} (ns)	T_{amb} (°C)	SOT109-1 (D)	SOT403-1 (PW)	SOT763-1 (BQ)
74AHC157-Q100	Quad 2-input multiplexer	2.0 - 5.5	± 8	3.2	-40~125	•	•	•
74AHCT157-Q100	Quad 2-input multiplexer; TTL-enabled	4.5 - 5.5	± 8	3.2	-40~125	•	•	•
74AHC257-Q100	Quad 2-input multiplexer (3-State)	2.0 - 5.5	± 8	2.9	-40~125	•	•	
74AHCT257-Q100	Quad 2-input multiplexer; TTL-enabled (3-State)	4.5 - 5.5	± 8	3.7	-40~125	•	•	
74HC151-Q100	8-input multiplexer	2.0 - 6.0	± 5.2	17	-40~125	•	•	
74HCT151-Q100	8-input multiplexer; TTL-enabled	4.5 - 5.5	± 4	19	-40~125	•	•	
74HC153-Q100	Dual 4-input multiplexer	2.0 - 6.0	± 5.2	17	-40~125	•	•	
74HCT153-Q100	Dual 4-input multiplexer; TTL-enabled	4.5 - 5.5	± 4	19	-40~125	•	•	
74HC157-Q100	Quad 2-input multiplexer	2.0 - 6.0	± 5.2	11	-40~125	•	•	•
74HCT157-Q100	Quad 2-input multiplexer; TTL-enabled	4.5 - 5.5	± 4	13	-40~125	•	•	•
74HC251-Q100	8-input multiplexer (3-State)	2.0 - 6.0	± 5.2	18	-40~125	•	•	
74HCT251-Q100	8-input multiplexer; TTL-enabled (3-State)	4.5 - 5.5	± 4	22	-40~125	•	•	
74HC253-Q100	Dual 4-input multiplexer (3-State)	2.0 - 6.0	± 7.8	17	-40~125	•		
74HCT253-Q100	Dual 4-input multiplexer; TTL-enabled (3-State)	4.5 - 5.5	± 6	17	-40~125	•		
74HC257-Q100	Quad 2-input multiplexer (3-State)	2.0 - 6.0	± 7.8	11	-40~125	•	•	
74HCT257-Q100	Quad 2-input multiplexer; TTL-enabled (3-State)	4.5 - 5.5	± 6	13	-40~125	•	•	
74LVC157A-Q100	Quad 2-input multiplexer	1.2 - 3.6	± 24	2.5	-40~125	•	•	•

Flip-flops

Type number	Description	Features				Package (suffix)									
		V_{CC} (V)	I_O (mA)	t_{pd} (ns)	T_{amb} (°C)	SOT108-1 (D)	SOT402-1 (PW)	SOT762-1 (BQ)	SOT109-1 (D)	SOT403-1 (PW)	SOT163-1 (D)	SOT360-1 (PW)	SOT764-1 (BQ)	SOT815-1 (BQ)	SOT362-1 (DGG)
74AHC74-Q100	Dual D-type flip-flop with set and reset; positive-edge trigger	2.0 - 5.5	± 8	3.7	-40~125	•	•	•							
74AHCT74-Q100	Dual D-type flip-flop with set and reset; positive-edge trigger; TTL-enabled	4.5 - 5.5	± 8	3.3	-40~125	•	•	•							
74AHC273-Q100	Octal D-type flip-flop with reset; positive-edge trigger	2.0 - 5.5	± 8	4.2	-40~125						•	•	•		
74AHCT273-Q100	Octal D-type flip-flop with reset; positive-edge trigger; TTL-enabled	4.5 - 5.5	± 8	4.0	-40~125						•	•	•		
74AHC374-Q100	Octal D-type flip-flop; positive-edge trigger	2.0 - 5.5	± 8	4.4	-40~125						•	•			
74AHCT374-Q100	Octal D-type flip-flop; positive-edge trigger (3-state); TTL-enabled (3-state)	4.5 - 5.5	± 8	4.3	-40~125						•	•			
74AHC377-Q100	Octal D-type flip-flop with data enable; positive-edge trigger	2.0 - 5.5	± 8	3.9	-40~125							•			
74AHCT377-Q100	Octal D-type flip-flop with data enable; positive-edge trigger; TTL-enabled	4.5 - 5.5	± 8	4.0	-40~125						•	•			
74AVC16374-Q100	16-bit D-type flip-flop; positive-edge trigger (3-state)	1.2 - 3.6	± 12	1.5	-40~85										•

Flip-flops

Type number	Description	Features				Package (suffix)									
		V_{CC} (V)	I_O (mA)	t_{pd} (ns)	T_{amb} (°C)	SOT108-1 (D)	SOT402-1 (PW)	SOT762-1 (BQ)	SOT109-1 (D)	SOT403-1 (PW)	SOT163-1 (D)	SOT360-1 (PW)	SOT764-1 (BQ)	SOT815-1 (BQ)	SOT362-1 (DGG)
74HC74-Q100	Dual D-type flip-flop with set and reset; positive-edge trigger	2.0 - 6.0	± 5.2	14	-40~125	•	•	•							
74HCT74-Q100	Dual D-type flip-flop with set and reset; positive-edge trigger; TTL-enabled	4.5 - 5.5	± 4	15	-40~125	•	•	•							
74HC107-Q100	Dual J-K flip-flop with reset; negative-edge trigger	2.0 - 6.0	± 5.2	16	-40~125	•	•								
74HCT107-Q100	Dual J-K flip-flop with reset; negative-edge trigger; TTL-enabled	4.5 - 5.5	± 4	16	-40~125	•									
74HC109-Q100	Dual J-K flip-flop with set and reset; positive-edge trigger	2.0 - 6.0	± 5.2	15	-40~125				•						
74HCT109-Q100	Dual J-K flip-flop with set and reset; positive-edge trigger; TTL-enabled	4.5 - 5.5	± 4	17	-40~125				•						
74HC174-Q100	Hex D-type flip-flop with reset; positive-edge trigger	2.0 - 6.0	± 5.2	17	-40~125				•	•					
74HCT174-Q100	Hex D-type flip-flop with reset; positive-edge trigger; TTL-enabled	4.5 - 5.5	± 4	18	-40~125				•	•					
74HC175-Q100	Quad D-type flip-flop with reset; positive-edge trigger	2.0 - 6.0	± 5.2	17	-40~125				•	•					
74HCT175-Q100	Quad D-type flip-flop with reset; positive-edge trigger; TTL-enabled	4.5 - 5.5	± 4	16	-40~125				•	•					
74HC273-Q100	Octal D-type flip-flop with reset; positive-edge trigger	2.0 - 6.0	± 5.2	15	-40~125						•	•	•		
74HCT273-Q100	Octal D-type flip-flop with reset; positive-edge trigger; TTL-enabled	4.5 - 5.5	± 4	15	-40~125						•	•	•		
74HC377-Q100	Octal D-type flip-flop with data enable; positive-edge trigger	2.0 - 6.0	± 7.8	13	-40~125						•	•			
74HCT377-Q100	Octal D-type flip-flop with data enable; positive-edge trigger; TTL-enabled	4.5 - 5.5	± 6	14	-40~125						•	•			
74HC574-Q100	Octal D-type flip-flop; positive-edge trigger (3-state)	2.0 - 6.0	± 7.8	14	-40~125						•	•			
74HCT574-Q100	Octal D-type flip-flop; positive-edge trigger; TTL-enabled (3-state)	4.5 - 5.5	± 6	15	-40~125						•	•			
74LV74-Q100	Dual D-type flip-flop with set and reset; positive-edge trigger	1.0 - 5.5	± 12	11	-40~125	•	•								
74LVC74A-Q100	Dual D-type flip-flop with set and reset; positive-edge trigger	1.2 - 3.6	± 24	2.5	-40~125	•	•	•							
74LVC273-Q100	Octal D-type flip-flop with reset; positive-edge trigger	1.2 - 3.6	± 24	6.0	-40~125						•	•	•		
74LVC374A-Q100	Octal D-type flip-flop; positive-edge trigger (3-state)	1.2 - 3.6	± 24	2.7	-40~125						•	•	•		

Flip-flops

Type number	Description	Features				Package (suffix)									
		V_{CC} (V)	I_O (mA)	t_{pd} (ns)	T_{amb} (°C)	SOT108-1 (D)	SOT402-1 (PW)	SOT762-1 (BQ)	SOT109-1 (D)	SOT403-1 (PW)	SOT163-1 (D)	SOT360-1 (PW)	SOT764-1 (BQ)	SOT815-1 (BQ)	SOT362-1 (DGG)
74LVC573A-Q100	Octal D-type transparent latch (3-state)	1.2 - 3.6	± 24	3.4	-40~125						•	•	•		
74LVC823A-Q100	9-bit D-type flip-flop; positive-edge trigger (3-state)	1.2 - 3.6	± 24	5.4	-40~125									•	
74LVC16374A-Q100	16-bit D-type flip-flop; positive-edge trigger (3-state)	1.2 - 3.6	± 24	3.8	-40~125										•
74LVCH16374A-Q100	16-bit D-type flip-flop with bus hold; positive-edge trigger (3-state)	1.2 - 3.6	± 24	3.8	-40~125										•
HEF4013B-Q100	Dual D-type flip-flop with set and reset; positive-edge trigger	3.0 - 15	± 2.4	30	-40~85	•	•								
HEF4027B-Q100	Dual J-K flip-flop	3.0 - 15	± 2.4	30	-40~85				•						

Gates

Type number	Description	Features				Package (suffix)		
		V_{CC} (V)	I_O (mA)	t_{pd} (ns)	T_{amb} (°C)	SOT108-1 (D)	SOT402-1 (PW)	SOT762-1 (BQ)
74AHC00-Q100	Quad 2-input NAND gate	2.0 - 5.5	± 8	3.2	-40~125	•	•	•
74AHCT00-Q100	Quad 2-input NAND gate; TTL-enabled	4.5 - 5.5	± 8	3.3	-40~125	•	•	•
74AHC02-Q100	Quad 2-input NOR gate	2.0 - 5.5	± 8	2.9	-40~125	•	•	•
74AHCT02-Q100	Quad 2-input NOR gate; TTL-enabled	4.5 - 5.5	± 8	3.8	-40~125	•	•	•
74AHC08-Q100	Quad 2-input AND gate	2.0 - 5.5	± 8	3.5	-40~125	•	•	•
74AHCT08-Q100	Quad 2-input AND gate; TTL-enabled	4.5 - 5.5	± 8	5.0	-40~125	•	•	•
74AHC30-Q100	8-input NAND gate	2.0 - 5.5	± 8	3.6	-40~125	•	•	•
74AHCT30-Q100	8-input NAND gate; TTL-enabled	4.5 - 5.5	± 8	3.3	-40~125	•	•	•
74AHC32-Q100	Quad 2-input OR gate	2.0 - 5.5	± 8	3.5	-40~125	•	•	•
74AHCT32-Q100	Quad 2-input OR gate; TTL-enabled	4.5 - 5.5	± 8	5.0	-40~125	•	•	•
74AHC86-Q100	Quad 2-input EXCLUSIVE-OR gate	2.0 - 5.5	± 8	3.4	-40~125	•	•	•
74AHCT86-Q100	Quad 2-input EXCLUSIVE-OR gate; TTL-enabled	4.5 - 5.5	± 8	3.4	-40~125	•	•	•
74ALVC00-Q100	Quad 2-input NAND gate	1.65 - 3.6	± 24	2.1	-40~85	•	•	•

Gates

Type number	Description	Features				Package (suffix)		
		V_{CC} (V)	I_O (mA)	t_{pd} (ns)	T_{amb} (°C)	SOT108-1 (D)	SOT402-1 (PW)	SOT762-1 (BQ)
74ALVC32-Q100	Quad 2-input OR gate	1.65 - 3.6	± 24	2.0	-40~125	•	•	•
74HC00-Q100	Quad 2-input NAND gate	2.0 - 6.0	± 5.2	7.0	-40~125	•	•	•
74HCT00-Q100	Quad 2-input NAND gate; TTL-enabled	4.5 - 5.5	± 4	10	-40~125	•	•	•
74HC02-Q100	Quad 2-input NOR gate	2.0 - 6.0	± 5.2	7.0	-40~125	•	•	•
74HCT02-Q100	Quad 2-input NOR gate; TTL-enabled	4.5 - 5.5	± 4	9.0	-40~125	•	•	•
74HC03-Q100	Quad 2-input NAND gate; open-drain	2.0 - 6.0	5.2	8.0	-40~125	•	•	
74HCT03-Q100	Quad 2-input NAND gate; open-drain; TTL-enabled	4.5 - 5.5	± 4	10	-40~125	•	•	
74HC08-Q100	Quad 2-input AND gate	2.0 - 6.0	± 5.2	7.0	-40~125	•	•	•
74HCT08-Q100	Quad 2-input AND gate; TTL-enabled	4.5 - 5.5	± 4	11	-40~125	•	•	•
74HC10-Q100	Triple 3-input NAND gate	2.0 - 6.0	± 5.2	9.0	-40~125	•	•	
74HCT10-Q100	Triple 3-input NAND gate; TTL-enabled	4.5 - 5.5	± 4	11	-40~125	•	•	
74HC11-Q100	Triple 3-input AND gate	2.0 - 6.0	± 5.2	10	-40~125	•	•	
74HCT11-Q100	Triple 3-input AND gate; TTL-enabled	4.5 - 5.5	± 4	11	-40~125	•	•	
74HC20-Q100	Dual 4-input NAND gate	2.0 - 6.0	± 5.2	8.0	-40~125	•	•	
74HCT20-Q100	Dual 4-input NAND gate; TTL-enabled	4.5 - 5.5	± 4	13	-40~125	•		•
74HC27-Q100	Triple 3-input NOR gate	2.0 - 6.0	± 5.2	8.0	-40~125	•	•	•
74HCT27-Q100	Triple 3-input NOR gate; TTL-enabled	4.5 - 5.5	± 4	10	-40~125	•	•	•
74HC30-Q100	8-input NAND gate	2.0 - 6.0	± 5.2	12	-40~125	•	•	
74HCT30-Q100	8-input NAND gate; TTL-enabled	4.5 - 5.5	± 4	12	-40~125	•	•	
74HC32-Q100	Quad 2-input OR gate	2.0 - 6.0	± 5.2	6.0	-40~125	•	•	•
74HCT32-Q100	Quad 2-input OR gate; TTL-enabled	4.5 - 5.5	± 4.0	9.0	-40~125	•	•	•
74HC86-Q100	Quad 2-input EXCLUSIVE-OR gate	2.0 - 6.0	± 5.2	11	-40~125	•	•	
74HCT86-Q100	Quad 2-input EXCLUSIVE-OR gate; TTL-enabled	4.5 - 5.5	± 4	14	-40~125	•	•	
74HC4002-Q100	Dual 4-input NOR gate	2.0 - 6.0	± 5.2	9.0	-40~125	•	•	
74HC4075-Q100	Triple 3-input OR gate	2.0 - 6.0	± 5.2	8.0	-40~125	•	•	
74HCT4075-Q100	Triple 3-input OR gate; TTL-enabled	4.5 - 5.5	± 4	10	-40~125	•	•	
74LV08-Q100	Quad 2-input AND gate	1.0 - 5.5	± 12	7.0	-40~125	•	•	
74LVC00A-Q100	Quad 2-input NAND gate	1.2 - 3.6	± 24	2.1	-40~125	•	•	•
74LVC02A-Q100	Quad 2-input NOR gate	1.2 - 3.6	± 24	2.1	-40~125	•	•	•
74LVC08A-Q100	Quad 2-input AND gate	1.2 - 3.6	± 24	2.1	-40~125	•	•	•
74LVC32A-Q100	Quad 2-input OR gate	1.2 - 3.6	± 24	2.1	-40~125	•	•	•
74VHC02-Q100	Quad 2-input NOR gate	2.0 - 5.5	± 8	2.9	-40~125	•	•	•
74VHCT02-Q100	Quad 2-input NOR gate; TTL-enabled	4.5 - 5.5	± 8	3.8	-40~125	•	•	•
74VHC08-Q100	Quad 2-input AND gate	2.0 - 5.5	± 8	3.5	-40~125	•	•	

Gates

Type number	Description	Features				Package (suffix)		
		V_{CC} (V)	I_O (mA)	t_{pd} (ns)	T_{amb} (°C)	SOT108-1 (D)	SOT402-1 (PW)	SOT762-1 (BQ)
74VHCT08-Q100	Quad 2-input AND gate; TTL-enabled	4.5 - 5.5	± 8	5.0	-40~125	•	•	•
74VHC32-Q100	Quad 2-input OR gate	2.0 - 5.5	± 8	3.5	-40~125	•	•	
74VHCT32-Q100	Quad 2-input OR gate; TTL-enabled	4.5 - 5.5	± 8	5.0	-40~125	•	•	•
HEF4001B-Q100	Quad 2-input NOR gate	3.0 - 15	± 2.4	20	-40~85	•		
HEF4011B-Q100	Quad 2-input NAND gate	3.0 - 15	± 2.4	20	-40~85	•		
HEF4030B-Q100	Quad 2-input EXCLUSIVE-OR gate	3.0 - 15	± 2.4	30	-40~85	•		
HEF4070B-Q100	Quad 2-input EXCLUSIVE-OR gate	3.0 - 15	± 2.4	30	-40~85	•		
HEF4081B-Q100	Quad 2-input AND gate	3.0 - 15	± 2.4	20	-40~85	•		
HEF4082B-Q100	Dual 4-input AND gate	3.0 - 15	± 2.4	25	-40~85	•		

Latches/Registered drivers

Type number	Description	Features				Package (suffix)						
		V_{CC} (V)	I_O (mA)	t_{pd} (ns)	T_{amb} (°C)	SOT109-1 (D)	SOT403-1 (PW)	SOT763-1 (BQ)	SOT163-1 (D)	SOT360-1 (PW)	SOT764-1 (BQ)	SOT362-1 (DGG)
74AHC573-Q100	Octal D-type transparent latch (3-state)	2.0 - 5.5	± 8	4.2	-40~125				•	•	•	
74AHCT573-Q100	Octal D-type transparent latch; TTL-enabled (3-state)	4.5 - 5.5	± 8	3.9	-40~125				•	•	•	
74HC259-Q100	8 bit addressable latch	2.0 - 6.0	± 5.2	18	-40~125	•	•	•				
74HCT259-Q100	8 bit addressable latch; TTL-enabled	4.5 - 5.5	± 4	20	-40~125	•	•	•				
74HC373-Q100	Octal D-type transparent latch (3-state)	2.0 - 6.0	± 7.8	12	-40~125				•	•	•	
74HCT373-Q100	Octal D-type transparent latch; TTL-enabled (3-state)	4.5 - 5.5	± 6	14	-40~125				•	•	•	
74HC573-Q100	Octal D-type transparent latch (3-state)	2.0 - 6.0	± 7.8	14	-40~125				•	•	•	
74HCT573-Q100	Octal D-type transparent latch; TTL-enabled (3-state)	4.5 - 5.5	± 6	17	-40~125				•	•	•	
74LVC373A-Q100	Octal D-type transparent latch (3-state)	1.2 - 3.6	± 24	3.0	-40~125				•	•	•	
74LVC16373A-Q100	16-bit D-type transparent latch (3-state)	1.2 - 3.6	± 24	2.4	-40~125							•
74LVCH16373A-Q100	16-bit D-type transparent latch with bushold (3-state)	1.2 - 3.6	± 24	2.4	-40~125							•
HEF4043B-Q100	Quad R/S latch with set and reset (3-state)	3.0 - 15	± 2.4	25	-40~85	•						

Level shifters/Translators

Types in **bold** represent new products

Type number	Description	Features				Package (suffix)									
		V_{CC}(A) (V)	V_{CC}(B) (V)	I_O (mA)	T_{amb} (°C)	SOT402-1 (PW)	SOT109-1 (D)	SOT403-1 (PW)	SOT763-1 (BQ)	SOT137-1 (D)	SOT355-1 (PW)	SOT815-1 (BQ)	SOT362-1 (DGG)	SOT480-1 (DGV)	SOT364-1 (DGG)
74ALVC164245-Q100	16-bit dual-supply voltage level translating transceiver (3-state)	1.5 - 3.6	1.5 - 5.5	± 24	-40~125								•		
74AVC4T245-Q100	4-bit dual-supply voltage level translating transceiver (3-state)	0.8 - 3.6	0.8 - 3.6	± 12	-40~125		•	•	•						
74AVC8T245-Q100	8-bit dual-supply voltage level translating transceiver (3-state)	0.8 - 3.6	0.8 - 3.6	± 12	-40~125						•	•			
74AVC16T245-Q100	16-bit dual-supply voltage level translating transceiver (3-state)	0.8 - 3.6	0.8 - 3.6	± 12	-40~125									•	
74AVC20T245-Q100	20-bit dual-supply voltage-translating transceiver (3-state)	0.8 - 3.6	0.8 - 3.6	± 12	-40~125										•
74AVCH4T245-Q100	4-bit dual-supply voltage translating transceiver with bus hold (3-state)	0.8 - 3.6	0.8 - 3.6	± 12	-40~125		•	•	•						
74HC4050-Q100	Hex buffer with 15V tolerant inputs	2.0 - 6.0	n.a	± 5.2	-40~125		•	•							
74LVC4T3144-Q100	4-bit dual supply buffer/line driver (3-state)	1.2 to 5.5	1.2 to 5.5	± 24	-40~125	•									
74LVC4245A-Q100	8-bit dual-supply voltage translating transceiver (3-state)	1.5 - 5.5	1.5 - 3.6	± 24	-40~125					•	•	•			
74LVC8T245-Q100	8-bit dual-supply voltage translating transceiver (3-state)	1.2 - 5.5	1.2 - 5.5	± 24	-40~125						•	•			
74LVCH8T245-Q100	8-bit dual-supply voltage translating transceiver with bus hold (3-state)	1.2 - 5.5	1.2 - 5.5	± 24	-40~125						•	•			
HEF4104B-Q100	Quad low-to-high voltage translator (3-state)	3.0 - 15.0	3.0 - 15.0	± 2.4	-40~85		•								

Multivibrators

Types in **bold** represent new products

Type number	Description	Features				Package (suffix)		
		V_{CC} (V)	I_O (mA)	t_{pd} (ns)	T_{amb} (°C)	SOT109-1 (D)	SOT403-1 (PW)	SOT763-1 (BQ)
74AHC123A-Q100	Dual retriggerable monostable multivibrator with reset	2.0 - 5.5	± 8	5.1	-40~125	•	•	•
74AHCT123A-Q100	Dual retriggerable monostable multivibrator with reset; TTL-enabled	4.5 - 5.5	± 8	5.0	-40~125	•	•	•
74HC123-Q100	Dual retriggerable monostable multivibrator with reset	2.0 - 6.0	± 7.8	9.0	-40~125	•	•	•
74HCT123-Q100	Dual retriggerable monostable multivibrator with reset; TTL-enabled	4.5 - 5.5	± 4	26	-40~125	•	•	•
74HC4538-Q100	Dual retriggerable precision monostable multivibrator	2.0 - 6.0	± 5.2	27	-40~125	•	•	
74HCT4538-Q100	Dual retriggerable precision monostable multivibrator; TTL-enabled	4.5 - 5.5	± 4	30	-40~125	•	•	
HEF4528B-Q100	Dual retriggerable monostable multivibrator with reset	3.0 - 15	± 2.4	40	-40~85	•		
HEF4538B-Q100	Dual retriggerable precision monostable multivibrator	3.0 - 15	± 2.4	60	-40~85	•		

Schmitt-triggers

Type number	Description	Features				Package (suffix)				
		V_{CC} (V)	I_O (mA)	t_{pd} (ns)	T_{amb} (°C)	SOT108-1 (D)	SOT402-1 (PW)	SOT762-1 (BQ)	SOT163-1 (D)	SOT360-1 (PW)
74AHC14-Q100	Hex inverter Schmitt-trigger	2.0 - 5.5	± 8	3.2	-40~125	•	•	•		
74AHCT14-Q100	Hex inverter Schmitt-trigger; TTL-enabled	4.5 - 5.5	± 8	4.0	-40~125	•	•	•		
74AHC132-Q100	Quad 2-input NAND gate Schmitt-trigger	2.0 - 5.5	± 8	3.3	-40~125	•	•	•		
74AHCT132-Q100	Quad 2-input NAND gate Schmitt-trigger; TTL-enabled	4.5 - 5.5	± 8	3.5	-40~125	•	•	•		
74HC7014-Q100	Hex buffer precision Schmitt-trigger	2.0 - 6.0	± 5.2	27	-40~125	•				
74HC14-Q100	Hex inverter Schmitt-trigger	2.0 - 6.0	± 5.2	12	-40~125	•	•	•		
74HCT14-Q100	Hex inverter Schmitt-trigger; TTL-enabled	4.5 - 5.5	± 4	17	-40~125	•	•	•		
74HC132-Q100	Quad 2-input NAND gate Schmitt-trigger	2.0 - 6.0	± 5.2	11	-40~125	•	•			
74HCT132-Q100	Quad 2-input NAND gate Schmitt-trigger; TTL-enabled	4.5 - 5.5	± 4	17	-40~125	•	•			
74HC7541-Q100	Octal buffer/line driver Schmitt-trigger (3-State)	2.0 - 6.0	± 7.8	11	-40~125				•	•
74HCT7541-Q100	Octal buffer/line driver Schmitt-trigger; TTL-enabled (3-State)	4.5 - 5.5	± 6	16	-40~125				•	•
74LV132-Q100	Quad 2-input NAND gate Schmitt-trigger	1.0 - 5.5	± 12	10	-40~125	•	•	•		
74LVC14A-Q100	Hex inverter Schmitt-trigger	1.2 - 3.6	± 24	3.2	-40~125	•	•	•		
74LVC132A-Q100	Quad 2-input NAND gate Schmitt-trigger	1.2 - 3.6	± 24	3.4	-40~125	•	•	•		
HEF40106B-Q100	Hex inverter Schmitt-trigger	4.5 - 15.5	± 2.4	30	-40~85	•	•			

Shift registers

Type number	Description	Features				Package (suffix)							
		V_{CC} (V)	I_O (mA)	t_{pd} (ns)	T_{amb} (°C)	SOT108-1 (D)	SOT402-1 (PW)	SOT762-1 (BQ)	SOT109-1 (D)	SOT403-1 (PW)	SOT763-1 (BQ)	SOT163-1 (D)	SOT360-1 (PW)
74AHC164-Q100	8-bit serial-in/parallel-out shift register	2.0 - 5.5	± 8	4.5	-40~125	•	•	•					
74AHCT164-Q100	8-bit serial-in/parallel-out shift register; TTL-enabled	4.5 - 5.5	± 8	3.4	-40~125	•	•	•					
74AHC594-Q100	8-bit serial-in/parallel-out shift register with output register	2.0 - 5.5	± 8	4.1	-40~125				•	•	•		
74AHCT594-Q100	8-bit serial-in/parallel-out shift register with output register; TTL-enabled	4.5 - 5.5	± 8	3.8	-40~125				•	•	•		
74AHC595-Q100	8-bit serial-in/parallel-out shift register with output register (3-state)	2.0 - 5.5	± 8	4.0	-40~125				•	•	•		
74AHCT595-Q100	8-bit serial-in/parallel-out shift register with output storage; TTL-enabled (3-state)	4.5 - 5.5	± 8	3.8	-40~125				•	•	•		
74HC164-Q100	8-bit serial-in/parallel-out shift register	2.0 - 6.0	± 5.2	12	-40~125	•	•	•					
74HCT164-Q100	8-bit serial-in/parallel-out shift register; TTL-enabled	4.5 - 5.5	± 4	12	-40~125	•	•	•					
74HC165-Q100	8-bit parallel or serial-in/serial-out shift register	2.0 - 6.0	± 5.2	16	-40~125				•	•	•		
74HCT165-Q100	8-bit parallel or serial-in/serial-out shift register; TTL-enabled	4.5 - 5.5	± 4	14	-40~125				•	•	•		
74HC166-Q100	8-bit parallel or serial-in/serial-out shift register	2.0 - 6.0	± 5.2	15	-40~125				•	•			
74HCT166-Q100	8-bit parallel or serial-in/serial-out shift register; TTL-enabled	4.5 - 5.5	± 4	23	-40~125				•				
74HC594-Q100	8-bit serial-in/parallel-out shift register with output storage register	2.0 - 6.0	± 7.8	14	-40~125			•					
74HCT594-Q100	8-bit serial-in/parallel-out shift register with output storage register; TTL-enabled	4.5 - 5.5	± 6	15	-40~125				•				
74HC595-Q100	8-bit serial-in/parallel-out shift register with output storage register (3-state)	2.0 - 6.0	± 7.8	16	-40~125				•	•	•		
74HCT595-Q100	8-bit serial-in/parallel-out shift register with output storage register; TTL-enabled (3-state)	4.5 - 5.5	± 6	25	-40~125				•	•	•		
74HC597-Q100	8-bit parallel or serial-in/parallel-out shift register with parallel input register	2.0 - 6.0	± 5.2	16	-40~125				•	•			
74HCT597-Q100	8-bit parallel or serial-in/parallel-out shift register with parallel input register; TTL-enabled	4.5 - 5.5	± 4	20	-40~125				•				
74HC4094-Q100	8-bit serial-in/serial or parallel-out shift register with output register (3-state)	2.0 - 6.0	± 5.2	15	-40~125				•	•			
74HCT4094-Q100	8-bit serial-in/serial or parallel-out shift register with output register; TTL-enabled (3-state)	4.5 - 5.5	± 4	19	-40~125				•				
74LV164-Q100	8-bit serial-in/parallel-out shift register	1.0 - 5.5	± 12	12	-40~125	•	•	•					
74LV165-Q100	8-bit parallel or serial-in/serial-out shift register	1.0 - 5.5	± 12	18	-40~125				•	•			
74LV165A-Q100	8-bit parallel or serial-in/serial-out shift register	1.0 - 5.5	± 12	7.5	-40~125				•	•			

Shift registers

Type number	Description	Features				Package (suffix)							
		V_{CC} (V)	I_O (mA)	t_{pd} (ns)	T_{amb} (°C)	SOT108-1 (D)	SOT402-1 (PW)	SOT762-1 (BQ)	SOT109-1 (D)	SOT403-1 (PW)	SOT763-1 (BQ)	SOT163-1 (D)	SOT360-1 (PW)
74LV4060-Q100	14-stage binary ripple counter with oscillator	1.0 - 5.5	± 6	29	-40~125				•	•			
74LVC594A-Q100	8-bit serial-in/parallel-out shift register with output storage register	1.2 - 5.5	± 24	3.1	-40~125				•	•	•		
74VHC595-Q100	8-bit serial-in/parallel-out shift register with output storage register (3-state)	2.0 - 5.5	± 8	4.0	-40~125				•	•	•		
74VHCT595-Q100	8-bit serial-in/parallel-out shift register with output storage register; TTL-enabled (3-state)	4.5 - 5.5	± 8	3.8	-40~125				•	•	•		
HEF4014B-Q100	8-bit shift register with synchronous parallel enable	3.0 - 15	± 2.4	40	-40~85				•				
HEF4021B-Q100	8-bit shift register with asynchronous parallel load	3.0 - 15	± 2.4	40	-40~85				•	•			
HEF4094B-Q100	8-bit serial-in/serial or parallel-out shift register with output register (3-state)	3.0 - 15	± 2.4	50	-40~85				•	•			
HEF4794B-Q100	8-bit serial-in/serial or parallel-out shift register with output register LED driver (3-state)	3.0 - 15	-20	45	-40~85				•				
HEF4894B-Q100	12-bit serial-in/serial or parallel-out shift register with output register LED driver (3-state)	3.0 - 15	-20	45	-40~85							•	•
NPIC6C595-Q100	8-bit serial-in/parallel-out shift register with output storage register (3-state)	4.5 - 5.5	-100	90	-40~125				•	•	•		
NPIC6C596-Q100	8-bit serial-in/serial or parallel-out shift register with output register LED driver (3-state)	4.5 - 5.5	-100	90	-40~125				•	•	•		
NPIC6C596A-Q100	8-bit serial-in/serial or parallel-out shift register with output register LED driver (3-state)	2.3 - 5.5	-100	90	-40~125				•	•	•		
NPIC6C4894-Q100	12-bit serial-in/serial or parallel-out shift register with output register LED driver (3-state)	3.5 - 15	-100	105	-40~125							•	•

Transceivers

Type number	Description	Features				Package (suffix)			
		V_{cc} (V)	I_o (mA)	t_{pd} (ns)	T_{amb} (°C)	SOT163-1 (D)	SOT360-1 (PW)	SOT764-1 (BQ)	SOT362-1 (DGG)
74AHC245-Q100	Octal transceiver (3-state)	2.0 - 5.5	± 8	3.5	-40~125	•	•	•	
74AHCT245-Q100	Octal transceiver; TTL-enabled (3-state)	4.5 - 5.5	± 8	5.0	-40~125	•	•	•	
74AVC16245-Q100	16-bit transceiver (3-state)	1.2 - 3.6	± 12	2.0	-40~85				•
74HC245-Q100	Octal transceiver (3-state)	2.0 - 6.0	± 7.8	7.0	-40~125	•	•	•	
74HCT245-Q100	Octal transceiver; TTL-enabled (3-state)	4.5 - 5.5	± 6	10	-40~125	•	•	•	
74LVC245A-Q100	Octal transceiver (3-state)	1.2 - 3.6	± 24	2.9	-40~125	•	•	•	
74LVCH245A-Q100	Octal transceiver with bus hold (3-state)	1.2 - 3.6	± 24	2.9	-40~125	•	•	•	
74LVC162245A-Q100	16-bit transceiver with 30 Ω termination resistors (3-state)	1.2 - 3.6	± 12	3.3	-40~125				•

Q100 mini logic functions and packages

Analog switches

Type number	Description	Features					Package (suffix)					
		Configuration	V_{CC} (V)	R_{ON} (Ω)	R_{ON}(FLAT) (Ω)	T_{amb} (°C)	SOT353-1 (GW)	SOT753 (GV)	SOT363 (GW)	SOT457 (GV)	SOT505-2 (DP)	SOT765-1 (DC)
74AHC1G66-Q100	Single-pole, single-throw analog switch	SPST-NO	2.0 - 5.5	40	5	-40~125	•	•				
74AHCT1G66-Q100	Single-pole, single-throw analog switch; TTL-enabled	SPST-NO	4.5 - 5.5	40	5	-40~125	•	•				
74HC1G66-Q100	Single-pole, single-throw analog switch	SPST-NO	2.0 - 9.0	105	23	-40~125	•	•				
74HCT1G66-Q100	Single-pole, single-throw analog switch; TTL-enabled	SPST-NO	4.5 - 5.5	118	23	-40~125	•	•				
74HC2G66-Q100	Dual single-pole, single-throw analog switch	SPST-NO	2.0 - 9.0	105	23	-40~125					•	•
74HCT2G66-Q100	Dual single-pole, single-throw analog switch; TTL-enabled	SPST-NO	4.5 - 5.5	118	23	-40~125					•	•
74LVC1G53-Q100	Single-pole, double-throw analog switch	SPDT-Z	1.65 - 5.5	15	1.5	-40~125					•	•
74LVC1G66-Q100	Single-pole, single-throw analog switch	SPST-NO	1.65 - 5.5	15	1.5	-40~125	•	•				
74LVC1G384-Q100	Single-pole, single-throw analog switch	SPST-NC	1.65 - 5.5	15	1.5	-40~125	•	•				
74LVC1G3157-Q100	Single-pole, double-throw analog switch	SPDT	1.65 - 5.5	15	1.5	-40~125			•	•		
74LVC2G66-Q100	Dual single-pole, single-throw analog switch	SPST-NO	1.65 - 5.5	15	1.5	-40~125					•	•

Bus switches

Type number	Description	Features				Package (suffix)	
		V_{CC} (V)	V_{PASS} (V)	R_{ON} (Ω)	T_{amb} (°C)	SOT96-1 (D)	SOT530-1 (PW)
CBT3306-Q100	Dual bus switch	4.5 - 5.5	3.9	7	-40~85	•	•

Buffers/Inverters

Type number	Description	Features				Package (suffix)					
		V_{CC} (V)	I_O (mA)	t_{pd} (ns)	T_{amb} (°C)	SOT353-1 (GW)	SOT753 (GV)	SOT363 (GW)	SOT457 (GV)	SOT505-2 (DP)	SOT765-1 (DC)
74AHC1GU04-Q100	Single inverter; unbuffered	2.0 - 5.5	± 8	2.6	-40~125	•	•				
74AHC3GU04-Q100	Triple inverter; unbuffered	2.0 - 5.5	± 8	2.5	-40~125					•	•
74AHC1G04-Q100	Single inverter	2.0 - 5.5	± 8	3.1	-40~125	•	•				
74AHCT1G04-Q100	Single inverter; TTL-enabled	4.5 - 5.5	± 8	3.4	-40~125	•	•				
74AHC1G07-Q100	Single buffer; open-drain	2.0 - 5.5	8	4.2	-40~125	•	•				
74AHC1G17-Q100	Single buffer with Schmitt-trigger inputs	2.0 - 5.5	± 8	3.2	-40~125	•					
74AHCT1G17-Q100	Single buffer with Schmitt-trigger inputs; TTL-enabled	4.5 - 5.5	± 8	4.1	-40~125	•					
74AHC1G125-Q100	Single buffer/line driver (3-state)	2.0 - 5.5	± 8	3.4	-40~125	•	•				
74AHCT1G125-Q100	Single buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	± 8	3.4	-40~125	•	•				
74AHC1G126-Q100	Single buffer/line driver (3-state)	2.0 - 5.5	± 8	3.4	-40~125	•	•				
74AHCT1G126-Q100	Single buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	± 8	3.4	-40~125	•	•				
74AHC2G125-Q100	Dual buffer/line driver (3-state)	2.0 - 5.5	± 8	3.4	-40~125					•	•
74AHCT2G125-Q100	Dual buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	± 8	3.4	-40~125					•	•
74AHC2G126-Q100	Dual buffer/line driver (3-state)	2.0 - 5.5	± 8	3.4	-40~125					•	•
74AHCT2G126-Q100	Dual buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	± 8	3.4	-40~125					•	•
74AHC2G241-Q100	Dual buffer/line driver (3-state)	2.0 - 5.5	± 8	3.4	-40~125					•	•
74AHCT2G241-Q100	Dual buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	± 8	3.4	-40~125					•	•
74AHC3G04-Q100	Triple inverter	2.0 - 5.5	± 8	3.1	-40~125					•	•
74AHCT3G04-Q100	Triple inverter; TTL-enabled	4.5 - 5.5	± 8	3.0	-40~125					•	•
74AUP1G04-Q100	Single inverter	1.1 - 3.6	± 1.9	4.0	-40~125	•	•				
74AUP1G06-Q100	Single inverter; open-drain	1.1 - 3.6	1.9	4.5	-40~125	•					
74AUP1G34-Q100	Single buffer	1.1 - 3.6	± 1.9	3.9	-40~125	•					
74AUP1G125-Q100	Single buffer/line driver (3-state)	1.1 - 3.6	± 1.9	4.3	-40~125	•					
74AUP2G04-Q100	Dual inverter	1.1 - 3.6	± 1.9	4.0	-40~125			•			
74AUP2GU04-Q100	Dual inverter; unbuffered	1.1 - 3.6	± 1.9	2.3	-40~125			•			
74HC1GU04-Q100	Single inverter; unbuffered	2.0 - 6.0	± 2.6	5.0	-40~125	•	•				
74HC2GU04-Q100	Dual inverter; unbuffered	2.0 - 6.0	± 5.2	5.0	-40~125			•	•		
74HC3GU04-Q100	Triple inverter; unbuffered	2.0 - 6.0	± 5.2	6.0	-40~125					•	•
74HC1G04-Q100	Single inverter	2.0 - 6.0	± 2.6	7.0	-40~125	•	•				
74HCT1G04-Q100	Single inverter; TTL-enabled	4.5 - 5.5	± 2.0	8.0	-40~125	•	•				
74HC1G125-Q100	Single buffer/line driver (3-state)	2.0 - 6.0	± 2.6	9.0	-40~125	•	•				
74HCT1G125-Q100	Single buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	± 2.0	10	-40~125	•	•				

Buffers/Inverters

Type number	Description	Features				Package (suffix)					
		V_{CC} (V)	I_O (mA)	t_{pd} (ns)	T_{amb} (°C)	SOT353-1 (GW)	SOT753 (GV)	SOT363 (GW)	SOT457 (GV)	SOT505-2 (DP)	SOT765-1 (DC)
74HC2G04-Q100	Dual inverter	2.0 - 6.0	± 5.2	8.0	-40~125			•	•		
74HCT2G04-Q100	Dual inverter; TTL-enabled	4.5 - 5.5	± 4.0	10	-40~125			•	•		
74HC2G34-Q100	Dual buffer	2.0 - 6.0	± 5.2	9.0	-40~125			•	•		
74HCT2G34-Q100	Dual buffer; TTL-enabled	4.5 - 5.5	± 4.0	10	-40~125			•	•		
74HC2G125-Q100	Dual buffer/line driver (3-state)	2.0 - 6.0	± 5.2	10	-40~125					•	•
74HCT2G125-Q100	Dual buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	± 4.0	12	-40~125					•	•
74HC3G04-Q100	Triple inverter	2.0 - 6.0	± 5.2	8.0	-40~125					•	•
74HCT3G04-Q100	Triple inverter; TTL-enabled	4.5 - 5.5	± 4.0	10	-40~125					•	•
74HC3G07-Q100	Triple buffer; open-drain	2.0 - 6.0	5.2	9.0	-40~125					•	•
74HCT3G07-Q100	Triple buffer; open-drain; TTL-enabled	4.5 - 5.5	4	9.0	-40~125					•	•
74HC3G34-Q100	Triple buffer	2.0 - 6.0	± 5.2	9.0	-40~125					•	•
74HCT3G34-Q100	Triple buffer; TTL-enabled	4.5 - 5.5	± 4.0	10	-40~125						•
74LVC1G04-Q100	Single inverter	1.65 - 5.5	± 32	2.0	-40~125	•	•				
74LVC1G06-Q100	Single inverter; open-drain	1.65 - 5.5	32	2.3	-40~125	•	•				
74LVC1G07-Q100	Single buffer; open-drain	1.65 - 5.5	32	2.2	-40~125	•	•				
74LVC1G34-Q100	Single buffer	1.65 - 5.5	± 32	2.0	-40~125	•	•				
74LVC1G125-Q100	Single buffer/line driver (3-state)	1.65 - 5.5	± 32	2.1	-40~125	•	•				
74LVC1G126-Q100	Single buffer/line driver (3-state)	1.65 - 5.5	± 32	2.0	-40~125	•	•				
74LVC1GU04-Q100	Single inverter; unbuffered	1.65 - 5.5	± 32	1.6	-40~125	•	•				
74LVC2G04-Q100	Dual inverter	1.65 - 5.5	± 32	2.7	-40~125			•	•		
74LVC2G06-Q100	Dual inverter; open-drain	1.65 - 5.5	32	2.3	-40~125			•	•		
74LVC2G07-Q100	Dual buffer; open-drain	1.65 - 5.5	32	2.6	-40~125			•	•		
74LVC2G125-Q100	Dual buffer/line driver (3-state)	1.65 - 5.5	± 32	2.3	-40~125					•	•
74LVC2G126-Q100	Dual buffer/line driver (3-state)	1.65 - 5.5	± 32	2.4	-40~125					•	•
74LVC2G240-Q100	Dual inverter/line driver (3-state)	1.65 - 5.5	± 32	2.5	-40~125					•	•
74LVC2G241-Q100	Dual buffer/line driver (3-state)	1.65 - 5.5	± 32	2.6	-40~125					•	•
74LVC2GU04-Q100	Dual inverter; unbuffered	1.65 - 5.5	± 32	2.3	-40~125			•	•		
74LVC3G04-Q100	Triple inverter	1.65 - 5.5	± 32	2.7	-40~125					•	•
74LVC3G07-Q100	Triple buffer; open-drain	1.65 - 5.5	32	2.1	-40~125					•	•
74LVC3G34-Q100	Triple buffer	1.65 - 5.5	± 32	2.2	-40~125					•	•

Digital decoders/Demultiplexers

Types in **bold** represent new products

Type number	Description	Features				Package (suffix)	
		V_{CC} (V)	I_O (mA)	t_{pd} (ns)	T_{amb} (°C)	SOT363 (GW)	SOT457 (GV)
74LVC1G18-Q100	1-to-2 demultiplexer (3-state)	1.65 - 5.5	± 32	2.3	-40~125	•	•
74LVC1G19-Q100	1-to-2 demultiplexer	1.65 - 5.5	± 32	1.8	-40~125	•	

Digital multiplexers

Type number	Description	Features				Package (suffix)	
		V_{CC} (V)	I_O (mA)	t_{pd} (ns)	T_{amb} (°C)	SOT363 (GW)	SOT457 (GV)
74LVC1G157-Q100	Single 2-input multiplexer	1.65 - 5.5	± 32	2.2	-40~125	•	•

Flip-flops

Type number	Description	Features				Package (suffix)					
		V_{CC} (V)	I_O (mA)	t_{pd} (ns)	T_{amb} (°C)	SOT353-1 (GW)	SOT753 (GV)	SOT363 (GW)	SOT457 (GV)	SOT505-2 (DP)	SOT765-1 (DC)
74AHC1G79-Q100	Single D-type flip-flop; positive-edge trigger	2.0 - 5.5	± 8	3.5	-40~125	•	•				
74AHCT1G79-Q100	Single D-type flip-flop; positive-edge trigger; TTL-enabled	4.5 - 5.5	± 8	3.5	-40~125	•	•				
74AUP1G74-Q100	Single D-type flip-flop with set and reset; positive-edge trigger	1.1 - 3.6	± 1.9	8.1	-40~125						•
74AUP1G175-Q100	Single D flip-flop with reset; positive-edge trigger	1.1 - 3.6	± 1.9	7.4	-40~125			•			
74AUP1G374-Q100	Single D-type flip-flop; positive-edge trigger (3-state)	1.1 - 3.6	± 1.9	7.9	-40~125			•			
74AUP2G79-Q100	Dual D-type flip-flop; positive-edge trigger	1.1 - 3.6	± 1.9	8.5	-40~125						•
74LVC1G74-Q100	Single D-type flip-flop with set and reset; positive-edge trigger	1.65 - 5.5	± 32	3.5	-40~125					•	•
74LVC1G79-Q100	Single D-type flip-flop; positive-edge trigger	1.65 - 5.5	± 32	2.2	-40~125	•	•				
74LVC1G80-Q100	Single D-type flip-flop; positive-edge trigger	1.65 - 5.5	± 32	2.4	-40~125	•	•				
74LVC1G175-Q100	Single D flip-flop with reset; positive-edge trigger	1.65 - 5.5	± 32	3.1	-40~125			•	•		
74LVC2G74-Q100	Single D-type flip-flop with set and reset; positive-edge trigger	1.65 - 5.5	± 32	3.5	-40~125					•	•

Gates

Type number	Description	Features				Package (suffix)					
		V_{CC} (V)	I_O (mA)	t_{pd} (ns)	T_{amb} (°C)	SOT353-1 (GW)	SOT753 (GV)	SOT363 (GW)	SOT457 (GV)	SOT505-2 (DP)	SOT765-1 (DC)
74AHC1G09-Q100	Single 2-input AND gate; open-drain	2.0 - 5.5	± 8	3.2	-40~125	•	•				
74AHC1G00-Q100	Single 2-input NAND gate	2.0 - 5.5	± 8	3.5	-40~125	•	•				
74AHCT1G00-Q100	Single 2-input NAND gate; TTL-enabled	4.5 - 5.5	± 8	3.6	-40~125	•	•				
74AHC1G02-Q100	Single 2-input NOR gate	2.0 - 5.5	± 8	3.2	-40~125	•	•				
74AHCT1G02-Q100	Single 2-input NOR gate; TTL-enabled	4.5 - 5.5	± 8	3.5	-40~125	•	•				
74AHC1G08-Q100	Single 2-input AND gate	2.0 - 5.5	± 8	3.2	-40~125	•	•				
74AHCT1G08-Q100	Single 2-input AND gate; TTL-enabled	4.5 - 5.5	± 8	3.6	-40~125	•	•				
74AHC1G32-Q100	Single 2-input OR gate	2.0 - 5.5	± 8	3.2	-40~125	•	•				
74AHCT1G32-Q100	Single 2-input OR gate; TTL-enabled	4.5 - 5.5	± 8	3.3	-40~125	•	•				
74AHC1G86-Q100	2-input EXCLUSIVE-OR gate	2.0 - 5.5	± 8	3.4	-40~125	•	•				
74AHCT1G86-Q100	2-input EXCLUSIVE-OR gate; TTL-enabled	4.5 - 5.5	± 8	3.5	-40~125	•	•				
74AHC2G00-Q100	Dual 2-input NAND gate	2.0 - 5.5	± 8	3.5	-40~125					•	•
74AHCT2G00-Q100	Dual 2-input NAND gate; TTL-enabled	4.5 - 5.5	± 8	3.6	-40~125					•	•
74AHC2G08-Q100	Dual 2-input AND gate	2.0 - 5.5	± 8	3.2	-40~125					•	•
74AHCT2G08-Q100	Dual 2-Input AND gate; TTL-enabled	4.5 - 5.5	± 8	3.6	-40~125					•	•
74AHC2G32-Q100	Dual 2-input OR gate	2.0 - 5.5	± 8	3.2	-40~125					•	•
74AHCT2G32-Q100	Dual 2-input OR gate; TTL-enabled	4.5 - 5.5	± 8	3.3	-40~125					•	•
74AUP1G02-Q100	Single 2-input NOR gate	1.1 - 3.6	± 1.9	8.2	-40~125	•					
74AUP1G08-Q100	Single 2-input AND gate	1.1 - 3.6	± 1.9	8.2	-40~125	•					
74AUP1G32-Q100	Single 2-input OR gate	1.1 - 3.6	±1.9	7.9	-40~125	•					
74AUP1G86-Q100	Single 2-input EXCLUSIVE-OR gate	1.1 - 3.6	± 1.9	3.3	-40~125	•					
74AUP1T98-Q100	Configurable gate with voltage level translation	2.3-3.6 V	±1.9	8.7	-40~125			•			
74HC1G86-Q100	Single 2-input EXCLUSIVE-OR gate	2.0 - 6.0	± 2.6	9.0	-40~125	•	•				
74HC1G00-Q100	Single 2-input NAND gate	2.0 - 6.0	± 2.6	7.0	-40~125	•					
74HCT1G00-Q100	Single 2-input NAND gate; TTL-enabled	4.5 - 5.5	± 2	10	-40~125	•	•				
74HC1G02-Q100	Single 2-input NOR gate	2.0 - 6.0	± 2.6	7.0	-40~125	•	•				
74HCT1G02-Q100	Single 2-input NOR gate; TTL-enabled	4.5 - 5.5	± 2.0	9.0	-40~125	•	•				
74HC1G08-Q100	Single 2-input AND gate	2.0 - 6.0	± 5.2	7.0	-40~125	•	•				
74HCT1G08-Q100	Single 2-input AND gate; TTL-enabled	4.5 - 5.5	± 2	11	-40~125	•	•				
74HC1G32-Q100	Single 2-input OR gate	2.0 - 6.0	± 2.6	8.0	-40~125	•	•				
74HCT1G32-Q100	Single 2-input OR gate; TTL-enabled	4.5 - 5.5	± 2.0	10	-40~125	•	•				
74HC2G00-Q100	Dual 2-input NAND gate	2.0 - 6.0	± 5.6	9.0	-40~125					•	•
74HCT2G00-Q100	Dual 2-input NAND gate; TTL-enabled	4.5 - 5.5	± 4	12	-40~125					•	•
74HC2G02-Q100	Dual 2-input NOR gate	2.0 - 6.0	± 5.2	9.0	-40~125					•	•
74HCT2G02-Q100	Dual 2-input NOR gate; TTL-enabled	4.5 - 5.5	± 4	12	-40~125					•	•
74HC2G08-Q100	ual 2-input AND gate	2.0 - 6.0	± 5.2	9.0	-40~125					•	•

Gates

Type number	Description	Features				Package (suffix)					
		V_{cc} (V)	I_O (mA)	t_{pd} (ns)	T_{amb} (°C)	SOT353-1 (GW)	SOT753 (GV)	SOT363 (GW)	SOT457 (GV)	SOT505-2 (DP)	SOT765-1 (DC)
74HCT2G08-Q100	Dual 2-Input AND gate; TTL-enabled	4.5 - 5.5	± 4	14	-40~125					•	•
74HC2G32-Q100	Dual 2-input OR gate	2.0 - 6.0	± 5.2	9.0	-40~125					•	•
74HCT2G32-Q100	Dual 2-input OR gate; TTL-enabled	4.5 - 5.5	± 4.0	13	-40~125					•	•
74HC2G86-Q100	Dual 2-input EXCLUSIVE-OR gate	2.0 - 6.0	± 5.2	9.0	-40~125					•	•
74HCT2G86-Q100	Dual 2-input EXCLUSIVE-OR gate; TTL-enabled	4.5 - 5.5	± 4.0	11	-40~125					•	•
74HCT1G86-Q100	Single 2-input EXCLUSIVE-OR gate; TTL-enabled	4.5 - 5.5	± 2.0	10	-40~125	•	•				
74LVC1G00-Q100	Single 2-input NAND gate	1.65 - 5.5	± 32	2.2	-40~125	•	•				
74LVC1G02-Q100	Single 2-input NOR gate	1.65 - 5.5	± 32	2.1	-40~125	•	•				
74LVC1G08-Q100	Single 2-input AND gate	1.65 - 5.5	± 32	2.1	-40~125	•	•				
74LVC1G10-Q100	Single 3-input NAND gate	1.65 - 5.5	± 32	2.6	-40~125			•			
74LVC1G11-Q100	Single 3-input AND gate	1.65 - 5.5	± 32	2.6	-40~125			•	•		
74LVC1G32-Q100	Single 2-input OR gate	1.65 - 5.5	± 32	2.1	-40~125	•	•				
74LVC1G38-Q100	Single 2-input NAND gate; open-drain	1.65 - 5.5	32	2.3	-40~125	•	•				
74LVC1G57-Q100	Configurable gate; Schmitt-trigger	1.65 - 5.5	± 32	3.8	-40~125			•	•		
74LVC1G58-Q100	Configurable gate; Schmitt-trigger	1.65 - 5.5	± 32	3.8	-40~125			•	•		
74LVC1G86-Q100	Single 2-input EXCLUSIVE-OR gate	1.65 - 5.5	± 32	2.4	-40~125	•	•				
74LVC1G332-Q100	Single 3-input OR gate	1.65 - 5.5	± 32	2.6	-40~125			•	•		
74LVC1GX04-Q100	Crystal driver	1.65 - 5.5	± 24	2.8	-40~125			•	•		
74LVC2G00-Q100	Dual 2-input NAND gate	1.65 - 5.5	± 32	2.2	-40~125						•
74LVC2G02-Q100	Dual 2-input NOR gate	1.65 - 5.5	± 32	2.4	-40~125					•	•
74LVC2G08-Q100	Dual 2-input AND gate	1.65 - 5.5	± 24	2.1	-40~125					•	•
74LVC2G32-Q100	Dual 2-input OR gate	1.65 - 5.5	± 32	2.2	-40~125					•	•
74LVC2G34-Q100	Dual buffer	1.65 - 5.5	± 32	2.2	-40~125			•	•		
74LVC2G86-Q100	Dual 2-input EXCLUSIVE-OR gate	1.65 - 5.5	± 32	2.3	-40~125					•	•

Latches/Registered drivers

Type number	Description	Features				Package (suffix)
		V_{cc} (V)	I_O (mA)	t_{pd} (ns)	T_{amb} (°C)	SOT363 (GW)
74AUP1G373-Q100	Single D-type transparent latch (3-state)	1.1 - 3.6	±1.9	8.5	-40~125	•

Multivibrators

Type number	Description	Features				Package (suffix)	
		V_{CC} (V)	I_O (mA)	t_{pd} (ns)	T_{amb} (°C)	SOT505-2 (DP)	SOT765-1 (DC)
74LVC1G123-Q100	Single retriggerable monostable multivibrator	1.65 - 5.5	± 32	3.5	-40~125	•	•

Schmitt-triggers

Type number	Description	Features				Package (suffix)					
		V_{CC} (V)	I_O (mA)	t_{pd} (ns)	T_{amb} (°C)	SOT353-1 (GW)	SOT753 (GV)	SOT363 (GW)	SOT457 (GV)	SOT505-2 (DP)	SOT765-1 (DC)
74AHC1G14-Q100	Single inverter Schmitt-trigger	2.0 - 5.5	± 8	3.2	-40~125	•	•				
74AHCT1G14-Q100	Single inverter Schmitt-trigger; TTL-enabled	4.5 - 5.5	± 8	4.1	-40~125	•	•				
74AHC3G14-Q100	Triple inverter Schmitt-trigger	2.0 - 5.5	± 8	3.2	-40~125					•	•
74AHCT3G14-Q100	Triple inverter Schmitt-trigger; TTL-enabled	4.5 - 5.5	± 8	4.1	-40~125					•	•
74HC1G14-Q100	Single inverter Schmitt-trigger	2.0 - 6.0	± 2.6	10	-40~125	•	•				
74HCT1G14-Q100	Single inverter Schmitt-trigger; TTL-enabled	4.5 - 5.5	± 2.0	15	-40~125	•	•				
74HC2G14-Q100	Dual inverter Schmitt-trigger	2.0 - 6.0	± 5.2	16	-40~125			•	•		
74HCT2G14-Q100	Dual inverter Schmitt-trigger; TTL-enabled	4.5 - 5.5	± 4.0	21	-40~125			•	•		
74HC2G17-Q100	Dual buffer Schmitt-trigger	2.0 - 6.0	± 5.2	12	-40~125			•	•		
74HCT2G17-Q100	Dual buffer Schmitt-trigger; TTL-enabled	4.5 - 5.5	± 4.0	21	-40~125			•	•		
74HC3G14-Q100	Triple inverter Schmitt-trigger	2.0 - 6.0	± 5.2	16	-40~125					•	•
74HCT3G14-Q100	Triple inverter Schmitt-trigger; TTL-enabled	4.5 - 5.5	± 4.0	21	-40~125					•	•
74LVC1G14-Q100	Single inverter Schmitt-trigger	1.65 - 5.5	± 32	3.0	-40~125	•	•				
74LVC1G17-Q100	Single buffer Schmitt-trigger	1.65 - 5.5	± 32	3.0	-40~125	•	•				
74LVC2G14-Q100	Dual inverter Schmitt-trigger	1.65 - 5.5	± 32	3.9	-40~125			•	•		
74LVC2G17-Q100	Dual buffer Schmitt-trigger	1.65 - 5.5	± 32	3.6	-40~125			•	•		
74LVC3G17-Q100	Triple buffer Schmitt-trigger	1.65 - 5.5	± 32	3.6	-40~125					•	•

Level shifters/Translators

Type number	Description	Features				Package (suffix)				
		V_{CC}(A) (V)	V_{CC}(B) (V)	I_O (mA)	T_{amb} (°C)	SOT353-1 (GW)	SOT363 (GW)	SOT505-2 (DP)	SOT765-1 (DC)	SOT552-1 (DP)
74AUP1T34-Q100	Single dual supply translating buffer	1.1 - 3.6	1.1 - 3.6	± 1.9	-40~125	•				
74AVC1T45-Q100	Single dual-supply voltage level translating transceiver (3-state)	0.8 - 3.6	0.8 - 3.6	± 12	-40~125		•			
74AVC2T45-Q100	Dual-bit dual-supply voltage level translating transceiver (3-state)	0.8 - 3.6	0.8 - 3.6	± 12	-40~125			•	•	
74AVCH1T45-Q100	Single dual-supply voltage translating transceiver with bus hold (3-state)	0.8 - 3.6	0.8 - 3.6	± 12	-40~125		•			
74AXP1T57-Q100	Dual-supply translating configurable multiple function gate, Schmitt-trigger inputs	0.7 - 2.75	1.2 - 5.5	± 12	-40~125				•	
74AXP2T08-Q100	Dual-supply 2-input AND gate	0.7 - 2.75	1.2 - 5.5	± 12	-40~125					•
74LVC1T45-Q100	Single dual-supply voltage level translating transceiver (3-state)	1.2 - 5.5	1.2 - 5.5	± 24	-40~125		•			
74LVCH1T45-Q100	Single dual-supply voltage translating transceiver with bus hold (3-state)	1.2 - 5.5	1.2 - 5.5	± 24	-40~125		•			
74LVC2T45-Q100	Dual-bit dual-supply voltage level translating transceiver (3-state)	1.2 - 5.5	1.2 - 5.5	± 24	-40~125				•	
74LVCH2T45-Q100	Dual-bit dual-supply voltage level translating transceiver with bus hold (3-state)	1.2 - 5.5	1.2 - 5.5	± 24	-40~125				•	

Buffers/Inverters/Drivers

Types in **bold** represent new products

Type number	Description	V_{CC} (V)	Logic switching levels	Output drive capability (mA)	Output Load CL (pF)	t_{pd} (ns)	f_{max} (MHz)	T_{amb} (°C)
74ABT04	Hex inverter	4.5 - 5.5	TTL	-15 / 20	50	2.2	100	-40~85
74ABT125	Quad buffer/line driver (3-state)	4.5 - 5.5	TTL	-32 / 64	50	3.1	100	-40~85
74ABT126	Quad buffer/line driver (3-state)	4.5 - 5.5	TTL	-32 / 64	50	3.0	100	-40~85
74ABT162244	16-bit buffer/line driver with 30 Ohm termination resistors (3-state)	4.5 - 5.5	TTL	-32 / 12	50	3.2	100	-40~85
74ABT16240A	16-bit inverter/line driver (3-state)	4.5 - 5.5	TTL	-32 / 64	50	2.0	150	-40~85
74ABT16244A	16-bit buffer/line driver (3-state)	4.5 - 5.5	TTL	-32 / 64	50	2.1	150	-40~85
74ABT244	Octal buffer/line driver (3-state)	4.5 - 5.5	TTL	-32 / 64	50	2.9	100	-40~85
74AHC04	Hex inverter	2.0 - 5.5	CMOS	±8	50	3.0	60	-40~125
74AHC125	Quad buffer/line driver (3-state)	2.0 - 5.5	CMOS	±8	50	3.0	60	-40~125
74AHC126	Quad buffer/line driver (3-state)	2.0 - 5.5	CMOS	±8	50	3.3	60	-40~125
74AHC14	Hex inverter; Schmitt-trigger	2.0 - 5.5	CMOS	±8	50	3.2	60	-40~125
74AHC1G04	Single inverter	2.0 - 5.5	CMOS	±8	50	3.1	60	-40~125
74AHC1G125	Single buffer/line driver (3-state)	2.0 - 5.5	CMOS	±8	50	3.4	60	-40~125
74AHC1G126	Single buffer/line driver (3-state)	2.0 - 5.5	CMOS	±8	50	3.4	60	-40~125
74AHC1G14	Single inverter; Schmitt-trigger	2.0 - 5.5	CMOS	±8	50	3.2	60	-40~125
74AHC1G17	Single buffer with Schmitt-trigger inputs	2.0 - 5.5	CMOS	±8	50	3.2	60	-40~125
74AHC1GU04	Single inverter; unbuffered	2.0 - 5.5	CMOS	±8	50	2.6	60	-40~125
74AHC244	Octal buffer/line driver (3-state)	2.0 - 5.5	CMOS	±8	50	3.5	60	-40~125
74AHC2G125	Dual buffer/line driver (3-state)	2.0 - 5.5	CMOS	±8	50	3.4	60	-40~125
74AHC2G126	Dual buffer/line driver (3-state)	2.0 - 5.5	CMOS	±8	50	3.4	60	-40~125
74AHC2G241	Dual buffer/line driver (3-state)	2.0 - 5.5	CMOS	±8	50	3.4	60	-40~125
74AHC3G04	Triple inverter	2.0 - 5.5	CMOS	±8	50	3.1	60	-40~125
74AHC3G14	Triple inverter; Schmitt-trigger	2.0 - 5.5	CMOS	±8	50	3.2	60	-40~125
74AHC3GU04	Triple inverter; unbuffered	2.0 - 5.5	CMOS	±8	50	2.5	60	-40~125
74AHC541	Octal buffer/line driver (3-state)	2.0 - 5.5	CMOS	±8	50	3.5	60	-40~125
74AHC9541A	Octal buffer/line driver; Schmitt-trigger (3-state)	1.8 - 5.5	CMOS	±8	15	3.4	60	-40~125
74AHCT04	Hex inverter; TTL-enabled	4.5 - 5.5	TTL	±8	50	3.0	60	-40~125
74AHCT04A	Hex inverter; TTL-enabled	4.5 - 5.5	TTL	±8	15	3.1	60	-40~125
74AHCT07A	Hex buffer; open-drain; TTL-enabled	4.5 - 5.5	TTL	±8	15	4.0	60	-40~125
74AHCT125	Quad buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	TTL	±8	50	3.0	60	-40~125
74AHCT126	Quad buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	TTL	±8	50	3.0	60	-40~125
74AHCT14	Hex inverting; Schmitt-trigger; TTL-enabled	4.5 - 5.5	TTL	±8	50	3.4	60	-40~125
74AHCT14A	Hex inverter; Schmitt-trigger; TTL-enabled	4.5 - 5.5	TTL	±8	15	3.7	60	-40~125
74AHCT17A	Hex buffer; Schmitt-trigger; TTL-enabled	4.5 - 5.5	TTL	±8	15	3.2	60	-40~125
74AHCT1G04	Single inverter; TTL-enabled	4.5 - 5.5	TTL	±8	50	3.4	60	-40~125
74AHCT1G125	Single buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	TTL	±8	50	3.4	60	-40~125
74AHCT1G126	Single buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	TTL	±8	50	3.4	60	-40~125
74AHCT1G14	Single inverter; Schmitt-trigger; TTL-enabled	4.5 - 5.5	TTL	±8	50	4.1	60	-40~125
74AHCT1G17	Single buffer with Schmitt-trigger inputs; TTL-enabled	4.5 - 5.5	TTL	±8	50	4.1	60	-40~125

Buffers/Inverters/Drivers

Types in **bold** represent new products

Type number	Description	V_{CC} (V)	Logic switching levels	Output drive capability (mA)	Output Load CL (pF)	t_{pd} (ns)	f_{max} (MHz)	T_{amb} (°C)
74AHCT240	Octal inverter/line driver; TTL-enabled (3-state)	4.5 - 5.5	TTL	±8	50	3.0	60	-40~125
74AHCT244	Octal buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	TTL	±8	50	3.5	60	-40~125
74AHCT244A	Octal buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	TTL	±8	15	3.5	60	-40~125
74AHCT2G125	Dual buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	TTL	±8	50	3.4	60	-40~125
74AHCT2G126	Dual buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	TTL	±8	50	3.4	60	-40~125
74AHCT2G241	Dual buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	TTL	±8	50	3.4	60	-40~125
74AHCT3G04	Triple inverter; TTL-enabled	4.5 - 5.5	TTL	±8	50	3.0	60	-40~125
74AHCT3G14	Triple inverter; Schmitt-trigger; TTL-enabled	4.5 - 5.5	TTL	±8	50	4.1	60	-40~125
74AHCT541	Octal buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	TTL	±8	50	3.5	60	-40~125
74AHCT541A	Octal buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	TTL	±8	15	3.5	60	-40~125
74AHCU04	Hex inverter; unbuffered	2.0 - 5.5	CMOS	±8	50	2.4	60	-40~125
74AHCV07A	Hex buffer; Schmitt-trigger; open-drain	1.8 - 5.5	CMOS	16	15	3.8	60	-40~125
74AHCV14A	Hex inverter; Schmitt-trigger	1.8 - 5.5	CMOS	±16	15	3.2	60	-40~125
74AHCV17A	Hex buffer; Schmitt-trigger	1.8 - 5.5	CMOS	±16	15	3.2	60	-40~125
74AHCV244A	Octal buffer/line driver; Schmitt-trigger (3-state)	1.8 - 5.5	CMOS	±16	15	3.0	60	-40~125
74AHCV541A	Octal buffer/line driver; Schmitt-trigger (3-state)	1.8 - 5.5	CMOS	±16	15	3.0	60	-40~125
74ALVC04	Hex inverter	1.65 - 3.6	TTL	±24	30	2.0	150	-40~85
74ALVC125	Quad buffer/line driver (3-state)	1.65 - 3.6	TTL	±24	30	1.8	145	-40~85
74ALVC14	Hex inverter; Schmitt-trigger	1.65 - 3.6	TTL	±24	30	2.4	150	-40~85
74ALVC16244	16-bit buffer/line driver (3-state)	1.2 - 3.6	TTL	±24	50	1.9	150	-40~85
74ALVC244	Octal buffer/line driver (3-state)	1.65 - 3.6	TTL	±24	30	2.9	130	-40~85
74ALVC541	Octal buffer/line driver (3-state)	1.65 - 3.6	TTL	±24	30	2.3	130	-40~85
74ALVCH162244	16-bit buffer/line driver with bus hold and 30 Ω termination resistors (3-state)	2.3 - 3.6	TTL	±12	30	2.7	150	-40~85
74ALVCH16244	16-bit buffer/line driver with bus hold (3-state)	1.2 - 3.6	TTL	±24	30	1.9	150	-40~85
74ALVCH162827	20-bit buffer/line driver with bus hold and 30 Ω termination resistors (3-state)	2.3 - 3.6	TTL	±12	30	2.9	150	-40~85
74ALVCH16825	18-bit buffer/line driver with bus hold (3-state)	2.3 - 3.6	TTL	±24	30	2.0	150	-40~85
74ALVCH16827	20-bit buffer/line driver with bus hold (3-state)	2.3 - 3.6	TTL	±24	30	2.0	150	-40~85
74ALVT16244	16-bit buffer/line driver with bus hold (3-state)	2.3 - 3.6	LVTTL	-32 / 64	50	1.5	200	-40~85
74ALVT162827	20-bit buffer/line driver with bus hold and 30 Ω termination resistors (3-state)	2.3 - 3.6	LVTTL	±12	50	2.2	75	-40~85
74ALVT16827	20-bit buffer/line driver with bus hold (3-state)	2.3 - 3.6	LVTTL	-32 / 64	50	1.3	200	-40~85
74AUP1G04	Single inverter	1.1 - 3.6	CMOS	±1.9	30	4.0	70	-40~125
74AUP1G06	Single inverter; open drain	1.1 - 3.6	CMOS	1.9	30	4.5	70	-40~125
74AUP1G07	Single buffer; open drain	1.1 - 3.6	CMOS	1.9	30	4.4	70	-40~125
74AUP1G125	Single buffer/line driver (3-state)	1.1 - 3.6	CMOS	±1.9	30	4.3	70	-40~125
74AUP1G126	Single buffer/line driver (3-state)	1.1 - 3.6	CMOS	±1.9	30	4.3	70	-40~125
74AUP1G14	Single inverter; Schmitt-trigger	1.1 - 3.6	CMOS	±1.9	30	4.7	70	-40~125
74AUP1G16	Single buffer	1.1 - 3.6	CMOS	±1.9	30	4.7	70	-40~125
74AUP1G240	Single inverter/line driver (3-state)	1.1 - 3.6	CMOS	±1.9	30	4.2	70	-40~125
74AUP1G34	Single buffer	1.1 - 3.6	CMOS	±1.9	30	3.9	70	-40~125
74AUP1GU04	Single inverter; unbuffered	1.1 - 3.6	CMOS	±1.9	30	2.3	70	-40~125

Buffers/Inverters/Drivers

Type number	Description	V_{CC} (V)	Logic switching levels	Output drive capability (mA)	Output Load CL (pF)	t_{pd} (ns)	f_{max} (MHz)	T_{amb} (°C)
74AUP2G04	Dual inverter	1.1 - 3.6	CMOS	±1.9	30	4.0	70	-40~125
74AUP2G06	Dual inverter; open drain	1.1 - 3.6	CMOS	1.9	30	4.5	70	-40~125
74AUP2G07	Dual buffer; open drain	1.1 - 3.6	CMOS	1.9	30	4.4	70	-40~125
74AUP2G125	Dual buffer/line driver (3-state)	1.1 - 3.6	CMOS	+-1.9	30	4.3	70	-40~125
74AUP2G126	Dual buffer/line driver (3-state)	1.1 - 3.6	CMOS	+-1.9	30	4.3	70	-40~125
74AUP2G14	Dual inverter; Schmitt-trigger	1.1 - 3.6	CMOS	+-1.9	30	4.7	70	-40~125
74AUP2G16	Dual buffer	1.1 - 3.6	CMOS	+-1.9	30	4.7	70	-40~125
74AUP2G17	Dual buffer; Schmitt-trigger	1.1 - 3.6	CMOS	+-1.9	30	7.8	70	-40~125
74AUP2G240	Dual inverter/line driver (3-state)	1.1 - 3.6	CMOS	+-1.9	30	4.2	70	-40~125
74AUP2G241	Dual buffer/line driver (3-state)	1.1 - 3.6	CMOS	+- 1.9	30	4.3	70	-40~125
74AUP2G34	Dual buffer	1.1 - 3.6	CMOS	+-1.9	30	3.9	70	-40~125
74AUP2GU04	Dual inverter; unbuffered	1.1 - 3.6	CMOS	+-1.9	30	2.3	70	-40~125
74AUP3G04	Triple inverter	1.1 - 3.6	CMOS	+-1.9	30	4.0	70	-40~125
74AUP3G14	Triple inverter; Schmitt-trigger	1.1 - 3.6	CMOS	+-1.9	30	4.7	70	-40~125
74AUP3G16	Triple buffer	1.1 - 3.6	CMOS	+-1.9	30	4.0	70	-40~125
74AUP3G17	Triple buffer; Schmitt-trigger	1.1 - 3.6	CMOS	+-1.9	30	4.7	70	-40~125
74AVC16244	16-bit buffer/line driver (3-state)	0.8 - 3.6	CMOS/LVTTL	+-12	30	2.0	200	-40~85
74AVCH16244	16-bit buffer/line driver with bus hold (3-state)	0.8 - 3.6	CMOS/LVTTL	+-12	30	2.0	200	-40~85
74AXP1G04	Single inverter	0.7 - 2.75	CMOS	+-4.5	5	2.6	70	-40~85
74AXP1G06	Single inverter; open drain	0.7 - 2.75	CMOS	4.5	5	3.5	70	-40~85
74AXP1G07	Single buffer; open-drain	0.7 - 2.75	CMOS	4.5	5	3.5	70	-40~85
74AXP1G125	Single buffer/line driver (3-state)	0.7 - 2.75	CMOS	+-4.5	5	2.7	70	-40~85
74AXP1G14	Single inverter; Schmitt-trigger	0.7 to 2.75	CMOS	+-4.5	5	2.9	70	-40~85
74AXP1G17	Single buffer; Schmitt-trigger	0.7 to 2.75	CMOS	+-4.5	5	2.8	70	-40~85
74AXP2G17	Dual buffer; Schmitt-trigger	0.7 to 2.75	CMOS	+-4.5	5	2.8	70	-40~85
74AXP2G34	Dual buffer	0.7 to 2.75	CMOS	+-4.5	5	2.5	70	-40~85
74AXP2G3404	Single buffer and Single inverter	0.7 to 2.75	CMOS	+-4.5	5	2.5	70	-40~85
74HC04	Hex inverter	2.0 - 6.0	CMOS	+-5.2	50	7.0	36	-40~125
74HC05	Hex inverter; open drain	2.0 - 6.0	CMOS	5.2	50	11	36	-40~125
74HC125	Quad buffer/line driver (3-state)	2.0 - 6.0	CMOS	+-7.8	50	9.0	36	-40~125
74HC126	Quad buffer/line driver (3-state)	2.0 - 6.0	CMOS	+-7.8	50	9.0	36	-40~125
74HC14	Hex inverter; Schmitt-trigger	2.0 - 6.0	CMOS	+-5.2	50	12	36	-40~125
74HC1G04	Single inverter	2.0 - 6.0	CMOS	+-2.6	50	7.0	36	-40~125
74HC1G125	Single buffer/line driver (3-state)	2.0 - 6.0	CMOS	+-2.6	50	9.0	36	-40~125
74HC1G126	Single buffer/line driver (3-state)	2.0 - 6.0	CMOS	+-2.6	50	9.0	36	-40~125
74HC1G14	Single inverter; Schmitt-trigger	2.0 - 6.0	CMOS	+-2.6	50	10	36	-40~125
74HC1GU04	Single inverter; unbuffered	2.0 - 6.0	CMOS	+- 2.6	50	5.0	36	-40~125
74HC240	Octal inverter/line driver (3-state)	2.0 - 6.0	CMOS	+-7.8	50	9.0	36	-40~125
74HC241	Octal buffer/line driver (3-state)	2.0 - 6.0	CMOS	+-7.8	50	7.0	36	-40~125
74HC244	Octal buffer/line driver (3-state)	2.0 - 6.0	CMOS	+-7.8	50	9.0	36	-40~125

Buffers/Inverters/Drivers

Type number	Description	V_{CC} (V)	Logic switching levels	Output drive capability (mA)	Output Load CL (pF)	t_{pd} (ns)	f_{max} (MHz)	T_{amb} (°C)
74HC2G04	Dual inverter	2.0 - 6.0	CMOS	±5.2	50	8.0	36	-40~125
74HC2G125	Dual buffer/line driver (3-state)	2.0 - 6.0	CMOS	±5.2	50	10	36	-40~125
74HC2G14	Dual inverter; Schmitt-trigger	2.0 - 6.0	CMOS	±5.2	50	16	36	-40~125
74HC2G17	Dual buffer; Schmitt-trigger	2.0 - 6.0	CMOS	±5.2	50	12	36	-40~125
74HC2G34	Dual buffer	2.0 - 6.0	CMOS	±5.2	50	9.0	36	-40~125
74HC2GU04	Single inverter; unbuffered	2.0 - 6.0	CMOS	±2.6	50	5.0	36	-40~125
74HC365	Hex buffer/line driver (3-state)	2.0 - 6.0	CMOS	±7.8	50	9.0	36	-40~125
74HC366	Hex inverter/line driver (3-state)	2.0 - 6.0	CMOS	±7.8	50	10	36	-40~125
74HC367	Hex buffer/line driver (3-state)	2.0 - 6.0	CMOS	±7.8	50	8.0	36	-40~125
74HC368	Hex inverter/line driver (3-state)	2.0 - 6.0	CMOS	±7.8	50	9.0	36	-40~125
74HC3G04	Triple inverter	2.0 - 6.0	CMOS	±5.2	50	8.0	36	-40~125
74HC3G06	Triple inverter; open drain	2.0 - 6.0	CMOS	5.2	50	9.0	36	-40~125
74HC3G07	Triple buffer; open drain	2.0 - 6.0	CMOS	5.2	50	9.0	36	-40~125
74HC3G14	Triple inverter; Schmitt-trigger	2.0 - 6.0	CMOS	±5.2	50	16	36	-40~125
74HC3G16	Triple buffer	2.0 - 6.0	CMOS	±5.2	50	9.0	36	-40~125
74HC3G34	Triple buffer	2.0 - 6.0	CMOS	±5.2	50	9.0	36	-40~125
74HC3GU04	Triple inverter; unbuffered	2.0 - 6.0	CMOS	±5.2	50	6.0	36	-40~125
74HC540	Octal inverter/line driver (3-state)	2.0 - 6.0	CMOS	±7.8	50	9.0	36	-40~125
74HC541	Octal buffer/line driver (3-state)	2.0 - 6.0	CMOS	±7.8	50	10	36	-40~125
74HC7014	Hex buffer; precision Schmitt-trigger	2.0 - 6.0	CMOS	±5.2	50	27	36	-40~125
74HC7540	Octal inverter/line driver; Schmitt-trigger (3-State)	2.0 - 6.0	CMOS	±7.8	15	11	36	-40~125
74HC7541	Octal buffer/line driver; Schmitt-trigger (3-State)	2.0 - 6.0	CMOS	±7.8	15	10	36	-40~125
74HC9114	9-bit inverter; Schmitt-trigger; open-drain (3-state)	2.0 - 6.0	CMOS	5.2	15	12	36	-40~125
74HC9115	9-bit buffer; Schmitt-trigger; open-drain (3-state)	2.0 - 6.0	CMOS	5.2	15	12	36	-40~125
74HCT04	Hex inverter; TTL-enabled	4.5 - 5.5	TTL	±4	50	8.0	36	-40~125
74HCT125	Quad buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	TTL	±6	50	12	36	-40~125
74HCT126	Quad buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	TTL	±6	50	11	36	-40~125
74HCT14	Hex inverter; Schmitt-trigger; TTL-enabled	4.5 - 5.5	TTL	±4	50	17	36	-40~125
74HCT1G04	Single inverter; TTL-enabled	4.5 - 5.5	TTL	±2	50	8.0	36	-40~125
74HCT1G125	Single buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	TTL	±2	50	10	36	-40~125
74HCT1G126	Single buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	TTL	±2	50	10	36	-40~125
74HCT1G14	Single inverter; Schmitt-trigger; TTL-enabled	4.5 - 5.5	TTL	±2	50	15	36	-40~125
74HCT240	Octal inverter/line driver; TTL-enabled (3-state)	4.5 - 5.5	TTL	±6	50	9.0	36	-40~125
74HCT241	Octal buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	TTL	±6	50	11	36	-40~125
74HCT244	Octal buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	TTL	±6	50	11	36	-40~125
74HCT2G04	Dual inverter; TTL-enabled	4.5 - 5.5	TTL	±4	50	10	36	-40~125
74HCT2G125	Dual buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	TTL	±4	50	12	36	-40~125
74HCT2G14	Dual inverter; Schmitt-trigger; TTL-enabled	4.5 to 5.5	TTL	±4	50	21	36	-40~125
74HCT2G17	Dual buffer; Schmitt-trigger; TTL-enabled	4.5 to 5.5	TTL	±4	50	21	36	-40~125

Buffers/Inverters/Drivers

Types in **bold** represent new products

Type number	Description	V_{CC} (V)	Logic switching levels	Output drive capability (mA)	Output Load CL (pF)	t_{pd} (ns)	f_{max} (MHz)	T_{amb} (°C)
74HCT2G34	Dual buffer; TTL-enabled	4.5 - 5.5	TTL	±4	50	10	32	-40~125
74HCT365	Hex buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	TTL	±6	50	11	36	-40~125
74HCT366	Hex inverter/line driver; TTL-enabled (3-state)	4.5 - 5.5	TTL	±6	50	11	36	-40~125
74HCT367	Hex buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	TTL	±6	50	11	36	-40~125
74HCT368	Hex inverter/line driver; TTL-enabled (3-state)	4.5 - 5.5	TTL	±6	50	11	36	-40~125
74HCT3G04	Triple inverter; TTL-enabled	4.5 - 5.5	TTL	±4	50	10	36	-40~125
74HCT3G06	Triple inverter; open drain; TTL-enabled	4.5 - 5.5	TTL	4	50	9.0	36	-40~125
74HCT3G07	Triple buffer; open drain; TTL-enabled	4.5 - 5.5	TTL	4	50	9.0	36	-40~125
74HCT3G14	Triple inverter Schmitt-trigger; TTL-enabled	4.5 - 5.5	TTL	±4	50	21	36	-40~125
74HCT3G16	Triple buffer; TTL-enabled	4.5 - 5.5	TTL	±4	50	10	36	-40~125
74HCT3G34	Triple buffer; TTL-enabled	4.5 - 5.5	TTL	±4	50	10	36	-40~125
74HCT540	Octal inverter/line driver; TTL-enabled (3-state)	4.5 - 5.5	TTL	±6	50	11	36	-40~125
74HCT541	Octal buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	TTL	±6	50	12	36	-40~125
74HCT7540	Octal inverter/line driver Schmitt-trigger; TTL-enabled (3-State)	4.5 - 5.5	TTL	±6	15	16	36	-40~125
74HCT7541	Octal buffer/line driver Schmitt-trigger; TTL-enabled (3-State)	4.5 - 5.5	TTL	±6	15	16	36	-40~125
74HCT9114	9-bit inverter Schmitt-trigger; open-drain; TTL-enabled (3-state)	4.5 - 5.5	TTL	4	15	13	36	-40~125
74HCU04	Hex inverter; unbuffered	2.0 - 6.0	CMOS	±5.2	50	5.0	36	-40~125
74LV04	Hex inverter	1.0 - 5.5	CMOS	±12	50	6.0	30	-40~125
74LV04AT	Hex buffer	4.5 - 5.5	TTL	±12	15	3.3	60	-40~125
74LV05A	Hex inverter; open-drain	2.0 - 5.5	CMOS	12	15	2.9	60	-40~125
74LV07A	Hex buffer; open-drain	2.0 - 5.5	CMOS	16	15	3.6	60	-40~125
74LV07AT	Hex buffer; open-drain; TTL-enabled	4.5 - 5.5	TTL	16	15	3.5	60	-40~125
74LV14	Hex inverter; Schmitt-trigger	1.0 - 5.5	TTL	±12	50	13	30	-40~125
74LV14A	Hex inverter; Schmitt-trigger	2.0 - 5.5	CMOS	±12	15	3.4	60	-40~125
74LV17A	Hex buffer; Schmitt-trigger	2.0 - 5.5	CMOS	±12	15	3.4	60	-40~125
74LV244	Octal buffer/line driver (3-state)	1.0 - 5.5	CMOS	±16	50	8.0	30	-40~125
74LV244A	Octal buffer/line driver (3-state)	2.0 - 5.5	CMOS	±16	15	2.9	60	-40~125
74LV244AT	Octal buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	TTL	±16	15	2.8	60	-40~125
74LV365	Hex buffer/line driver (3-state)	1.0 - 3.6	CMOS	±8	50	9.0	30	-40~125
74LV540A	Octal buffer/line driver (3-state); inverting	1.65 - 5.5	CMOS/LVTTL	±16	15	3.1	60	-40~125
74LV541A	Octal buffer/line driver (3-state)	2.0 - 5.5	CMOS	±16	15	2.9	60	-40~125
74LV541AT	Octal buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	TTL	±16	15	2.8	60	-40~125
74LVC04A	Hex inverter	1.65 - 5.5	CMOS/LVTTL	±24	50	2.0	175	-40~125
74LVC06A	Hex inverter; open drain	1.65 - 5.5	CMOS/LVTTL	32	50	2.2	175	-40~125
74LVC07A	Hex buffer; open drain	1.65 - 5.5	CMOS/LVTTL	32	50	2.2	175	-40~125
74LVC125A	Quad buffer/line driver (3-state)	1.2 - 3.6	CMOS/LVTTL	±24	50	2.4	175	-40~125
74LVC126A	Quad buffer/line driver (3-state)	1.2 - 3.6	CMOS/LVTTL	±24	50	2.4	175	-40~125
74LVC14A	Hex inverter; Schmitt-trigger	1.2 - 3.6	CMOS/LVTTL	±24	50	3.2	175	-40~125
74LVC162244A	16-bit buffer/line driver with 30 Ω termination resistors (3-state)	1.2 - 3.6	CMOS/LVTTL	±24	50	2.9	175	-40~125

Buffers/Inverters/Drivers

Type number	Description	V_{CC} (V)	Logic switching levels	Output drive capability (mA)	Output Load CL (pF)	t_{pd} (ns)	f_{max} (MHz)	T_{amb} (°C)
74LVC16240A	16-bit inverter/line driver (3-state)	1.2 - 3.6	CMOS/LVTTL	±24	50	2.7	175	-40~125
74LVC16241A	16-bit buffer/line driver (3-state)	1.2 - 3.6	CMOS/LVTTL	±24	50	2.9	175	-40~125
74LVC16244A	16-bit buffer/line driver (3-state)	1.2 - 3.6	CMOS/LVTTL	±24	50	3.0	175	-40~125
74LVC1G04	Single inverter	1.65 - 5.5	CMOS/LVTTL	±32	50	2.0	175	-40~125
74LVC1G06	Single inverter; open drain	1.65 - 5.5	CMOS/LVTTL	32	50	2.3	175	-40~125
74LVC1G07	Single buffer; open drain	1.65 - 5.5	CMOS/LVTTL	32	50	2.2	175	-40~125
74LVC1G125	Single buffer/line driver; TTL-enabled (3-state)	1.65 - 5.5	CMOS/LVTTL	±32	50	2.1	175	-40~125
74LVC1G126	Single buffer/line driver; TTL-enabled (3-state)	1.65 - 5.5	CMOS/LVTTL	±32	50	2.0	175	-40~125
74LVC1G14	Single inverter; Schmitt-trigger	1.65 - 5.5	CMOS/LVTTL	±32	50	3.0	175	-40~125
74LVC1G16	Single buffer	1.65 - 5.5	CMOS/LVTTL	±24	50	2.0	175	-40~125
74LVC1G17	Single buffer; Schmitt-trigger	1.65 - 5.5	CMOS/LVTTL	±32	50	3.0	175	-40~125
74LVC1G34	Single buffer	1.65 - 5.5	CMOS/LVTTL	±24	50	2.0	175	-40~125
74LVC1GU04	Single inverter; unbuffered	1.65 - 5.5	CMOS/LVTTL	±32	50	1.6	175	-40~125
74LVC2244A	Octal buffer/line driver with 30 Ω termination resistors (3-state)	1.2 - 3.6	CMOS/LVTTL	±12	50	3.1	175	-40~125
74LVC240A	Octal inverter/line driver (3-state)	1.2 - 3.6	CMOS/LVTTL	±24	50	3.5	175	-40~125
74LVC244A	Octal buffer/line driver (3-state)	1.2 - 3.6	CMOS/LVTTL	±24	50	2.8	175	-40~125
74LVC2G04	Dual inverter	1.65 - 5.5	CMOS/LVTTL	±24	50	2.7	175	-40~125
74LVC2G06	Dual inverter; open drain	1.65 - 5.5	CMOS/LVTTL	32	50	2.3	175	-40~125
74LVC2G07	Dual buffer; open drain	1.65 - 5.5	CMOS/LVTTL	32	50	2.6	175	-40~125
74LVC2G125	Dual buffer/line driver; TTL-enabled (3-state)	1.65 - 5.5	CMOS/LVTTL	±32	50	2.3	175	-40~125
74LVC2G126	Dual buffer/line driver; TTL-enabled (3-state)	1.65 - 5.5	CMOS/LVTTL	±32	50	2.4	175	-40~125
74LVC2G14	Dual inverter; Schmitt-trigger	1.65 - 5.5	CMOS/LVTTL	±32	50	3.9	175	-40~125
74LVC2G16	Dual buffer	1.65 - 5.5	CMOS/LVTTL	±24	50	2.0	175	-40~125
74LVC2G17	Dual buffer; Schmitt-trigger	1.65 - 5.5	CMOS/LVTTL	±32	50	3.6	175	-40~125
74LVC2G240	Dual inverter/line driver (3-state)	1.65 - 5.5	CMOS/LVTTL	±32	50	2.5	175	-40~125
74LVC2G241	Dual buffer/line driver (3-state)	1.65 - 5.5	CMOS/LVTTL	±32	50	2.6	175	-40~125
74LVC2G34	Dual buffer	1.65 - 5.5	CMOS/LVTTL	±32	50	2.2	175	-40~125
74LVC2GU04	Dual inverter; unbuffered	1.65 - 5.5	CMOS/LVTTL	±32	50	2.3	175	-40~125
74LVC3G04	Triple inverter	1.65 - 5.5	CMOS/LVTTL	±32	50	2.7	175	-40~125
74LVC3G06	Triple inverter; open drain	1.65 - 5.5	CMOS/LVTTL	32	50	2.0	175	-40~125
74LVC3G07	Triple buffer; open drain	1.65 - 5.5	CMOS/LVTTL	32	50	2.1	175	-40~125
74LVC3G14	Triple inverter; Schmitt-trigger	1.65 - 5.5	CMOS/LVTTL	±32	50	3.2	175	-40~125
74LVC3G16	Triple buffer	1.65 - 5.5	CMOS/LVTTL	±24	50	2.0	175	-40~125
74LVC3G17	Triple buffer; Schmitt-trigger	1.65 - 5.5	CMOS/LVTTL	±32	50	3.6	175	-40~125
74LVC3G34	Triple buffer	1.65 - 5.5	CMOS/LVTTL	±32	50	2.2	175	-40~125
74LVC3GU04	Triple inverter; unbuffered	1.65 - 5.5	CMOS/LVTTL	±32	50	2.3	175	-40~125
74LVC541A	Octal buffer/line driver (3-state)	1.2 - 3.6	CMOS/LVTTL	±24	50	3.3	175	-40~125
74LVC827A	10-bit buffer/line driver (3-state)	1.2 - 3.6	CMOS/LVTTL	±24	50	4.0	175	-40~125
74LVCH162244A	16-bit buffer/line driver with bus hold and 30 Ω termination resistors (3-state)	1.2 - 3.6	CMOS/LVTTL	±12	50	2.9	175	-40~125

Buffers/Inverters/Drivers

Type number	Description	V_{CC} (V)	Logic switching levels	Output drive capability (mA)	Output Load CL (pF)	t_{pd} (ns)	f_{max} (MHz)	T_{amb} (°C)
74LVCH16244A	16-bit buffer/line driver with bus hold (3-state)	1.2 - 3.6	CMOS/LVTTL	±24	50	3.0	175	-40~125
74LVCH16541A	16-bit buffer/line driver with bus hold (3-state)	1.2 - 3.6	CMOS/LVTTL	±24	50	2.7	175	-40~125
74LVCH244A	Octal buffer/line driver with bus hold (3-state)	1.2 - 3.6	CMOS/LVTTL	±24	50	2.8	175	-40~125
74LVCU04A	Hex inverter; unbuffered	1.2 - 3.6	CMOS/LVTTL	±24	50	2.0	175	-40~125
74LVT04	Hex inverter	2.7 - 3.6	TTL	-20 / 32	50	2.6	150	-40~85
74LVT125	Quad buffer/line driver with bus hold (3-state)	2.7 - 3.6	TTL	-32 / 64	50	2.9	150	-40~85
74LVT126	Quad buffer/line driver with bus hold (3-state)	2.7 - 3.6	TTL	-32 / 64	50	2.4	150	-40~85
74LVT14	Hex inverter; Schmitt-trigger	2.7 - 3.6	TTL	-32 / 64	50	3.8	150	-40~85
74LVT162240A	16-bit inverter/line driver with bus hold and 30 Ω termination (3-state)	2.7 - 3.6	TTL	±12	50	2.6	150	-40~85
74LVT162244B	16-bit buffer/line driver with bus hold and 30 Ω termination resistors (3-state)	2.7 - 3.6	TTL	±12	50	2.8	150	-40~85
74LVT16240A	16-bit inverter/line driver with bus hold (3-state)	2.7 - 3.6	TTL	-32 / 64	50	2.0	150	-40~85
74LVT16244B	16-bit buffer/line driver with bus hold (3-state)	2.7 - 3.6	TTL	-32 / 64	50	1.8	150	-40~85
74LVT2241	Octal buffer/line driver with bus hold and 30 Ω termination resistors (3-state)	2.7 - 3.6	TTL	±12	50	3.3	150	-40~85
74LVT2244	Octal buffer/line driver with bus hold and 30 Ω termination resistors (3-state)	2.7 - 3.6	TTL	±12	50	2.9	150	-40~85
74LVT240	Octal inverter/line driver with bus hold (3-state)	2.7 - 3.6	TTL	-32 / 64	50	2.5	150	-40~85
74LVT241	Octal buffer/line driver with bus hold (3-state)	2.7 - 3.6	TTL	-32 / 64	50	2.8	150	-40~85
74LVT244A	Octal buffer/line driver with bus hold (3-state)	2.7 - 3.6	TTL	-32 / 64	50	2.6	150	-40~85
74LVT244B	Octal buffer/line driver with bus hold (3-state)	2.7 - 3.6	TTL	-32 / 64	50	2.0	150	-40~85
74LVTH125	Quad buffer/line driver with bus hold (3-state)	2.7 - 3.6	TTL	-32 / 64	50	2.9	150	-40~85
74LVTH16244B	16-bit buffer/line driver with bus hold (3-state)	2.7 - 3.6	TTL	-32 / 64	50	1.8	150	-40~85
74LVTH244A	Octal buffer/line driver with bus hold (3-state)	2.7 - 3.6	TTL	-32 / 64	50	2.6	150	-40~85
74LVTH244B	Octal buffer/line driver with bus hold (3-state)	2.7 - 3.6	TTL	-32 / 64	50	2.0	150	-40~85
74LVTN16244B	16-bit buffer/line driver (3-state)	2.7 - 3.6	TTL	-32 / 64	50	1.8	150	-40~85
74VHC125	Quad buffer/line driver (3-state)	2.0 - 5.5	CMOS	±8	50	3.0	60	-40~125
74VHC126	Quad buffer/line driver (3-state)	2.0 - 5.5	CMOS	±8	50	3.3	60	-40~125
74VHC14	Hex inverter; Schmitt-trigger	2.0 - 5.5	CMOS	±8	50	3.2	60	-40~125
74VHC244	Octal inverter/line driver (3-state)	2.0 - 5.5	CMOS	±8	50	3.5	60	-40~125
74VHC541	Octal buffer/line driver (3-state)	2.0 - 5.5	CMOS	±8	50	3.5	60	-40~125
74VHCT125	Quad buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	TTL	±8	50	3.0	60	-40~125
74VHCT126	Quad buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	TTL	±8	50	3.0	60	-40~125
74VHCT14	Hex inverter; Schmitt-trigger; TTL-enabled	4.5 - 5.5	TTL	±8	50	4.1	60	-40~125
74VHCT244	Octal inverter/line driver; TTL-enabled (3-state)	4.5 - 5.5	TTL	±8	50	5.0	60	-40~125
74VHCT541	Octal buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	TTL	±8	50	3.5	60	-40~125
HEF40098B	Hex inverter	3.0 - 15.0	CMOS	-10 / 20	50	25	10	-40~125
HEF40244B	Octal buffer/line driver (3-state)	3.0 - 15.0	CMOS	-62 / 45	50	30	10	-40~125
HEF4049B	Hex inverter/line driver	3.0 - 15.0	CMOS	-3 / 20	50	20	10	-40~125
HEF4050B	Hex buffer/line driver	3.0 - 15.0	CMOS	-3 / 20	50	40	10	-40~125
HEF4069UB	Hex inverter; unbuffered	3.0 - 15.0	CMOS	±3.4	50	15	10	-40~125
XC7SET04	Single inverter; TTL-enabled	4.5 - 5.5	TTL	±8	50	3.5	60	-40~125

Buffers/inverters/drivers

Type number	Description	V_{CC} (V)	Logic switching levels	Output drive capability (mA)	Output Load CL (pF)	t_{pd} (ns)	f_{max} (MHz)	T_{amb} (°C)
XC7SET125	Single buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	TTL	±8	50	3.4	60	-40~125
XC7SET14	Single inverter; Schmitt-trigger; TTL-enabled	4.5 - 5.5	TTL	±8	50	4.1	60	-40~125
XC7SH04	Single inverter	2.0 - 5.5	CMOS	±8	50	3.5	60	-40~125
XC7SH125	Single buffer/line driver (3-state)	2.0 - 5.5	CMOS	±8	50	3.4	60	-40~125
XC7SH14	Single inverter; Schmitt-trigger	2.0 - 5.5	CMOS	±8	50	3.2	60	-40~125
XC7SHU04	Single inverter; unbuffered	2.0 - 5.5	CMOS	±8	50	3.5	60	-40~125
XC7WH126	Dual buffer/line driver (3-state)	2.0 - 5.5	CMOS	±8	50	3.4	60	-40~125
XC7WH14	Triple inverter; Schmitt-trigger	2.0 - 5.5	CMOS	±8	50	3.2	60	-40~125
XC7WT14	Triple inverter; Schmitt-trigger; TTL-enabled	4.5 - 5.5	TTL	±8	50	4.1	60	-40~125

Transceivers

Type number	Description	V_{CC} (V)	Logic switching levels	Output drive capability (mA)	t_{pd} (ns)	Number of bits	f_{max} (MHz)	T_{vv} (°C)
74ABT162245A	16-bit transceiver with 30 ohm termination resistors (3-state)	4.5 - 5.5	TTL	-32 / 12	3.0	16	100	-40~85
74ABT16245B	16-bit transceiver (3-state)	4.5 - 5.5	TTL	-32 / 64	2.3	16	150	-40~85
74ABT245	Octal transceiver (3-state)	4.5 - 5.5	TTL	-32 / 64	2.9	8	100	-40~85
74ABTH162245A	16-bit transceiver with bus hold and 30 ohm termination resistors (3-state)	4.5 - 5.5	TTL	-32 / 12	3.0	16	80	-40~85
74AHC245	Octal transceiver (3-state)	2.0 - 5.5	CMOS	±8	3.5	8	60	-40~125
74AHCT245	Octal transceiver; TTL-enabled (3-state)	4.5 - 5.5	TTL	±8	5.0	8	60	-40~125
74AHCT245A	Octal transceiver; TTL-enabled (3-state)	4.5 - 5.5	TTL	±8	3.0	8	60	-40~125
74AHCV245A	Octal transceiver; Schmitt-trigger (3-state)	1.8 - 5.5	CMOS	±16	3.2	8	60	-40~125
74ALVC16245	16-bit transceiver (3-state)	1.65 - 3.6	TTL	±24	1.9	16	150	-40~85
74ALVC245	Octal transceiver (3-state)	1.65 - 3.6	TTL	±24	2.3	8	130	-40~85
74ALVCH162245	16-bit transceiver with bus hold and 30 Ω termination resistors (3-state)	1.65 - 3.6	TTL	±12	2.4	16	150	-40~85
74ALVCH16245	16-bit transceiver with bus hold (3-state)	1.65 - 3.6	TTL	±24	1.9	16	150	-40~85
74ALVCH162601	18-bit universal bus transceiver with bus hold and 30 Ω termination resistors; positive-edge trigger (3-state)	1.65 - 3.6	TTL	±12	3.1	18	150	-40~85
74ALVCH16500	18-bit universal bus transceiver with bus hold; negative edge trigger (3-state)	1.65 - 3.6	TTL	±24	2.9	18	150	-40~85
74ALVCH16501	18-bit universal bus transceiver with bus hold; positive edge trigger (3-state)	1.65 - 3.6	TTL	±24	2.8	18	150	-40~85
74ALVCH16543	16-bit registered transceiver with bus hold (3-state)	1.65 - 3.6	TTL	±24	3.8	16	150	-40~85
74ALVCH16600	18-bit universal bus transceiver with bus hold; negative edge trigger (3-state)	1.65 - 3.6	TTL	±24	2.8	18	150	-40~85
74ALVCH16601	18-bit universal bus transceiver with bus hold; positive edge trigger (3-state)	1.65 - 3.6	TTL	±24	2.8	18	150	-40~85
74ALVCH16646	16-bit registered transceiver with bus hold (3-state)	1.65 - 3.6	TTL	±24	2.6	16	150	-40~85
74ALVCH16652	16-bit registered transceiver with bus hold (3-state)	1.65 - 3.6	TTL	±24	2.6	16	150	-40~85
74ALVCH16952	16-bit registered transceiver with bus hold (3-state)	1.65 - 3.6	TTL	±24	3.2	16	150	-40~85
74ALVT162245	16-bit transceiver with bus hold and 30 Ω termination resistors (3-state)	2.3 - 3.6	TTL	±12	2.3	16	75	-40~85
74AVC16245	16-bit transceiver (3-state)	1.2 - 3.6	CMOS	±12	2.0	16	200	-40 ~85
74AVCH16245	16-bit transceiver with bus hold (3-state)	1.2 - 3.6	CMOS	±12	2.0	16	200	-40~85
74HC245	Octal transceiver (3-state)	2.0 - 6.0	CMOS	±7.8	7.0	8	36	-40~125
74HCT245	Octal transceiver; TTL-enabled (3-state)	4.5 - 5.5	TTL	±6	10	8	36	-40~125
74LV245	Octal transceiver (3-state)	1.0 - 5.5	TTL	±16	7.0	8	30	-40~125
74LV245A	Octal transceiver (3-state)	2.0 - 5.5	CMOS	±16	3	8	60	-40~125
74LV245AT	Octal transceiver; TTL-enabled (3-state)	4.5 - 5.5	TTL	±16	3	8	60	-40~125
74LVC162245A	16-bit transceiver with 30 Ω termination resistors (3-state)	1.2 - 3.6	CMOS/LVTTL	±12	3.3	16	175	-40~125
74LVC16245A	16-bit transceiver (3-state)	1.2 - 3.6	CMOS/LVTTL	±24	3.0	16	175	-40~125
74LVC2245A	Octal transceiver with 30 Ω termination resistors (3-state)	1.2 - 3.6	CMOS/LVTTL	±12	3.3	8	175	-40~125
74LVC245A	Octal transceiver (3-state)	1.2 - 3.6	CMOS/LVTTL	±24	2.9	8	175	-40~125
74LVC32245A	32-bit transceiver (3-state)	1.2 - 3.6	CMOS/LVTTL	±24	2.2	32	175	-40~125
74LVCH162245A	16-bit transceiver with bus hold and 30 Ω termination resistors (3-state)	1.2 - 3.6	CMOS/LVTTL	±12	3.3	16	175	-40~125
74LVCH16245A	16-bit transceiver with bus hold (3-state)	1.2 - 3.6	CMOS/LVTTL	±24	3.0	16	175	-40~125
74LVCH245A	Octal transceiver with bus hold (3-state)	1.2 - 3.6	CMOS/LVTTL	±24	2.9	8	175	-40~125

Transceivers

Type number	Description	V_{CC} (V)	Logic switching levels	Output drive capability (mA)	t_{pd} (ns)	Number of bits	f_{max} (MHz)	T_{vv} (°C)
74LVT162245B	16-bit transceiver with bus hold and 30 Ω termination resistors (3-state)	2.7 - 3.6	TTL	±12	2.5	16	150	-40~85
74LVT16245B	16-bit transceiver with bus hold (3-state)	2.7 - 3.6	TTL	-32 / 64	1.9	16	150	-40~85
74LVT16543A	16-bit registered transceiver with bus hold (3-state)	2.7 - 3.6	TTL	-32 / 64	2.2	16	150	-40~85
74LVT16543A	16-bit registered transceiver with bus hold (3-state)	2.7 - 3.6	TTL	-32 / 64	2	16	150	-40~85
74LVT2245	Octal transceiver with bus hold and 30 Ω termination resistors (3-state)	2.7 - 3.6	TTL	±12	3.2	8	150	-40~85
74LVT245	Octal transceiver (3-state)	2.7 - 3.6	TTL	-32 / 64	2.4	8	150	-40~85
74LVT245B	Octal transceiver (3-state)	2.7 - 3.6	TTL	-32 / 64	2	8	150	-40~85
74LVT640	Octal transceiver with bus hold; inverting (3-state)	2.7 - 3.6	TTL	-32 / 64	2.4	8	150	-40~85
74LVTH16245B	16-bit transceiver with bus hold (3-state)	2.7 - 3.6	TTL	-32 / 64	1.9	16	150	-40~85
74LVTH2245	Octal transceiver with bus hold and 30 Ω termination resistors (3-state)	2.7 - 3.6	TTL	±12	3.2	8	150	-40~85
74LVTN16245B	16-bit transceiver (3-state)	2.7 - 3.6	TTL	-32 / 64	1.9	16	150	-40~85
74VHC245	Octal transceiver (3-state)	2.0 - 5.5	CMOS	±8	3.5	8	60	-40~125
74VHCT245	Octal transceiver; TTL-enabled (3-state)	4.5 - 5.5	TTL	±8	5.0	8	60	-40~125

Schmitt-triggers

Types in **bold** represent new products

Type number	Description	V_{CC} (V)	Logic switching levels	Output drive capability (mA)	t_{pd} (ns)	Output Load C_L (pF)	f_{max} (MHz)	Number of bits	T_{amb} (°C)
74AHC132	Quad 2-input NAND gate Schmitt-trigger	2.0 - 5.5	CMOS	±8	3.3	50	60	4	-40~125
74AHC14	Hex inverter Schmitt-trigger	2.0 - 5.5	CMOS	±8	3.2	50	60	6	-40~125
74AHC1G14	Single inverter Schmitt-trigger	2.0 - 5.5	CMOS	±8	3.2	50	60	1	-40~125
74AHC1G17	Single buffer Schmitt-trigger	2.0 - 5.5	CMOS	±8	3.2	50	60	1	-40~125
74AHC3G14	Triple inverter Schmitt-trigger	2.0 - 5.5	CMOS	±8	3.2	50	60	3	-40~125
74AHCT132	Quad 2-input NAND gate Schmitt-trigger; TTL- enabled	4.5 - 5.5	TTL	±8	3.5	50	60	4	-40~125
74AHCT14	Hex inverter Schmitt-trigger; TTL-enabled	4.5 - 5.5	TTL	±8	4.0	50	60	6	-40~125
74AHCT17A	Hex buffer Schmitt-trigger	4.5 - 5.5	TTL	±8	3.2	50	60	8	-40~125
74AHCT1G14	Single inverter Schmitt-trigger; TTL-enabled	4.5 - 5.5	TTL	±8	4.1	50	60	1	-40~125
74AHCT1G17	Single buffer Schmitt-trigger; TTL-enabled	4.5 - 5.5	TTL	±8	4.1	50	60	1	-40~125
74AHCT3G14	Triple inverter Schmitt-trigger; TTL-enabled	4.5 - 5.5	TTL	±8	4.1	50	60	3	-40~125
74AHCV07A	Hex buffer Schmitt-trigger; open-drain	1.8 - 5.5	CMOS	16	3.8	15	60	6	-40~125
74AHCV14A	Hex inverter Schmitt-trigger	1.8 - 5.5	CMOS	±16	3.2	15	60	6	-40~125
74AHCV17A	Hex buffer Schmitt-trigger	1.8 - 5.5	CMOS	±16	3.2	15	60	6	-40~125
74AHCV244A	Octal buffer/line driver Schmitt-trigger (3-state)	1.8 - 5.5	CMOS	±16	3.0	15	60	8	-40~125
74AHCV245A	Octal transceiver Schmitt-trigger (3-state)	1.8 - 5.5	CMOS	±16	3.2	15	60	8	-40~125
74AHCV541A	Octal buffer/line driver Schmitt-trigger (3-state)	1.8 - 5.5	CMOS	±16	3.0	15	60	8	-40~125
74ALVC14	Hex inverter Schmitt-trigger	1.65 - 3.6	TTL	±24	2.4	50	150	6	-40~85
74AUP1G132	Single 2-input NAND gate Schmitt-trigger	1.1 - 3.6	CMOS	±1.9	10.0	30	70	1	-40~125
74AUP1G14	Single inverter Schmitt-trigger	1.1 - 3.6	CMOS	±1.9	4.7	30	70	1	-40~125
74AUP1G17	Single buffer Schmitt-trigger	1.1 - 3.6	CMOS	±1.9	7.8	30	70	1	-40~125

Schmitt-triggers

Types in **bold** represent new products

Type number	Description	V_{CC} (V)	Logic switching levels	Output drive capability (mA)	t_{pd} (ns)	Output Load C_L (pF)	f_{max} (MHz)	Number of bits	T_{amb} (°C)
74AUP1G57	Configurable gate; Schmitt-trigger	1.1 - 3.6	CMOS	±1.9	8.7	30	70	1	-40~125
74AUP1G58	Configurable gate; Schmitt-trigger	1.1 - 3.6	CMOS	±1.9	8.7	30	70	1	-40~125
74AUP1G97	Configurable gate; Schmitt-trigger	1.1 - 3.6	CMOS	±1.9	8.7	30	70	1	-40~125
74AUP1G98	Configurable gate; Schmitt-trigger	1.1 - 3.6	CMOS	±1.9	8.9	30	70	1	-40~125
74AUP2G132	Dual 2-input NAND gate Schmitt-trigger	1.1 - 3.6	CMOS	±1.9	10	30	70	2	-40~125
74AUP2G14	Dual inverter Schmitt-trigger	1.1 - 3.6	CMOS	±1.9	4.7	30	70	2	-40~125
74AUP2G17	Dual buffer Schmitt-trigger	1.1 - 3.6	CMOS	±1.9	7.8	30	70	2	-40~125
74AUP2G58	Dual configurable gate; Schmitt-trigger	1.1 - 3.6	CMOS	±1.9	8.7	30	70	2	-40~125
74AUP2G97	Dual configurable gate; Schmitt-trigger	1.1 - 3.6	CMOS	±1.9	8.7	30	70	2	-40~125
74AUP2G98	Dual configurable gate; Schmitt-trigger	1.1 - 3.6	CMOS	±1.9	8.9	30	70	2	-40~125
74AUP3G14	Triple inverter Schmitt-trigger	1.1 - 3.6	CMOS	±1.9	2.4	30	70	3	-40~125
74AUP3G17	Triple Schmitt-trigger	1.1 - 3.6	CMOS	±1.9	2.4	30	70	3	-40~125
74AXP1G14	Single inverter Schmitt-trigger	0.7 - 2.75	CMOS	±4.5	2.9	5	70	1	-40~85
74AXP1G17	Single buffer Schmitt-trigger	0.7 - 2.75	CMOS	±4.5	2.8	5	70	1	-40~85
74AXP1G57	Configurable gate; Schmitt-trigger	0.7 - 2.75	CMOS	±4.5	4.6	5	70	1	-40~85
74AXP1G58	Configurable gate; Schmitt-trigger	0.7 - 2.75	CMOS	±4.5	4.5	5	70	1	-40~85
74AXP1G97	Configurable gate; Schmitt-trigger	0.7 - 2.75	CMOS	±4.5	4.5	5	70	1	-40~85
74AXP1G98	Configurable gate; Schmitt-trigger	0.7 - 2.75	CMOS	±4.5	4.5	5	70	1	-40~85
74AXP1T14	Dual-supply Schmitt-trigger inverter	0.75 - 2.75	CMOS	±12	4.9	5	45	1	-40~125
74AXP1T57	Single dual-supply translating configurable gate; Schmitt-trigger inputs	0.75 - 2.75	CMOS	±12	4.8	5	45	1	-40~125
74AXP2G14	Dual inverter Schmitt-trigger	0.7 - 2.75	CMOS	±4.5	2.9	5	70	2	-40~85
74AXP2G17	Dual buffer Schmitt-trigger	0.7 - 2.75	CMOS	±4.5	2.8	5	70	1	-40~85
74HC132	Quad 2-input NAND gate Schmitt-trigger	2.0 - 6.0	CMOS	±5.2	11	50	36	4	-40~125
74HC14	Hex inverter Schmitt-trigger	2.0 - 6.0	CMOS	±5.2	12	50	36	6	-40~125
74HC1G14	Single inverter Schmitt-trigger	2.0 - 6.0	CMOS	±2.6	10	50	36	1	-40~125
74HC2G14	Dual inverter Schmitt-trigger	2.0 - 6.0	CMOS	±5.2	16	50	36	2	-40~125
74HC2G17	Dual buffer Schmitt-trigger	2.0 - 6.0	CMOS	±5.2	12	50	36	2	-40~125
74HC3G14	Triple inverter Schmitt-trigger	2.0 - 6.0	CMOS	±5.2	16	50	36	3	-40~125
74HC7014	Hex buffer precision Schmitt-trigger	2.0 - 6.0	CMOS	±5.2	27	50	36	6	-40~125
74HC7540	Octal inverter/line driver Schmitt-trigger (3-state)	2.0 - 6.0	CMOS	±7.8	11	50	36	8	-40~125
74HC7541	Octal buffer/line driver Schmitt-trigger (3-state)	2.0 - 6.0	CMOS	±7.8	11	50	36	8	-40~125
74HC9114	9-bit inverter Schmitt-trigger; open drain (3-state)	2.0 - 6.0	CMOS	5,2	12	50	36	9	-40~125
74HC9115	9-bit buffer Schmitt-trigger; open drain (3-state)	2.0 - 6.0	CMOS	5,2	12	50	36	9	-40~125
74HCT132	Quad 2-input NAND gate Schmitt-trigger; TTL- enabled	4.5 - 5.5	TTL	±4	17	50	36	4	-40~125
74HCT14	Hex inverter Schmitt-trigger; TTL-enabled	4.5 - 5.5	TTL	±4	17	50	36	6	-40~125
74HCT1G14	Single inverter Schmitt-trigger; TTL-enabled	4.5 - 5.5	TTL	±2.0	15	50	36	1	-40~125
74HCT2G14	Dual inverter Schmitt-trigger; TTL-enabled	4.5 - 5.5	TTL	±4.0	21	50	36	2	-40~125
74HCT2G17	Dual buffer Schmitt-trigger; TTL-enabled	4.5 - 5.5	TTL	±4.0	21	50	36	2	-40~125

Schmitt-triggers

Type number	Description	V_{CC} (V)	Logic switching levels	Output drive capability (mA)	t_{pd} (ns)	Output Load C_L (pF)	f_{max} (MHz)	Number of bits	T_{amb} (°C)
74HCT3G14	Triple inverter Schmitt-trigger; TTL-enabled	4.5 - 5.5	TTL	±4.0	21	50	36	3	-40~125
74HCT7540	Octal inverter/line driver Schmitt-trigger; TTL- enabled (3-state)	4.5 - 5.5	TTL	±6	16	50	36	8	-40~125
74HCT7541	Octal buffer/line driver Schmitt-trigger; TTL- enabled (3-state)	4.5 - 5.5	TTL	±6	16	50	36	8	-40~125
74HCT9114	9-bit inverter Schmitt-trigger; open drain; TTL- enabled (3-state)	4.5 - 5.5	TTL	4	13	50	36	9	-40~125
74LV132	Quad 2-input NAND gate Schmitt-trigger	1.0 - 5.5	TTL	±12	10	50	30	4	-40~125
74LV14	Hex inverter Schmitt-trigger	1.0 - 5.5	TTL	±12	13	50	30	6	-40~125
74LV14A	Hex inverter Schmitt-trigger	2.0 - 5.5	CMOS	±12	3.4	15	60	6	-40~125
74LVC132A	Quad 2-input NAND gate Schmitt-trigger	1.2 - 3.6	CMOS/LVTTL	±24	3.4	50	175	4	-40~125
74LVC14A	Hex inverter Schmitt-trigger	1.2 - 3.6	CMOS/LVTTL	±24	3.2	50	175	6	-40~125
74LVC1G14	Single inverter Schmitt-trigger	1.65 - 5.5	CMOS/LVTTL	±32	3.0	50	175	1	-40~125
74LVC1G17	Single buffer Schmitt-trigger	1.65 - 5.5	CMOS/LVTTL	±32	3.0	50	175	1	-40~125
74LVC1G57	Configurable gate; Schmitt-trigger	1.65 - 5.5	CMOS/LVTTL	±32	6.3	50	150	1	-40~125
74LVC1G58	Configurable gate; Schmitt-trigger	1.65 - 5.5	CMOS/LVTTL	±32	6.3	50	150	1	-40~125
74LVC1G97	Configurable gate; Schmitt-trigger	1.65 - 5.5	CMOS/LVTTL	±32	6.3	50	150	1	-40~125
74LVC1G98	Configurable gate; Schmitt-trigger	1.65 - 5.5	CMOS/LVTTL	±32	6.3	50	150	1	-40~125
74LVC1G99	Configurable gate; Schmitt-trigger	1.65 - 5.5	CMOS/LVTTL	±32	8.4	50	150	1	-40~125
74LVC2G14	Dual inverter Schmitt-trigger	1.65 - 5.5	CMOS/LVTTL	±32	3.9	50	175	2	-40~125
74LVC2G17	Dual buffer Schmitt-trigger	1.65 - 5.5	CMOS/LVTTL	±32	3.6	50	175	2	-40~125
74LVC3G14	Triple inverter Schmitt-trigger	1.65 - 5.5	CMOS/LVTTL	±32	3.2	50	175	3	-40~125
74LVC3G17	Triple buffer Schmitt-trigger	1.65 - 5.5	CMOS/LVTTL	±32	3.6	50	175	3	-40~125
74LVT14	Hex inverter Schmitt-trigger	2.7 - 3.6	TTL	±32	3.8	50	150	6	-40~125
74VHC14	Hex inverter Schmitt-trigger	2.0 - 5.5	CMOS	±8	3.2	50	60	6	-40~125
74VHCT14	Hex inverter Schmitt-trigger; TTL-enabled	4.5 - 5.5	TTL	±8	4.1	50	60	6	-40~125
HEF40106B	Hex inverter Schmitt-trigger	3.0 - 15	CMOS	±2.4	30	50	10	6	-40~85
HEF4093B	Quad 2-input NAND gate Schmitt-trigger	3.0 - 15	CMOS	±2.4	30	50	10	4	-40~125
XC7SET14	Single inverter Schmitt-trigger; TTL-enabled	4.5 - 5.5	TTL	±8	4.1	50	60	1	-40~125
XC7SH14	Single inverter Schmitt-trigger	2.0 - 5.5	CMOS	±8	3.2	50	60	1	-40~125
XC7WH14	Triple inverter Schmitt-trigger	2.0 - 5.5	CMOS	±8	3.2	50	60	3	-40~125
XC7WT14	Triple inverter Schmitt-trigger; TTL-enabled	4.5 - 5.5	TTL	±8	4.1	50	60	3	-40~125

Counters/Frequency dividers

Type number	Description	V_{CC} (V)	Output drive capability (mA)	Logic switching levels	t_{pd} (ns)	Output Load C_L (pF)	f_{max} (MHz)	T_{amb} (°C)
74AHC1G4210	10-stage divider and oscillator	2.0 - 5.5	±5.2	CMOS	17	15	125	-40~125
74AHC1G4212	12-stage divider and oscillator	2.0 - 5.5	±5.2	CMOS	20	15	125	-40~125
74AHC1G4214	14-stage divider and oscillator	2.0 - 5.5	±5.2	CMOS	23	15	125	-40~125
74HC160	Presettable synchronous BCD decade counter; asynchronous reset	2.0 - 6.0	±5.2	CMOS	18	50	55	-40~125
74HC161	Presettable synchronous 4-bit binary counter; asynchronous reset	2.0 - 6.0	±5.2	CMOS	19	50	48	-40~125
74HCT161	Presettable synchronous 4-bit binary counter; asynchronous reset; TTL-enabled	4.5 - 5.5	±4.0	TTL	20	50	41	-40~125
74HCT163	Presettable synchronous 4-bit binary counter; synchronous reset; TTL-enabled	4.5 - 5.5	±4.0	TTL	20	50	50	-40~125
74HC191	Presettable synchronous 4-bit binary up/down counter	2.0 - 6.0	±5.2	CMOS	22	50	36	-40~125
74HC193	Presettable synchronous 4-bit binary up/down counter; separate up/down clocks	2.0 - 6.0	±5.2	CMOS	20	50	49	-40~125
74HCT193	Presettable synchronous 4-bit binary up/down counter; separate up/down clocks; TTL-enabled	4.5 - 5.5	±4.0	TTL	20	50	43	-40~125
74HC390	Dual decade ripple counter	2.0 - 6.0	±5.2	CMOS	14	50	60	-40~125
74HCT390	Dual decade ripple counter; TTL-enabled	4.5 - 5.5	±4.0	TTL	18	50	55	-40~125
74HC393	Dual 4-bit binary ripple counter	2.0 - 6.0	±5.2	CMOS	12	50	107	-40~125
74HCT393	Dual 4-bit binary ripple counter; TTL-enabled	4.5 - 5.5	±4.0	TTL	20	50	53	-40~125
74HC4017	Johnson decade counter with 10 decoded outputs	2.0 - 6.0	±5.2	CMOS	18	50	77	-40~125
74HCT4017	Johnson decade counter with 10 decoded outputs; TTL-enabled	4.5 - 5.5	±4.0	TTL	21	50	67	-40~125
74HC4020	14-stage binary ripple counter	2.0 - 6.0	±5.2	CMOS	11	50	52	-40~125
74HCT4020	14-stage binary ripple counter; TTL-enabled	4.5 - 5.5	±4.0	TTL	15	50	52	-40~125
74HC4040	12-stage binary ripple counter	2.0 - 6.0	±5.2	CMOS	14	50	90	-40~125
74HCT4040	12-stage binary ripple counter; TTL-enabled	4.5 - 5.5	±4.0	TTL	16	50	79	-40~125
74HC4060	14-stage binary ripple counter with oscillator	2.0 - 6.0	±5.2	CMOS	31	50	95	-40~125
74HCT4060	14-stage binary ripple counter with oscillator; TTL-enabled	4.5 - 5.5	±4.0	TTL	31	50	88	-40~125
74HC4520	Dual 4-bit synchronous binary counter	2.0 - 6.0	±5.2	CMOS	24	50	64	-40~125
74HCT4520	Dual 4-bit synchronous binary counter; TTL-enabled	4.5 - 5.5	±4.0	TTL	24	50	64	-40~125
74HC5555	Programmable delay timer with oscillator	2.0 - 6.0	-0,8	CMOS	89	50	24	-40~125
74HC6323	Programmable ripple counter with oscillator (3-state)	2.0 - 6.0	±7.8	CMOS	17	50	100	-40~125
74HCT6323	Programmable ripple counter with oscillator (3-state); TTL-enabled	4.5 - 5.5	±4.0	TTL	17	50	85	-40~125
74HC40103	8-bit synchronous binary down counter	2.0 - 6.0	±5.2	CMOS	15	50	14	-40~125
74HC4024	7-stage binary ripple counter	2.0 - 6.0	±5.2	CMOS	14	50	90	-40~125
74HC590	8-bit binary counter with output register (3-state)	2.0 - 6.0	±5.2	CMOS	19	50	61	-40~125
74LV393	Dual 4-bit binary ripple counter	1.0 - 3.6	±6	TTL	12	50	90	-40~125
74LV4020	14-stage binary ripple counter	1.0 - 5.5	±6	TTL	16	50	100	-40~125
74LV4060	14-stage binary ripple counter with oscillator	1.0 - 5.5	±6	TTL	29	50	100	-40~125
74LVC161	Presettable synchronous 4-bit binary counter; asynchronous reset	1.2 - 3.6	±24	CMOS/ LVTTL	4.9	50	200	-40~125

Counters/Frequency dividers

Type number	Description	V_{CC} (V)	Output drive capability (mA)	Logic switching levels	t_{pd} (ns)	Output Load C_L (pF)	f_{max} (MHz)	T_{amb} (°C)
74LVC163	Presettable synchronous 4-bit binary counter; synchronous reset	1.2 - 3.6	±24	CMOS/ LVTTL	4.9	50	200	-40~125
HEF4017B	Johnson decade counter with 10 decoded outputs	3.0 - 15	±2.4	CMOS	40	50	30	-40~85
HEF4020B	14-stage binary ripple counter	3.0 - 15	±2.4	CMOS	35	50	35	-40~85
HEF4024B	7-stage binary ripple counter	3.0 - 15	±2.4	CMOS	30	50	35	-40~85
HEF4040B	12-stage binary ripple counter	3.0 - 15	±2.4	CMOS	35	50	50	-40~85
HEF4060B	14-stage binary ripple counter with oscillator	3.0 - 15	±2.4	CMOS	50	50	30	-40~85
HEF4518B	Dual BCD counter	3.0 - 15	±2.4	CMOS	40	50	40	-40~85
HEF4520B	Dual 4-bit synchronous binary counter	3.0 - 15	±2.4	CMOS	15	50	40	-40~85
HEF4521B	24-stage frequency divider and oscillator	3.0 - 15	±2.4	CMOS	220	50	35	-40~85
HEF4541B	Programmable timer	3.0 - 15	- 4/ 2.7	CMOS	38	50	150	-40~85

FIFO registers

Type number	Description	V_{CC} (V)	Logic switching levels	Output drive capability (mA)	t_{pd} (ns)	Output Load C_L (pF)	f_{max} (MHz)	T_{amb} (°C)
74HC40105	4-bit x 16-word FIFO register	2.0 - 6.0	CMOS	±5.2	15	50	30	-40~125

Flip-flops

Type number	Description	V_{CC} (V)	Logic switching levels	Output drive capability (mA)	t_{pd} (ns)	Output Load C_L (pF)	f_{max} (MHz)	T_{amb} (°C)
74AHC1G79	Single D-type flip-flop; positive-edge trigger	2.0 - 5.5	CMOS	±8	3.5	50	90	-40~125
74AHC273	Octal D-type flip-flop with reset; positive-edge trigger	2.0 - 5.5	CMOS	±8	4.2	50	165	-40~125
74AHC374	Octal D-type flip-flop; positive-edge trigger (3-state)	2.0 - 5.5	CMOS	±8	4.4	50	185	-40~125
74AHC377	Octal D-type flip-flop with data enable; positive-edge trigger	2.0 - 5.5	CMOS	±8	3.9	50	175	-40~125
74AHC574	Octal D-type flip-flop; positive-edge trigger (3-state)	2.0 - 5.5	CMOS	±8	4.4	50	130	-40~125
74AHC74	Dual D-type flip-flop with set and reset; positive-edge trigger	2.0 - 5.5	CMOS	±8	3.7	50	170	-40~125
74AHCT1G79	Single D-type flip-flop; positive-edge trigger; TTL-enabled	4.5 - 5.5	TTL	±8	3.5	50	90	-40~125
74AHCT273	Octal D-type flip-flop with reset; positive-edge trigger; TTL-enabled	4.5 - 5.5	TTL	±8	4.0	50	120	-40~125
74AHCT374	Octal D-type flip-flop; positive-edge trigger (3-state)	4.5 - 5.5	TTL	±8	4.3	50	140	-40~125
74AHCT377	Octal D-type flip-flop with data enable; positive-edge trigger; TTL-enabled	4.5 - 5.5	TTL	±8	4.0	50	140	-40~125
74AHCT574	Octal D-type flip-flop; positive-edge trigger; TTL-enabled (3-state)	4.5 - 5.5	TTL	±8	4.4	50	130	-40~125
74AHCT74	Dual D-type flip-flop with set and reset; positive-edge trigger; TTL-enabled	4.5 - 5.5	TTL	±8	3.3	50	160	-40~125
74ALVC374	Octal D-type flip-flop; positive-edge trigger (3-state)	1.65 - 3.6	TTL	±24	2.5	50	300	-40~85
74ALVC574	Octal D-type flip-flop; positive-edge trigger (3-state)	1.65 - 3.6	TTL	±24	2.5	50	300	-40~85
74ALVC74	Dual D-type flip-flop with set and reset; positive-edge trigger	1.65 - 3.6	TTL	±24	2.3	50	425	-40~85
74ALVCH16374	16-bit D-type flip-flop with bus hold; positive-edge trigger (3-state)	1.2 - 3.6	TTL	±24	2.3	50	350	-40~85
74ALVCH16821	20-bit D-type flip-flop; positive-edge trigger (3-state)	2.3 - 3.6	TTL	±24	2.5	50	350	-40~85
74ALVCH16823	18-bit D-type flip-flop with bus hold; positive-edge trigger (3-state)	1.2 - 3.6	TTL	±24	2.1	50	350	-40~85
74ALVT162821	20-bit D-type flip-flop; positive-edge trigger (3-state)	2.3 - 3.6	TTL	±12	3.2	50	150	-40~85
74ALVT162823	18-bit buffer/line driver with bus hold and 30 Ω termination resistors (3-state)	2.3 - 3.6	TTL	±12	3.0	50	150	-40~85
74ALVT16821	20-bit D-type flip-flop; positive-edge trigger (3-state)	2.3 - 3.6	TTL	-32 / 64	1.8	50	150	-40~85
74ALVT16823	18-bit D-type flip-flop with bus hold; positive-edge trigger (3-state)	2.3 - 3.6	TTL	-32 / 64	1.9	50	250	-40~85
74AUP1G175	Single D flip-flop with reset; positive-edge trigger	1.1 - 3.6	CMOS	±1.9	7.4	30	70	-40~125
74AUP1G374	Single D-type flip-flop; positive-edge trigger (3-state)	1.1 - 3.6	CMOS	±1.9	7.9	30	400	-40~125
74AUP1G74	Single D-type flip-flop with set and reset; positive-edge trigger	1.1 - 3.6	CMOS	±1.9	9.2	30	400	-40~125
74AUP1G79	Single D-type flip-flop; positive-edge trigger	1.1 - 3.6	CMOS	±1.9	9.1	30	400	-40~125
74AUP1G80	Single D-type flip-flop; positive-edge trigger	1.1 - 3.6	CMOS	±1.9	9.1	30	400	-40~125
74AUP2G79	Dual D-type flip-flop; positive-edge trigger	1.1 - 3.6	CMOS	±1.9	8.5	30	400	-40~125
74AUP2G80	Dual D-type flip-flop; positive-edge trigger	1.1 - 3.6	CMOS	±1.9	9.1	30	400	-40~125
74AVC16374	16-bit D-type flip-flop; positive-edge trigger (3-state)	1.2 - 3.6	CMOS	±12	1.5	30	350	-40~85
74HC107	Dual JK-type flip-flop with reset; negative-edge trigger	2.0 - 6.0	CMOS	±5.2	16	50	78	-40~125

Flip-flops

Type number	Description	V_{CC} (V)	Logic switching levels	Output drive capability (mA)	t_{pd} (ns)	Output Load C_L (pF)	f_{max} (MHz)	T_{amb} (°C)
74HC109	Dual JK-type flip-flop with set and reset; positive-edge trigger	2.0 - 6.0	CMOS	±5.2	15	50	75	-40~125
74HC112	Dual JK-type flip-flop with set and reset; negative-edge trigger	2.0 - 6.0	CMOS	±5.2	15	50	66	-40~125
74HC173	Quad D-type flip-flop; positive-edge trigger (3-state)	2.0 - 6.0	CMOS	±7.8	17	50	88	-40~125
74HC174	Hex D-type flip-flop with reset; positive-edge trigger	2.0 - 6.0	CMOS	±5.2	17	50	99	-40~125
74HC175	Quad D-type flip-flop with reset; positive-edge trigger	2.0 - 6.0	CMOS	±5.2	17	50	83	-40~125
74HC273	Octal D-type flip-flop with reset; positive-edge trigger	2.0 - 6.0	CMOS	±5.2	15	50	122	-40~125
74HC374	Octal D-type flip-flop; positive-edge trigger (3-state)	2.0 - 6.0	CMOS	±7.8	14	50	83	-40~125
74HC377	Octal D-type flip-flop with data enable; positive-edge trigger	2.0 - 6.0	CMOS	±7.8	13	50	83	-40~125
74HC574	Octal D-type flip-flop; positive-edge trigger (3-state)	2.0 - 6.0	CMOS	±7.8	14	50	133	-40~125
74HC73	Dual JK-type flip-flop with reset; negative-edge trigger	2.0 - 6.0	CMOS	±5.2	16	50	77	-40~125
74HC74	Dual D-type flip-flop with set and reset; positive-edge trigger	2.0 - 6.0	CMOS	±5.2	14	50	82	-40~125
74HCT107	Dual JK-type flip-flop with reset; negative-edge trigger; TTL-enabled	4.5 - 5.5	TTL	±4	16	50	73	-40~125
74HCT109	Dual JK-type flip-flop with set and reset; positive-edge trigger; TTL-enabled	4.5 - 5.5	TTL	±4	17	50	61	-40~125
74HCT112	Dual JK-type flip-flop with set and reset; negative-edge trigger; TTL-enabled	4.5 - 5.5	TTL	±4	19	50	70	-40~125
74HCT173	Quad D-type flip-flop; positive-edge trigger; TTL-enabled (3-state)	4.5 - 5.5	TTL	±6	17	50	88	-40~125
74HCT174	Hex D-type flip-flop with reset; positive-edge trigger; TTL-enabled	4.5 - 5.5	TTL	±4	18	50	69	-40~125
74HCT175	Quad D-type flip-flop with reset; positive-edge trigger; TTL-enabled	4.5 - 5.5	TTL	±4	16	50	54	-40~125
74HCT273	Octal D-type flip-flop with reset; positive-edge trigger; TTL-enabled	4.5 - 5.5	TTL	±4	15	50	36	-40~125
74HCT374	Octal D-type flip-flop; positive-edge trigger; TTL-enabled (3-state)	4.5 - 5.5	TTL	±6	13	50	48	-40~125
74HCT377	Octal D-type flip-flop with data enable; positive-edge trigger; TTL-enabled	4.5 - 5.5	TTL	±6	14	50	53	-40~125
74HCT574	Octal D-type flip-flop; positive-edge trigger; TTL-enabled (3-state)	4.5 - 5.5	TTL	±6	15	50	76	-40~125
74HCT74	Dual D-type flip-flop with set and reset; positive-edge trigger; TTL-enabled	4.5 - 5.5	TTL	±4	15	50	59	-40~125
74LV74	Dual D-type flip-flop with set and reset; positive-edge trigger	1.0 - 5.5	TTL	±12	11	50	75	-40~125
74LVC16374A	16-bit D-type flip-flop; positive-edge trigger (3-state)	1.2 - 3.6	CMOS/ LVTTL	±24	3.8	50	150	-40~125
74LVC1G175	Single D flip-flop with reset; positive-edge trigger	1.65 - 5.5	CMOS/ LVTTL	±32	3.1	50	300	-40~125
74LVC1G74	Single D-type flip-flop with set and reset; positive-edge trigger	1.65 - 5.5	CMOS/ LVTTL	±32	3.5	50	280	-40~125
74LVC1G79	Single D-type flip-flop; positive-edge trigger	1.65 - 5.5	CMOS/ LVTTL	±32	2.2	50	450	-40~125
74LVC1G80	Single D-type flip-flop; positive-edge trigger	1.65 - 5.5	CMOS/ LVTTL	±32	2.4	50	450	-40~125
74LVC273	Octal D-type flip-flop with reset; positive-edge trigger	1.2 - 3.6	CMOS/ LVTTL	±24	6.0	50	230	-40~125
74LVC2G74	Single D-type flip-flop with set and reset; positive-edge trigger	1.65 - 5.5	CMOS/ LVTTL	±32	3.5	50	280	-40~125
74LVC374A	Octal D-type flip-flop; positive-edge trigger (3-state)	1.2 - 3.6	CMOS/ LVTTL	±24	2.7	50	100	-40~125
74LVC377	Octal D-type flip-flop with data enable; positive-edge trigger	1.2 - 3.6	CMOS/ LVTTL	±24	6.0	50	230	-40~125
74LVC574A	Octal D-type flip-flop; positive-edge trigger (3-state)	1.2 - 3.6	CMOS/ LVTTL	±24	3.2	50	150	-40~125
74LVC74A	Dual D-type flip-flop with set and reset; positive-edge trigger	1.2 - 3.6	CMOS/ LVTTL	±24	2.5	50	250	-40~125
74LVC823A	9-bit D-type flip-flop; positive-edge trigger (3-state)	1.2 - 3.6	CMOS/ LVTTL	±24	5.4	50	150	-40~125
74LVCH162374A	16-bit D-type flip-flop with bus hold and 30 Ω termination resistors; positive-edge trigger (3-state)	1.2 - 3.6	CMOS/ LVTTL	±24	3.8	50	150	-40~125
74LVCH16374A	16-bit D-type flip-flop with bus hold; positive-edge trigger (3-state)	1.2 - 3.6	CMOS/ LVTTL	±24	3.8	50	150	-40~125

Flip-flops

Type number	Description	V_{CC} (V)	Logic switching levels	Output drive capability (mA)	t_{pd} (ns)	Output Load C_L (pF)	f_{max} (MHz)	T_{amb} (°C)
74LVT162374	16-bit D-type flip-flop with bus hold and 30 Ω termination resistors; positive-edge trigger (3-state)	2.7 - 3.6	TTL	±12	3.0	50	150	-40~85
74LVT16374A	16-bit D-type flip-flop with bus hold; positive-edge trigger (3-state)	2.7 - 3.6	TTL	-32 / 64	3.0	50	150	-40~85
74LVTH16374A	16-bit D-type flip-flop with bus hold; positive-edge trigger (3-state)	2.7 - 3.6	TTL	-32 / 64	3.0	50	150	-40~85
HEF4013B	Dual D-type flip-flop with set and reset; positive-edge trigger	3.0 - 15.0	CMOS	±2.4	30	50	40	-40~85
HEF40175B	Quad D-type flip-flop with reset; positive-edge trigger	3.0 - 15.0	CMOS	±2.4	25	50	45	-40~85
HEF4027B	Dual JK-type flip-flop	3.0 - 15.0	CMOS	±2.4	30	50	30	-40~85

Latches/Registered drivers

Type number	Description	V_{CC} (V)	Logic switching levels	Output drive capability (mA)	t_{pd} (ns)	Output Load C_L (pF)	Number of bits	T_{amb} (°C)
74AHC373	Octal D-type transparent latch (3-state)	2.0 - 5.5	CMOS	±8	4.3	50	8	-40~125
74AHC573	Octal D-type transparent latch (3-state)	2.0 - 5.5	CMOS	±8	4.2	50	8	-40~125
74AHCT573	Octal D-type transparent latch; TTL-enabled (3-state)	4.5 - 5.5	TTL	±8	3.9	50	8	-40~125
74ALVC162334A	16-bit registered driver with 30 Ω termination resistors (3-state)	1.65 - 3.6	TTL	±24	6.0	50	16	-40~85
74ALVC162834A	18-bit registered driver with 30 Ω termination resistors (3-state)	1.65 - 3.6	TTL	±24	6.0	50	18	-40~85
74ALVC162835A	18-bit registered driver with 30 Ω termination resistors (3-state)	1.65 - 3.6	TTL	±24	6.0	50	18	-40~85
74ALVC162836A	20-bit registered driver with 30 Ω termination resistors (3-state)	1.65 - 3.6	TTL	±24	6.0	50	20	-40~85
74ALVC16834A	18-bit registered driver (3-state)	1.65 - 3.6	TTL	±24	4.0	50	18	-40~85
74ALVC16835A	18-bit registered driver (3-state)	1.65 - 3.6	TTL	±24	4.0	50	18	-40~85
74ALVC16836A	20-bit registered driver (3-state)	1.65 - 3.6	TTL	±24	4.0	50	20	-40~85
74ALVC373	Octal D-type transparent latch (3-state)	1.65 - 3.6	TTL	±24	2.2	50	8	-40~85
74ALVC573	Octal D-type transparent latch (3-state)	1.65 - 3.6	TTL	±24	2.2	50	8	-40~85
74ALVCH16373	16-bit D-type transparent latch with bus hold (3-state)	2.3 - 3.6	TTL	±24	2.1	50	16	-40~85
74ALVCH16841	20-bit D-type transparent latch with bus hold (3-state)	2.3 - 3.6	TTL	±24	2.4	50	20	-40~85
74ALVCH16843	18-bit D-type transparent latch with bus hold (3-state)	2.3 - 3.6	TTL	±24	2.1	50	18	-40~85
74ALVCH32973	16-bit transceiver and transparent D-type latch with 8 independent buffers	1.8 - 3.6	TTL	±24	2.5	50	16	-40~85
74ALVT16373	16-bit D-type transparent latch with bus hold (3-state)	2.3 - 3.6	TTL	-32 / 64	1.8	50	16	-40~85
74AUP1G373	Single D-type transparent latch (3-state)	1.1 - 3.6	CMOS	±1.9	8.5	30	1	-40~125
74AVC16334A	16-bit registered driver (3-state)	1.2 - 3.6	CMOS	±12	2.0	30	16	-40~85
74AVC16373	16-bit D-type transparent latch (3-state)	1.2 - 3.6	CMOS	±12	2.0	30	16	-40~85
74AVC16834A	18-bit registered driver (3-state)	1.2 - 3.6	CMOS	±12	2.0	30	18	-40~85
74AVC16835A	18-bit registered driver (3-state)	1.2 - 3.6	CMOS	±12	2.0	30	18	-40~85
74AVC16836A	20-bit registered driver (3-state)	1.2 - 3.6	CMOS	±12	2.0	30	20	-40~85
74HC259	8-bit addressable latch	2.0 - 6.0	CMOS	±5.2	18	50	8	-40~125
74HC373	Octal D-type transparent latch (3-state)	2.0 - 6.0	CMOS	±7.8	12	50	8	-40~125
74HC573	Octal D-type transparent latch (3-state)	2.0 - 6.0	CMOS	±7.8	14	50	8	-40~125
74HC75	Quad bistable transparent latch	2.0 - 6.0	CMOS	±5.2	11	50	4	-40~125
74HC75	Quad bistable transparent latch	2.0 - 6.0	CMOS	±5.2	11	50	4	-40~125
74HCT259	8-bit addressable latch; TTL-enabled	4.5 - 5.5	TTL	±4	20	50	8	-40~125
74HCT373	Octal D-type transparent latch; TTL-enabled (3-state)	4.5 - 5.5	TTL	±6	14	50	8	-40~125
74HCT573	Octal D-type transparent latch; TTL-enabled (3-state)	4.5 - 5.5	TTL	±6	17	50	8	-40~125
74LVC162373A	16-bit D-type transparent latch with 30 Ω termination resistors (3-state)	1.2 - 3.6	CMOS/LVTTL	±12	3.2	50	16	-40~125
74LVC16373A	16-bit D-type transparent latch (3-state)	1.2 - 3.6	CMOS/LVTTL	±24	3.0	50	16	-40~125
74LVC373A	Octal D-type transparent latch (3-state)	1.2 - 3.6	CMOS/LVTTL	±24	3.0	50	8	-40~125
74LVC573A	Octal D-type transparent latch (3-state)	1.2 - 3.6	CMOS/LVTTL	±24	3.4	50	8	-40~125
74LVCH162373A	16-bit D-type transparent latch with bus hold and 30 Ω termination resistors (3-state)	1.2 - 3.6	CMOS/LVTTL	±24	3.2	50	16	-40~125
74LVCH16373A	16-bit D-type transparent latch with bus hold (3-state)	1.2 - 3.6	CMOS/LVTTL	±24	3.0	50	16	-40~125

Latches/Registered drivers

Type number	Description	V_{CC} (V)	Logic switching levels	Output drive capability (mA)	t_{pd} (ns)	Output Load C_L (pF)	Number of bits	T_{amb} (°C)
74LVT162373	16-bit D-type transparent latch with bus hold and 30 Ω termination resistors (3-state)	2.7 - 3.6	TTL	±12	2.5	50	16	-40~85
74LVT16373A	16-bit D-type transparent latch with bus hold (3-state)	2.7 - 3.6	TTL	-32 / 64	1.9	50	16	-40~85
74LVT573	Octal D-type transparent latch (3-state)	2.7 - 3.6	TTL	-32 / 64	2.7	50	8	-40~85
HEF40373B	Octal D-type transparent latch (3-state)	3.0 - 15.0	CMOS	-50 / 62	40	50	8	-40~85
HEF4043B	Quad R/S latch with set and reset (3-state)	3.0 - 15.0	CMOS	±2.4	25	50	4	-40~85

AND Gates

Type number	Description	V_{CC} (V)	Logic switching levels	Output drive capability (mA)	t_{pd} (ns)	Output Load $C_{L\ (Typ)}$	f_{max} (MHz)	Number of bits	T_{amb} (°C)
74ABT08	Quad 2-input AND gate	4.5 - 5.5	TTL	-15 / 20	2.4	50	100	4	-40~85
74AHC08	Quad 2-input AND gate	2.0 - 5.5	CMOS	±8	3.5	50 pF	60	4	-40~125
74AHC1G08	Single 2-input AND gate	2.0 - 5.5	CMOS	±8	3.2	50 pF	60	1	-40~125
74AHC1G09	Single 2-input AND gate; open drain	2.0 - 5.5	CMOS	±8	3.2	50 pF	60	1	-40~125
74AHC2G08	Dual 2-input AND gate	2.0 - 5.5	CMOS	±8	3.2	50 pF	60	2	-40~125
74AHCT08	Quad 2-input AND gate; TTL-enabled	4.5 - 5.5	TTL	±8	5.0	50 pF	60	4	-40~125
74AHCT1G08	Single 2-input AND gate; TTL-enabled	4.5 - 5.5	TTL	±8	3.6	50 pF	60	1	-40~125
74AHCT2G08	Dual 2-Input AND gate; TTL-enabled	4.5 - 5.5	TTL	±8	3.6	50 pF	60	2	-40~125
74ALVC08	Quad 2-input AND gate	1.65 - 3.6	CMOS/ LVTTL	±24	2.0	50 pF	145	4	-40~85
74AUP1G08	Single 2-input AND gate	1.1 - 3.6	CMOS	±1.9	8.2	30 pF	70	1	-40~125
74AUP1G09	Single 2-input AND gate; open drain	1.1 - 3.6	CMOS	1.9	8.5	30 pF	70	1	-40~125
74AUP1G11	Single 3-input AND gate	1.1 - 3.6	CMOS	±1.9	6.9	30 pF	70	1	-40~125
74AUP2G08	Dual 2-input AND gate	1.1 - 3.6	CMOS	±1.9	8.2	30 pF	70	2	-40~125
74AXP1G08	Single 2-input AND gate	0.7 - 2.75	CMOS	±4.5	2.6	5 pF	70	1	-40~85
74AXP1G09	Single 2-input AND gate with open-drain output	0.7 - 2.75	CMOS	±4.5	2.6	5 pF	70	1	-40~85
74AXP1G11	Single 3-input AND gate	0.7 - 2.75	CMOS	±4.5	2.6	5 pF	70	1	-40~85
74HC08	Quad 2-input AND gate	2.0 - 6.0	CMOS	±5.2	7.0	50 pF	36	4	-40~125
74HC11	Triple 3-input AND gate	2.0 - 6.0	CMOS	±5.2	10	50 pF	36	3	-40~125
74HC1G08	Single 2-input AND gate	2.0 - 6.0	CMOS	±5.2	7.0	50 pF	36	1	-40~125
74HC21	Dual 4-input AND gate	2.0 - 6.0	CMOS	±5.2	10	50 pF	36	2	-40~125
74HC2G08	Dual 2-input AND gate	2.0 - 6.0	CMOS	±5.2	9.0	50 pF	36	2	-40~125
74HCT08	Quad 2-input AND gate; TTL-enabled	4.5 - 5.5	TTL	±4	11	50 pF	36	4	-40~125
74HCT11	Triple 3-input AND gate	4.5 - 5.5	TTL	±4	11	50 pF	36	3	-40~125
74HCT1G08	Single 2-input AND gate; TTL-enabled	4.5 - 5.5	TTL	±2	11	50 pF	36	1	-40~125
74HCT2G08	Dual 2-Input AND gate; TTL-enabled	4.5 - 5.5	TTL	±4	14	50 pF	36	2	-40~125
74LV08	Quad 2-input AND gate	1.0 - 5.5	TTL	±12	7.0	50 pF	30	4	-40~125
74LVC08A	Quad 2-input AND gate	1.2 - 3.6	CMOS / LVTTL	±24	2.1	50 pF	150	4	-40~125
74LVC11	Triple 3-input AND gate	1.2 - 3.6	CMOS / LVTTL	±24	3.7	50 pF	150	3	-40~125
74LVC1G08	Single 2-input AND gate	1.65 - 5.5	CMOS / LVTTL	±24	2.1	50 pF	150	1	-40~125
74LVC1G11	Single 3-input AND gate	1.65 - 5.5	CMOS / LVTTL	±24	2.6	50 pF	150	1	-40~125
74LVC2G08	Dual 2-input AND gate	1.65 - 5.5	CMOS / LVTTL	±24	2.1	50 pF	150	2	-40~125
74LVT08	Quad 2-input AND gate	2.7 - 3.6	TTL	-20 / 32	3.4	50 pF	150	4	-40~85
74VHC08	Quad 2-input AND gate	2.0 - 5.5	CMOS	±8	3.5	50 pF	60	4	-40~125
74VHCT08	Quad 2-input AND gate; TTL-enabled	4.5 - 5.5	TTL	±8	5.0	50 pF	60	4	-40~125
HEF4073B	Triple 3-input AND gate	3.0 - 15	CMOS	±2.4	20	50 pF	10	3	-40~85
HEF4081B	Quad 2-input AND gate	3.0 - 15	CMOS	±2.4	20	50 pF	10	4	-40~85
HEF4082B	Dual 4-input AND gate	3.0 - 15	CMOS	±2.4	25	50 pF	10	2	-40~85
XC7SET08	Single 2-input AND gate; TTL-enabled	4.5 - 5.5	TTL	±8	3.6	50 pF	60	1	-40~125
XC7SH08	Single 2-input AND gate	2.0 - 5.5	CMOS	±8	3.2	50 pF	60	1	-40~125

Combination Gates

Type number	Description	V_{CC} (V)	Logic switching levels	Output drive capability (mA)	t_{pd} (ns)	Output Load $C_{L\ (Typ)}$	f_{max} (MHz)	Number of bits	T_{amb} (°C)
74AUP1G0832	Single 3-input AND-OR gate	1.1 - 3.6	CMOS	±1.9	6.7	30 pF	70	1	-40~125
74AUP1G3208	Single 3-input OR-AND gate	1.1 - 3.6	CMOS	±1.9	7.4	30 pF	70	1	-40~125
74AUP1G885	Dual function gate	1.1 - 3.6	CMOS	±1.9	7.6	30 pF	70	1	-40~125
74AUP1Z04	Crystal driver with enable and internal resistor	1.1 - 3.6	CMOS	±1.9	5.6	30 pF	70	1	-40~125
74AUP1Z125	Crystal driver with enable and internal resistor (3-state)	1.1 - 3.6	CMOS	±1.9	4.7	30 pF	70	1	-40~125
74AUP2G0604	Inverter with open drain and inverter	1.1 - 3.6	CMOS	±1.9	4.0	30 pF	70	2	-40~125
74AUP2G3404	Buffer and inverter	1.1 - 3.6	CMOS	±1.9	4.0	30 pF	70	2	-40~125
74AUP2G3407	Buffer and buffer with open drain	1.1 - 3.6	CMOS	±1.9	4.1	30 pF	70	2	-40~125
74AUP2T1326	Dual supply buffer/line driver; 3-state	1.1 - 3.6	CMOS	±1.9	3.8	30 pF	70	2	-40~125
74AUP3G0434	Dual inverter and single buffer	1.1 - 3.6	CMOS	±1.9	4.0	30 pF	70	3	-40~125
74AUP3G3404	Dual buffer and single inverter	1.1 - 3.6	CMOS	±1.9	4.0	30 pF	70	3	-40~125
74LVC1GX04	Crystal driver	1.65 - 5.5	CMOS / LVTTL	±24	2.8	50 pF	150	1	-40~125
HEF4007UB	Dual complementary pair and inverter	3.0 - 15	CMOS	±3.4	15	50 pF	10	2	-40~85

Configurable Gates

Type number	Description	V_{CC} (V)	Logic switching levels	Output drive capability (mA)	t_{pd} (ns)	Output Load $C_{L\ (Typ)}$	f_{max} (MHz)	Number of bits	T_{amb} (°C)
74AUP1G57	Configurable gate; Schmitt-trigger	1.1 - 3.6	CMOS	±1.9	8.7	30 pF	70	1	-40~125
74AUP1G58	Configurable gate; Schmitt-trigger	1.1 - 3.6	CMOS	±1.9	8.7	30 pF	70	1	-40~125
74AUP1G97	Configurable gate; Schmitt-trigger	1.1 - 3.6	CMOS	±1.9	8.7	30 pF	70	1	-40~125
74AUP1G98	Configurable gate; Schmitt-trigger	1.1 - 3.6	CMOS	±1.9	8.9	30 pF	70	1	-40~125
74AUP1G3208	Configurable multiple function gate	0.8 - 3.6	CMOS	±4	6.6	30 pF	70	1	-40~125
74AUP1T57	Configurable gate with voltage-level translation	2.3 - 3.6	CMOS	±1.9	8.7	30 pF	70	1	-40~125
74AUP1T58	Configurable gate with voltage-level translation	2.3 - 3.6	CMOS	±1.9	8.7	30 pF	70	1	-40~125
74AUP1T97	Configurable gate with voltage-level translation	2.3 - 3.6	CMOS	±1.9	8.7	30 pF	70	1	-40~125
74AUP1T98	Configurable gate with voltage-level translation	2.3 - 3.6	CMOS	±1.9	8.7	30 pF	70	1	-40~125
74AUP2G57	Dual configurable gate; Schmitt-trigger	0.8 - 3.6	CMOS	±4	6.6	30pF	70	1	-40~125
74AUP2G58	Dual configurable gate; Schmitt-trigger	0.8 - 3.6	CMOS	±4	6.6	30pF	70	1	-40~125
74AUP2G97	Dual configurable gate; Schmitt-trigger	0.8 - 3.6	CMOS	±4	6.6	30pF	70	1	-40~125
74AUP2G98	Dual configurable gate; Schmitt-trigger	0.8 - 3.6	CMOS	±4	6.6	30pF	70	1	-40~125
74AXP1G57	Configurable gate; Schmitt-trigger	0.7 - 2.75	CMOS	±4.5	4.6	5pF	70	1	-40~85
74AXP1G58	Configurable gate; Schmitt-trigger	0.7 - 2.75	CMOS	±4.5	4.5	5pF	70	1	-40~85
74AXP1G97	Configurable gate; Schmitt-trigger	0.7 - 2.75	CMOS	±4.5	4.5	5pF	70	1	-40~85
74AXP1G98	Configurable gate; Schmitt-trigger	0.7 - 2.75	CMOS	±4.5	4.5	5pF	70	1	-40~85
74LVC1G57	Configurable gate; Schmitt-trigger	1.65 - 5.5	CMOS/ LVTTL	±32	6.3	50 pF	150	1	-40~125
74LVC1G58	Configurable gate; Schmitt-trigger	1.65 - 5.5	CMOS/ LVTTL	±32	6.3	50 pF	150	1	-40~125
74LVC1G97	Configurable gate; Schmitt-trigger	1.65 - 5.5	CMOS/ LVTTL	±32	6.3	50 pF	150	1	-40~125
74LVC1G98	Configurable gate; Schmitt-trigger	1.65 - 5.5	CMOS/ LVTTL	±32	6.3	50 pF	150	1	-40~125
74LVC1G99	Configurable gate; Schmitt-trigger	1.65 - 5.5	CMOS/ LVTTL	±32	8.4	50 pF	150	1	-40~125

EXCLUSIVE-NOR Gates

Type number	Description	V_{CC} (V)	Logic switching levels	Output drive capability (mA)	t_{pd} (ns)	Output Load $C_{L\ (Typ)}$	f_{max} (MHz)	T_{amb} (°C)
HEF4077	Quad 2-input EXCLUSIVE-NOR gate	3.0 - 15	CMOS	±2.4	30	50 pF	10	-40~85

EXCLUSIVE-OR Gates

Type number	Description	V_{CC} (V)	Logic switching levels	Output drive capability (mA)	t_{pd} (ns)	Output Load $C_{L\ (Typ)}$	f_{max} (MHz)	Number of bits	T_{amb} (°C)
74AHC1G86	2-input EXCLUSIVE-OR gate	2.0 - 5.5	CMOS	±8	3.4	50 pF	60	1	-40~125
74AHCT1G86	2-input EXCLUSIVE-OR gate; TTL-enabled	4.5 - 5.5	TTL	±8	3.5	50 pF	60	1	-40~125
74AHC86	Quad 2-input EXCLUSIVE-OR gate	2.0 - 5.5	CMOS	±8	3.4	50 pF	60	4	-40~125
74AHCT86	Quad 2-input EXCLUSIVE-OR gate; TTL-enabled	4.5 - 5.5	TTL	±8	3.4	50 pF	60	4	-40~125
74AUP1G386	Single 3-input EXCLUSIVE-OR gate	1.1 - 3.6	CMOS	±1.9	8.6	30 pF	70	1	-40~125
74AUP1G86	Single 2-input Exclusive-OR gate	1.1 - 3.6	CMOS	±1.9	9.0	30	70	1	-40 ~125
74AUP2G86	Dual 2-input EXCLUSIVE-OR gate	1.1 - 3.6	CMOS	±1.9	9.0	30 pF	70	2	-40~125
74AXP1G86	Single 2-input Exclusive-OR gates	0.7 - 2.75	CMOS	±4.5	4.5	5	70	1	-40 ~85
74HC1G86	Single 2-input EXCLUSIVE-OR gate	2.0 - 6.0	CMOS	±2.6	9.0	50 pF	36	1	-40~125
74HCT1G86	Single 2-input EXCLUSIVE-OR gate; TTL-enabled	4.5 - 5.5	TTL	±2.0	10	50 pF	36	1	-40~125
74HC2G86	Dual 2-input EXCLUSIVE-OR gate	2.0 - 6.0	CMOS	±5.2	9.0	50 pF	36	2	-40~125
74HCT2G86	Dual 2-input EXCLUSIVE-OR gate; TTL-enabled	4.5 - 5.5	TTL	±4.0	11	50 pF	36	2	-40~125
74HC86	Quad 2-input EXCLUSIVE-OR gate	2.0 - 6.0	CMOS	±5.2	11	50 pF	36	4	-40~125
74HCT86	Quad 2-input EXCLUSIVE-OR gate; TTL-enabled	4.5 - 5.5	TTL	±4	14	50 pF	36	4	-40~125
74LVC1G386	Single 3-Input EXCLUSIVE-OR gate	1.65 - 5.5	CMOS/ LVTTL	±32	4.5	50 pF	150	1	-40~125
74LVC1G86	Single 2-input EXCLUSIVE-OR gate	1.65 - 5.5	CMOS/ LVTTL	±32	2.4	50 pF	150	1	-40~125
74LVC2G86	Dual 2-input EXCLUSIVE-OR gate	1.65 - 5.5	CMOS/ LVTTL	±32	2.3	50 pF	150	2	-40~125
74LVC86	Quad 2-input EXCLUSIVE-OR gate	1.2 - 3.6	CMOS/ LVTTL	±24	3.0	50 pF	150	4	-40~125
HEF4030B	Quad 2-input EXCLUSIVE-OR gate	3.0 - 15	CMOS	±2.4	30	50 pF	10	4	-40~85
HEF4070B	Quad 2-input EXCLUSIVE-OR gate	3.0 - 15	CMOS	±2.4	30	50 pF	10	4	-40~85
XC7SET86	2-input EXCLUSIVE-OR gate; TTL-enabled	4.5 - 5.5	TTL	±8	3.5	50 pF	60	1	-40~125
XC7SH86	2-input EXCLUSIVE-OR gate	2.0 - 5.5	CMOS	±8	3.4	50 pF	60	1	-40~125

NAND Gates

Type number	Description	V_{CC} (V)	Logic switching levels	Output drive capability (mA)	t_{pd} (ns)	Output Load $C_{L\ (Typ)}$	f_{max} (MHz)	Number of bits	T_{amb} (°C)
74ABT00	Quad 2-input NAND gate	4.5 - 5.5	TTL	-15 / 20	2.5	50	100	4	-40~85
74ABT20	Dual 4-input NAND gate	4.5 - 5.5	TTL	-15 / 20	2.7	50	100	2	-40~85
74AHC00	Quad 2-input NAND gate	2.0 - 5.5	CMOS	±8	3.2	50	60	4	-40~125
74AHC132	Quad 2-input NAND gate Schmitt-trigger	2.0 - 5.5	CMOS	±8	3.3	50	60	4	-40~125
74AHC1G00	Single 2-input NAND gate	2.0 - 5.5	CMOS	±8	3.5	50	60	1	-40~125
74AHC2G00	Dual 2-input NAND gate	2.0 - 5.5	CMOS	±8	3.5	50	60	2	-40~125
74AHCT00	Quad 2-input NAND gate; TTL-enabled	4.5 - 5.5	TTL	±8	3.3	50	60	4	-40~125
74AHCT132	Quad 2-input NAND gate Schmitt-trigger; TTL-enabled	4.5 - 5.5	TTL	±8	3.5	50	60	4	-40~125

NAND Gates

Types in **bold** represent new products

Type number	Description	V_{CC} (V)	Logic switching levels	Output drive capability (mA)	t_{pd} (ns)	Output Load $C_{L\ (Typ)}$	f_{max} (MHz)	Number of bits	T_{amb} (°C)
74AHCT1G00	Single 2-input NAND gate; TTL-enabled	4.5 - 5.5	TTL	±8	3.6	50	60	1	-40~125
74AHCT2G00	Dual 2-input NAND gate; TTL-enabled	4.5 - 5.5	TTL	±8	3.6	50	60	2	-40~125
74AUP2G132	Dual 2-input NAND gate Schmitt-trigger	1.1 - 3.6	CMOS	±1.9	10	30	70	2	-40~125
74AXP1G00	Single 2-input NAND gate	0.7 - 2.75	CMOS	±4.5	2.7	5	70	1	-40~85
74AXP1G10	Single 3-input NAND gate	0.7 - 2.75	CMOS	±4.5	2.6	5	70	1	-40~85
74HC132	Quad 2-input NAND gate Schmitt-trigger	2.0 - 6.0	CMOS	±5.2	11	50	36	4	-40~125
74HCT132	Quad 2-input NAND gate Schmitt-trigger; TTL-enabled	4.5 - 5.5	TTL	±4	17	50	36	4	-40~125
74LV132	Quad 2-input NAND gate Schmitt-trigger	1.0 - 5.5	TTL	±12	10	50	30	4	-40~125
74LVC132A	Quad 2-input NAND gate Schmitt-trigger	1.2 - 3.6	CMOS/ LVTTL	±24	3.4	50	175	4	-40~125
HEF4093B	Quad 2-input NAND gate Schmitt-trigger	3.0 - 15	CMOS	±2.4	3.0	50	10	4	-40~85
74AHC30	8-input NAND gate	2.0 - 5.5	CMOS	±8	3.6	50	60	1	-40~125
74AHCT30	8-input NAND gate; TTL-enabled	4.5 - 5.5	TTL	±8	3.3	50	60	1	-40~125
74ALVC00	Quad 2-input NAND gate	1.65 - 3.6	CMOS/ LVTTL	±24	2.1	50	145	4	-40~85
74AUP1G00	Single 2-input NAND gate	1.1 - 3.6	CMOS	±1.9	8.3	30	70	1	-40~125
74AUP1G132	Single 2-input NAND gate Schmitt trigger	1.1 - 3.6	CMOS	±1.9	10	30	70	1	-40~125
74AUP1G38	Single 2-input NAND gate; open drain	1.1 - 3.6	CMOS	1.9	8.5	30	70	1	-40~125
74AUP2G00	Dual 2-input NAND gate	1.1 - 3.6	CMOS	±1.9	8.3	30	70	2	-40~125
74AUP2G38	Dual 2-input NAND gate; open drain	1.1 - 3.6	CMOS	1.9	8.5	30	70	2	-40~125
74HC00	Quad 2-input NAND gate	2.0 - 6.0	CMOS	±5.2	7.0	50	36	4	-40~125
74HC03	Quad 2-input NAND gate; open drain	2.0 - 6.0	CMOS	5.2	8.0	50	36	4	-40~125
74HC10	Triple 3-input NAND gate	2.0 - 6.0	CMOS	±5.2	9.0	50	36	3	-40~125
74HC1G00	Single 2-input NAND gate	2.0 - 6.0	CMOS	±2.6	7.0	50	36	1	-40~125
74HC20	Dual 4-input NAND gate	2.0 - 6.0	CMOS	±5.2	8.0	50	36	2	-40~125
74HC2G00	Dual 2-input NAND gate	2.0 - 6.0	CMOS	±5.6	9.0	50	36	2	-40~125
74HC30	8-input NAND gate	2.0 - 6.0	CMOS	±5.2	12	50	36	1	-40~125
74HCT00	Quad 2-input NAND gate; TTL-enabled	4.5 - 5.5	TTL	±4	10	50	36	4	-40~125
74HCT03	Quad 2-input NAND gate; TTL-enabled; open drain	4.5 - 5.5	TTL	±4	10	50	36	4	-40~125
74HCT10	Triple 3-input NAND gate; TTL-enabled	4.5 - 5.5	TTL	±4	11	50	36	3	-40~125
74HCT1G00	Single 2-input NAND gate; TTL-enabled	4.5 - 5.5	TTL	±2	10	50	36	1	-40~125
74HCT20	Dual 4-input NAND gate; TTL-enabled	4.5 - 5.5	TTL	±4	13	50	36	2	-40~125
74HCT2G00	Dual 2-input NAND gate; TTL-enabled	4.5 - 5.5	TTL	±4	12	50	36	2	-40~125
74HCT30	8-input NAND gate; TTL-enabled	4.5 - 5.5	TTL	±4	12	50	36	1	-40~125
74LV00	Quad 2-input NAND gate	1.0 - 5.5	TTL	±12	7	50	30	4	-40~125
74LV03	Quad 2-input NAND gate; TTL-enabled; open drain	1.0 - 5.5	TTL	±12	8.0	50	30	4	-40~125
74LVC00A	Quad 2-input NAND gate	1.2 - 3.6	CMOS/ LVTTL	±24	2.1	50	150	4	-40~125
74LVC10A	Triple 3-input NAND gate	1.2 - 3.6	CMOS/ LVTTL	±24	3.9	50	150	3	-40~125
74LVC1G00	Single 2-input NAND gate	1.65 - 5.5	CMOS/ LVTTL	±32	2.2	50	175	1	-40~125
74LVC1G10	Single 3-input NAND gate	1.65 - 5.5	CMOS/ LVTTL	±32	2.6	50	175	1	-40~125
74LVC1G38	Single 2-input NAND gate; open drain	1.65 - 5.5	CMOS/ LVTTL	32	2.3	50	175	1	-40~125
74LVC2G00	Dual 2-input NAND gate	1.65 - 5.5	CMOS/ LVTTL	±32	2.2	50	175	2	-40~125
74LVC2G38	Dual 2-input NAND gate; open drain	1.65 - 5.5	CMOS/ LVTTL	32	2.1	50	175	2	-40~125
74LVC30A	8-input NAND gate	1.65 - 5.5	CMOS/ LVTTL	24	3.6	50	175	1	-40~125
HEF4011B	Quad 2-input NAND gate	3.0 - 15	CMOS	±2.4	20	50	10	4	-40~85

NOR Gates

Type number	Description	V_{CC} (V)	Logic switching levels	Output drive capability (mA)	t_{pd} (ns)	Output Load $C_{L\ (Typ)}$	f_{max} (MHz)	Number of bits	T_{amb} (°C)
74AHC02	Quad 2-input NOR gate	2.0 - 5.5	CMOS	±8	2.9	50	60	4	-40 ~125
74AHCT02	Quad 2-input NOR gate; TTL-enabled	4.5 - 5.5	TTL	±8	3.8	50 pF	60	4	-40~125
74AHC1G02	Single 2-input NOR gate	2.0 - 5.5	CMOS	±8	3.2	50 pF	60	1	-40~125
74AHCT1G02	Single 2-input NOR gate; TTL-enabled	4.5 - 5.5	TTL	±8	3.5	50 pF	60	1	-40~125
74ALVC02	Quad 2-input NOR gate	1.65 - 3.6	CMOS/ LVTTL	±24	2.2	50 pF	150	4	-40~85
74AUP1G02	Single 2-input NOR gate	1.1 - 3.6	CMOS	±1.9	8.3	30 pF	70	1	-40~125
74AUP2G02	Dual 2-input NOR gate	1.1 - 3.6	CMOS	±1.9	8.3	30 pF	70	2	-40~125
74AXP1G02	Single 2-input NOR gate	0.7 - 2.75	CMOS	±4.5	2.6	5	70	1	-40 ~85
74HC02	Quad 2-input NOR gate	2.0 - 6.0	CMOS	±5.2	7.0	50 pF	36	4	-40~125
74HCT02	Quad 2-input NOR gate; TTL-enabled	4.5 - 5.5	TTL	±4	9.0	50 pF	36	4	-40~125
74HC1G02	Single 2-input NOR gate	2.0 - 6.0	CMOS	±2.6	7.0	50 pF	36	1	-40~125
74HCT1G02	Single 2-input NOR gate; TTL-enabled	4.5 - 5.5	TTL	±2.0	9.0	50 pF	36	1	-40~125
74HC27	Triple 3-input NOR gate	2.0 - 6.0	CMOS	±5.2	8.0	50 pF	36	3	-40~125
74HCT27	Triple 3-input NOR gate; TTL-enabled	4.5 - 5.5	TTL	±4	10	50 pF	36	3	-40~125
74HC2G02	Dual 2-input NOR gate	2.0 - 6.0	CMOS	±5.2	9.0	50 pF	36	2	-40~125
74HCT2G02	Dual 2-input NOR gate; TTL-enabled	4.5 - 5.5	TTL	±4	12	50 pF	36	2	-40~125
74HC4002	Dual 4-input NOR gate	2.0 - 6.0	CMOS	±5.2	9.0	50 pF	36	2	-40~125
74HCT4002	Dual 4-input NOR gate; TTL-enabled	4.5 - 5.5	TTL	±4	11	50 pF	36	2	-40~125
74LV02	Quad 2-input NOR gate	1.0 - 5.5	TTL	±12	6.0	50 pF	30	4	-40~125
74LVC02A	Quad 2-input NOR gate	1.2 - 3.6	CMOS/ LVTTL	±24	2.1	50 pF	150	4	-40~125
74LVC1G02	Single 2-input NOR gate	1.65 - 5.5	CMOS/ LVTTL	±32	2.1	50 pF	150	1	-40~125
74LVC1G27	Single 3-input NOR gate	1.65 - 5.5	CMOS/ LVTTL	±32	2.6	50 pF	150	1	-40~125
74LVC2G02	Dual 2-input NOR gate	1.65 - 5.5	CMOS/ LVTTL	±32	2.4	50 pF	150	2	-40~125
74LVT02	Quad 2-input NOR gate	2.7 - 3.6	TTL	-20 / 32	2.8	50 pF	150	4	-40~85
74VHC02	Quad 2-input NOR gate	2.0 - 5.5	CMOS	±8	2.9	50 pF	60	4	-40~125
74VHCT02	Quad 2-input NOR gate; TTL-enabled	4.5 - 5.5	TTL	±8	3.8	50 pF	60	4	-40~125
HEF4001B	Quad 2-input NOR gate	3.0 - 15	CMOS	±2.4	20	50 pF	10	4	-40~85
HEF4002B	Dual 4-input NOR gate	3.0 - 15	CMOS	±2.4	20	50 pF	10	4	-40~85
XC7SET02	Single 2-input NOR gate; TTL-enabled	4.5 - 5.5	TTL	±8	3.5	50 pF	60	1	-40~125
XC7SH02	Single 2-input NOR gate	2.0 - 5.5	CMOS	±8	3.2	50 pF	60	1	-40~125

OR Gates

Type number	Description	V_{CC} (V)	Logic switching levels	Output drive capability (mA)	t_{pd} (ns)	Output Load $C_{L\ (Typ)}$	f_{max} (MHz)	Number of bits	T_{amb} (°C)
74ABT32	Quad 2-input OR gate	4.5 - 5.5	TTL	-15 / 20	2.3	50	100	4	-40 ~85
74AHC1G32	Single 2-input OR gate	2.0 - 5.5	CMOS	±8	3.2	50 pF	60	1	-40~125
74AHCT1G32	Single 2-input OR gate	4.5 - 5.5	TTL	±8	3.3	50 pF	60	1	-40~125
74AHC2G32	Dual 2-input OR gate	2.0 - 5.5	CMOS	±8	3.2	50 pF	60	2	-40~125
74AHCT2G32	Dual 2-input OR gate	4.5 - 5.5	TTL	±8	3.3	50 pF	60	2	-40~125
74AHC32	Quad 2-input OR gate	2.0 - 5.5	CMOS	±8	3.5	50 pF	60	4	-40~125
74AHCT32	Quad 2-input OR gate; TTL-enabled	4.5 - 5.5	TTL	±8	5.0	50 pF	60	4	-40~125
74ALVC32	Quad 2-input OR gate	1.65 - 3.6	CMOS/LVTTL	±24	2.0	50 pF	150	4	-40~125
74AUP1G32	Single 2-input OR gate	1.1 - 3.6	CMOS	±1.9	7.9	30 pF	70	1	-40~125
74AUP1G332	Single 3-input OR gate	1.1 - 3.6	CMOS	±1.9	6.8	30 pF	70	1	-40~125
74AUP2G32	Dual 2-input OR gate	1.1 - 3.6	CMOS	±1.9	7.9	30 pF	70	2	-40~125
74AXP1G32	Single 2-input OR gate	0.7 - 2.75	CMOS	±4.5	2.5	5	70	1	-40 ~85
74HC1G32	Single 2-input OR gate	2.0 - 6.0	CMOS	±2.6	8.0	50 pF	36	1	-40~125
74HCT1G32	Single 2-input OR gate; TTL-enabled	4.5 - 5.5	TTL	±2.0	10	50 pF	36	1	-40~125
74HC2G32	Dual 2-input OR gate	2.0 - 6.0	CMOS	±5.2	9.0	50 pF	36	2	-40~125
74HCT2G32	Dual 2-input OR gate; TTL-enabled	4.5 - 5.5	TTL	±4.0	13	50 pF	36	2	-40~125
74HC32	Quad 2-input OR gate	2.0 - 6.0	CMOS	±5.2	6.0	50 pF	36	4	-40~125
74HCT32	Quad 2-input OR gate	4.5 - 5.5	TTL	±4.0	9.0	50 pF	36	4	-40~125
74HC4075	Triple 3-input OR gate	2.0 - 6.0	CMOS	±5.2	8.0	50 pF	36	3	-40~125
74HCT4075	Triple 3-input OR gate; TTL-enabled	4.5 - 5.5	TTL	±4	10	50 pF	36	3	-40~125
74LVC1G32	Single 2-input OR gate	1.65 - 5.5	CMOS/LVTTL	±32	2.1	50 pF	150	1	-40~125
74LVC1G332	Single 3-input OR gate	1.65 - 5.5	CMOS/LVTTL	±32		50 pF	150	1	-40~125
74LVC2G32	Dual 2-input OR gate	1.65 - 5.5	CMOS/LVTTL	±32	2.2	50 pF	150	2	-40~125
74LVC32A	Quad 2-input OR gate	1.2 - 3.6	CMOS/LVTTL	±24	2.1	50 pF	150	4	-40~125
74VHC32	Quad 2-input OR gate	2.0 - 5.5	CMOS	±8	3.5	50 pF	60	4	-40~125
74VHCT32	Quad 2-input OR gate; TTL-enabled	4.5 - 5.5	TTL	±8	5.0	50 pF	60	4	-40~125
HEF4071B	Quad 2-input OR gate	3.0 - 15	CMOS	±2.4	20	50 pF	10	4	-40~125
XC7SET32	Single 2-input OR gate; TTL-enabled	4.5 - 5.5	TTL	±8	3.3	50 pF	60	1	-40~125
XC7SH32	Single 2-input OR gate	2.0 - 5.5	CMOS	±8	3.2	50 pF	60	1	-40~125

Level shifters/Translators

Types in **bold** represent new products

Type number	Description	$V_{CC(A)}$ (V)	$V_{CC(B)}$ (V)	Logic switching levels	Output drive capability (mA)	t_{pd} (ns)	Output Load C_L (pF)	Number of bits	T_{amb} (°C)
74ALVC164245	16-bit dual-supply voltage-translating transceiver (3-state)	1.5 - 5.5	1.5 - 3.6	CMOS/ LVTTL	±24	2.9	50	16	-40~85
74AUP1T34	Single dual-supply translating buffer	1.1 - 3.6	1.1 - 3.6	CMOS	±1.9	15.2	30	1	-40~125
74AUP1T45	Single dual-supply voltage-translating transceiver (3-state)	1.1 - 3.6	1.1 - 3.6	CMOS	±1.9	15.6	30	1	-40~125
74AVC16T245	16-bit dual-supply voltage-translating transceiver (3-state)	0.8 - 3.6	0.8 - 3.6	CMOS/ LVTTL	±12	2.1	30	16	-40~125
74AVC1T1022	1-to-4 fan out buffer	0.8 - 3.6	0.8 - 3.6	CMOS/ LVTTL	±12	2.1	30	1	-40~125
74AVC1T45	Single dual-supply voltage-translating transceiver (3-state)	0.8 - 3.6	0.8 - 3.6	CMOS/ LVTTL	±12	2.1	30	1	-40~125
74AVC20T245	20-bit dual-supply voltage-translating transceiver (3-state)	0.8 - 3.6	0.8 - 3.6	CMOS/ LVTTL	±12	3.5	30	20	-40~125
74AVC2T245	2-bit dual-supply voltage-translating transceiver	0.8 - 3.6	0.8 - 3.6	CMOS/ LVTTL	±12	2.1	30	2	-40~125
74AVC2T45	Dual-bit dual-supply voltage-translating transceiver (3-state)	0.8 - 3.6	0.8 - 3.6	CMOS/ LVTTL	±12	2.1	30	2	-40~125
74AVC32T245	32-bit dual-supply voltage-translating transceiver (3-state)	0.8 - 3.6	0.8 - 3.6	CMOS/ LVTTL	±12	2.1	30	32	-40~125
74AVC4T245	4-bit dual-supply voltage-translating transceiver (3-state)	0.8 - 3.6	0.8 - 3.6	CMOS/ LVTTL	±12	2.1	30	4	-40~125
74AVC4TD245	4-bit dual-supply voltage-translating transceiver (3-state)	0.8 - 3.6	0.8 - 3.6	CMOS/ LVTTL	±12	2.1	30	4	-40~125
74AVC8T245	8-bit dual-supply voltage-translating transceiver (3-state)	0.8 - 3.6	0.8 - 3.6	CMOS/ LVTTL	±12	2.1	30	8	-40~125
74AVCH16T245	16-bit dual-supply voltage-translating transceiver with bus hold (3-state)	0.8 - 3.6	0.8 - 3.6	CMOS/ LVTTL	±12	2.1	30	16	-40~125
74AVCH1T45	Single dual-supply voltage-translating transceiver with bus hold (3-state)	0.8 - 3.6	0.8 - 3.6	CMOS/ LVTTL	±12	2.1	30	1	-40~125
74AVCH20T245	20-bit dual-supply voltage-translating transceiver with bus hold (3-state)	0.8 - 3.6	0.8 - 3.6	CMOS/ LVTTL	±12	3.5	30	20	-40~125
74AVCH2T45	Dual-bit dual-supply voltage-translating transceiver with bus hold (3-state)	0.8 - 3.6	0.8 - 3.6	CMOS/ LVTTL	±12	2.1	30	2	-40~125
74AVCH4T245	4-bit dual-supply voltage-translating transceiver with bus hold (3-state)	0.8 - 3.6	0.8 - 3.6	CMOS/ LVTTL	±12	2.1	30	4	-40~125
74AVCH8T245	8-bit dual-supply voltage translating transceiver with bus hold (3-state)	0.8 - 3.6	0.8 - 3.6	CMOS	±12	2.1	15	8	-40~125
74AXP1T125	Dual-supply buffer/line driver (3-state)	0.7 - 2.75	1.2 - 5.5	CMOS	±12	4.8	50	1	-40~125
74AXP1T14	Dual-supply schmitt-trigger inverter	0.7 - 2.75	1.2 - 5.5	CMOS	±12	3.4	50	1	-40~125
74AXP1T32	Dual-supply 2-input or gate	0.7 - 2.75	1.2 - 5.5	CMOS	±12	3.4	50	1	-40~125
74AXP1T34	Single dual-supply voltage-translating buffer	0.7 - 2.75	1.2 - 5.5	CMOS	±12	3.4	50	1	-40~125
74AXP1T57	Schmitt-trigger inputs, Dual supply configurable multiple function gate	0.7 - 2.75	1.2 - 5.5	CMOS	±12	4.8	50	1	-40~85
74AXP2T08	Dual-supply 2-input AND gate	0.7 - 2.75	1.2 - 5.5	CMOS	±12	4.8	50	1	-40~125
74AXP2T3407	Dual-supply single buffer and single buffer with open drain	0.7 - 2.75	1.2 - 5.5	CMOS	±12	4.8	50	1	-40~125
74HC4049	Hex inverter with 15 V-tolerant inputs	2.0 - 6.0	n.a.	CMOS	±5.2	8.0	50	6	-40~125
74HC4050	Hex buffer with 15 V-tolerant inputs	2.0 - 6.0	n.a.	CMOS	±5.2	7.0	50	6	-40~125
74LVC1T45	Single dual-supply voltage-translating transceiver (3-state)	1.2 - 5.5	1.2 - 5.5	CMOS/ LVTTL	±24	2.5	50	1	-40~125
74LVC2T45	Dual-bit dual-supply voltage-translating transceiver (3-state)	1.2 - 5.5	1.2 - 5.5	CMOS/ LVTTL	±24	2.5	50	2	-40~125
74LVC4245	8-bit dual-supply voltage-translating transceiver (3-state)	1.2 - 5.5	1.2 - 5.5	CMOS/ LVTTL	±24	3.5	50	8	-40~125
74LVC4245A	8-bit dual-supply voltage translating transceiver (3-state)	1.2 - 5.5	1.2 - 5.5	CMOS/ LVTTL	±24	3.5	50	8	-40~125
74LVC8T245	8-bit dual-supply voltage-translating transceiver (3-state)	1.2 - 5.5	1.2 - 5.5	CMOS/ LVTTL	±24	3.5	50	8	-40~125
74LVC8T595	Dual supply 8-bit serial-in/serial-out or parallel-out shift register; 3-state	1.1 - 5.5	1.1 - 5.5	CMOS/ LVTTL	±24	4.1	15	8	-40~125
74LVCH1T45	Single dual-supply voltage-translating transceiver with bus hold (3-state)	1.2 - 5.5	1.2 - 5.5	CMOS/ LVTTL	±24	2.5	50	1	-40~125
74LVCH2T45	Dual-bit dual-supply voltage-translating transceiver with bus hold (3-state)	1.2 - 5.5	1.2 - 5.5	CMOS/ LVTTL	±24	2.5	50	2	-40~125
74LVCH8T245	8-bit dual-supply voltage-translating transceiver with bus hold (3-state)	1.2 - 5.5	1.2 - 5.5	CMOS/ LVTTL	±24	3.5	50	8	-40~125
HEF4104B	Quad low-to-high voltage translator (3-state)	3.0 - 15	3.0 - 15	CMOS	±2.4	3.4	50	16	-40~85

Digital comparators

Type number	Description	V_{CC} (V)	Logic switching levels	Output drive capability (mA)	t_{pd} (ns)	Output Load C_L (pF)	T_{amb} (°C)
74HC688	8-bit magnitude comparator	2.0 - 6.0	CMOS	±5.2	17	50	-40~125
74HCT688	8-bit magnitude comparator; TTL-enabled	4.5 - 5.5	TTL	±4	17	50	-40~125
74HC85	4-bit magnitude comparator	2.0 - 6.0	CMOS	±5.2	23	50	-40~125
74HCT85	4-bit magnitude comparator; TTL-enabled	4.5 - 5.5	TTL	±4	26	50	-40~125

Multivibrators

Type number	Description	V_{CC} (V)	Logic switching levels	Output drive capability (mA)	t_{pd} (ns)	Output Load C_L (pF)	T_{amb} (°C)
74AHC123A	Dual retriggerable monostable multivibrator with reset	2.0 - 5.5	CMOS	±8	5.1	50	-40~125
74AHCT123A	Dual retriggerable monostable multivibrator with reset; TTL-enabled	4.5 - 5.5	TTL	±8	5.0	50	-40~125
74HC123	Dual retriggerable monostable multivibrator with reset	2.0 - 6.0	CMOS	±7.8	9.0	50	-40~125
74HCT123	Dual retriggerable monostable multivibrator with reset; TTL-enabled	4.5 - 5.5	TTL	±4	26	50	-40~125
74HCT221	dual non-retriggerable monostable multivibrator with reset; TTL-enabled	4.5 - 5.5	TTL	±4	32	50	-40~125
74HC423	Dual retriggerable monostable multivibrator with reset	2.0 - 6.0	CMOS	±5.2	23	50	-40~125
74HCT423	Dual retriggerable monostable multivibrator with reset; TTL-enabled	4.5 - 5.5	TTL	±4	26	50	-40~125
74HC4538	Dual retriggerable precision monostable multivibrator	2.0 - 6.0	CMOS	±5.2	27	50	-40~125
74HCT4538	Dual retriggerable precision monostable multivibrator; TTL-enabled	4.5 - 5.5	TTL	±4	30	50	-40~125
74LV123	Dual retriggerable monostable multivibrator with reset	1.0 - 5.5	TTL	±12	20	50	-40~125
74LVC1G123	Single retriggerable monostable multivibrator	1.65 - 5.5	CMOS/LVTTL	±32	3.5	50	-40~125
HEF4047B	Monostable/astable multivibrator	3.0 - 15	CMOS	±2.4	50	50	-40~85
HEF4528B	Dual retriggerable monostable multivibrator with reset	3.0 - 15	CMOS	±2.4	40	50	-40~85
HEF4538B	Dual retriggerable precision monostable multivibrator	3.0 - 15	CMOS	±2.4	60	50	-40~85

Parity generators-checkers

Type number	Description	V_{CC} (V)	Logic switching levels	Output drive capability (mA)	t_{pd} (ns)	Output Load C_L (pF)	T_{amb} (°C)
74HC280	9-bit odd/even parity generator/checker	2.0 - 6.0	CMOS	±5.2	17	50	-40~125
74HCT280	9-bit odd/even parity generator/checker; TTL-enabled	4.5 - 5.5	TTL	±4	18	50	-40~125

Phase-locked loops

Type number	Description	V_{CC} (V)	Logic switching levels	Output drive capability (mA)	t_{pd} (ns)	Output Load C_L (pF)	F_{max} (MHz)	T_{amb} (°C)
74HC4046A	Phase-locked loop with VCO	3.0 - 6.0	CMOS	±5.2	18	50	21	-40~125
74HCT4046A	Phase-locked loop with VCO; TTL-enabled	4.5 - 5.5	TTL	±4	23	50	19	-40~125
74HCT9046A	Phase-locked loop with bandgap controlled VCO; TTL-enabled	4.5 - 5.5	TTL	±4	23	50	19	-40~125
HEF4046B	Phase-locked loop with VCO	3.0 - 15.0	CMOS	±2.4		50	2.7	-40~125

Printer interfaces

Type number	Description	V_{CC} (V)	Logic switching levels	Output drive capability (mA)	t_{pd} (ns)	Output Load C_L (pF)	T_{amb} (°C)
PDI1284P11	Parallel interface transceiver/buffer	3.0 - 3.6	LVTTL	±14	13.9	50	0~70

Bus Switches

Types in **bold** represent new products

Type number	Description	V_{CC} (V)	V_{PASS} (V)	Logic switching levels	R_{ON}(Ω)	$f_{(-3dB)}$ (MHz)	Number of bits	t_{pd} (ns)	T_{amb} (°C)
74CB3Q3253	Dual 1-of-4 FET multiplexer/ demultiplexer with charge pump	2.3 - 3.6	V_{CC}	CMOS/LVTTL	4	500	2	0.2	-40~85
74CB3Q3257	Quad 1-of-2 FET multiplexer/ demultiplexer with charge pump	2.3 - 3.6	V_{CC}	CMOS/LVTTL	4	500	4	0.2	-40~85
74CBTLV16211	24-bit bus switch	2.3 - 3.6	3.3	CMOS/LVTTL	7	400	10	0.2	-40~125
74CBTLV1G125	Single bus switch	2.3 - 3.6	3.3	CMOS/LVTTL	7	400	1	0.2	-40~125
74CBTLV3125	Quad bus switch	2.3 - 3.6	3.3	CMOS/LVTTL	7	400	4	0.2	-40~125
74CBTLV3126	Quad bus switch	2.3 - 3.6	3.3	CMOS/LVTTL	7	400	4	0.2	-40~125
74CBTLV3244	Octal bus switch	2.3 - 3.6	3.3	CMOS/LVTTL	7	400	8	0.2	-40~125
74CBTLV3245	Octal bus switch	2.3 - 3.6	3.3	CMOS/LVTTL	7	400	8	0.2	-40~125
74CBTLV3253	Dual 4:1 mux/demux	2.3 - 3.6	3.3	CMOS/LVTTL	7	400	2	0.2	-40~125
74CBTLV3257	Quad 2:1 mux/demux	2.3 - 3.6	3.3	CMOS/LVTTL	7	400	4	0.2	-40~125
74CBTLV3306	2-bit bus switch	2.3 - 3.6	5.0	CMOS/LVTTL	7	400	2	0.2	-40~125
74CBTLV3384	10-bit bus switch	2.3 - 3.6	3.3	CMOS/LVTTL	7	400	10	0.2	-40~125
74CBTLV3861	10-bit bus switch	2.3 - 3.6	3.3	CMOS/LVTTL	7	400	10	0.2	-40~125
74CBTLVD3244	Octal bus switch level translator	3.0 - 3.6	1.8	CMOS/LVTTL	7	400	8	0.2	-40~125
74CBTLVD3245	Octal bus switch level translator	3.0 - 3.6	1.8	CMOS/LVTTL	7	400	8	0.2	-40~125
74CBTLVD3384	10-bit bus switch level translator	3.0 - 3.6	1.8	CMOS/LVTTL	7	400	10	0.2	-40~125
74CBTLVD3861	10-bit bus switch level translator	3.0 - 3.6	1.8	CMOS/LVTTL	7	400	10	0.2	-40~125
CBT16210	20-bit bus switch	4.5 - 5.5	3.9	TTL	7	300	20	0.25	-40~85
CBT3125	Quad bus switch	4.5 - 5.5	3.9	TTL	7	300	4	0.25	-40~85
CBT3244A	Octal bus switch	4.5 - 5.5	3.9	TTL	7	300	8	0.25	-40~85
CBT3245A	Octal bus switch	4.5 - 5.5	3.9	TTL	7	300	8	0.25	-40~85
CBT3251	8:1 mux/demux	4.5 - 5.5	3.9	TTL	7	300	8	0.25	-40~85
CBT3253	Dual 4:1 mux/demux	4.5 - 5.5	3.9	TTL	7	300	2	0.25	-40~85
CBT3253A	Dual 4:1 mux/demux	4.5 - 5.5	3.9	TTL	7	300	2	0.25	-40~85
CBT3257A	Quad 2:1 mux/demux	4.5 - 5.5	3.9	TTL	7	300	4	0.25	-40~85
CBT3306	Dual bus switch	4.5 - 5.5	3.9	TTL	7	300	2	0.25	-40~85
CBT3861	10-bit bus switch	4.5 - 5.5	3.9	TTL	7	300	10	0.25	-40~85
CBTD16210	20-bit bus switch level translator	4.5 - 5.5	3.3	TTL	7	300	20	0.25	-40~85
CBTD3306	Dual bus switch level translator	4.5 - 5.5	3.3	TTL	7	300	2	0.25	-40~85
CBTD3384	10-bit bus switch level translator	4.5 - 5.5	3.3	TTL	7	300	10	0.25	-40~85
CBTD3861	10-bit bus switch level translator	4.5 - 5.5	3.3	TTL	7	300	10	0.25	-40~85

Decoders/Demultiplexers

Type number	Description	V_{CC} (V)	Logic switching levels	Output drive capability (mA)	t_{pd} (ns)	Output Load C_L (pF)	T_{amb} (°C)
74AHC138	3-to-8 line decoder/demultiplexer; inverting	2.0 - 5.5	CMOS	±8	4.4	50	-40~125
74AHC139	Dual 2-to-4 line decoder/demultiplexer	2.0 - 5.5	CMOS	±8	3.9	50	-40~125
74AHCT138	3-to-8 line decoder/demultiplexer; inverting; TTL- enabled	4.5 - 5.5	TTL	±8	4.4	50	-40~125
74AHCT139	Dual 2-to-4 line decoder/demultiplexer; TTL-enabled	4.5 - 5.5	TTL	±8	3.6	50	-40~125
74AUP1G18	1-to-2 demultiplexer (3-state)	1.1 - 3.6	CMOS	±1.9	3.2	30	-40~125
74AUP1G19	1-to-2 decoder/demultiplexer	1.1 - 3.6	CMOS	±1.9	3.0	30	-40~125
74HC137	3-to-8 line decoder/demultiplexer with address latches; inverting	2.0 - 6.0	CMOS	±5.2	18	50	-40~125
74HC138	3-to-8 line decoder/demultiplexer; inverting	2.0 - 6.0	CMOS	±5.2	12	50	-40~125
74HC139	Dual 2-to-4 line decoder/demultiplexer	2.0 - 6.0	CMOS	±5.2	14	50	-40~125
74HC154	4-to-16 line decoder/demultiplexer	2.0 - 6.0	CMOS	±5.2	11	50	-40~125
74HC237	3-to-8 decoder/demultiplexer with address latches	2.0 - 6.0	CMOS	±5.2	18	50	-40~125
74HC238	3-to-8 decoder/demultiplexer	2.0 - 6.0	CMOS	±5.2	14	50	-40~125
74HC42	BCD to decimal decoder (1-of-10)	2.0 - 6.0	CMOS	±5.2	17	50	-40~125
74HC4511	BCD to 7-segment latch/decoder/driver with lamp test input	2.0 - 6.0	CMOS	-10	28	50	-40~125
74HC4514	4-to-16 decoder/demultiplexer with address latches	2.0 - 6.0	CMOS	±5.2	27	50	-40~125
74HC4515	4-to-16 decoder/demultiplexer with address latches; inverting	2.0 - 6.0	CMOS	±5.2	29	50	-40~125
74HCT138	3-to-8 line decoder/demultiplexer; inverting; TTL- enabled	4.5 - 5.5	TTL	±4	19	50	-40~125
74HCT139	Dual 2-to-4 line decoder/demultiplexer; TTL-enabled	4.5 - 5.5	TTL	±4	16	50	-40~125
74HCT154	4-to-16 line decoder/demultiplexer; TTL-enabled	4.5 - 5.5	TTL	±4	13	50	-40~125
74HCT238	3-to-8 decoder/demultiplexer; TTL-enabled	4.5 - 5.5	TTL	±4	18	50	-40~125
74HCT4511	BCD to 7-segment latch/decoder/driver with lamp test input; TTL-enabled	4.5 - 5.5	TTL	-10	28	50	-40~125
74HCT4514	4-to-16 decoder/demultiplexer with address latches; TTL-enabled	4.5 - 5.5	TTL	±4	30	50	-40~125
74LV138	3-to-8 line decoder/demultiplexer; inverting	1.0 - 5.5	TTL	±12	12	50	-40~125
74LVC138A	3-to-8 line decoder/demultiplexer; inverting	1.2 - 3.6	CMOS/LVTTL	±24	2.7	50	-40~125
74LVC139	Dual 2-to-4 line decoder/demultiplexer	1.2 - 3.6	CMOS/LVTTL	±24	2.5	50	-40~125
74LVC1G18	1-to-2 demultiplexer (3-state)	1.65 - 5.5	CMOS/LVTTL	±32	2.3	50	-40~125
74LVC1G19	1-to-2 decoder/demultiplexer	1.65 - 5.5	CMOS/LVTTL	±32	1.8	50	-40~125
HEF4028B	1-of-10 decoder	3.0 - 15.0	CMOS	±2.4	30	50	-40~85
HEF4543B	BCD to 7-segment latch/decoder/driver with phase input	3.0 - 15.0	CMOS	±2.4	55	50	-40~85
HEF4555B	Dual 1-to-4 line decoder/demultiplexer	3.0 - 15.0	CMOS	±2.4	30	50	-40~85

Digital Multiplexers

Type number	Description	V_{CC} (V)	Logic switching levels	Output drive capability (mA)	Output Load C_L (pF)	t_{pd} (ns)	T_{amb} (°C)
74AHC157	Quad 2-input multiplexer	2.0 - 5.5	CMOS	±8	50	3.2	-40~125
74AHC257	Quad 2-input multiplexer (3-state)	2.0 - 5.5	CMOS	±8	50	2.9	-40~125
74AHCT157	Quad 2-input multiplexer; TTL- enabled	4.5 - 5.5	TTL	±8	50	3.2	-40~125
74AHCT257	Quad 2-input multiplexer; TTL- enabled (3-state)	4.5 - 5.5	TTL	±8	50	3.7	-40~125
74AUP1G157	Single 2-input multiplexer	1.1 - 3.6	CMOS	±1.9	30	3.2	-40~125
74AUP1G158	Single 2-input multiplexer; inverting	1.1 - 3.6	CMOS	±1.9	30	3.2	-40~125
74AUP2G157	Single 2-input multiplexer	1.1 - 3.6	CMOS	±1.9	30	3.4	-40~125
74AXP1G157	Single 2-input multiplexer	0.7 - 2.75	CMOS	±4.5	5	2.7	-40~85
74HC151	8-input multiplexer	2.0 - 6.0	CMOS	±5.2	50	17	-40~125
74HC153	Dual 4-input multiplexer	2.0 - 6.0	CMOS	±5.2	50	17	-40~125
74HC157	Quad 2-input multiplexer	2.0 - 6.0	CMOS	±5.2	50	11	-40~125
74HC158	Quad 2-input multiplexer; inverting	2.0 - 6.0	CMOS	±5.2	50	12	-40~125
74HC251	8-input multiplexer (3-state)	2.0 - 6.0	CMOS	±5.2	50	18	-40~125
74HC253	Dual 4-input multiplexer (3-state)	2.0 - 6.0	CMOS	±7.8	50	17	-40~125
74HC257	Quad 2-input multiplexer (3-state)	2.0 - 6.0	CMOS	±7.8	50	11	-40~125
74HCT151	8-input multiplexer; TTL-enabled	4.5 - 5.5	TTL	±4	50	19	-40~125
74HCT153	Dual 4-input multiplexer; TTL-enabled	4.5 - 5.5	TTL	±4	50	19	-40~125
74HCT157	Quad 2-input multiplexer; TTL- enabled	4.5 - 5.5	TTL	±4	50	13	-40~125
74HCT251	8-input multiplexer; TTL-enabled (3-state)	4.5 - 5.5	TTL	±4	50	22	-40~125
74HCT253	Dual 4-input multiplexer; TTL- enabled (3-state)	4.5 - 5.5	TTL	±6	50	17	-40~125
74HCT257	Quad 2-input multiplexer; TTL- enabled (3-state)	4.5 - 5.5	TTL	±6	50	13	-40~125
74LVC157A	Quad 2-input multiplexer	1.2 - 3.6	CMOS/LVTTL	±24	50	2.5	-40~125
74LVC1G157	Single 2-input multiplexer	1.65 - 5.5	CMOS/LVTTL	±32	50	2.2	-40~125
74LVC257A	Quad 2-input multiplexer (3-state)	1.2 - 3.6	CMOS/LVTTL	±24	50	2.4	-40~125

Analog Switches

Type number	Description	V_{CC} (V)	Logic switching levels	R_{ON} (Ω)	$R_{ON(FLAT)}$ (Ω)	$f_{(-3dB)}$ (MHz)	T_{HD} (%)	X_{talk} (dB)	T_{amb} (°C)
74AHC1G66	Single-pole, single-throw analog switch	2.0 - 5.5	CMOS	40	14	280	0.015		-40~125
74AHCT1G66	Single-pole, single-throw analog switch; TTL-enabled	4.5 - 5.5	TTL	40	14	280	0.015		-40~125
74HC1G66	Single-pole, single-throw analog switch	2.0 - 9.0	CMOS	105	23	200	0.02		-40~125
74HC2G66	Dual single-pole, single-throw analog switch	2.0 - 9.0	CMOS	105	23	200	0.02	-60	-40~125
74HC4016	Quad single-pole, single-throw analog switch	2.0 - 10	CMOS	300	80	160	0.4	-60	-40~125
74HC4051	Single-pole, octal-throw analog switch	2.0 - 10	CMOS	200	20	180	0.02		-40~125
74HC4052	Dual single-pole, quad-throw analog switch	2.0 - 10	CMOS	200	20	180	0.02	-60	-40~125
74HC4053	Triple single-pole, double-throw analog switch	2.0 - 10	CMOS	200	20	170	0.02		-40~125
74HC4066	Quad single-pole, single-throw analog switch	2.0 - 10	CMOS	105	23	200	0.02	-60	-40~125
74HC4067	Single-pole, 16-throw analog switch	2.0 - 10	CMOS	200	25	100	0.02		-40~125
74HC4316	Quad single-pole, single-throw analog switch with translation	2.0 - 10	CMOS	300	80	160	0.4	-60	-40~125
74HC4351	Single-pole, octal-throw analog switch with latch	2.0 - 10	CMOS	200	20	180	0.02		-40~125
74HC4851	Single-pole, octal-throw analog switch	2.0 - 10	CMOS	220					-40~125
74HC4852	Dual single-pole, quad-throw analog switch; TTL-enabled	2.0 - 10	CMOS	220					-40~125
74HCT1G66	Single-pole, single-throw analog switch; TTL-enabled	4.5 - 5.5	TTL	118	23	180	0.04		-40~125
74HCT2G66	Dual single-pole, single-throw analog switch; TTL-enabled	4.5 - 5.5	TTL	118	23	180	0.04	-60	-40~125
74HCT4051	Single-pole, octal-throw analog switch; TTL-enabled	4.5 - 5.5	TTL	225	20	170	0.04		-40~125
74HCT4052	Dual single-pole, quad-throw analog switch; TTL-enabled	4.5 - 5.5	TTL	225	20	170	0.04	-60	-40~125
74HCT4053	Triple single-pole, double-throw analog switch; TTL-enabled	4.5 - 5.5	TTL	225	20	160	0.04		-40~125
74HCT4066	Quad single-pole, single-throw analog switch; TTL-enabled	4.5 - 5.5	TTL	118	23	180	0.04	-60	-40~125
74HCT4067	Single-pole, 16-throw analog switch; TTL-enabled	4.5 - 5.5	TTL	225	25	90	0.04		-40~125
74HCT4316	Quad single-pole, single-throw analog switch with translation; TTL-enabled	4.5 - 5.5	TTL	400	50	150	0.8	-60	-40~125
74HCT4351	Single-pole, octal-throw analog switch with latch; TTL-enabled	4.5 - 5.5	TTL	225	20	170	0.04		-40~125
74HCT4851	Single-pole, octal-throw analog switch; TTL-enabled	4.5 - 5.5	TTL	240					-40~125
74HCT4852	Dual single-pole, quad-throw analog switch; TTL-enabled	4.5 - 5.5	TTL	240					-40~125
74LV4051	Single-pole, octal-throw analog switch	1.0 - 6.0	TTL	135	35	200	0.4	-60	-40~125
74LV4052	Dual single-pole, quad-throw analog switch	1.0 - 6.0	TTL	125	15	180	0.4	-60	-40~125
74LV4053	Triple single-pole, double-throw analog switch	1.0 - 6.0	TTL	150	30	180	0.4	-60	-40~125
74LV4066	Quad single-pole, single-throw analog switch	1.0 - 6.0	TTL	50	3.0	180	0.02	-60	-40~125
74LVC1G3157	Single-pole, double-throw analog switch	1.65 - 5.5	CMOS/ LVTTL	15	1.5	300	0.078		-40~125
74LVC1G384	Single-pole, single-throw analog switch	1.65 - 5.5	CMOS/ LVTTL	15	1.5	440	0.001		-40~125
74LVC1G53	Single-pole, double-throw analog switch	1.65 - 5.5	CMOS/ LVTTL	15	1.5	300	0.078		-40~125
74LVC1G66	Single-pole, single-throw analog switch	1.65 - 5.5	CMOS/ LVTTL	15	1.5	440	0.001		-40~125
74LVC2G3157	Dual single-pole, double-throw analog switch	1.65 - 5.5	CMOS/ LVTTL	15	1.5	300	0.078	-54	-40~125
74LVC2G53	Single-pole, double-throw analog switch	1.65 - 5.5	CMOS/ LVTTL	15	1.5	300	0.078		-40~125
74LVC2G66	Dual single-pole, single-throw analog switch	1.65 - 5.5	CMOS/ LVTTL	15	1.5	440	0.005	-56	-40~125
74LVC4066	Quad single-pole, single-throw analog switch	1.65 - 5.5	CMOS/ LVTTL	15	1.5	440	0.005	-58	-40~125
74LVCV2G66	Dual single-pole, single-throw analog switch; overvoltage tolerant	2.3 - 5.5	CMOS/ LVTTL	15	3.0	210	0.01	-55	-40~125
HEF4016B	Quad single-pole, single-throw analog switch	3.0 - 15	CMOS	350	65	90	0.04	-50	-40~85
HEF4051B	Single-pole, octal-throw analog switch	3.0 - 15	CMOS	175	30	70	0.04	-50	-40~85
HEF4052B	Dual single-pole, quad-throw analog switch	3.0 - 15	CMOS	175	30	70	0.04	-50	-40~85
HEF4053B	Triple single-pole, double-throw analog switch	3.0 - 15	CMOS	175	30	70	0.04	-50	-40~85
HEF4066B	Quad single-pole, single-throw analog switch	3.0 - 15	CMOS	175	20	90	0.04	-50	-40~85
HEF4067B	Single-pole, 16-throw analog switch	3.0 - 15	CMOS	175	20	13	0.04	-50	-40~85

Standard logic functions

74 XXX XXX XXX

Logic family	Function number	Package type	
AHC(T)		BQ	DQFN
ALVC		BX	DQFN
ALVT		D	SO
AUP		DB	SSOP
AVC(M)		DC	VSSOP
CBT(D)		DG	TSSOP
CBTLV(D)		DGG	TSSOP
HC(T)		DL	SSOP
HEF4000B		DP	TSSOP
LV		FC	BGA
LVC		EV	BGA
LVT		GU	DQFN
NPIC		P	TSSOP
VHC(T)		T	SO
XC7		TS	SSOP
		TT	TSSOP

Mini logic functions

74 XXX XG XT XXX XXX

Logic family	Gate format	Function number	Package type	
AHC(T)	1G Single-gate		DC	PicoGate
AUP	2G Dual-gate		DP	PicoGate
AVC(M)	3G Triple-gate		GD	MicroPak
AXP			GF	MicroPak
CBT(D)	**Translator format**		GM	MicroPak
CBTLV(D)	1T Single-translator		GN	MicroPak
HC(T)	2T Dual-translator		GS	MicroPak
LVC	3T Triple-translator		GT	MicroPak
XC7	4T Quad-translator		GV	PicoGate
			GW	PicoGate
			GX	MicroPak

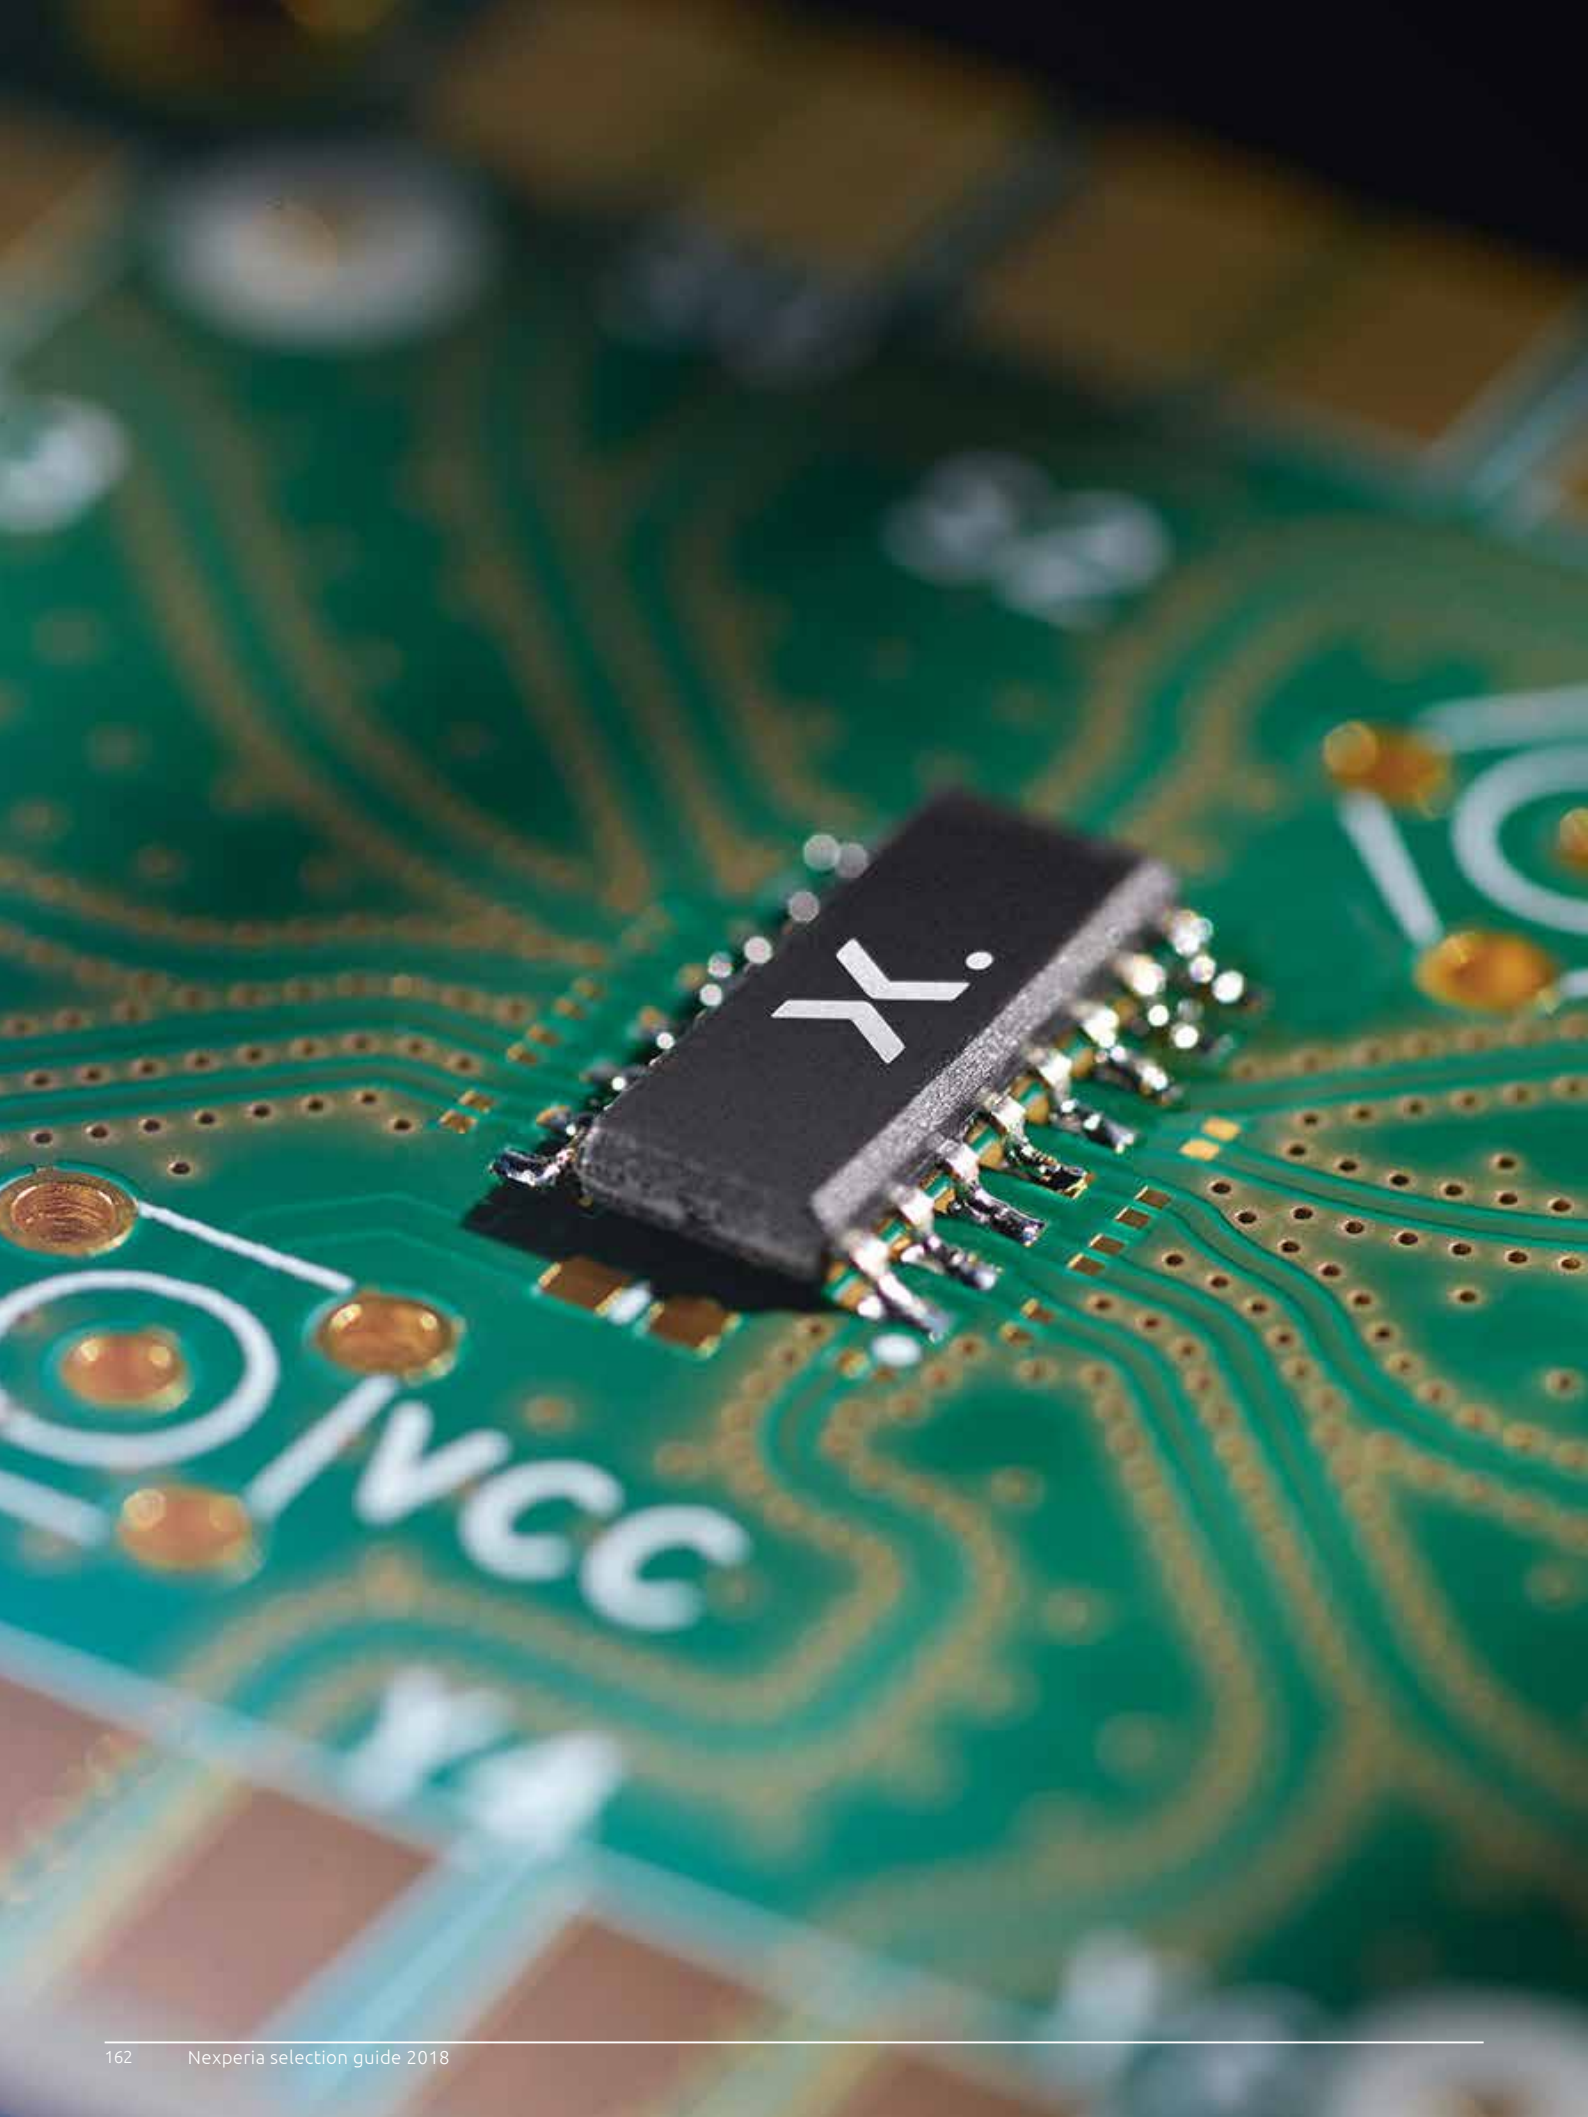
VCC

Packages 6

Package details and packing methods 164

Package details and packing methods SMD – Part 1 164
Package details and packing methods SMD – Part 2 165
Package details and packing methods SMD – Part 3 166
Package details and packing methods SMD – Part 4 167
Package details and packing methods WLCSP 168
Packing details glass diodes, single ended and through hole packages 168

Package cross reference 169

Package cross reference list – Part 1 169
Package cross reference list – Part 2 170
Package cross reference list – Part 3 171
Package cross reference list – Part 4 172
Package cross reference list – Part 5 173
Package cross reference matrix – Part 1 174
Package cross reference matrix – Part 2 175
Package cross reference matrix – Part 3 176
Competitive cross reference - Logic 176

Packing methods 177

Product orientation (tape and reel pack) 178

Minimized outline drawings and reflow soldering footprint 181

2-pin SMD packages 181
3-pin SMD packages 184
4-pin SMD packages 187
5-pin SMD packages 188
6-pin SMD packages 189
8-pin SMD packages 194
8-pin SMD packages 195
8-pin SMD packages 196
More than 8-pin SMD packages 198
Glass diodes 204
Single-ended and through-hole packages 205

Index 206

Package details and packing methods SMD – Part 1

Package details					Packing methods																	
Pins/ Terminals	Package	Package size (l x w x h) (mm)	Lead pitch (mm)	Package	Packing method and tape dimension	Reel dimension (d x w) (mm)	Packing quantity and ordering code (12NC ending)															
							500	800	1000	1400	1500	2000	2500	3000	3500	4000	4500	5000	6000	8000	9000	10000
2	DSN0402-2 (SOD992)	0.40 x 0.20 x 0.12	0.25		2 mm pitch, 8 mm tape and reel	180 x 8																-315
	DSN0603B-2 (SOD962B)	0.60 x 0.30 x 0.20	0.4		2mm pitch, 8mm tape and reel	180 x 8															-315	
	DSN0603-2 (SOD962)	0.60 x 0.30 x 0.30	0.4		2 mm pitch. 8 mm tape and reel	180 x 8															-315	
	DSN1006U-2 (SOD995)	1.00 x 0.60 x 0.30	0.55		2 mm pitch, 8 mm tape and reel	180 x 8																-315
	DSN1006-2 (SOD993)	1.00 x 0.60 x 0.30	0.65		2 mm pitch, 8 mm tape and reel	180 x 8																-315
	DFN1006D-2 (SOD882D)	1.00 x 0.60 x 0.37	0.65		2 mm pitch. 8 mm tape and reel	180 x 8																-315
	DFN1006-2 (SOD882)	1.00 x 0.60 x 0.48	0.65		2 mm pitch. 8 mm tape and reel	180 x 8																-315
	SOD523 (SC-79)	1.20 x 0.80 x 0.60			2 mm pitch. 8 mm tape and reel	180 x 8														-315		
					4 mm pitch. 8 mm tape and reel	180 x 8								-115								
					4 mm pitch. 8 mm tape and reel	286 x 8																-135
	DFN1608D-2 (SOD 1608)	1.60 x 0.80 x 0.37	0.94		2 mm pitch. 8 mm tape and reel	180 x 8														-315		
	DSN1608-2 (SOD964)	1.60 x 0.80 x 0.37	0.94		2 mm pitch. 8 mm tape and reel	180 x 8														-315		
	SOD323F (SC-90)	1.70 x 1.25 x 0.70			4 mm pitch. 8 mm tape and reel	180 x 8								-115								
						286 x 8																-135
	SOD323 (SC-76)	1.70 x 1.25 x 0.95			4 mm pitch. 8 mm tape and reel	180 x 8								-115								
					4 mm pitch. 8 mm tape and reel	286 x 8																-135
					10 reels in one box	286 x 8																-135
	SOD123F	2.60 x 1.60 x 1.10			4 mm pitch. 8 mm tape and reel	180 x 8								-115								
	CFP3 (SOD123W)	2.60 x 1.70 x 1.00			4 mm pitch. 8 mm tape and reel	180 x 8								-115								
	SOD123	2.70 x 1.60 x 1.20			4 mm pitch. 8 mm tape and reel	180 x 8								-115								
						286 x 8																-118
	SOD80C (MiniMelf)	3.50 x 1.50 x 1.50			4 mm pitch. 8 mm tape and reel	180 x 8							-115									
					4 mm pitch. 8 mm tape and reel	330 x 8																-135
	CFP5 (SOD128)	3.80 x 2.50 x 1.00			4 mm pitch. 12 mm tape and reel	180 x 12								-115								
3	DFN1006B-3 (SOT883B)	1.00 x 0.60 x 0.37	0.65		2 mm pitch. 8 mm tape and reel	180 x 8																-315
	DFN1006-3 (SOT883)	1.00 x 0.60 x 0.48	0.65		2 mm pitch. 8 mm tape and reel	180 x 8																-315
	DFN1010D-3 (SOT1215)	1.10 x 1.00 x 0.37	0.75		4 mm pitch. 8 mm tape and reel	180 x 8												-115				
	SOT663	1.20 x 1.60 x 0.55	0.5		4 mm pitch. 8 mm tape and reel	180 x 8										-115						
	SOT323 (SC-70)	2.00 x 1.25 x 0.95	0.65		4 mm pitch. 8 mm tape and reel	180 x 8								-115								
					4 mm pitch. 8 mm tape and reel	286 x 8																-135
	DFN2020-3 (SOT1061)	2.00 x 2.00 x 0.62	1.3		4 mm pitch. 8 mm tape and reel	180 x 8								-115								
	DFN2020D-3 (SOT1061D)	2.00 x 2.00 x 0.62	1.3		4 mm pitch, 8 mm tape and reel	180 x 8								-115								
	SOT23	2.90 x 1.30 x 1.00	0.95		4 mm pitch. 8 mm tape and reel	180 x 8								-215								
						286 x 8																-235
					10 reels in one box	180 x 8								-185								

Package details and packing methods SMD – Part 2

Package details					Packing methods																	
Pins/ Terminals	Package	Package size (l x w x h) (mm)	Lead pitch (mm)	Package	Packing method and tape dimension	Reel dimension (d x w) (mm)	Packing quantity and ordering code (12NC ending)															
							500	800	1000	1400	1500	2000	2500	3000	3500	4000	4500	5000	6000	8000	9000	10000
3	SOT89 (SC-62)	4.50 x 2.50 x 1.50	1.5		8 mm pitch. 12 mm tape and reel	180 x 12			-115													
					8 mm pitch. 12 mm tape and reel	330 x 12										-135						
					8 mm pitch. 12 mm tape and reel	180 x 12			-146													
					8 mm pitch. 12 mm tape and reel	180 x 12			-147													
	CFP15 (SOT1289)	5.80 x 4.30 x 0.78	2.13		8 mm pitch. 12 mm tape and reel	330 x 12					-146							-139				
	DPAK (SOT428)	6.60 x 6.10 x 2.30	4.57		8 mm pitch. 16 mm tape and reel	330 x 16							-118									
	D2PAK (SOT404)	10 x 9.60 x 4.30	5.08		16 mm pitch. 24 mm tape and reel	330 x 24		118														
4	SOT143B	2.90 x 1.30 x 1.00	1.9		4 mm pitch. 8 mm tape and reel	180 x 8								-215								
					4 mm pitch. 8 mm tape and reel	286 x 8																-235
	LFPAK56 (SOT669)	4.90 x 4.45 x 1.00	1.27		8 mm pitch. 12 mm tape and reel	180 x 12					-115											
	SOT223 (SC-73)	6.50 x 3.50 x 1.65	2.3		8 mm pitch. 12 mm tape and reel	180 x 12			-115													
					8 mm pitch. 12 mm tape and reel	330 x 12										-135						
5	X2SON5 (SOT1226)	0.80 x 0.80 x 0.35	0.4		2mm pitch, 8mm tape and reel	180 x 8																-125
	SOT665	1.60 x 1.20 x 0.55	0.5		2 mm pitch. 8 mm tape and reel	180 x 8																-125
					4 mm pitch. 8 mm tape and reel	180 x 8										-115						
	SOT353 (SC-88 A)	2.00 x 1.25 x 0.95	0.65		4 mm pitch. 8 mm tape and reel	180 x 8								-115								
					4 mm pitch. 8 mm tape and reel	286 x 8																-135
					4 mm pitch. 8 mm tape and reel	180 x 8								-125								
					4 mm pitch. 8 mm tape and reel	286 x 8																-165
	TSOP5 (SOT753)	2.90 x 1.50 x 1.00	0.95		4mm pitch, 8mm tape and reel	180 x 8								-125								
6	X2SON6 (SOT1255)	1.00 x 0.80 x 0.35	0.40		2mm pitch, 8mm tape and reel	180 x 8																-147
	XSON6 (SOT1115)	0.90 x 1.00 x 0.35	0.3		4mm pitch, 8mm tape and reel	180 x 8												-125				
	XSON6 (SOT1202)	1.00 x 1.00 x 0.35	0.35		4mm pitch, 8mm tape and reel	180 x 8												-125				
	DFN1010-6 (SOT891)	1.00 x 1.00 x 0.50	0.35		4 mm pitch. 8 mm tape and reel	180 x 8												-125				
	XSON6 (SOT886)	1.45 x 1.00 x 0.50	0.5		4mm pitch, 8mm tape and reel	180 x 8												-115				
	DFN1010B-6 (SOT1216)	1.10 x 1.00 x 0.37	0.35		4 mm pitch. 8 mm tape and reel	180 x 8												-147				
	DFN1412-6 (SOT1268)	1.40 x 1.20 x 0.50	0.5		4 mm pitch. 8 mm tape and reel	180 x 8												-147				
	SOT666	1.60 x 1.20 x 0.55	0.5		2 mm pitch. 8 mm tape and reel	180 x 8														-315		
					4 mm pitch. 8 mm tape and reel	180 x 8										-115						
	DFN1616-6 (SOT 1189)	1.60 x 1.60 x 0.48	0.5		4 mm pitch. 8 mm tape and reel	180 x 8										-115						
	SOT363 (SC-88)	2.00 x 1.25 x 0.95	0.65		4 mm pitch. 8 mm tape and reel	180 x 8								-115								
					4 mm pitch. 8 mm tape and reel	286 x 8																-135
					4 mm pitch. 8 mm tape and reel	180 x 8								-125								
					4 mm pitch. 8 mm tape and reel	286 x 8																-165

Package details and packing methods SMD – Part 3

Package details					Packing methods																	
Pins/ Terminals	Package	Package size (l x w x h) (mm)	Lead pitch (mm)	Package	Packing method and tape dimension	Reel dimension (d x w) (mm)	Packing quantity and ordering code (12NC ending)															
							500	800	1000	1400	1500	2000	2500	3000	3500	4000	4500	5000	6000	8000	9000	10000
6	DFN2020-6 (SOT 1118)	2.00 x 2.00 x 0.62	0.65		4 mm pitch. 8 mm tape and reel	180 x 8								-115								
														-184								
	DFN2020D-6 (SOT1118D)	2.00 x 2.00 x 0.62	0.65		4 mm pitch, 8 mm tape and reel	180 x 8								-115								
	DF-N2020MD-6 (SOT1220)	2.00 x 2.00 x 0.62	0.65		4 mm pitch. 8 mm tape and reel	180 x 8								-115								
														-125								
	SOT457 (SC-74)	2.90 x 1.50 x 1.00	0.95		4 mm pitch. 8 mm tape and reel	180 x 8								-115								
					4 mm pitch. 8 mm tape and reel	286 x 8																-135
					4 mm pitch. 8 mm tape and reel	180 x 8								-125								
					4 mm pitch. 8 mm tape and reel	286 x 8																-165
7	DFN2111-7 (SOT1358)	2.10 x 1.10 x 0.50	1.3		4 mm pitch, 8 mm tape and reel	180 x 9								471								
	D2PAK-7 (SOT427)	10 x 15.30 x 4.30	-		16 mm pitch, 24 mm tape and reel	330 x 24		118														
8	XSON8 (SOT1116)	1.20 x 1.00 x 0.35	0.55		4mm pitch, 8mm tape and reel	180 x 8												-115				
	XSON8 (SOT1089)	1.35 x 1.00 x 0.50	0.55		4mm pitch, 8mm tape and reel	180 x 8												-115				
	X2SON8 (SOT1233)	1.35 x 0.80 x 0.35	0.40		2mm pitch, 8mm tape and reel	180 x 8																-115
	XSON8 (SOT1203)	1.35 x 1.00 x 0.35	0.35		4mm pitch, 8mm tape and reel	180 x 8												-115				
	XQFN8 (SOT902-2)	1.60 x 1.60 x 0.50	0.5		4mm pitch, 8mm tape and reel	180 x 8										-125						
	XSON8 (SOT833-1)	1.95 x 1.00 x 0.50	0.5		4mm pitch, 8mm tape and reel	180 x 8												-115				
	VSSOP8 (SOT765-1)	2.00 x 2.30 x 1.00	0.5		4mm pitch, 8mm tape and reel	180 x 8								-125								
	XSON8 (SOT996-2)	2.00 x 3.00 x 0.50	0.5		4mm pitch, 8mm tape and reel	180 x 8								-125								
	TSSOP8 (SOT505-2)	3.00 x 3.00 x 1.10	0.65		4mm pitch, 12mm tape and reel	180 x 12								-125								
	TSSOP8 (SOT530-1)	3.00 x 3.40 x 1.10	0.65			330 x 12							-118									
	LFPAK33 (SOT1210)	3.30 x 3.30 x 0.85	-		8 mm pitch, 12 mm tape and reel	180 x 12					-115											
	SOT96 (SO8)	4.90 x 3.90 x 1.75	1.27		8 mm pitch. 12 mm tape and reel	180 x 12			-115													
					8 mm pitch. 12 mm tape and reel	330 x 12							-518									
					8 mm pitch. 12 mm tape and reel	331 x 12							-118									
	LFPAK56D (SOT1205)	4.90 x 4.45 x 1.00	1.27		8 mm pitch. 12 mm tape and reel	180 x 12					-115											
10	XQFN10 (SOT1337-1)	1.30 x 1.60 x 0.50	0.4													-115						
	X2QFN10 (SOT1430-1)	1.30 x 1.60 x 0.33	0.40		4 mm pitch, 8 mm tape and reel	180 x 8												-471				
	XQFN10 (SOT1160-1)	1.40 x 1.80 x 0.50	0.40		4 mm pitch, 8 mm tape and reel	180 x 8										-115						
	XQFN10 (SOT1049-3)	1.55 x 2.00 x 0.50	0.5		4mm pitch, 8mm tape and reel	180 x 8												-115				
	XSON10 (SOT1081-2)	1.70 x 1.00 x 0.50	0.50															-115				
	DFN2510-10 (SOT1165)	2.50 x 1.00 x 0.48	0.5		4 mm pitch. 8 mm tape and reel	180 x 8												-115				
	DFN2510A-10 (SOT1176)	2.50 x 1.00 x 0.48	0.5		4 mm pitch. 8 mm tape and reel	180 x 8												-115 -471				
	HVSON10 (SOT650)	3.00 x 3.00 x 0.85	0.5		8mm pitch, 12mm tape and reel	330 x 12													-118			
	TSSOP10 (SOT552-1)	3.00 x 3.00 x 1.10	0.50		8 mm pitch, 12 mm tape and reel	330 x 12							-118									
12	XQFN12 (SOT1174-1)	1.70 x 2.00 x 0.50	0.4		4mm pitch, 8mm tape and reel	180 x 8										-115						

Package details and packing methods SMD – Part 4

Package details					Packing methods																	
Pins/ Terminals	Package	Package size (l x w x h) (mm)	Lead pitch (mm)	Package	Packing method and tape dimension	Reel dimension (d x w) (mm)	Packing quantity and ordering code (12NC ending)															
							500	800	1000	1400	1500	2000	2500	3000	3500	4000	4500	5000	6000	8000	9000	10000
14	DHVQFN14 (SOT762-1)	3.00 x 2.50 x 1.00	0.50		4 mm pitch, 12 mm tape and reel	180 x 12								-115								
	TSSOP14 (SOT402-1)	5.00 x 4.40 x 1.10	0.65		8mm pitch, 12mm tape and reel	330 x 12							-118									
	SSOP14 (SOT337-1)	6.20 x 5.30 x 2.00	0.65		12 mm pitch, 16 mm tape and reel	330 x 16						-118										
	SO14 (SOT108-1)	8.65 x 3.9 x 1.45	1.27		8mm pitch, 16mm tape and reel	330 x 16							-118									
16	XQFN16 (SOT1161-1)	1.80 x 2.60 x 0.50	0.4		4mm pitch, 8mm tape and reel	180 x 8										-115						
	TSSOP16 (SOT403-1)	5.00 x 4.40 x 1.10	0.65		8mm pitch, 12mm tape and reel	330 x 12							-118									
	SSOP16 (SOT519-1)	4.90 x 3.90 x 1.73	0.64		8 mm pitch, 12 mm tape and reel	330 x 12							-118									
	SSOP16 (SOT338-1)	6.20 x 5.30 x 2.00	0.65		12mm pitch, 16mm tape and reel	330 x 16						-118										
	SO16 (SOT109-1)	9.90 x 3.90 x 1.35	1.27		8 mm pitch, 16 mm tape and reel	330 x 16							-118									
20	DHXQFN20 (SOT1045-2)	4.50 x 2.50 x 0.50	0.50			180 x 12										-115						
	DHVQFN20 (SOT764-1)	4.50 x 2.50 x 1.00	0.5		4mm pitch, 12mm tape and reel	180 x 12								-115								
	TSSOP20 (SOT360-1)	6.50 x 4.40 x 1.10	0.65		8 mm pitch, 16 mm tape and reel	330 x 16							-118									
	SSOP20 (SOT339-1)	7.20 x 5.30 x 2.00	0.65		12mm pitch, 16mm tape and reel	330 x 16			-118													
	SO20 (SOT163-1)	12.80 x 7.50 x 2.65	1.27		12mm pitch, 24mm tape and reel	330 x 24						-118										
24	DHVQFN24 (SOT815-1)	5.50 x 3.50 x 0.85	0.5		8mm pitch, 12mm tape and reel	330 x 12								-118								
	TSSOP24 (SOT355-1)	7.80 x 4.40 x 1.10	0.65		8mm pitch, 16mm tape and reel	330 x 16							-118									
	SSOP24 (SOT340-1)	8.20 x 5.30 x 2.00	0.65		12mm pitch, 16mm tape and reel	330 x 16			-118													
	SO24 (SOT137-1)	15.40 x 7.50 x 2.65	1.27		12mm pitch, 24mm tape and reel	330 x 24			-118													
32	DFN5050-32 (SOT617)	5.00 x 5.00 x 1.00	0.5		8 mm pitch, 12 mm tape and reel	330 x 12													-118 -128			
48	TSSOP48 (SOT480-1)	9.70 x 4.40 x 1.10	0.40			330 x 16							-118									
	TSSOP48 (SOT362-1)	12.50 x 6.10 x 1.20	0.50		12 mm pitch, 24 mm tape and reel	330 x 24						-118										
	SSOP48 (SOT370-1)	15.90 x 7.50 x 2.80	0.64		16 mm pitch, 24 mm tape and reel	330 x 24			-118													
56	VFBGA56 (SOT702-1)	4.50 x 7.00 x 1.00	0.65		8 mm pitch, 16 mm tape and reel	330 x 16									-518							
	TSSOP56 (SOT364-1)	14.00 x 6.10 x 1.20	0.50		12 mm pitch, 24 mm tape and reel	330 x 24						-118										
	SSOP56 (SOT371-1)	18.45 x 7.50 x 2.80	0.64			330 x 32			-518													
96	LFBGA96 (SOT536-1)	5.50 x 13.50 x 1.50	0.80		8 mm pitch, 24 mm tape and reel	330 x 24									-518							

Package details and packing methods WLCSP

Basic Type	Length x width x height	# of balls	Pitch	Package	Package name
IP4369CX4	0.76 x 0.76 x 0.5	4	0.4		WLCSP4
PMCM440VNE	0.78 x 0.78 x 0.35	4	0.4		WLCSP4
PMCM4401VNE	0.78 x 0.78 x 0.35	4	0.4		WLCSP4
PMCM440VPE	0.78 x 0.78 x 0.35	4	0.4		WLCSP4
PMCM4401VPE	0.78 x 0.78 x 0.35	4	0.4		WLCSP4
PCMF1USB3S	1.17 x 0.77 x 0.57	5	0.4		WLCSP5
PESD1USB3S	1.17 x 0.77 x 0.57	5	0.4		WLCSP5
SOT1454-1	0.65 x 0.44 x 0.27	6	0.23		WLCSP
PCMF2USB3S	1.17 x 1.57 x 0.57	10	0.4		WLCSP10
PESD2USB3S	1.17 x 1.57 x 0.57	10	0.4		WLCSP10
PCMF3USB3S	1.17 x 2.37 x 0.57	15	0.4		WLCSP15
PESD3USB3S	1.17 x 2.37 x 0.57	15	0.4		WLCSP15
IP3319CX6	1.34 x 0.95 x 0.57	6	0.4		WLCSP6
IP4340CX15	1.56 x 1.56 x 0.47	15	0.4		WLCSP15

Packing details glass diodes, single ended and through hole packages

Pins/ leads	Package	Packing method and tape/reel/tube dimensions	Package	Ordering code (12 NC ending)	Packing quantity
2	SOD27	26 mm tape ammo pack, axial		-143	5000 pcs
		52 mm tape ammo pack, axial		-133	10000 pcs
		52 mm reel pack, axial		-113	10000 pcs
	SOD66	52 mm tape ammo pack, axial		-133	10000 pcs
		52 mm reel pack, axial		-113	10000 pcs
	SOD68	26 mm tape ammo pack, axial		-143	5000 pcs
		52 mm reel pack, axial		-113	10000 pcs
		52 mm tape ammo pack, axial		-133	10000 pcs
3	SOT78 (TO-220)	Rail packing, 50 pcs/tube, tube length = 520 mm		-127	20 tubes x 50 pcs
	I2PAK (SOT226)	Rail packing, 50 pcs/tube, tube length = 520 mm		-127	20 tubes x 50 pcs

Package cross reference list – Part 1

Type	Competitor	Nexperia	Pins/ Leads
µQFN-10L	ST	DFN2510A-10 (SOT1176)	10
µQFN-2L	ST	DFN1006-2 (SOD882)	2
6 Lead DFN	ON Semi	DFN2020-6 (SOT1118)	6
CL2	Toshiba	DSN0402-2 (SOD992)	2
CLP0603	Vishay	DSN0603-2 (SOD962)	2
CMAK/ CMPAK	Renesas	SOT323	3
CMPAK-5(T)	Renesas	SOT353	5
CMPAK-6	Renesas	SOT363	6
CMPAK/ CMAK	Renesas	SOT323	3
CP4	Toshiba	SOT143B	4
CPT3	Rohm	DPAK (SOT428)	3
CS6	Toshiba	DFN1010-6 (SOT891)	6
CST3	Toshiba	DFN1006-3 (SOT883)	3
CST3	Toshiba	DFN1006B-3 (SOT883B)	3
CTS2 (fSC)	Toshiba	DFN1006-2 (SOD882)	2
CTS2 (fSC)	Toshiba	DFN1006D-2 (SOD882D)	2
D2PAK	ON Semi	D2PAK (SOT404)	3
D2PAK	Vishay	D2PAK (SOT404)	3
D2PAK	Toshiba	D2PAK (SOT404)	3
D2PAK	Infineon	D2PAK (SOT404)	3
D2PAK	ST	D2PAK (SOT404)	3
D2PAK 3	ON Semi	D2PAK (SOT404)	3
D2PAK-3	OnSemi	D2PAK (SOT404)	3
D2PAK-7	ST	D2PAK-7 (SOT427)	7
D2PAK*	Diodes Inc.	D2PAK (SOT404)	3
D2PAK7P	Infineon	D2PAK-7 (SOT427)	7
DFN-5	OnSemi	LFPAK56 (SOT669)	4
DFN-8	OnSemi	LFPAK56D (SOT1205)	8
DFN1006-3	Diodes Inc.	DFN1006-3 (SOT883)	3
DFN1006H4-3	Diodes Inc.	DFN1006-3 (SOT883)	3
DFN1411*	Diodes Inc.	DFN1010D-3 (SOT1215)	3
DFN2	ST	DSN0603-2 (SOD962)	2
DPAK	ON Semi	DPAK (SOT428)	3
DPAK	Toshiba	DPAK (SOT428)	3
DPAK	OnSemi	DPAK (SOT428)	3
DPAK	Infineon	DPAK (SOT428)	3
DPAK	ST	DPAK (SOT428)	3
DPAK(S)	Renesas	DPAK (SOT428)	3
DSN2, 0.4 x 0.2	ON Semi	DSN0402-2 (SOD992)	2
DSN2, 0.6 x 0.3	ON Semi	DSN0603-2 (SOD962)	2
DSN2, 1.0 x 0.6	ON Semi	DSN1006-2 (SOD993)	2
DSN2, 1.0 x 0.6	ON Semi	DFN1006D-2 (SOD882D)	2
DSN2, 1.6 x 0.8	ON Semi	DFN1608D-2 (SOD1608)	2
DSN2, 1.6 x 0.8	ON Semi	DFN1608D-2 (SOD1608)	2
EMD2	Rohm	SOD523	2
EMD3/EMT3	Rohm	DFN1006-3 (SOT883)	3
EMD5/EMT5	Rohm	SOT665	5
EMD6/EMT6/WEMT6	Rohm	SOT666	6
EMT3	Rohm	DFN1006-3 (SOT883)	3

Type	Competitor	Nexperia	Pins/ Leads
EMT3/EMD3	Rohm	DFN1006-3 (SOT883)	3
EMT3F*	Rohm	DFN1006-3 (SOT883)	3
EMT5*	Rohm	SOT666	6
EMT5/EMD5	Rohm	SOT665	5
EMT6	Rohm	SOT666	6
EMT6/EMD6/WEMT6	Rohm	SOT666	6
ES6	Toshiba	SOT666	6
ES6 ESV	Toshiba	SOT666	6
ESC/TESC	Toshiba	SOD523	2
ESM	Toshiba	DFN1006-3 (SOT883)	3
ESV	Toshiba	SOT665	5
ESV	Toshiba	SOT666	6
FM8	Toshiba	SOT96	8
FS6*	Toshiba	DFN1010B-6 (SOT1216)	6
GMD2	Rohm	DSN0603-2 (SOD962)	2
H2PAK-2	ST	D2PAK (SOT404)	3
H2PAK-6	ST	D2PAK-7 (SOT427)	7
HSMT8	Rohm	LFPAK33 (SOT1210)	8
HSON-8	Renesas	LFPAK56 (SOT669)	4
HSON-8 Dual	Renesas	LFPAK56D (SOT1205)	8
HSOP8 (Dual)	Rohm	LFPAK56D (SOT1205)	8
HSOP8 (Single)	Rohm	LFPAK56 (SOT669)	4
HUML2020L8 (Dual)	Rohm	DFN2020-6 (SOT1118)	6
HUML2020L8 (Single)	Rohm	DFN2020MD-6 (SOT1220)	6
I2PAK	OnSemi	I2PAK (SOT226)	3
I2PAK	ST	I2PAK (SOT226)	3
KMD2	Rohm	DFN1608D-2 (SOD1608)	2
LDPAK(S)-(1)	Renesas	D2PAK (SOT404)	3
LFPAK	Renesas	LFPAK (SOT669)	5
LG A 1.0 x 0.6mm	Texas Instruments	DFN1006B-3 (SOT883B)	3
LLD	Renesas	SOD80C	2
LLDS	Rohm	SOD80C	2
LLP1006-2L	Vishay	DFN1006-2 (SOD882)	2
LLP1006-2L	Vishay	DFN1006D-2 (SOD882D)	2
LLP1006-2M	Vishay	DFN1006-2 (SOD882)	2
LLP1006-2M	Vishay	DFN1006D-2 (SOD882D)	2
LLP75-7L	Vishay	DFN1616-6 (SOT1189)	6
LPDS/LPTS	Rohm	D2PAK (SOT404)	3
LPTS	Rohm	D2PAK (SOT404)	3
LPTS/LPDS	Rohm	D2PAK (SOT404)	3
M-Flat	Toshiba	SOD128	2
Micro 3	Int. Rectifier	SOT23	3
Micro 6	Int. Rectifier	SOT457	6
MiCRO FOOT 0.8 x 0.8*	Vishay	DFN1010D-3 (SOT1215)	3
MiCRO FOOT 1 x 1.2*	Vishay	DFN1010D-3 (SOT1215)	3
MICRO FOOT 1 x 1.5*	Vishay	DFN1010D-3 (SOT1215)	3
MiCRO FOOT 1 x 1*	Vishay	DFN1010D-3 (SOT1215)	3
MiCRO FOOT 1.6 x 1.6*	Vishay	DFN2020MD-6 (SOT1220)	6
MICRO FOOT*	Vishay	DFN2020MD-6 (SOT1220)	6

Types with * show footprint compability only

Package cross reference list – Part 2

Type	Competitor	Nexperia	Pins/ Leads
MicroFET	Fairchild	DFN2020MD-6 (SOT1220)	6
MicroFET 1.6 x 1.6*	Fairchild	DFN2020MD-6 (SOT1220)	6
MiniMelf	Diodes Inc.	SOD80C	2
MiniMelf	ST	SOD80C	2
MiniMelf	Vishay	SOD80C	2
MP-25(K)	Renesas	TO-220 (SOT78)	3
MP-25SK	Renesas	I2PAK (SOT226)	3
MP-25ZT	Renesas	D2PAK-7 (SOT427)	7
MP-25ZT	Renesas	D2PAK (SOT404)	3
MP-3Z	Renesas	DPAK (SOT428)	3
MP6	Renesas	DSN0603-2 (SOD962)	2
MPAK	Renesas	SOT23	3
MPAK	Renesas	SOT23	3
MPAK-4R	Renesas	SOT143B	4
MPT3	Rohm	SOT89	3
PG-TD SON-8	Infineon	LFPAK (SOT669)	5
PG-TDSON-8	Infineon	LFPAK56D (SOT1205)	8
PG-TDSON-8	Infineon	LFPAK56 (SOT669)	4
PG-TO220-3	Infineon	TO-220 (SOT78)	3
PG-TO252-3	Infineon	DPAK (SOT428)	3
PG-TO262-3	Infineon	I2PAK (SOT226)	3
PG-TO263-3	Infineon	D2PAK (SOT404)	3
PG-TO263-7	Infineon	D2PAK-7 (SOT427)	7
PG-TSDSON-8	Infineon	LFPAK33 (SOT1210)	8
PMDT	Rohm	SOD128	2
PMDU	Rohm	SOD123W	2
Power DI3333-8	Diodes Inc.	LFPAK33 (SOT1210)	8
Power DI5060-8	Diodes Inc.	LFPAK56D (SOT1205)	8
Power DI5060-8	Diodes Inc.	LFPAK56 (SOT669)	4
Power FLAT 3.3 x 3.3	ST	LFPAK33 (SOT1210)	8
Power FLAT 5x6 Dual	ST	LFPAK56D (SOT1205)	8
Power FLAT 5x6 Dual	ST	LFPAK56 (SOT669)	4
PowerDI123	Diodes Inc.	SOD123F	2
PowerDI123	Diodes Inc.	SOD123W	2
PowerDI323	Diodes Inc.	SOD323F	2
PowerDi5	Diodes Inc.	CFP15 (SOT1289)	3
PowerFLAT (6 x 5)	ST	LFPAK56 (SOT669)	5
PowerFLAT (6 x 5)	ST	LFPAK56D (SOT1205)	5
PowerPAK 1212-8	Vishay	LFPAK33 (SOT1210)	8
PowerPAK SC-70	Vishay	DFN2020-6 (SOT1118)	6
PowerPAK SC-70	Vishay	DFN2020MD-6 (SOT1220)	6
PowerPAK SC-70	Vishay	DFN2020MD-6 (SOT1220)	6
PowerPak SC-70-6L	Vishay	DFN2020-6 (SOT1118)	6
PowerPak SC-75-6L*	Vishay	DFN2020MD-6 (SOT1220)	6
PowerPAK SC-75*	Vishay	DFN2020MD-6 (SOT1220)	6
PowerPAK SC706L	Vishay	DFN2020-3 (SOT1061)	3
PowerPAK SO-8	Vishay	LFPAK56 (SOT669)	5
PowerPAK SO-8(L)	Vishay	LFPAK56 (SOT669)	4
PowerPAK SO-8L Dual	Vishay	LFPAK56D (SOT1205)	8

Type	Competitor	Nexperia	Pins/ Leads
PW-Mini	Toshiba	SOT89	3
S-Flat	Toshiba	SOD123F	2
S-Flat	Toshiba	SOD123W	2
S-Mini	Toshiba	SOT23	3
S-Mini TSM	Toshiba	SOT23	3
S08	Vishay	SOT96	8
SC-70	ON Semi	SOT323	3
SC-70, 3 leads	Vishay	SOT323	3
SC-74 TSOP-6	ON Semi	SOT457	6
SC-75	ON Semi	DFN1006-3 (SOT883)	3
SC-75	Semtech	DFN1006-3 (SOT883)	3
SC-75A	Vishay	DFN1006-3 (SOT883)	3
SC-88	ON Semi	SOT363	6
SC-88A	ON Semi	SOT353	5
SC-89	Semtech	SOT666	6
SC2	Toshiba	DSN0603-2 (SOD962)	2
SC59	Diodes Inc.	SOT23	3
SC70	ON Semi	SOT323	3
SC70-3	Vishay	SOT323	3
SC70-3	AOS	SOT323	3
SC70-5L	Semtech	SOT353	5
SC70-6	Vishay	SOT363	6
SC70-6	AOS	SOT363	6
SC70-6	Fairchild	SOT363	6
SC70-6L	Semtech	SOT363	6
SC74 TSOP6	Infineon	SOT457	6
SC75	Infineon	DFN1006-3 (SOT883)	3
SC75	ON Semi	DFN1006-3 (SOT883)	3
SC75A	Vishay	DFN1006-3 (SOT883)	3
SC79	Infineon	SOD523	2
SC88/SC 7 0-6/SOT 363 6 LEAD	ON Semi	SOT363	6
SC89	Fairchild	SOT666	6
SC89-3	Vishay	DFN1006-3 (SOT883)	3
SC89-3	ON Semi	DFN1006-3 (SOT883)	3
SC89-3	Fairchild	DFN1006-3 (SOT883)	3
SC89-6	Vishay	SOT666	6
SC89-6	AOS	SOT666	6
SC89-6	Fairchild	SOT666	6
SC89-6lead	Vishay	SOT666	6
SLP0402P2X3	Semtech	DSN0402-2 (SOD992)	2
SLP1006P2	Semtech	DFN1006-2 (SOD882)	2
SLP1006P2T	Semtech	DFN1006D-2 (SOD882D)	2
SLP1006P3	Semtech	DFN1006-3 (SOT883)	3
SLP1006P3T	Semtech	DFN1006B-3 (SOT883B)	3
SLP1510N6	Semtech	DFN1410-6 (SOT886)	6
SLP1610N2	Semtech	DFN1608D-2 (SOD1608)	2
SLP1610P4	Semtech	DFN2510A-10 (SOT1176)	10
SLP1616P6	Semtech	DFN1616-6 (SOT1189)	6
SLP1713P8	Semtech	DFN1714-8 (SOT1166)	8

Types with * show footprint compability only

Package cross reference list – Part 3

Type	Competitor	Nexperia	Pins/ Leads
SLP1713P8	Semtech	DFN1714U-8 (SOT983)	8
SLP2513P12	Semtech	DFN2514-12 (SOT1167)	12
SLP3313P16	Semtech	DFN3314-16 (SOT1168)	16
SM6 VS-6	Toshiba	SOT457	6
SMA flat	ST	SOD128	2
SMD TO-263	Renesas	D2PAK (SOT404)	3
SMD0402	Rohm	DSN0402-2 (SOD992)	2
SMD6/SMT6	Rohm	SOT457	6
SMD6/SMZ6	Rohm	SOT457	6
SMFPAK-6	Renesas	SOT666	6
SMPAK	Renesas	DFN1006-3 (SOT883)	3
SMPC TO-277A	Vishay	CFP15 (SOT1289)	3
SMT3	Rohm	SOT23	3
SMT5*	Rohm	SOT457	6
SMT6	Rohm	SOT457	6
SMZ6/SMD6	Rohm	SOT457	6
SO-8 FL	ON Semi	LFPAK56 (SOT669)	5
SO-8FL Dual	OnSemi	LFPAK56D (SOT1205)	8
SO-8FL Dual	OnSemi	LFPAK56 (SOT669)	4
SOD-123	ST	SOD123F	2
SOD-123-FL	ON Semi	SOD123F	2
SOD-123-FL	ON Semi	SOD123W	2
SOD-323	ON Semi	SOD323	2
SOD-323	Diodes Inc.	SOD323	2
SOD-323	ST	SOD323	2
SOD-523	ON Semi	SOD523	2
SOD-523	ST	SOD523	2
SOD323	Infineon	SOD323	2
SOD323	Vishay	SOD323	2
SOD323	Semtech	SOD323	2
SOD523	Diodes Inc.	SOD523	2
SOD523	Vishay	SOD523	2
SOD523	Semtech	SOD523	2
SOD882	ST	DFN1006-2 (SOD882)	2
SOD882T	ST	DFN1006D-2 (SOD882D)	2
SOD923-2*	ON Semi	DFN1006-2 (SOD882)	2
SOIC-8 NB	ON Semi	SOT96	8
SON 2x2	Texas Instruments	DFN2020MD-6 (SOT1220)	6
SON 3x3*	Texas Instruments	DFN2020MD-6 (SOT1220)	6
SOP-8	Renesas	SOT96	8
SOP/DSOP Advance	Toshiba	LFPAK56 (SOT669)	4
SOP8	Rohm	SOT96	8
SOT 143	Infineon	SOT143B	4
SOT-143	Semtech	SOT143B	4
SOT-143	Diodes Inc.	SOT143B	4
SOT-223	ON Semi	SOT223	4
SOT-223	Diodes Inc.	SOT223	4
SOT-223	OnSemi	SOT223	3
SOT-223	Infineon	SOT223	3

Type	Competitor	Nexperia	Pins/ Leads
SOT-223	ST	SOT223	3
SOT-23	ON Semi	SOT23	3
SOT-23	Diodes Inc.	SOT23	3
SOT-323	Diodes Inc.	SOT323	3
SOT-323	ST	SOT323	3
SOT-363	Diodes Inc.	SOT363	6
SOT-553	ON Semi	SOT665	5
SOT-563	ON Semi	SOT666	6
SOT-89	ON Semi	SOT89	3
SOT063*	ON Semi	DFN101 OB-6 (SOT1216)	6
SOT223	Vishay	SOT223	4
SOT223	Infineon	SOT223	4
SOT223	Fairchild	SOT223	4
SOT223	ON Semi	SOT223	4
SOT223	Diodes Inc.	SOT223	4
SOT223	Diodes Inc.	SOT223	3
SOT23	Infineon	SOT23	3
SOT23	ST	SOT23	3
SOT23	Vishay	SOT23	3
SOT23	Semtech	SOT23	3
SOT23	Diodes Inc.	SOT23	3
SOT23	AOS	SOT23	3
SOT23	ON Semi	SOT23	3
SOT23-3	Diodes Inc.	SOT23	3
SOT23-3	AOS	SOT23	3
SOT23-3	ON Semi	SOT23	3
SOT23-5	AOS	SOT457	6
SOT23-5	Diodes Inc.	SOT457	6
SOT23-6	Diodes Inc.	SOT457	6
SOT23-6	ST	SOT457	6
SOT23-6	Diodes Inc.	SOT457	6
SOT23-6L	Semtech	SOT457	6
SOT23F	Toshiba	SOT23	3
SOT23F	Diodes Inc.	SOT23	3
SOT26	Diodes Inc.	SOT457	6
SOT323	Infineon	SOT323	3
SOT323	Diodes Inc.	SOT323	3
SOT323	Fairchild	SOT323	3
SOT353	Diodes Inc.	SOT353	5
SOT353	Vishay	SOT353	5
SOT353	Diodes Inc.	SOT363	6
SOT363	Infineon	SOT363	6
SOT363	Diodes Inc.	SOT363	6
SOT523	Diodes Inc.	DFN1006-3 (SOT883)	3
SOT523F	Fairchild	DFN1006-3 (SOT883)	3
SOT563	Diodes Inc.	SOT666	6
SOT563-6	ON Semi	SOT666	6
SOT563F	Fairchild	SOT666	6
SOT666	Infineon	SOT666	6

Types with * show footprint compability only

Package cross reference list – Part 4

Type	Competitor	Nexperia	Pins/ Leads
SOT723-3*	ON Semi	DFN1010D-3 (SOT1215)	3
SOT723*	ON Semi	DFN1010D-3 (SOT1215)	3
SOT89	Infineon	SOT89	3
SOT89	Diodes Inc.	SOT89	3
SOT89-3L	Diodes Inc.	SOT89	3
SOT963	ON Semi	DFN1010-6 (SOT891)	6
SOT963*	Diodes Inc.	DFN1010B-6 (SOT1216)	6
SRP-F	Renesas	SOD123W	2
SS CSP2	Toshiba	DFN1006-3 (SOT883)	3
SSD3/SST3	Rohm	SOT23	3
SSM	Toshiba	DFN1006-3 (SOT883)	3
SSOT3	Fairchild	SOT23	3
SSOT6	Fairchild	SOT457	6
SSOT6 FLMP	Fairchild	SOT457	6
SST3	Rohm	SOT23	3
SST3/SSD3	Rohm	SOT23	3
ST01005	STM	DSN0402-2 (SOD992)	2
Stmite flat	ST	SOD123W	2
T0263	Diodes Inc.	D2PAK(SOT404)	3
T0263-3	Infineon	D2PAK (SOT404)	3
Thin PowerPAK SC-70	Vishay	DFN2020-6 (SOT1118)	6
Thin PowerPAK SC-70	Vishay	DFN2020MD-6 (SOT1220)	6
Thin PowerPAK SC70	Vishay	DFN2020MD-6 (SOT1220)	6
Thin PowerPAK SC75*	Vishay	DFN2020MD-6 (SOT1220)	6
TO-220	ST	TO-220 (SOT78)	3
TO-220	Vishay	TO-220 (SOT78)	3
TO-220	Toshiba	TO-220 (SOT78)	3
TO-220-3	OnSemi	TO-220 (SOT78)	3
TO-220-3L	OnSemi	TO-220 (SOT78)	3
TO-220AB	Vishay	TO-220 (SOT78)	3
TO-220F-3FS	OnSemi	TO-220 (SOT78)	3
TO-220FM	Rohm	TO-220 (SOT78)	3
TO-220S	Renesas	D2PAK (SOT404)	3
TO-220SM	Toshiba	D2PAK (SOT404)	3
TO-252	Renesas	DPAK (SOT428)	3
TO-252	Vishay	DPAK (SOT428)	3
TO-252 (MP-3ZK)	Renesas	DPAK (SOT428)	3
TO-252 reverse, TO-252	Vishay	DPAK (SOT428)	3
TO-252-3/-3-23	Infineon	DPAK (SOT428)	3
TO-252, TO-252 reverse	Vishay	DPAK (SOT428)	3
TO-262	Renesas	I2PAK (SOT226)	3
TO-262	Vishay	I2PAK (SOT226)	3
TO-262-2L	OnSemi	I2PAK (SOT226)	3
TO-262-3L	OnSemi	I2PAK (SOT226)	3
TO-263	Renesas	D2PAK-7 (SOT427)	7
TO-263	Renesas	D2PAK (SOT404)	3
TO-263	Vishay	D2PAK (SOT404)	3
TO-263 3-lead	Vishay	D2PAK (SOT404)	3
TO-263-2L	OnSemi	D2PAK (SOT404)	3

Type	Competitor	Nexperia	Pins/ Leads
TO-263-7L	Vishay	D2PAK-7 (SOT427)	7
TO-263AB	Vishay	D2PAK (SOT404)	3
TO220	Infineon	TO-220 (SOT78)	3
TO220-3	Diodes Inc.	TO-220 (SOT78)	3
TO252	Diodes Inc.	DPAK (SOT428)	3
TO262	Infineon	I2PAK (SOT226)	3
TO263	Diodes Inc.	D2PAK (SOT404)	3
TP-FA	OnSemi	DPAK (SOT428)	3
TSLP-2-1	Infineon	DFN1006-2 (SOD882)	2
TSLP-2-7/-17	Infineon	DFN1006D-2 (SOD882D)	2
TSLP-3-1, -15	Infineon	DFN1006B-3 (SOT883B)	3
TSLP-3-4	Infineon	DFN1006-3 (SOT883)	3
TSLP-9-1	Infineon	DFN2510A-10 (SOT 1176)	10
TSMT5*	Rohm	SOT457	6
TSMT6	Rohm	SOT457	6
TSNP-2-2	Infineon	DFN1608D-2 (SOD 1608)	2
TSON Advance	Toshiba	LFPAK33 (SOT1210)	8
TSOP-6	Renesas	SOT457	6
TSOP-6/ TSOP6	Vishay	SOT457	6
TSOP6	Vishay	SOT457	6
TSOP6	AOS	SOT457	6
TSOP6	ON Semi	SOT457	6
TSSLP-2-1	Infineon	DSN0603-2 (SOD962)	2
TSST8*	Rohm	DFN2020MD-6 (SOT1220)	6
TUMT3	Rohm	SOT323	3
TUMT5*	Rohm	DFN2020-6 (SOT1118)	6
TUMT6*	Rohm	DFN2020-6 (SOT1118)	6
U-DFN2020-3 Type B 2.0 x 2.0 x 0.6	Diodes Inc.	DFN2020-3 (SOT1061)	3
U-DFN2020-6	Diodes Inc.	DFN2020MD-6 (SOT1220)	6
U-DFN2523-6*	Diodes Inc.	DFN2020MD-6 (SOT1220)	6
UDFN 1.6 x 1.6	ON Semi	DFN1616-6 (SOT1189)	6
UDFN 1.7 x 1.35, 0.4P	ON Semi	DFN1714U-8 (SOT983)	8
UDFN-6 WDFN6	ON Semi	DFN2020MD-6 (SOT1220)	6
UDFN10 2.5 x 1, 0.5P	ON Semi	DFN2510A-10 (SOT1176)	10
UDFN12 2.5 x 1.35, 0.4P	ON Semi	DFN2514-12 (SOT1167)	12
UDFN2020-6 Type B	Diodes Inc.	DFN2020-6 (SOT1118)	6
UDFN2020-6 Type E	Diodes Inc.	DFN2020MD-6 (SOT1220)	6
UDFN6	Toshiba	DFN2020-6 (SOT1118)	6
UDFN6	ON Semi	DFN2020MD-6 (SOT1220)	6
UDFN6B	Toshiba	DFN2020MD-6 (SOT1220)	6
UF6	Toshiba	SOT363	6
UF6/ USV/ US6	Toshiba	SOT363	6
UFP	Renesas	SOD523	2
UMD2	Rohm	SOD323F	2
UMD3/UMT3	Rohm	SOT323	3
UMD5/UMT5	Rohm	SOT353	5
UMD6/ UMT6	Rohm	SOT363	6
UMLP 1.6 x 1.6*	Fairchild	DFN2020MD-6 (SOT1220)	6
UMT3	Rohm	SOT323	3

Types with * show footprint compability only

Package cross reference list – Part 5

Type	Competitor	Nexperia	Pins/ Leads
UMT3F*	Rohm	SOT323	3
UMT5/ UMD5	Rohm	SOT353	5
UMT6	Rohm	SOT363	6
UMT6/ UMD6	Rohm	SOT363	6
UPAK (SOT89)	Renesas	SOT89	3
URP	Renesas	SOD323	2
US-Flat	Toshiba	SOD323F	2
US6	Toshiba	SOT363	6
US6/ UF6/ USV	Toshiba	SOT363	6
use	Toshiba	SOD323	2
USM	Toshiba	SOT323	3
USV	Toshiba	SOT353	5
USV	Toshiba	SOT363	6
USV/ US6/ UF6/	Toshiba	SOT363	6
VESM*	Toshiba	DFN1010D-3 (SOT1215)	3
VML0806*	Rohm	DFN1006B-3 (SOT883B)	3
VML1006	Rohm	DFN1006-3 (SOT883)	3
VMN2*	Rohm	DFN1006-2 (SOD882)	2
VMN2*	Rohm	DFN1006D-2 (SOD882D)	2
VMN3*	Rohm	DFN1006-3 (SOT883)	3
VMT3*	Rohm	DFN1010D-3 (SOT1215)	3
VMT6*	Rohm	DFN101 OB-6 (SOT1216)	6
VS6	Toshiba	SOT457	6
VSON-5	Renesas	SOT665	5
W-DFN3020-8*	Diodes Inc.	DFN2020-6 (SOT1118)	6
WDFN-8	OnSemi	LFPAK33 (SOT1210)	8
WDFN3	ON Semi	DFN2020-3 (SOT1061)	3
WDFN6	ON Semi	DFN2020-6 (SOT1118)	6
WDFN6	ON Semi	DFN2020MD-6 (SOT1220)	6
WEMT6	Rohm	SOT666	6
WEMT6/ EMT6/ EMD6	Rohm	SOT666	6
WLCSP 1 x 1*	Fairchild	WLCSP4	3
WLCSP-4*	Fairchild	WLCSP4	3
WLCSP-4*	ON Semi	WLCSP4	3
WLCSP1.6 x 1.6*	AOS	WLCSP6	6
WLCSP2	ON Semi	DSN0603-2 (SOD962)	2
WLL-2-2	Infineon	DSN0402-2 (SOD992)	2
WLP1.5x 1.5*	Texas Instruments	DFN2020MD-6 (SOT1220)	6
WLPI.Ox 1.0*	Texas Instruments	DFN1010D-3 (SOT1215)	3
WLPI.Ox 1.5*	Texas Instruments	DFN2020MD-6 (SOT1220)	6
X1 -DFN 1006-3	Diodes Inc.	DFN1006-3 (SOT883)	3
X1-DFN1212-3*	Diodes Inc.	DFN1010D-3 (SOT1215)	3
X1-DFN1616-6*	Diodes Inc.	DFN2020MD-6 (SOT1220)	6
X2-DFN0806-3	Diodes Inc.	DFN1006-3 (SOT883)	3
X2-DFN1006-2	Diodes Inc.	DFN1006D-2 (SOD882D)	2
X2-DFN1006-3	Diodes Inc.	DFN1006B-3 (SOT883B)	3
X2-DFN1010-3	Diodes Inc.	DFN1010D-3 (SOT1215)	3
X2-DFN1310-6*	Diodes Inc.	DFN1010B-6 (SOT1216)	6
X2-DFN2015-3*	Diodes Inc.	DFN2020MD-6 (SOT1220)	6
X2-DFN2020-6	Diodes Inc.	DFN2020MD-6 (SOT1220)	6
X3-DFN0603-2	Diodes Inc.	DSN0603-2 (SOD962)	2
X3DFN-2	ON Semi	DSN0603-2 (SOD962)	2
XDFN3	ON Semi	DFN1006-3 (SOT883)	3
XI-DFN1006-2	Diodes Inc.	DFN1006-2 (SOD882)	2
µ8FL	OnSemi	LFPAK33 (SOT1210)	8

Types with * show footprint compability only

Package cross reference matrix – Part 1

Pins/ leads	Nexperia	Industry standard names	Size (l x w x h) (mm)	P_{tot} (mW)	Package	Competitor synonyms								
						Rohm	Toshiba	ON Semi	Renesas	Infineon	Diodes Inc	ST	Vishay	Semtech
2	DSN0402-2 (SOD992)		0.4 x 0.2 x 0.12			SMD0402	CL2	DSN2 0.4 x 0.2		WLL-2-2		ST01005		SLP-0402P2X3
	DSN1006-2 (SOD993)		1.0 x 0.6 x 0.3					DSN2 1.0 x 0.6						
	DSN1006U-2 (SOD995)		1.0 x 0.6 x 0.3					DSN2 1.0 x 0.6						
	DFN1006-2 (SOD882)		1.0 x 0.6 x 0.48	250		(VMN2)	CTS2 (fSC)	(SOD923-2)		TSLP-2-1	XI-DFN1006-2	SOD 882 uQFN-2L	LLP1006-2M LLP1006-2L	SLP1006P2
	DFN1006D-2 (SOD882D)		1.0 x 0.6 x 0.37	250		(VMN2)	CTS2 (fSC)	DSN2 1.0 x 0.6		TSLP-2-7/ -17	X2-DFN1006-2	SOD882T	LLP1006-2L LLP1006-2M	SLP1006P2T
	DFN1608D-2 (SOD1608)		1.6 x 0.8 x 0.37	780		KMD2		DSN2 1.6 x 0.8		TSNP-2-2				SLP1610N2
	DSN0603-2 (SOD962)		0.6 x 0.3 x 0.3	525		GMD2	SC2	DSN2, X3DFN-2 WLCSP2	MP6	TSSLP-2-1	X3-DFN0603-2	DFN2	CLP0603	SLP-0603P2X3
	SOD80C	Mini-Melf	3.5 x 1.5 x 1.5	300		LLDS			LLD		MiniMelf	MiniMelf	MiniMelf	
	SOD123F		2.6 x 1.6 x 1.1	830			S-Flat	SOD-123-FL			PowerDI123	SOD-123		
	SOD123W		2.6 x 1.7 x 1.0	900		PMDU	S-Flat	SOD-123-FL	SRP-F		PowerDI123	Stmite flat		
	SOD128		3.8 x 2.5 x 1.0	1000		PMDT	M-Flat					SMA flat		
	SOD323	SC-76	1.7 x 1.25 x 0.95	400			USC	SOD-323	URP	SOD323	SOD-323	SOD-323	SOD323	SOD323
	SOD323F	SC-90	1.7 x 1.25 x 0.7	830		UMD2	US-Flat				PowerDI323			
	SOD523	SC-79	1.2 x 0.8 x 0.6	500		EMD2	ESC/ TESC	SOD-523	UFP	SC79	SOD523	SOD-523	SOD523	SOD523
3	CFP15 (SOT1289)		5.8 x 4.3 x 0.78	1200							PowerDi5		SMPC TO-277A	
	DFN1006-3 (SOT883)	SC-101	1.0 x 0.6 x 0.48	250		VML1006	SS CSP2	XDFN3		TSLP-3-4	X1 -DFN 1006-3			SLP1006P3
	DFN1006B-3 (SOT883B)		1.0 x 0.6 x 0.37	250		VML1006	CST3	XDFN3		TSLP-3-1, -15	X2-DFN1006-3			SLP1006P3T
	DFN1010D-3 (SOT1215)		1.1 x 1.0 x 0.37	325		(VMT3)	(VESM)	(SOT723)			X2-DFN1010-3			
	DFN2020-3 (SOT1061)	HU-SON3	2.0 x 2.0 x 0.62	1300				WDFN3			U-DFN2020-3 Type B 2.0 x 2.0 x 0.6		PowerPAK SC706L	
	DFN2020D-3 (SOT1061D)		2.0 x 2.0 x 0.62	1300				WDFN3			U-DFN2020-3 Type B 2.0 x 2.0 x 0.6		PowerPAK SC706L	
	DPAK (SOT428)		6.6 x 6.1 x 2.3			CPT3	DPAK	DPAK, TP-FA	TO-252 (MP-3ZK) DPAK(S)	TO-252-3/-3-2 3 DPAK, PG-TO252-3	TO252	DPAK	TO-252,TO-252 reverse	
	D2PAK (SOT404)		11.0 x 11.0 x 4.3			LPDS/ LPTS	TO-220SM D2PAK	D2PAK D2PAK 3 TO-263-2L	TO-220S / SMD TO-263 LDPAK(S)-(1) MP-25Z	D2PAK, PG-T0263-3	T0263 (D2PAK)	D2PAK, H2PAK-2	TO-263 3-lead TO-263AB / D2PAK TO-263	
	SOT23		2.9 x 1.3 x 1.0	250		SSD3/ SST3	S-Mini TSM	SOT-23	MPAK	SOT23	SOT-23	SOT23	SOT23	SOT23
	SOT89	SC-62	4.5 x 2.5 x 1.5	1300		MPT3	PW-Mini	SOT-89	UPAK (SOT89)	SOT89	SOT89			
	SOT323	SC-70	2.0 x 1.25 x 0.95	200		UMD3/ UMT3 TUMT3	USM	SC-70	CMAK/ CMPAK	SOT323	SOT-323	SOT-323	SC-70 3 leads	SOT-323

Types in brackets (…) show footprint compatibility only

Package cross reference matrix – Part 2

Pins/ leads	Nexperia	Industry standard names	Size (l x w x h) (mm)	P_{tot} (mW)	Package	Competitor synonyms								
						Rohm	Toshiba	ON Semi	Renesas	Infineon	Diodes Inc	ST	Vishay	Semtech
3	TO-220 (SOT78)		15.6 x 10 x 4.4			TO-220FM	TO-220	TO-220-3L, TO-220F-3FS, TO-220-3	MP-25(K)	PG-TO220-3, TO220	TO220-3	TO-220	TO-220, TO-220AB	
	I2PAK (SOT226)		11 x 10 x 4.3					I2PAK, TO-262-2L, TO-262-3L	MP-25SK, TO-262	PG-TO262-3, TO262		I2PAK	TO-262	
	SOT223		6.5 x 3.5 x 1.65					SOT-223		SOT-223	SOT223	SOT-223		
4	LFPAK56 (SOT669)	Power-S08	4.9 x 4.45 x 1.0	3000		HSOP8 (Single)	SOP / DSOP Advance	SO-8 FL, DFN-5	LFPAK56, HSON-8	PG-TD-SON-8	Power-Di5060-8	Power-FLAT (6x5)	PowerPAK SO-8(L)	
	SOT143B		2.9 x 1.3 x 1.0	250			CP4		MPAK-4R	SOT143	SOT-143			SOT-143
	SOT223	SC-73	6.5 x 3.5 x 1.65	1700				SOT-223		SOT223	SOT-223		SOT223	
5	SOT353	SC-88 A	2.0 x 1.25 x 0.95	300		UMD5/ UMT5	USV	SC-88 A	CMPAK-5C0		SOT353		SOT353	SC70-5L
	SOT665		1.6 x 1.2 x 0.55	300		EMD5/ EMT5	ESV	SOT-553	VSON-5					
6	DFN1010-6 (SOT891)	x SON6	1.0 x 1.0 x 0.48				CS6	SOT963						
	DFN1010B-6 (SOT1216)		1.1 x 1.0 x 0.37	350		(VMT6)	(FS6)	(SOT063)			(SOT963)			
	DFN1410-6 (SOT886)	x SON6	1.45 x 1.0 x 0.48	250										SLP1510N6
	DFN1616-6 (SOT1189)	H x SON6	1.6 x 1.6 x 0.48					UDFN 1.6 x 1.6					LLP75-/L	SLP1616P6
	DFN2020-6 (SOT1118)		2.0 x 2.0 x 0.62	1300		HU-ML2020L8 (Dual)	UDFN6	6 Lead DFN WDFN6			UDFN2020-6 Type B		PowerPAK SC-70 Thin PowerPAK SC-70	
	DFN2020D-6 (SOT1118D)		2.0 x 2.0 x 0.62	1300		HU-ML2020L8 (Dual)	UDFN6	6 Lead DFN WDFN6			UDFN2020-6 Type B		PowerPAK SC-70 Thin PowerPAK SC-70	
	DFN-2020MD-6 (SOT1220)		2.0 x 2.0 x 0.62	1250		HU-ML2020L8 (Single)	UDFN6B	UDFN-6 WDFN6			UDFN2020-6 Type E		PowerPAK SC-70 Thin PowerPAK SC-70	
	SOT363	SC-88	2.0 x 1.25 x 0.95	300		UMD6/ UMT6	US6 UF6 USV	SC-88	CMPAK-6	SOT363	SOT-363		SC70-6	SC70-6L
	SOT457	SC-74	2.9 x 1.5 x 1.0	750		SMD6/ SMT6	SM6 VS-6	SC-74 TSOP-6	TSOP-6	SC74 TSOP6	SOT23-6 SOT26		TSOP6 TSOP-6	SOT23-6L
	SOT666		1.6 x 1.2 x 0.55	300		EMD6/ EMT6 WEMT6	ES6 ESV	SOT-563	SMFPAK-6	SOT666	SOT563		SC89-6lead	SC-89
7	D2PAK-7 (SOT427)		11 x 10 x 4.3						MP-25ZT, 7pin TO-263	D2PAK7P, PG-TO263-7		D2PAK-7, H2PAK-6	TO-263-7L	
8	LFPAK33 (SOT1210)		3.3 x 3.3 x 0.85			HSMT8	TSON Advance	µ8FL, WDFN-8		PG-TSD-SON-8	Power DI3333-8	Power FLAT 3.3 x 3.3	PowerPAK 1212-8	
	LFPAK56D (SOT1205)		4.9 x 4.45 x 1.0	3000		HSOP8 (Dual)		SO-8FL Dual, DFN-8	HSON-8 dual	PG-TD-SON-8	Power DI5060-8	Power FLAT 5x6 Dual	PowerPAK SO-8L Dual	
	SOT96	S08	4.9 x 3.9 x 1.75	1500		SOP8	FM8	SOIC-8 NB	SOP-8				S08	
	DFN1714-8 (SOT 1166)	HUSON8	1.7 x 1.35 x 0.52											SLP1713P8
	DFN1714U-8 (SOT983)	H x SON8	1.7 x 1.35 x 0.48					UDFN 1.7 x 1.35, 0.4P						SLP1713P8
10	DFN2510-10 (SOT 1165)	x SON10	2.5 x 1.0 x 0.48					UDFN10 2.5 x 1, 0.5P		TSLP-9-1		pQFN-10L		SLP1610P4

Types in brackets (…) show footprint compatibility only

Package cross reference matrix – Part 3

Pins/ leads	Nexperia	Industry standard names	Size (l x w x h) (mm)	P_{tot} (mW)	Package	Competitor synonyms								
						Rohm	Toshiba	ON Semi	Renesas	Infineon	Diodes Inc	ST	Vishay	Semtech
10	DF-N2510A-10 (SOT1176)	x SON10	2.5 x 1.0 x 0.48					UDFN10 2.5 x 1, 0.5P		TSLP-9-1		pQFN-10L		SLP1610P4
	DFN2626-10 (SOT 1197)		2.6 x 2.6 x 0.48					UDFN10 2.6 x 2.6, 0.5P						SLP2626P10
12	DFN2512-12 (SOT 1158)	H x - SON12	2.5 x 1.2 x 0.48					UDFN12, 2.5 x 1.2, 0.4P						
	DFN2514-12 (SOT 1167)	HU-SON12	2.5 x 1.35 x 0.53					UDFN12, 2.5 x 1.35, 0.4P						SLP2513P12
16	DFN3312-16 (SOT 1159)	H x - SON16	3.3 x 1.2 x 0.48					UDFN 16, 3.5 x 1.2, 0.4P						
	DFN3314-16 (SOT 1168)	HU-SON16	3.3 x 1.35 x 0.53											SLP3313P16

Types in brackets (…) show footprint compatibility only

Competitive cross reference - Logic

This cross reference allows you to match a competitor's part number to a Nexperia part number. Once you have the equivalent part number, check the Nexperia website www.nexperia.com/logic to confirm that the particular configuration is released.

On semiconductor low pin count logic

NL 1 7 SZ 08 DTF

Prefix		Prefix		Gate count		Function	Package	
ON	Nexperia	ON	Nexperia	ON	Nexperia		ON	Nexperia
NL7	74	n	nG	SV	AUP		DFT	GW
				SZ	LVC		DTT	GV
				WZ	LVC		US	DC
				WB	LVC		AMX	GM
							CMX	GS

74 LVC 1G 08 GW

Fairchild semiconductor tiny logic

NC7 S Z 157 P6

Prefix		Gate count		Logic Family		Function	Package	
FSC	Nexperia	FSC	Nexperia	FSC	Nexperia		FSC	Nexperia
NC7	74	S	1G	-	HC		P5	GW
		W	2G	B	LVC		M5	GV
		n	3G	P	AUP		P6	GW
				T	HCT		K8	DC
				V	AUP		L6	GM
				Z	LVC		L8	GM

74 LVC 1G 157 GW

On semiconductors logic

MC74 VHC 1GT 08 DTT

Prefix		logic Family		Gate count		Function	Package	
ON	Nexperia	ON	Nexperia	ON	Nexperia		ON	Nexperia
-	-	HC	HC(T)	-	-		N, C	N, P
MC74	74	LCX	LVC	nG	nG		D	D
		LVX	LV	nGT*	nG		DT	PW
		MC1	HEF	* Indicates TTL variant of the family			DFT	GW
		VCX	ALVC				DTT	GV
		VHC	AHC(T)				US	DC
							QZ	DS
							MN	BQ
							AMX	GM
							CMX	GS

74 AHCT 1G 08 GW

Toshiba one gate

TC7 S Z 157 FU

Prefix		Gate count		logic Family		Function	Package	
Tosh	Nexperia	Tosh	Nexperia	Tosh	Nexperia		Tosh	Nexperia
TC7	74	S	1G	-	HC		FK	GV
		W	1,2 or 3G	A	LVC		FU	GW, DP
		P	1 or 2G	G	AUP			
				T	HCT			
				H	AHC			
				ET	AHCT			
				Z	LVC			

74 LVC 1G 157 GW

Fairchild semiconductor standard logic

MM74 LCX 157 MTD

Prefix		logic Family		Function	Package	
FSC	Nexperia	FSC	Nexperia		FSC	Nexperia
MM74	74	ABT	ABT		N	N
74	74	F	F		M, SC	D
		HC(T)	HC(T)		MSA	DB
		LCX	LVC		MEA	DL
		LVX	LV		MTC	PW
		VCX	ALVC		MTD	DGG
		VHC(T)	AHC(T)		BQ	BQ
		LVT	LVT			

74 LVC 157 PW

Toshiba standard logic

TC74 LCX 125 FT

Prefix		logic Family		Function	Package	
Tosh	Nexperia	Tosh	Nexperia		Tosh	Nexperia
-	-	HC(T)	HC(T)		P	N
TC74	74	LCX	LVC		FW	D
		LVX	LV		FN	D
		TC	HEF		FT	PW
		VCX	ALVC		FS	DB
		VHC(T)	VHC(T)			

74 LVC 125 PW

Texas instruments logic

SN74 LVC 1G 08 DCK

Prefix		Logic Family		Gate count		Function	Package	
TI	Nexperia	TI	Nexperia	TI	Nexperia		TI	Nexperia
-	-	ABT	ABT	-	-		E	P
SN74	74	AHC(T)	AHC(T)	nG	nG		M	T
SN54	74	ALVC	ALVC	nT	nT		D	D
		ALVT	ALVT				PW	PW, TT
		AUP	AUP				DB	DB
		AVC	AVC				DL	DL
		CBT	CBT				DGG	DGG
		CBT LV	CBT LV				DGV	DGV
		CD	HEF				GKE	EV
		F	F				ZKE	EC
		HC(T)	HC(T)				DCK	GW
		LV	LV				DBV	GV
		LVC	LVC				DCU	DC
		LVT	LVT				DCT	DP
		TPIC6C	NPIC6C				DRY	GM
							YZP	GM

74 LVC 1G 08 GW

IDT logic

74 FCT 244 PY

Prefix		logic Family		Function	Package	
Tosh	Nexperia	IDT	Nexperia		IDT	Nexperia
TC7	74	ALVC	ALVC		BF	EC
54	74	CBTLV	CBTLV		CD	N
		FCT	ABT		DC, PS	D
		LVC	LVC		DJ, PF	DGV
		QS	CBT		PA	DGG
					PC	DS, DK
					PG	PW
					PV	DL
					PY	DB

74 ABT 244 DB

Diodes Inc. logic

74 LVC 1G 08 FW4

Prefix		logic Family		Gate count		Function	Packages	
Diodes	Nexperia	Diodes	Nexperia	Diodes	Nexperia		Diodes	Nexperia
74	74	AHC(T)	AHC(T)	-	-		T14	PW
		LVC	LVC	nG	nG		S14	D
							SE	GW
							DW	GW
							W5	GV
							FZ4	GM
							FW4	GF

74 LVC 1G 08 GW

Renesas logic

HD74 HC 1G 08 CM

Prefix		logic Family		Gate count		Function	package	
Ren.	Nexperia	Ren.	Nexperia	Ren.	Nexperia		Ren.	Nexperia
HD74	74	ALVC	ALVC	-	-		CM	GW
		BC, LS	ABT	nG	nG		FP	DC
		CBT	CBT				P	N
		HC(T)	HC(T)				T	PW
		LV	LV				US	DC
		LVC	LVC					
		LVT	LVT					

74 HC 1G 08 GW

Product orientation (tape and reel pack)

2 pin packages

Orientation in tape	Package	Packing 12NC ending
	DFN1006-2 (SOD882)	315
	DFN1006D-2 (SOD882D)	315
	DFN1608D-2 (SOD1608)	315
	DSN0603-2 (SOD962)	315
	DSN0402-2 (SOD992)	315
	DSN1006-2 (SOD993)	315
	DSN1006U-2 (SOD995)	315
	DSN1608-2 (SOD963&964)	315
	SOD80	115, 135
	SOD123F	115
	CFP3 (SOD123W)	115
	SOD123	115,118
	CFP5 (SOD128)	115
	SOD323	115, 135
	SOD323F	115
	SOD523	115, 135, 315, 335

3 pin packages

Orientation in tape	Package	Packing 12NC ending
	SOT89	146
Orientation in tape	Package	Packing 12NC ending
	DFN1006-3 (SOT883)	315
	DFN1006B-3 (SOT883B)	315
	SOT23	185, 215, 235
	SOT323	115, 135
	SOT416	115, 135

Orientation in tape	Package	Packing 12NC ending
	DFN1010D-3 (SOT1215)	147
	DFN2020-3 (SOT1061)	115, 135
	DFN2020D-3 (SOT1061D)	115,135
	SOT89	115,135
	SOT663	115
	CFP15 (SOT1289)	139, 146
	DPAK (SOT428)	118
	D2PAK (SOT404)	118
Orientation in tape		
	SOT89	147

4 pin packages

Orientation in tape	Package	Packing 12NC ending
	WLCSP4 (0808)	084
Orientation in tape	Package	Packing 12NC ending
	SOT143B	215, 235
	SOT223	115, 135
	DFN1010-4 (SOT1194)	115

Orientation in tape	Package	Packing 12NC ending
	SOT89	115, 135
Orientation in tape	Package	Packing 12NC ending

5 pin packages

Orientation in tape	Package	Packing 12NC ending
	LFPAK56 (SOT669)	115
	WLCSP5 (1208)	087

Orientation in tape	Package	Packing 12NC ending
	SOT753	125
	X2SON5 (SOT1226)	125
	UMTS (SOT353-1)	125
	SO5 (SOT753)	125

Orientation in tape	Package	Packing 12NC ending
	SOT353	115, 135
	SOT665	115

Orientation in tape	Package	Packing 12NC ending

6 pin packages

Orientation in tape	Package	Packing 12NC ending
	DFN1410-6 (SOT886)	115
	DFN1616-6 (SOT1189)	115
	DFN2020MD-6 (SOT1220)	184
	LFPAK33 (SOT1210)	115
	LFPAK56D (SOT1205)	115
	WLCSP6 (1510)	023
	X2SON6 (SOT1115)	125
	XSON6 (SOT1202)	125
	XSON6 (SOT886)	125

Orientation in tape	Package	Packing 12NC ending
	DFN1010-6 (SOT891)	132
	DFN1010E-6 (SOT1202)	132
	DFN1410-6 (SOT886)	132
	DFN2020MD-6 (SOT1220)	125
	SOT363	125, 165
	SOT457	125, 165
	XSON6 (SOT891)	125
	SC-88 (SOT363)	125
	SC-74 (SOT457)	125

Orientation in tape	Package	Packing 12NC ending
	DFN1412-6 (SOT1268)	147
	DFN2020-6 (SOT1118)	115
	DFN2020D-6 (SOT1118D)	115
	DFN2020MD-6 (SOT1220)	115
	SOT363	115, 135
	SOT457	115, 135
	SOT666	115, 315
	X2SON6 (SOT1255)	147

Orientation in tape	Package	Packing 12NC ending

Packing methods

multi I/O pin packages

Orientation in tape	Package	Packing 12NC ending
	DFN2110-9 (SOT1178)	115
	DFN2111-7 (SOT1358)	471
	DFN2510A-10 (SOT1176)	115
	DFN2520-9 (SOT1333)	
	DFN2520-9 (SOT1333)	
	DFN2520-9 (SOT1333)	
	DFN2520-9 (SOT1333)	
	DFN5050-32 (SOT617-3)	
	XSON8 (SOT1116)	115
	X2SON8 (SOT1233)	115
	XSON8 (SOT1203)	115
	XSON8 (SOT1089)	115
	XSON8 (SOT833-1)	115
	TSSOP8 (SOT530-1)	118
	SO8 (SOT96-1)	118
	X2QFN10 (SOT1430-1)	471
	XQFN10 (SOT1337-1)	115
	XSON10 (SOT1081-2)	115
	TSSOP10 (SOT552-1)	118
	XQFN10 (SOT1160-1)	115
	XQFN12 (SOT1174-1)	115
	DHVQFN14 (SOT762-1)	115
	TSSOP14 (SOT402-1)	118
	SSOP14 (SOT337-1)	118
	SSOP16 (SOT519-1)	118
	TSSOP16 (SOT403-1)	118
	SSOP16 (SOT338-1)	118
	SO16 (SOT109-1)	118
	TSSOP20 (SOT360-1)	118
	SO20 (SOT163-1)	118
	DHXQFN20 (SOT1045-2)	115
	DHVQFN20 (SOT764-1)	115
	SSOP20 (SOT339-1)	118
	SO24 (SOT137-1)	118
	DHVQFN24 (SOT815-1)	118
	TSSOP24 (SOT355-1)	118
	SSOP24 (SOT340-1)	118
	TSSOP48 (SOT362-1)	118
	TSSOP48 (SOT480-1)	118
	SSOP48 (SOT370-1)	118
	TSSOP56 (SOT364-1)	118
	SSOP56 (SOT371-1)	518
	VFBGA56 (SOT702-1)	518
	LFBGA96 (SOT536-1)	518

Orientation in tape	Package	Packing 12NC ending
	XQFN8 (SOT902-2)	125
	VSSOP8 (SOT765-1)	125
	TSSOP8 (SOT505-2)	125

2-pin SMD packages



DSN0402-2 (SOD992)

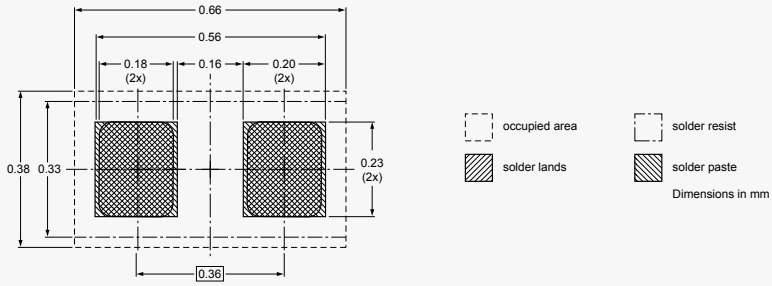

DSN0402-2 (SOD992)



DSN1006-2 (SOD993)

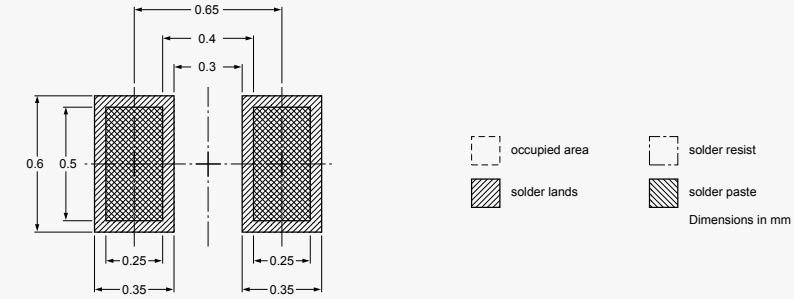

DSN1006-2 (SOD993)



DSN1006U-2 (SOD995)

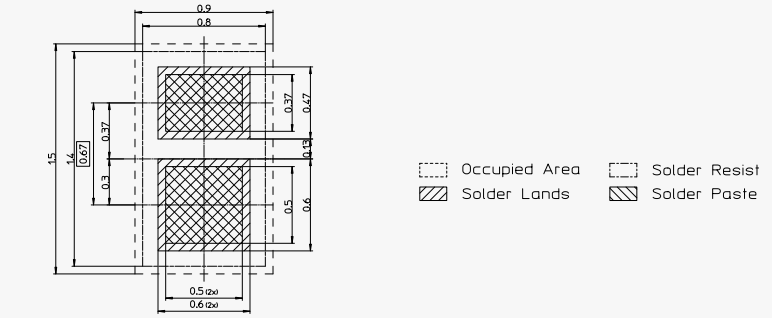

DSN1006U-2 (SOD995)



DFN1006-2 (SOD882)

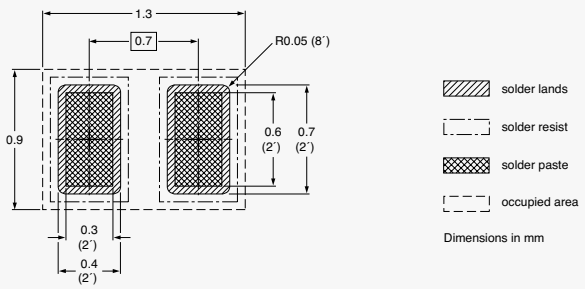

DFN1006-2 (SOD882)

Dimensions in mm

2-pin SMD packages



DFN1006D-2 (SOD882D)

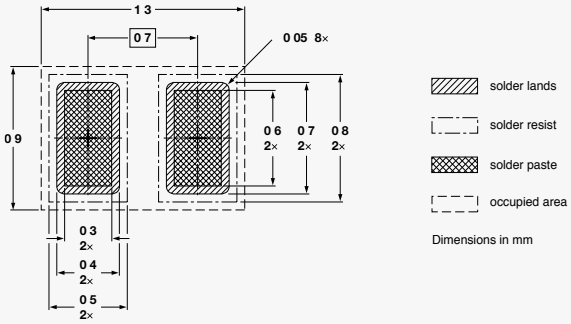

DFN1006D-2 (SOD882D)



DFN1608D-2 (SOD1608)

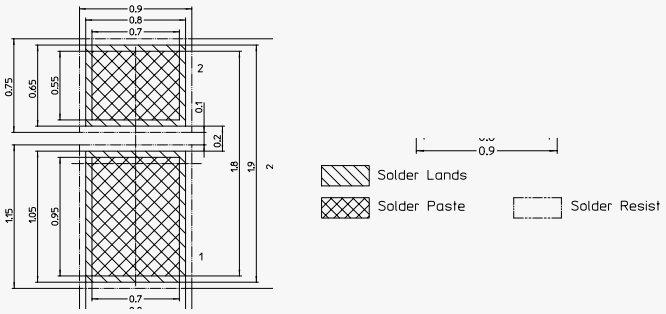

DFN1608D-2 (SOD1608)



DSN0603-2 (SOD962)

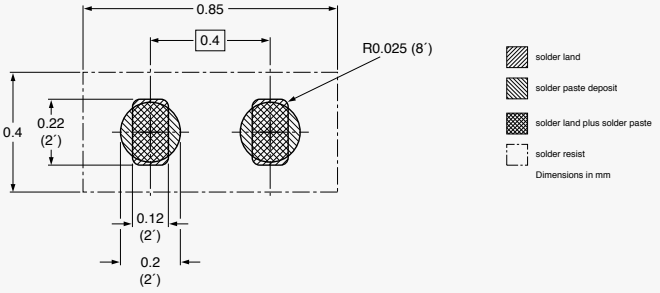

DSN0603-2 (SOD962) and DSN0603B-2 (SOD962B)



SOD80C

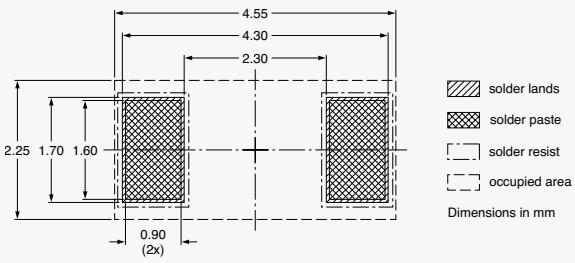

SOD80C

Dimensions in mm

2-pin SMD packages



SOD123F

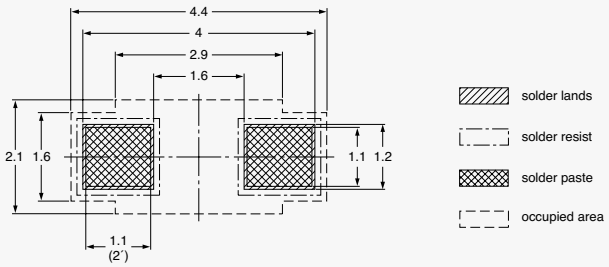

SOD123F



SOD123

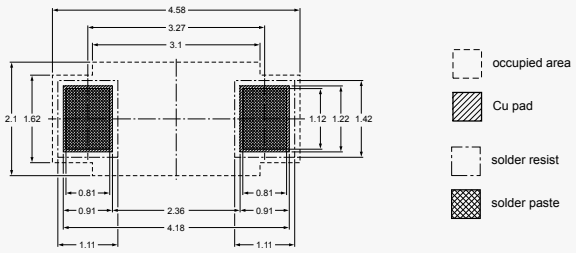

SOD123



SOD123W

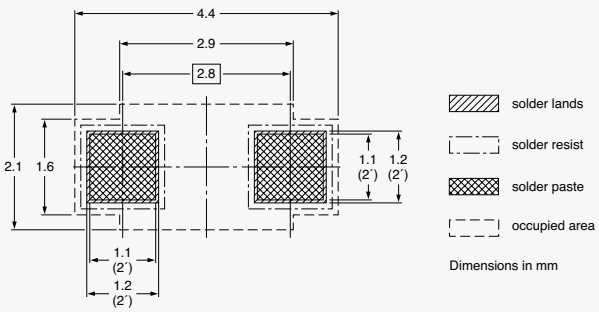

SOD123W



SOD128

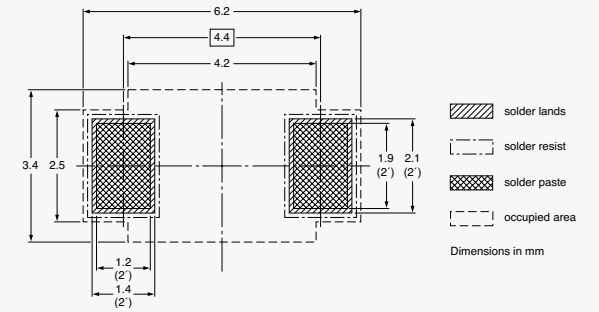

SOD128

Dimensions in mm

2-pin SMD packages



SOD323 (SC-76)

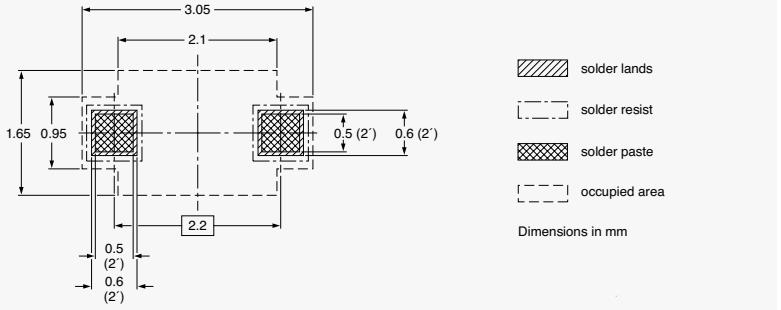

SOD323 (SC-76)



SOD323F (SC-90)

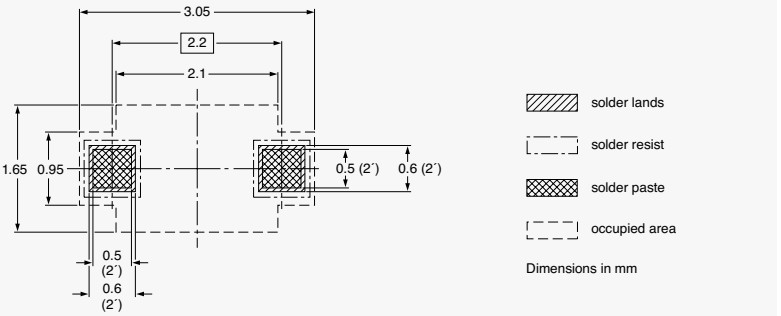

SOD323F (SC-90)

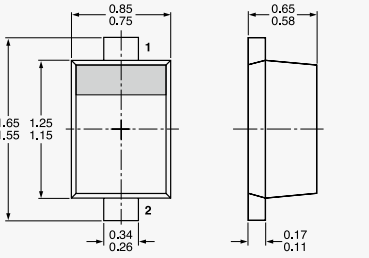

SOD523 (SC-79)

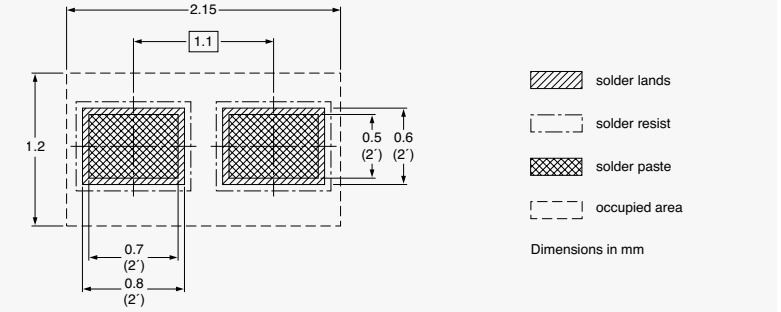

SOD523 (SC-79)

3-pin SMD packages



CFP15 (SOT1289)

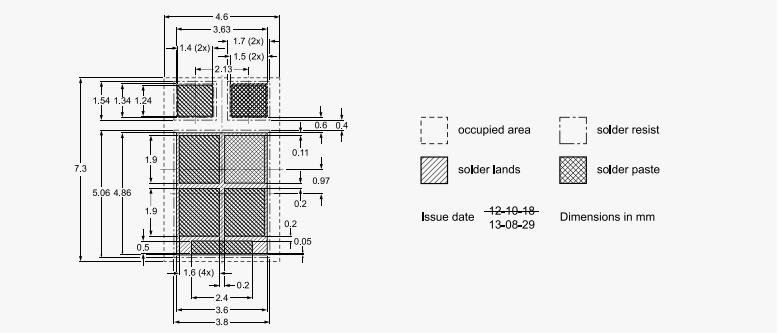

CFP15 (SOT1289)

Dimensions in mm

3-pin SMD packages



DFN1006-3 (SOT883)

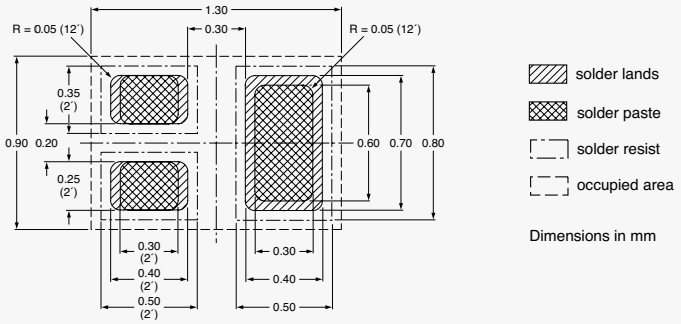

DFN1006-3 (SOT883)



DFN1006B-3 (SOT883B)

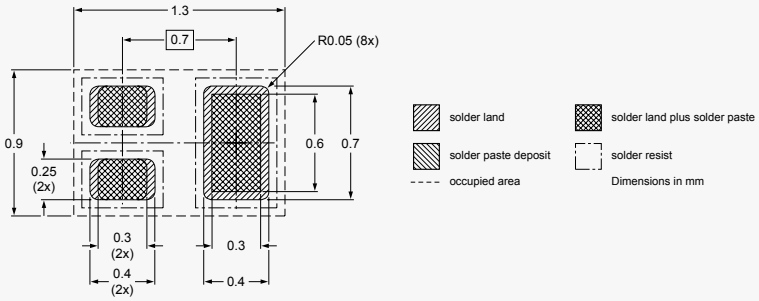

DFN1006B-3 (SOT883B)

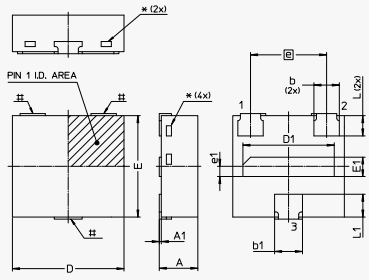

DFN1010D-3 (SOT1215)

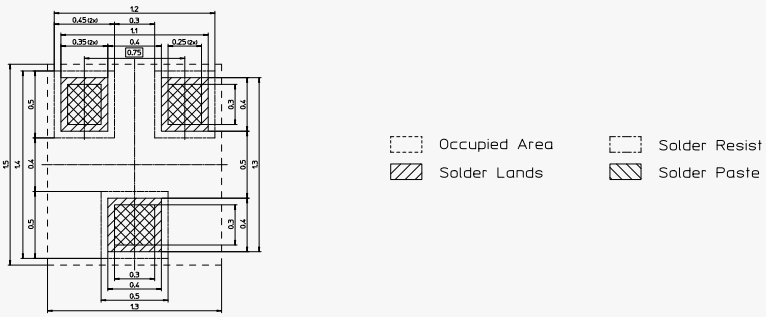

DFN1010D-3 (SOT1215)

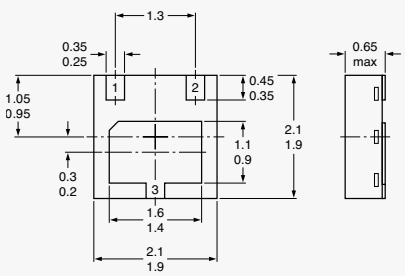

DFN2020-3 (SOT1061)

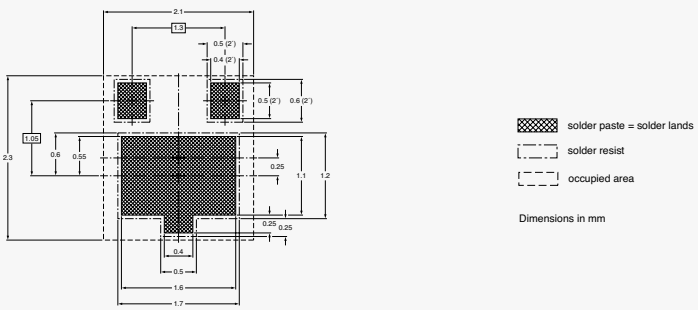

DFN2020-3 (SOT1061)

Dimensions in mm

3-pin SMD packages

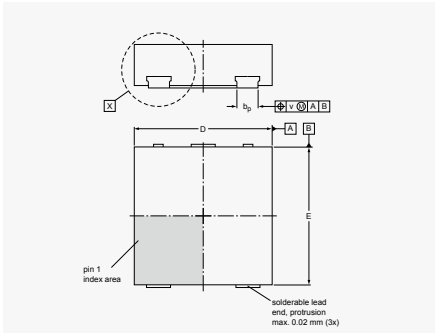

DFN2020D-3 (SOT1061D)

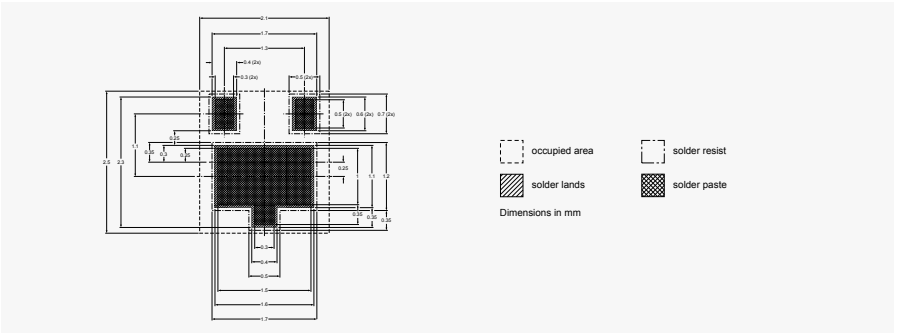

DFN2020D-3 (SOT1061D)

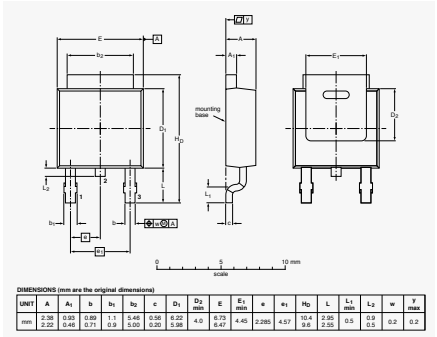

UNIT	A	A_1	b	b_1	b_2	c	D_1	D_2 min	E	E_1 min	e	e_1	H_D	L	L_1 min	L_2	w	y max
mm	2.38 2.22	0.93 0.46	0.89 0.71	1.1 0.9	5.46 5.00	0.56 0.20	6.22 5.98	4.0	6.73 6.47	4.45	2.285	4.57	10.4 9.6	2.95 2.55	0.5	0.9 0.5	0.2	0.2

DPAK (SOT428)

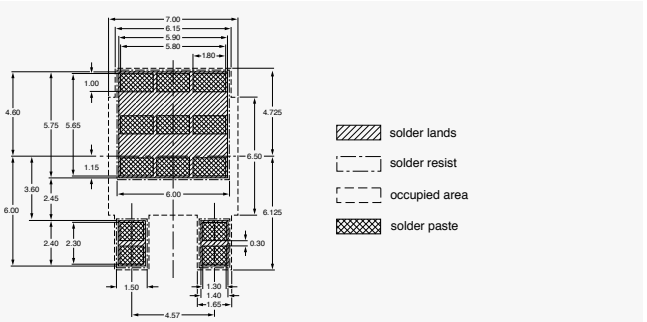

DPAK (SOT428)

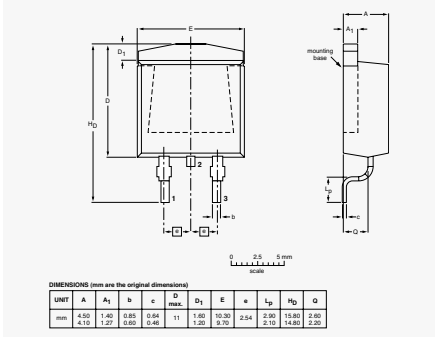

UNIT	A	A_1	b	c	D max.	D_1	E	e	L_p	H_D	Q
mm	4.50 4.10	1.40 1.27	0.85 0.60	0.64 0.46	11	1.60 1.20	10.30 9.70	2.54	2.90 2.10	15.80 14.80	2.60 2.20

D²PAK (SOT404)

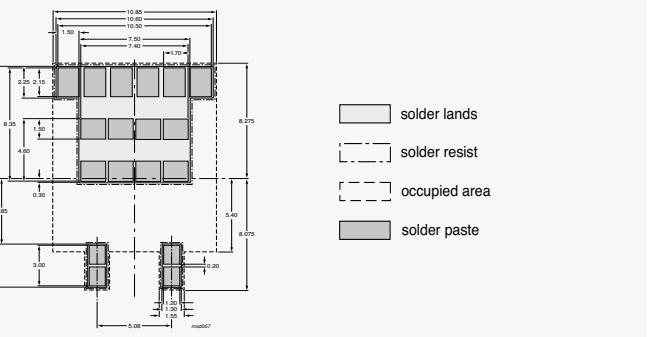

D²PAK (SOT404)

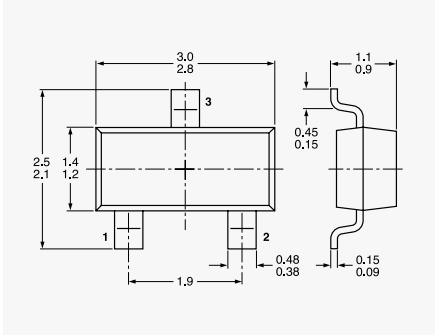

SOT23

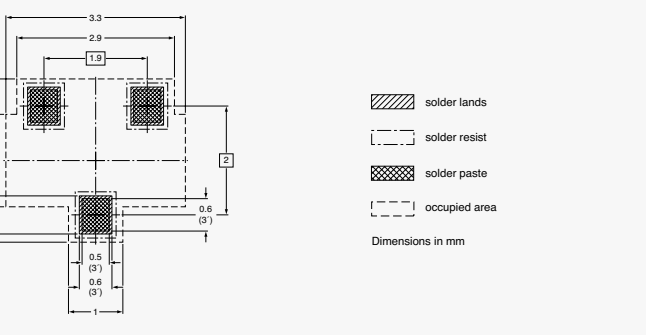

SOT23

Dimensions in mm

3-pin SMD packages

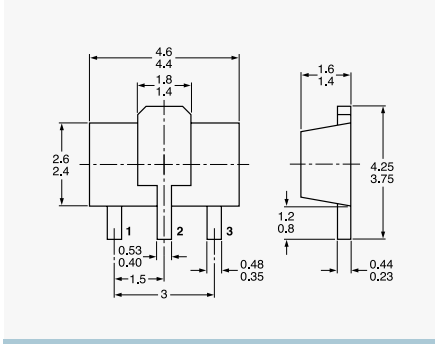

SOT89 (SC-62)

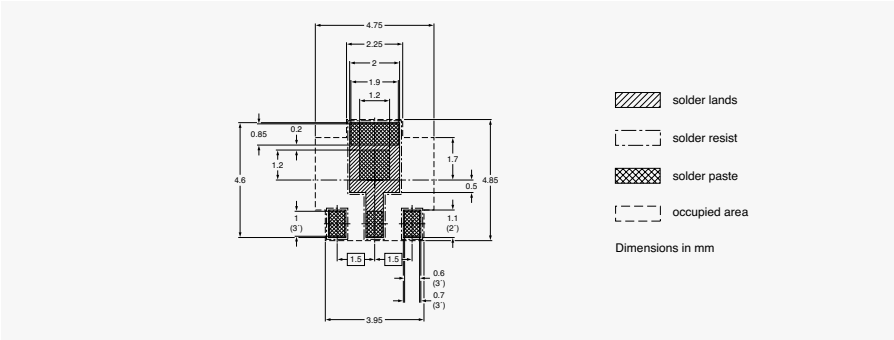

SOT89 (SC-62)

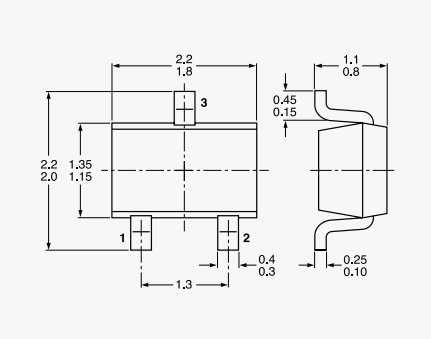

SOT323 (SC-70)

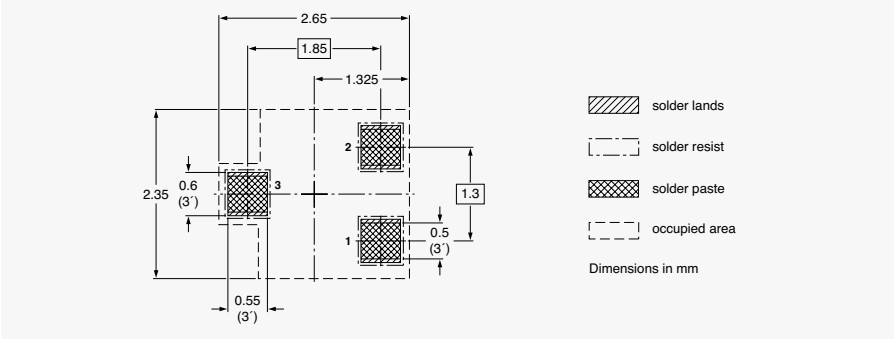

SOT323 (SC-70)

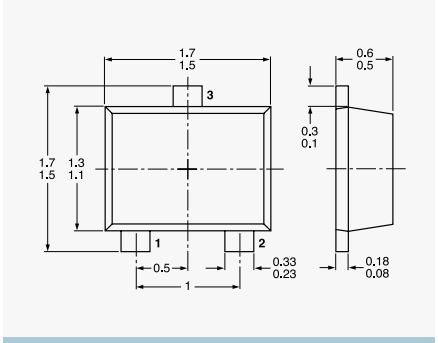

SOT663

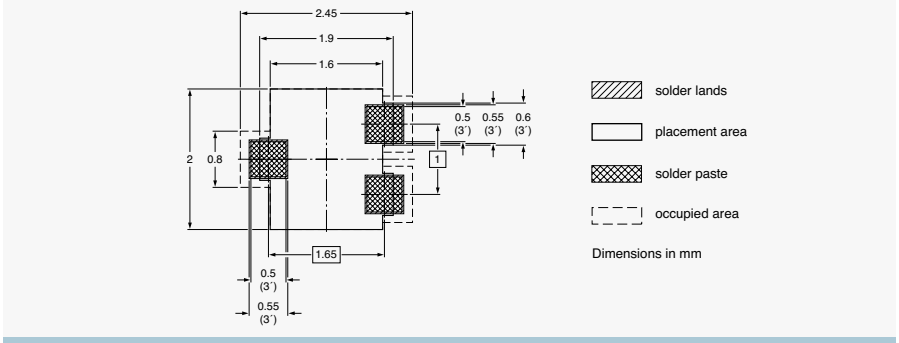

SOT663

4-pin SMD packages

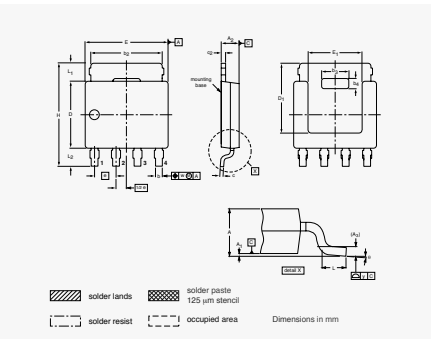

LFPAK56 (SOT669)

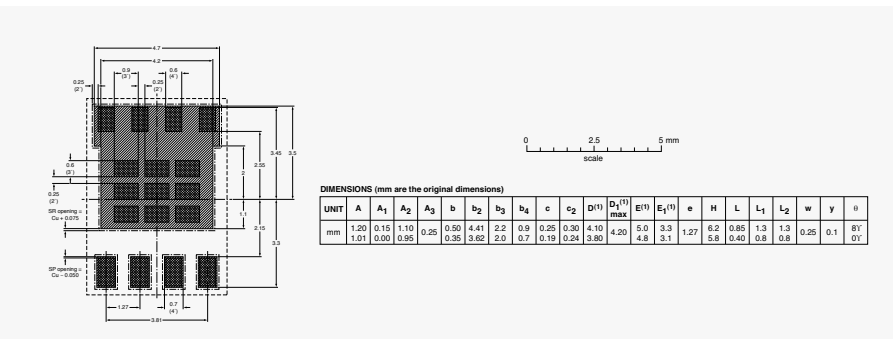

UNIT	A	A_1	A_2	A_3	b	b_2	b_3	b_4	c	c_2	$D^{(1)}$	$D_1^{(1)}$ max	$E^{(1)}$	$E_1^{(1)}$	e	H	L	L_1	L_2	w	y	θ
mm	1.20 1.01	0.15 0.00	1.10 0.95	0.25	0.50 0.35	4.41 3.62	2.2 2.0	0.9 0.7	0.25 0.19	0.30 0.24	4.10 3.80	4.20	5.0 4.8	3.3 3.1	1.27	6.2 5.8	0.85 0.40	1.3 0.8	1.3 0.8	0.25	0.1	8° 0°

LFPAK56 (SOT669)

Dimensions in mm

Minimized outline drawings and reflow soldering footprint

4-pin SMD packages

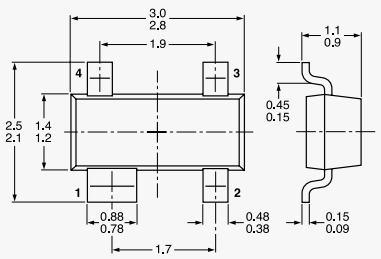

SOT143B

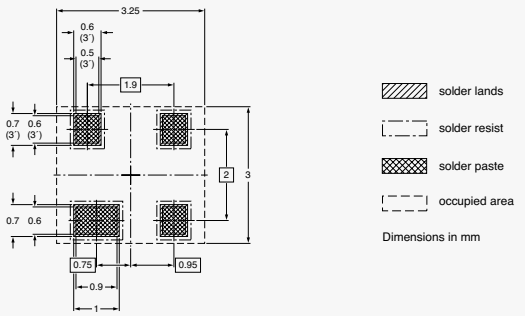

SOT143B

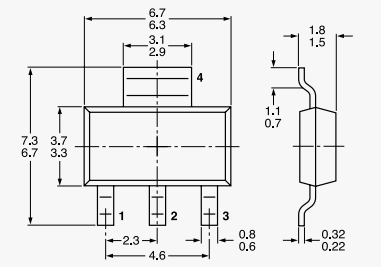

SOT223 (SC-73)

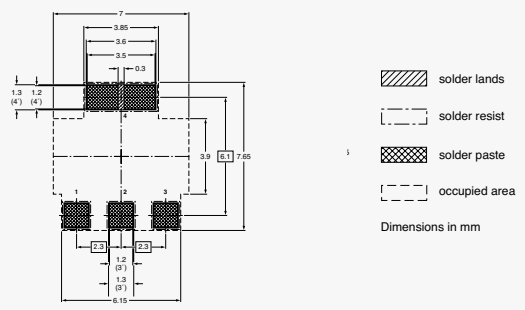

SOT223 (SC-73)

5-pin SMD packages

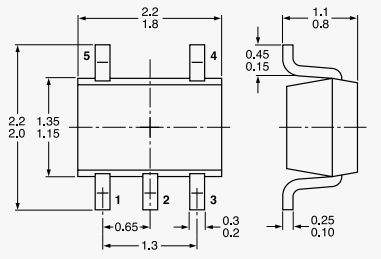

SOT353 (SC-88A)

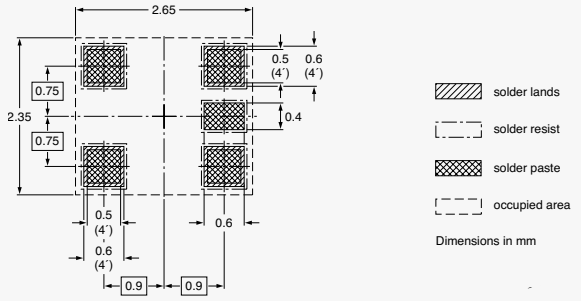

SOT353 (SC-88A)

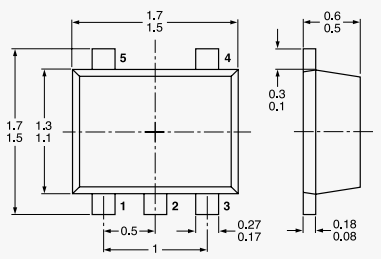

SOT665

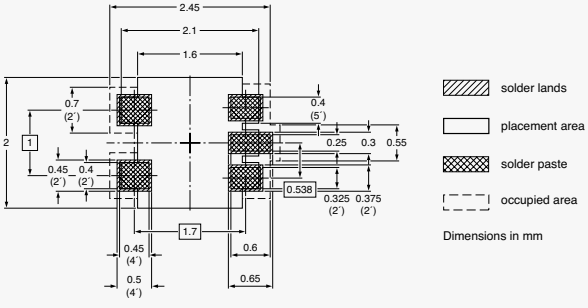

SOT665

Dimensions in mm

5-pin SMD packages

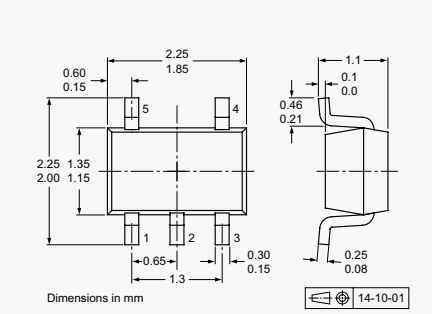

SOT353 GW

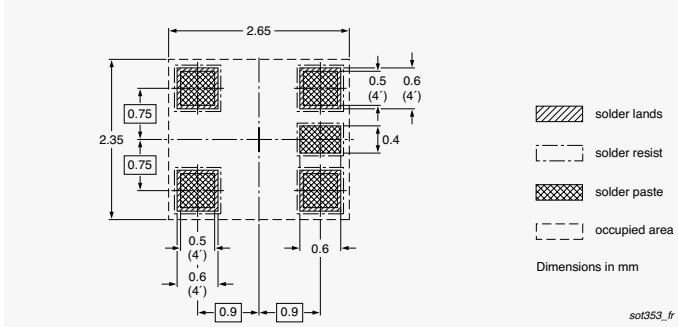

SOT353 GW

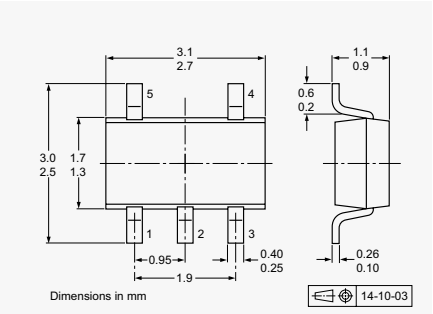

SOT753-1 GV

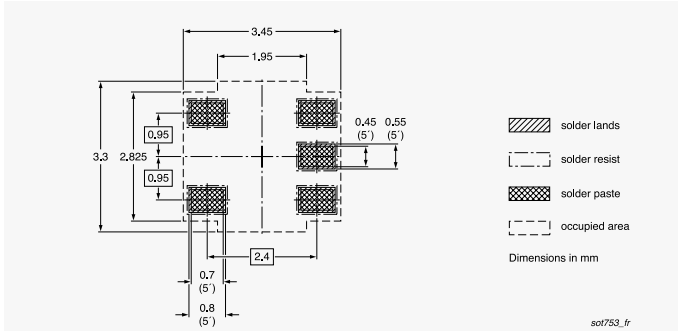

SOT753-1 GV

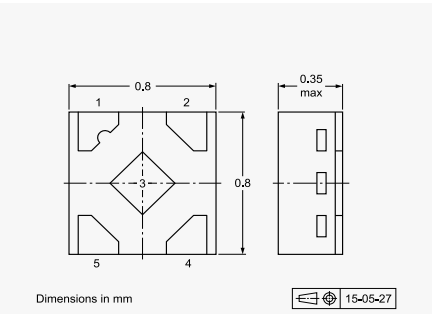

SOT1226 GX

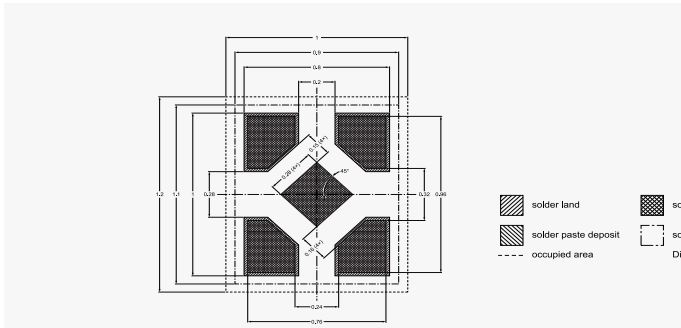

SOT1226 GX

6-pin SMD packages

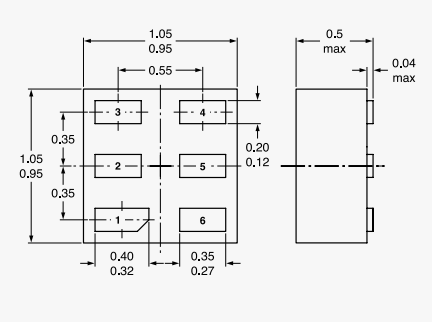

DFN1010-6 (SOT891)

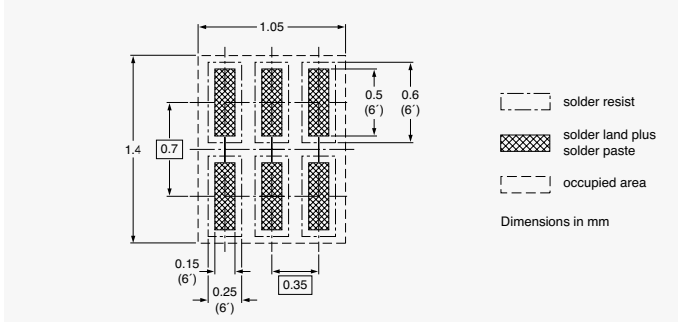

DFN1010-6 (SOT891)

Dimensions in mm

6-pin SMD packages

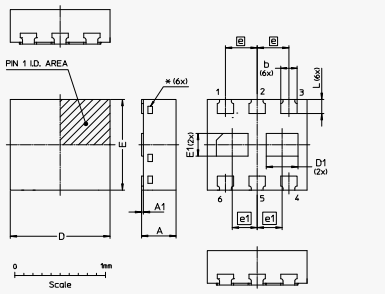

DFN1010B-6 (SOT1216)

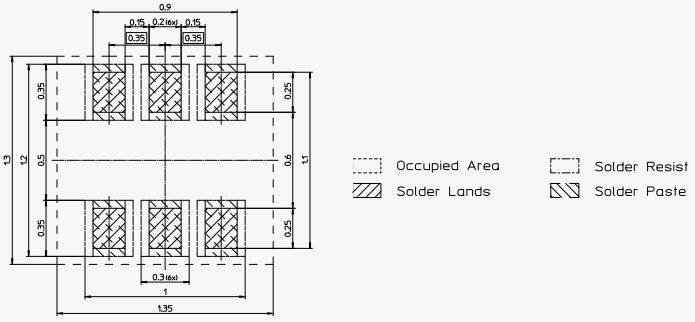

DFN1010B-6 (SOT1216)

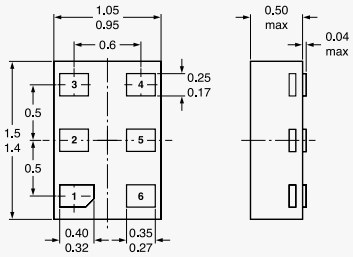

DFN1410-6 (SOT886)

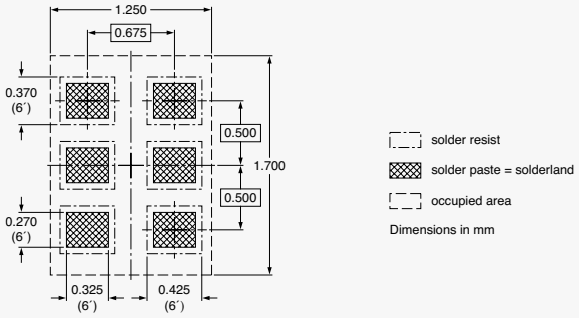

DFN1410-6 (SOT886)

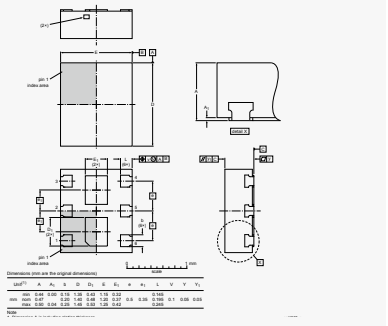

DFN1412-6 (SOT1268)

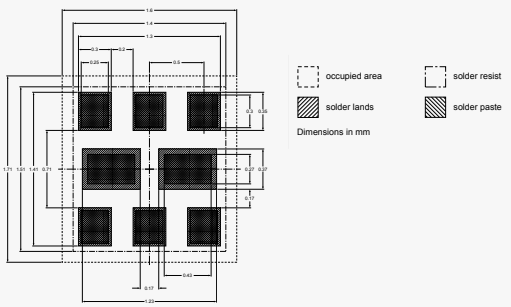

DFN1412-6 (SOT1268)

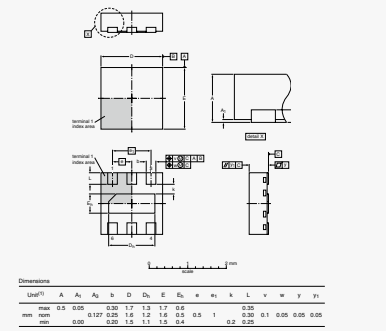

DFN1616-6 (SOT1189)

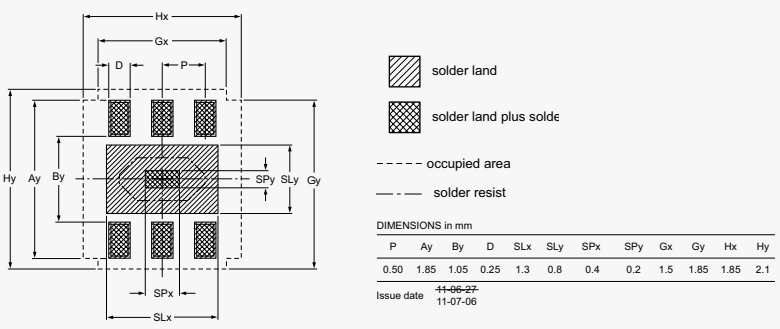

P	Ay	By	D	SLx	SLy	SPx	SPy	Gx	Gy	Hx	Hy
0.50	1.85	1.05	0.25	1.3	0.8	0.4	0.2	1.5	1.85	1.85	2.1

Issue date ~~11-06-27~~ 11-07-06

DFN1616-6 (SOT1189)

Dimensions in mm

6-pin SMD packages

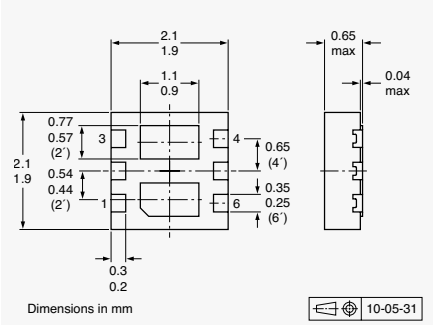

DFN2020-6 (SOT1118)

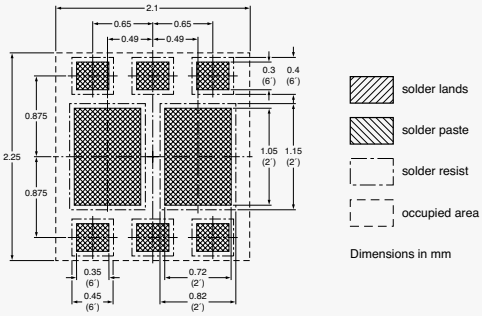

DFN2020-6 (SOT1118)

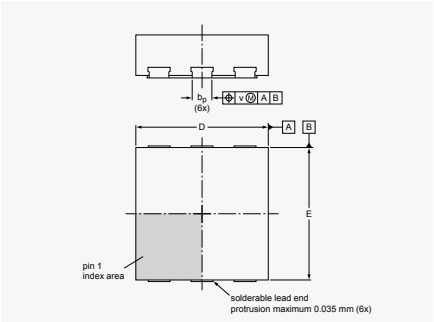

DFN2020D-6 (SOT1118D)

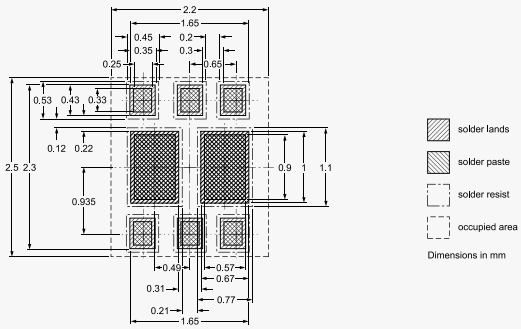

DFN2020D-6 (SOT1118D)

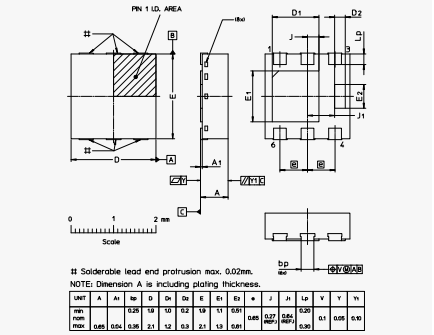

DFN2020MD-6 (SOT1220)



DFN2020MD-6 (SOT1220)

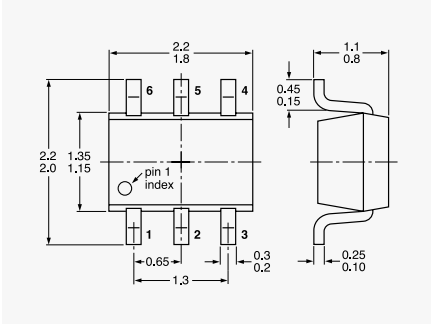

SOT363 (SC-88)

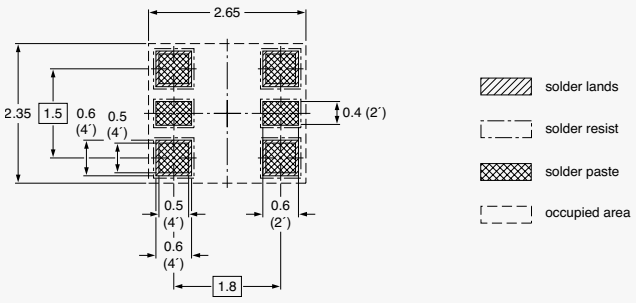

SOT363 (SC-88)

Dimensions in mm

6-pin SMD packages

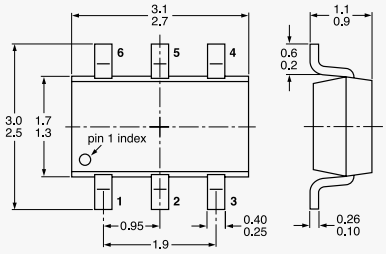

SOT457 (SC-74)

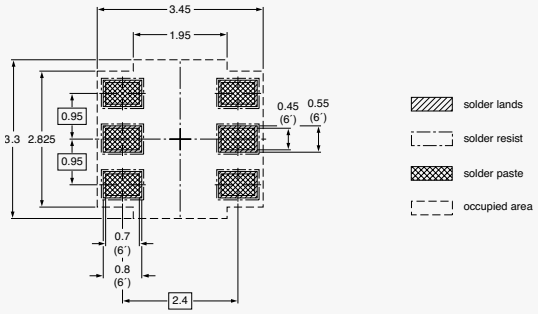

SOT457 (SC-74)

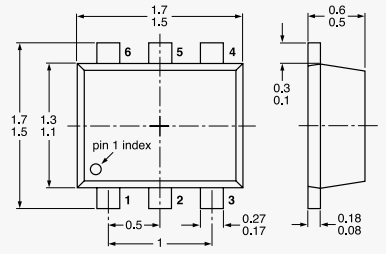

SOT666

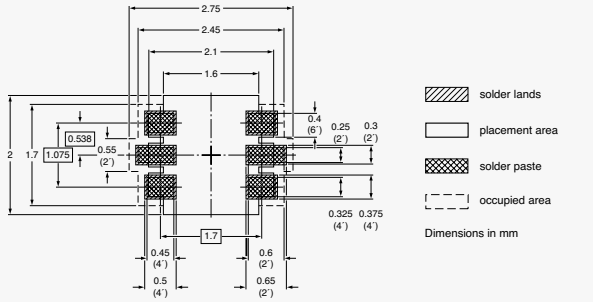

SOT666

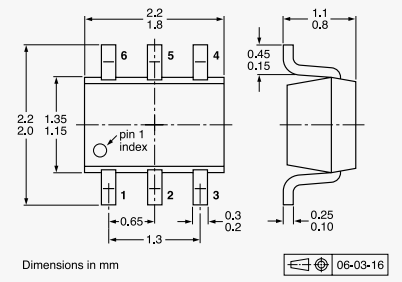

SOT363 GW

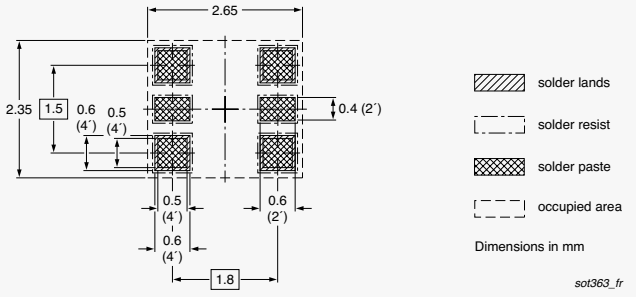

SOT363 GW

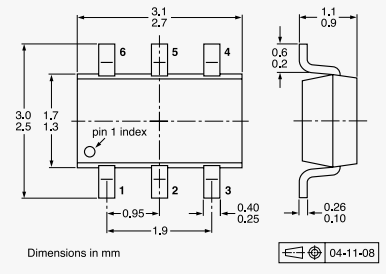

SOT457 GV

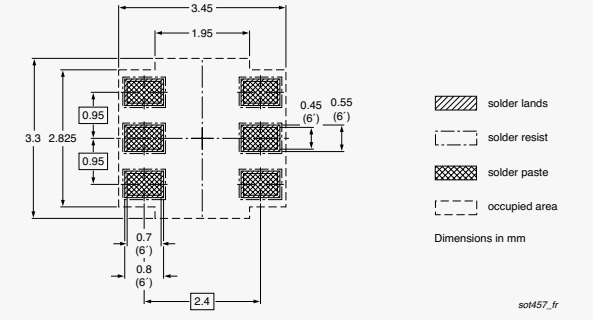

SOT457 GV

Dimensions in mm

6-pin SMD packages

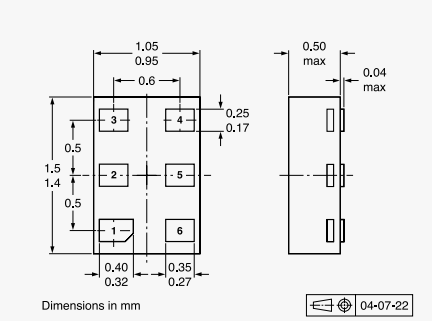

SOT886 GM

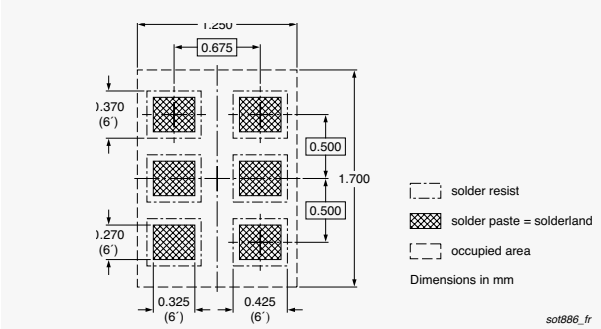

SOT886 GM

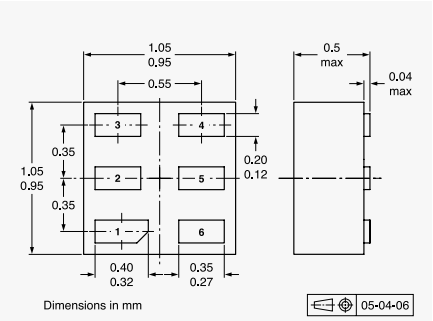

SOT891 GF

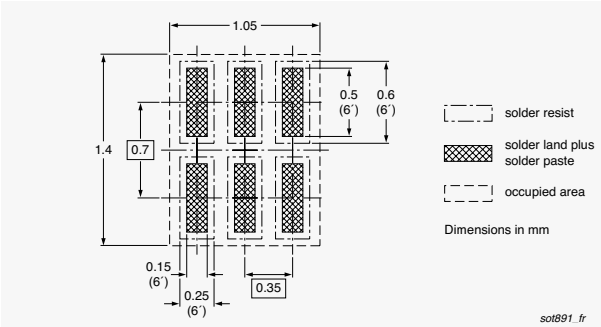

SOT891 GF

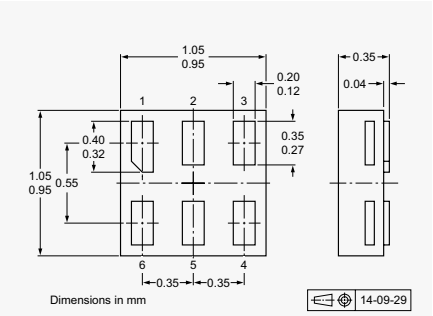

SOT1202 GS

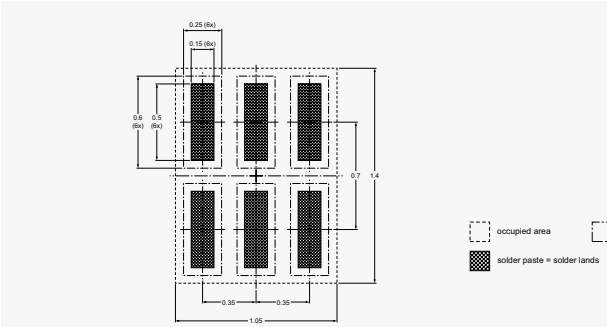

SOT1202 GS

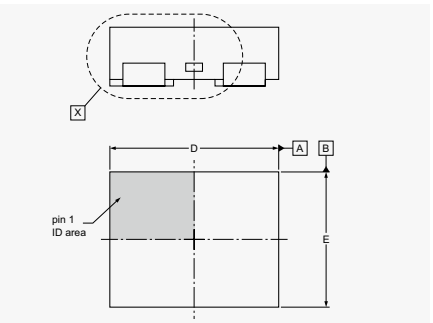

X2SON6 (SOT1255)

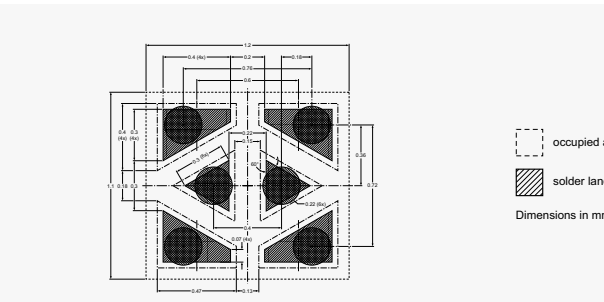

X2SON6 (SOT1255)

Dimensions in mm

7-pin SMD packages



DFN2111-7 (SOT1358)

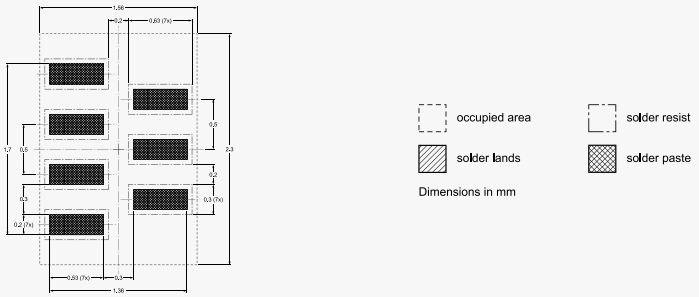

DFN2111-7 (SOT1358)

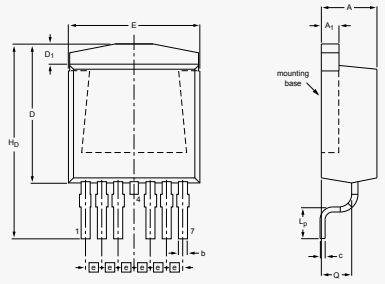

D2PAK-7 (SOT428)

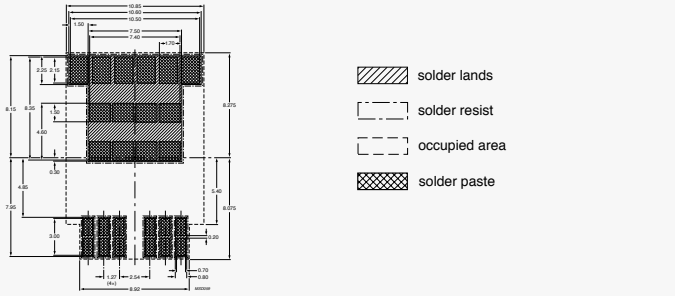

D2PAK-7 (SOT428)

8-pin SMD packages

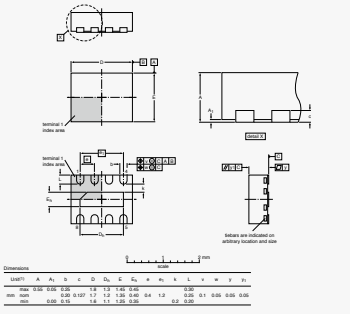

DFN1714-8 (SOT1166)

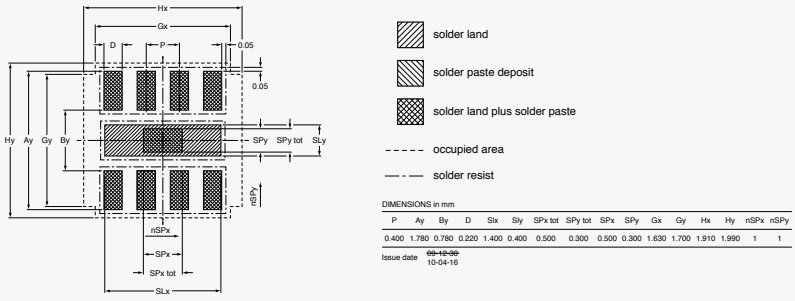

DFN1714-8 (SOT1166)

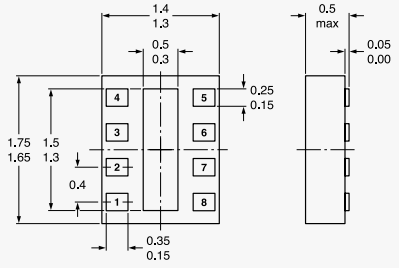

DFN1714U-8 (SOT983)

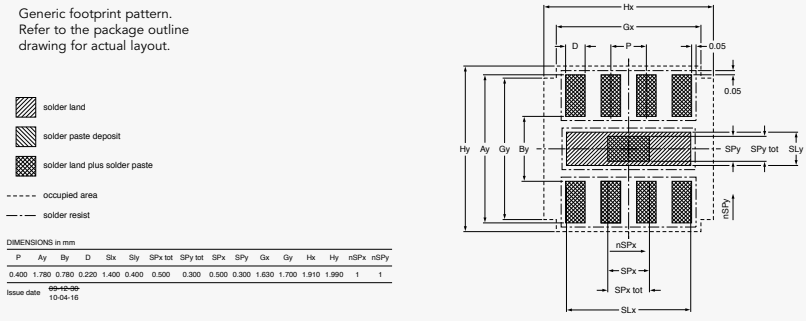

DFN1714U-8 (SOT983)

Dimensions in mm

8-pin SMD packages

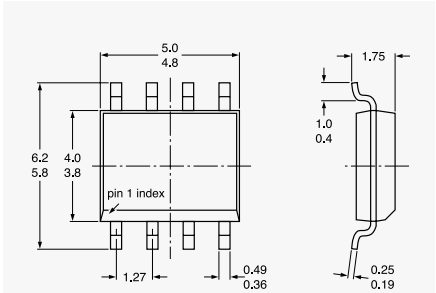

SOT96 (SO8)

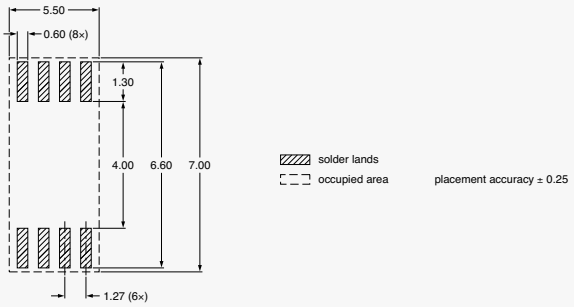

SOT96 (SO8)



X2SON8 (SOT1233)

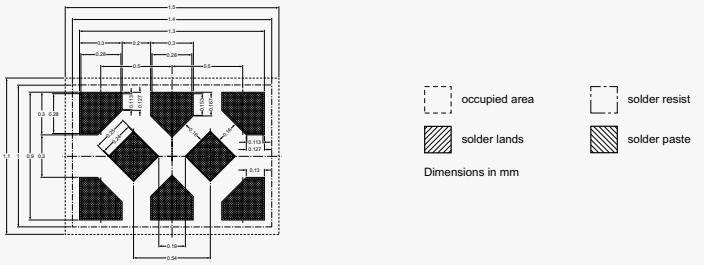

X2SON8 (SOT1233)

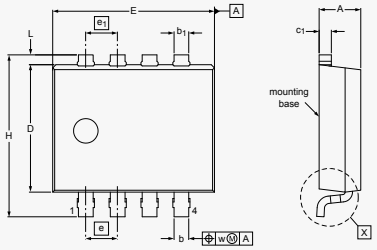

LFPAK33 (SOT1210)

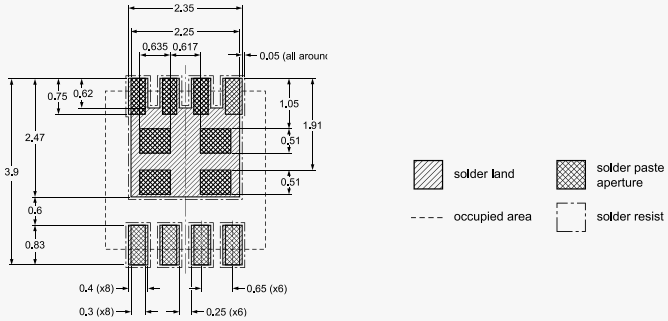

LFPAK33 (SOT1210)

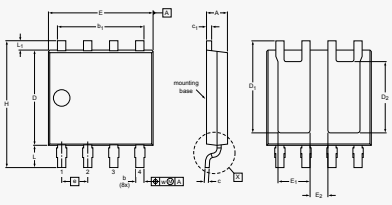

LFPAK56D (SOT1205)

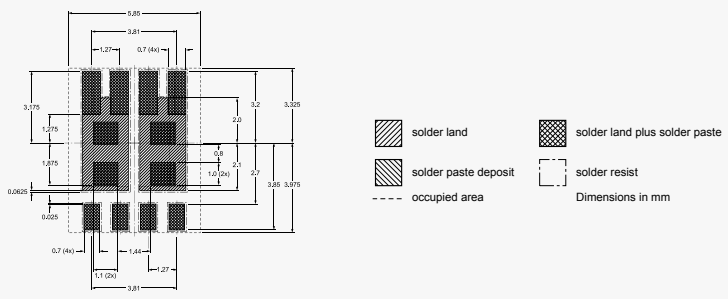

LFPAK56D (SOT1205)

Dimensions in mm

8-pin SMD packages

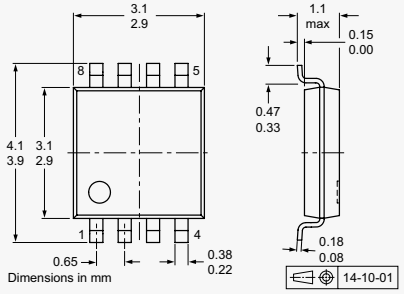

SOT505-2 DP

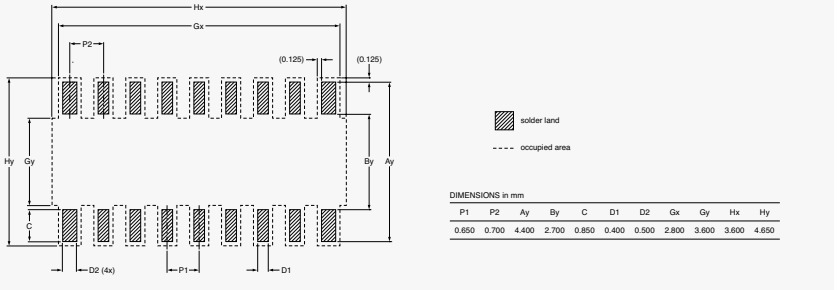

SOT505-2 DP

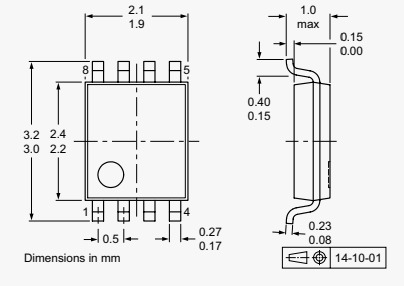

SOT765-1 DC

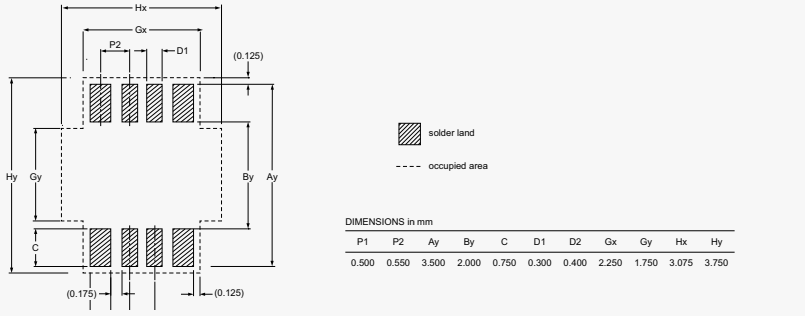

SOT765-1 DC

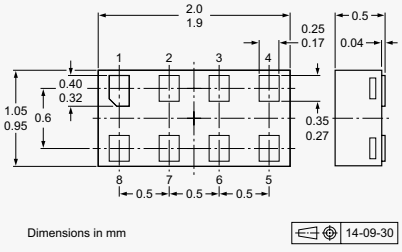

SOT833-1 GT

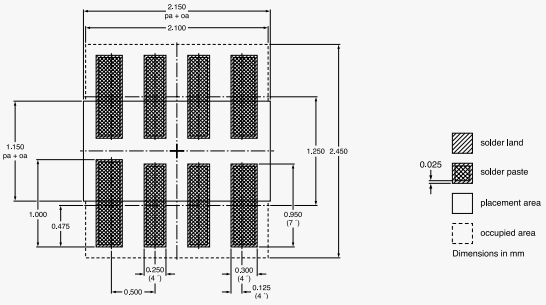

SOT833-1 GT

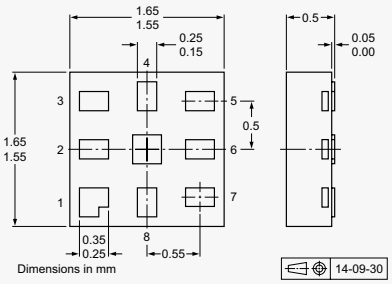

SOT902-2 GM

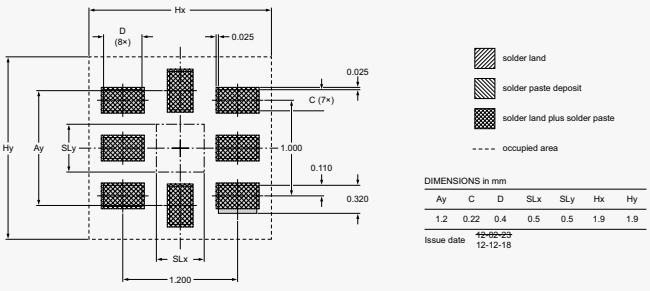

SOT902-2 GM

Dimensions in mm

8-pin SMD packages

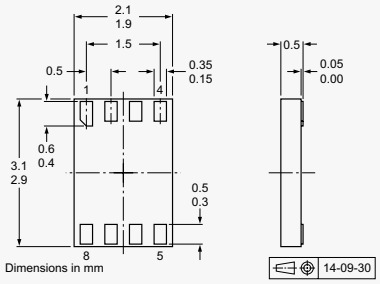

SOT996 GD



SOT996 GD

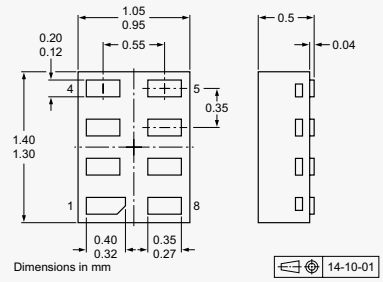

SOT1089 GF

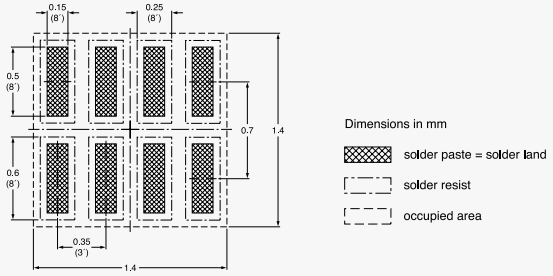

SOT1089 GF

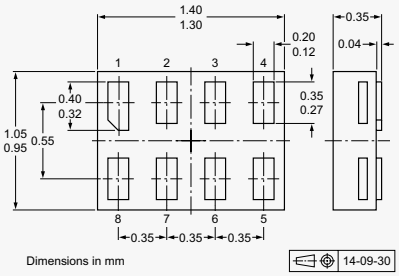

SOT1203 GS

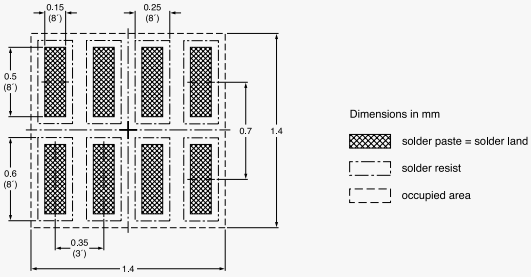

SOT1203 GS

Dimensions in mm

More than 8-pin SMD packages

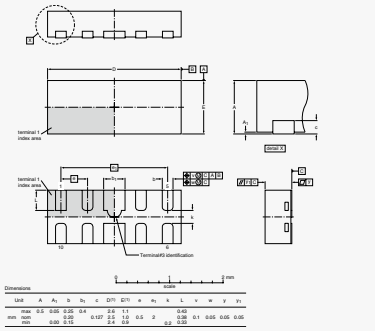

DFN2510-10 (SOT1165)

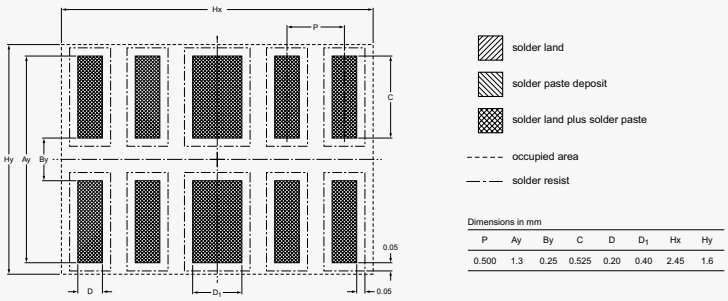

DFN2510-10 (SOT1165)

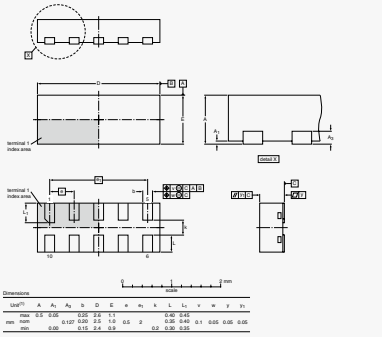

DFN2510A-10 (SOT1176)

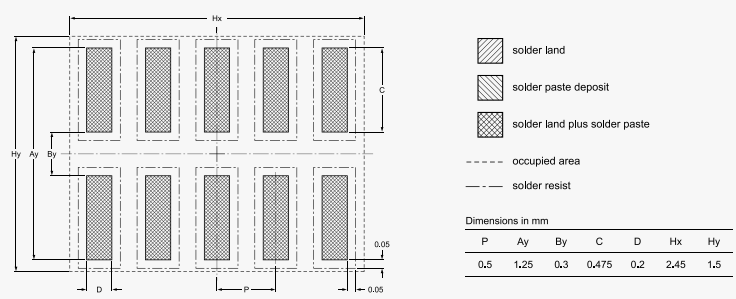

DFN2510A-10 (SOT1176)

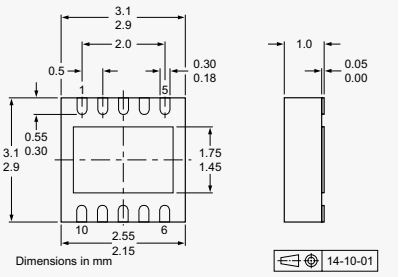

SOT650-1 TK

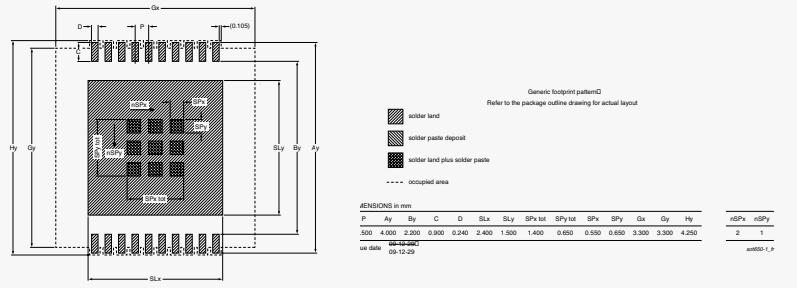

SOT650-1 TK

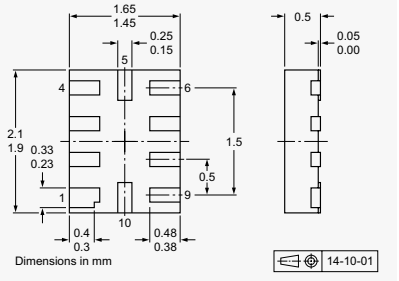

SOT1049-3 GM

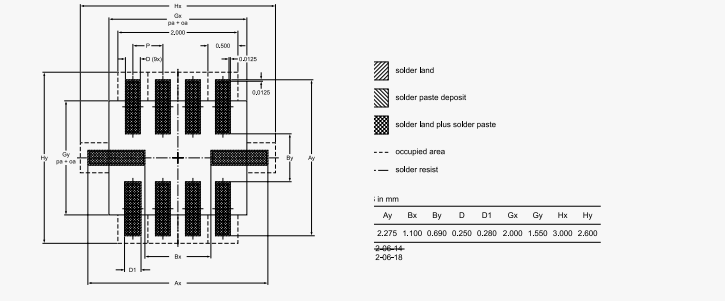

SOT1049-3 GM

Dimensions in mm

More than 8-pin SMD packages

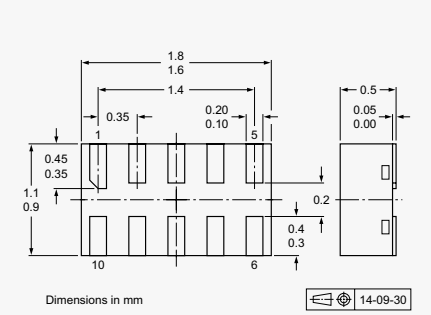

SOT1081-1/2 GF

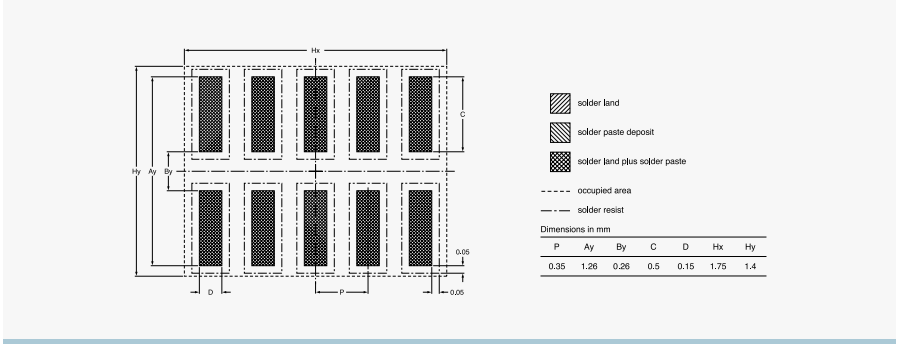

SOT1081-1/2 GF

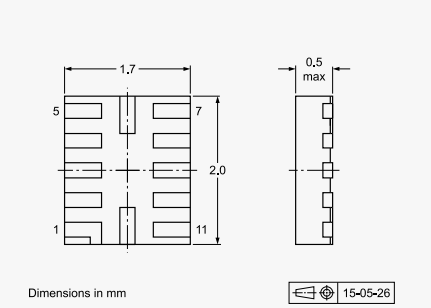

SOT1174 GM

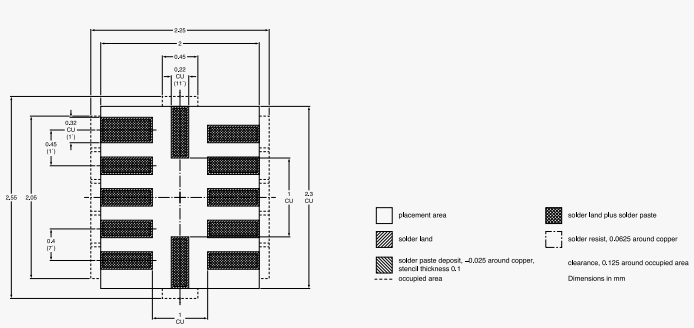

SOT1174 GM

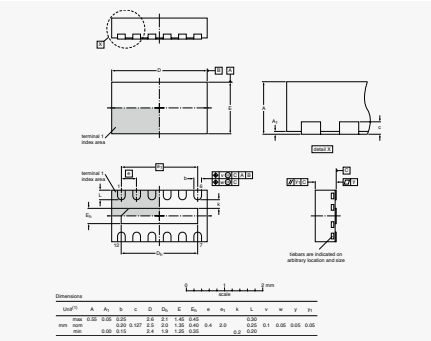

DFN2514-12 (SOT1167)

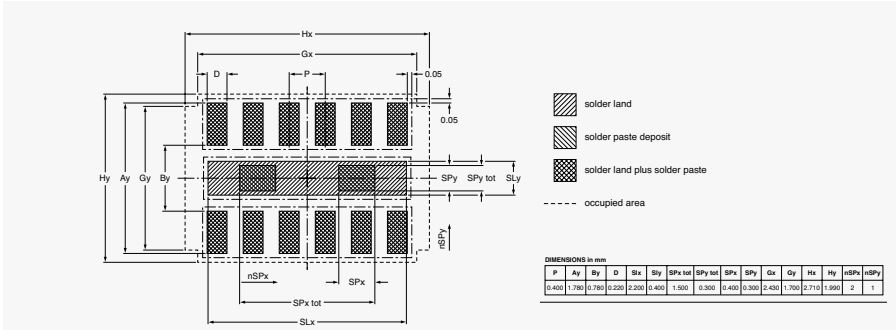

DFN2514-12 (SOT1167)

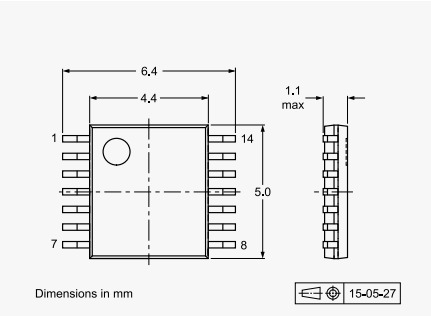

SOT402-1 PW

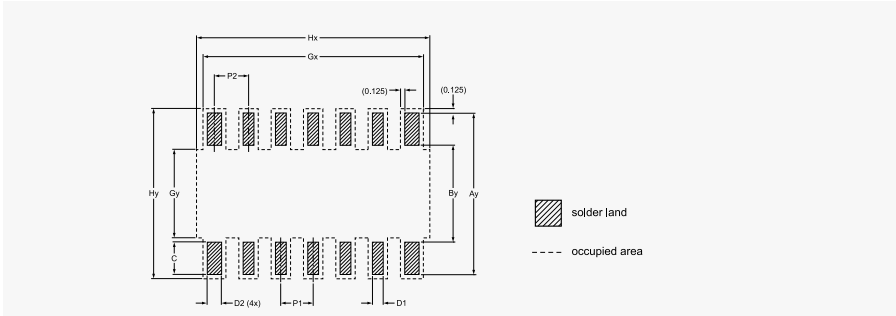

SOT402-1 PW

Dimensions in mm

More than 8-pin SMD packages

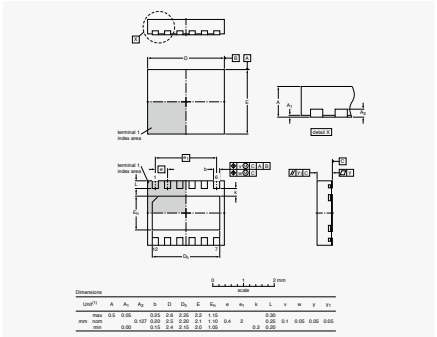

DFN2521-12 (SOT1156)

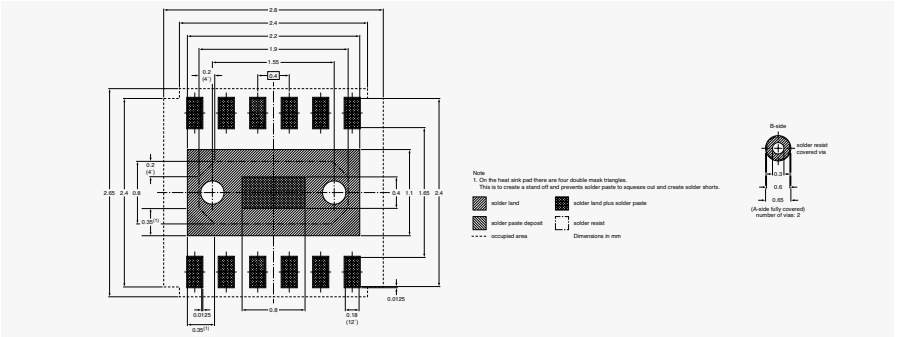

DFN2521-12 (SOT1156)

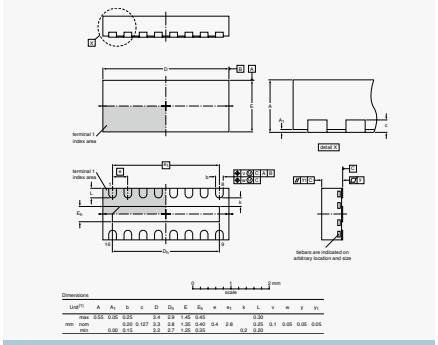

DFN3314-16 (SOT1168)

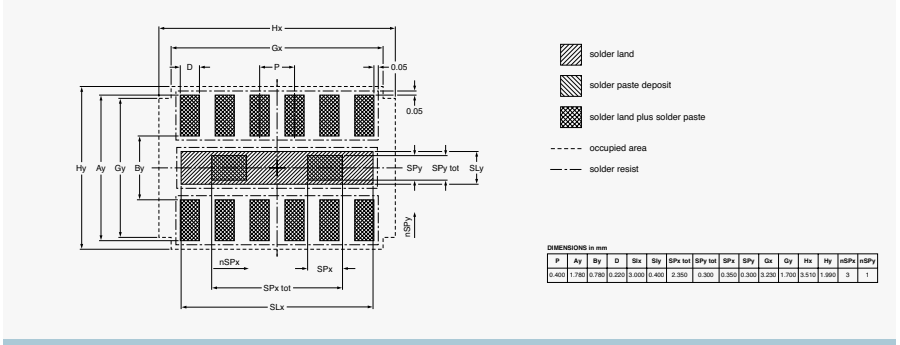

DFN3314-16 (SOT1168)

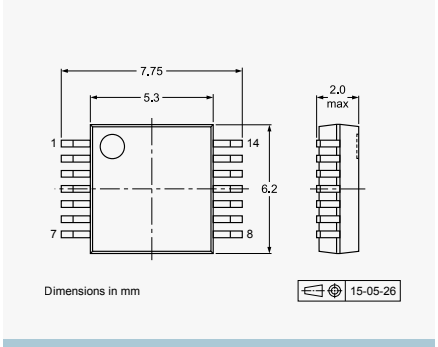

SOT337-1 DB

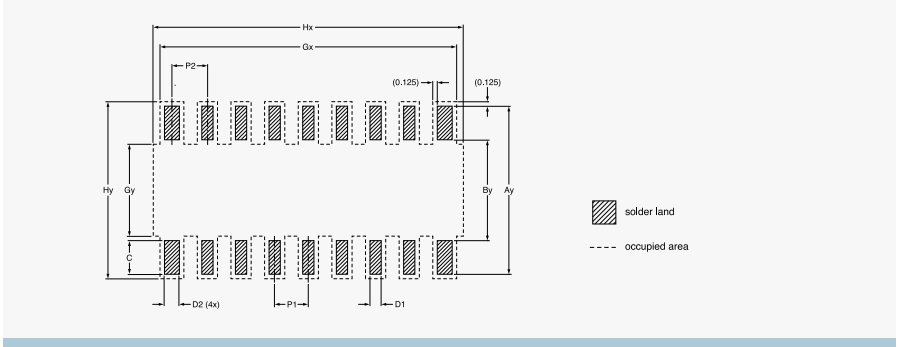

SOT337-1 DB

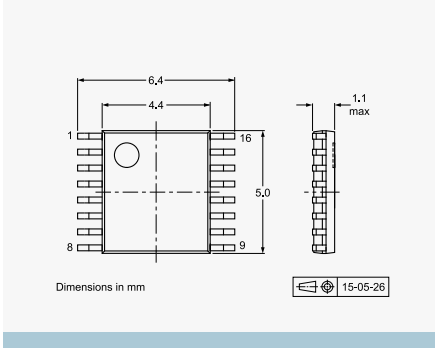

SOT403-1 PW

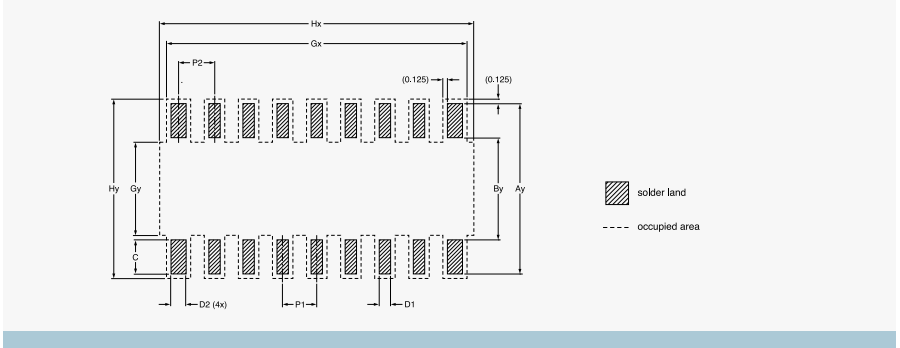

SOT403-1 PW

Dimensions in mm

More than 8-pin SMD packages

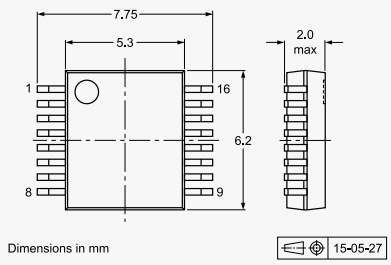

SOT338-1 DB

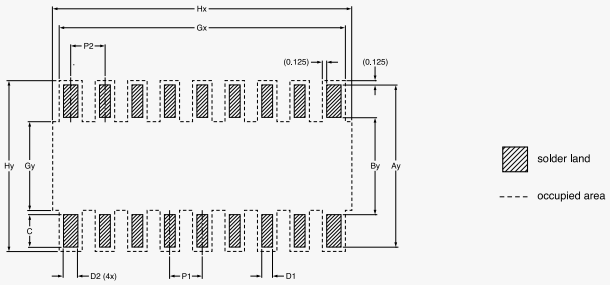

SOT338-1 DB

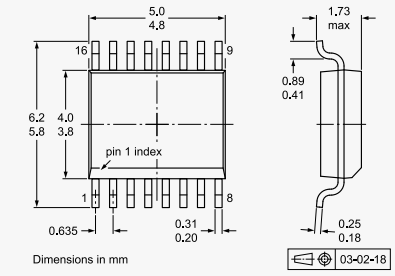

SOT519-1 DS

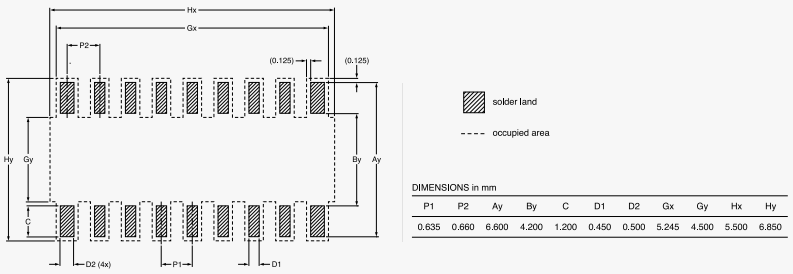

SOT519-1 DS

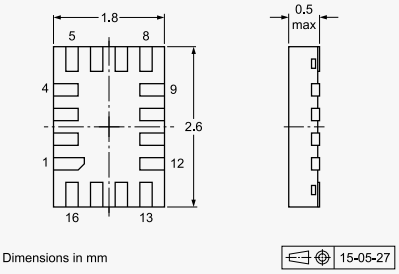

SOT1161 GU

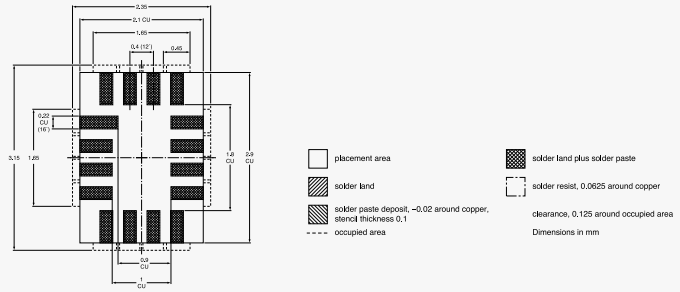

SOT1161 GU

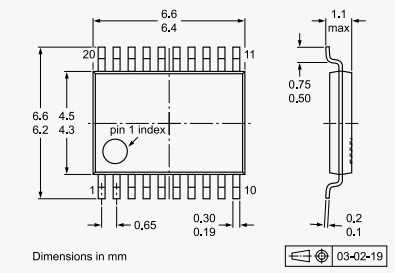

SOT360-1 PW

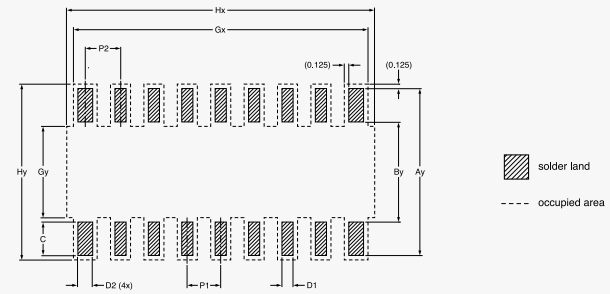

SOT360-1 PW

Dimensions in mm

More than 8-pin SMD packages

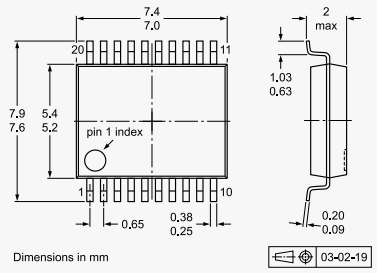

SOT339-1 DB

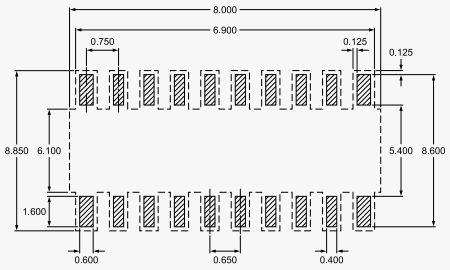

SOT339-1 DB

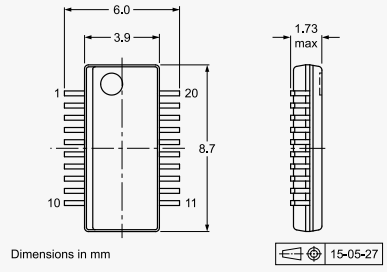

SOT724-1 DS

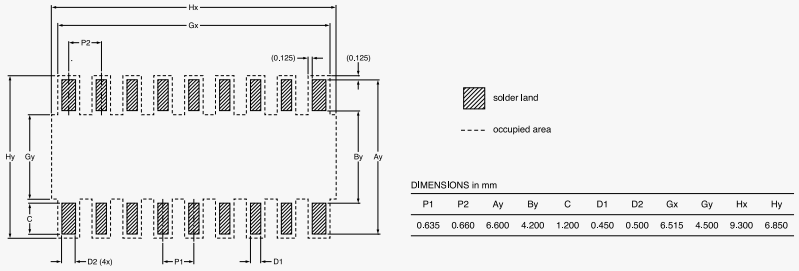

SOT724-1 DS

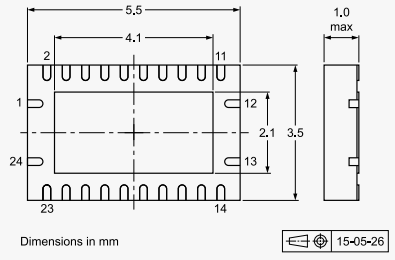

SOT815-1 BQ

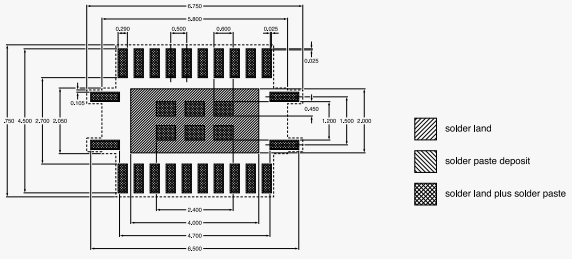

SOT815-1 BQ

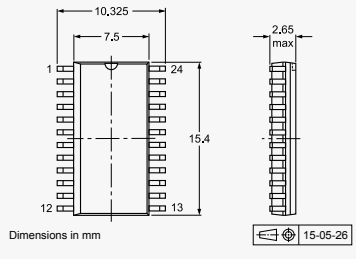

SOT137-1 D

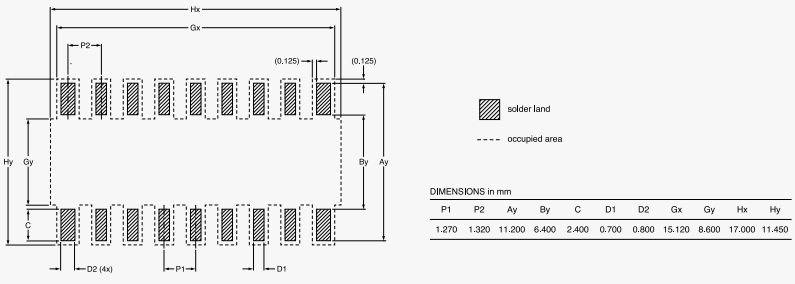

SOT137-1 D

Dimensions in mm

More than 8-pin SMD packages

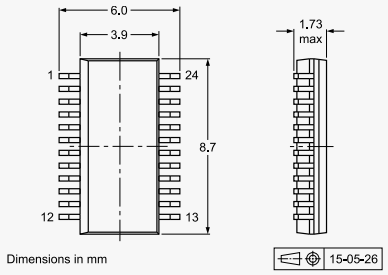

SOT556-1 DK

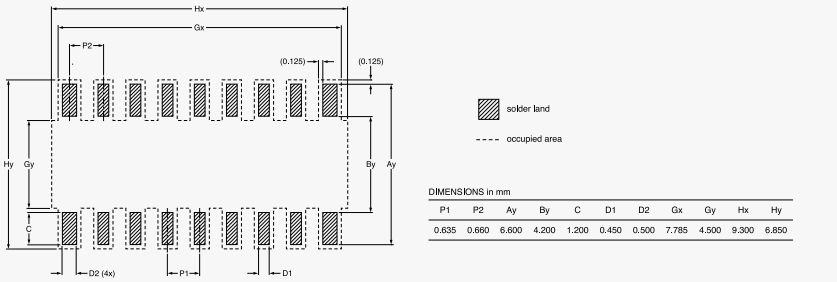

SOT556-1 DK

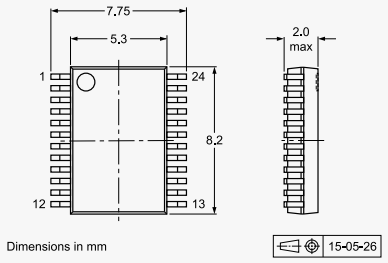

SOT340-1 DB

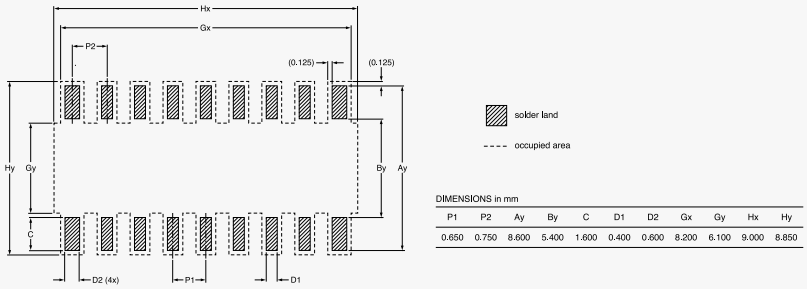

SOT340-1 DB

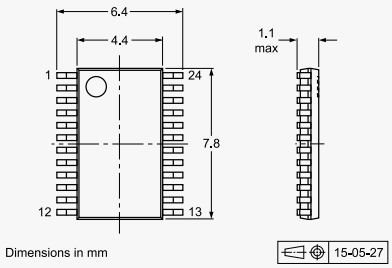

SOT355-1 PW

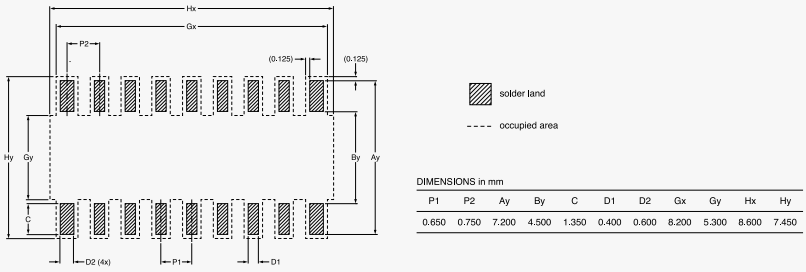

SOT355-1 PW

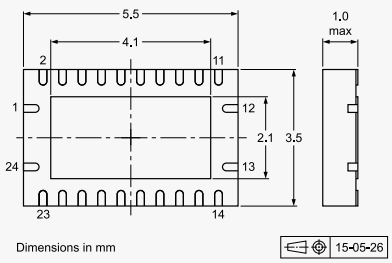

SOT815-1 BQ

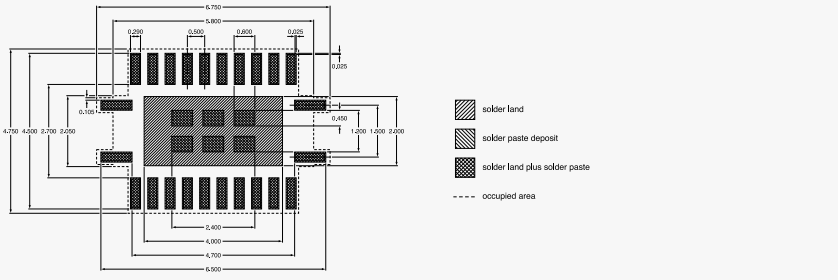

SOT815-1 BQ

Dimensions in mm

More than 8-pin SMD packages

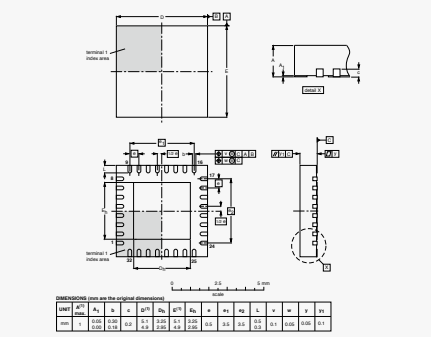

DFN5050-32 (SOT617)

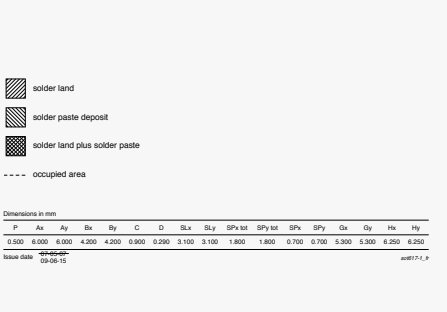

DFN5050-32 (SOT617)

Glass diodes

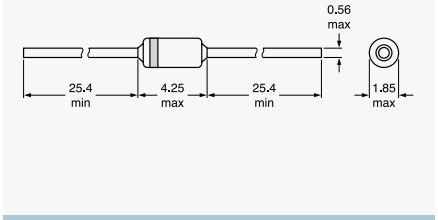

SOD27 (DO-35)



SOD66 (DO-41)



SOD68 (DO-34)

Single-ended and through-hole packages

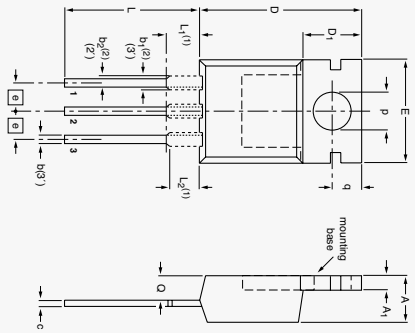

DIMENSIONS (mm are the original dimensions)

UNIT	A	A_1	b	b_1(2)	b_2(2)	c	D	D_1	E	e	L	L_1(1)	L_2(1) max.	p	q	Q
mm	4.7 4.1	1.40 1.25	0.9 0.6	1.6 1.0	1.3 1.0	0.7 0.4	16.0 15.2	6.6 5.9	10.3 9.7	2.54	15.0 12.8	3.30 2.79	3.0	3.8 3.5	3.0 2.7	2.6 2.2

Notes
1. Lead shoulder designs may vary.
2. Dimension includes excess dambar.



SOT78 (TO220AB)

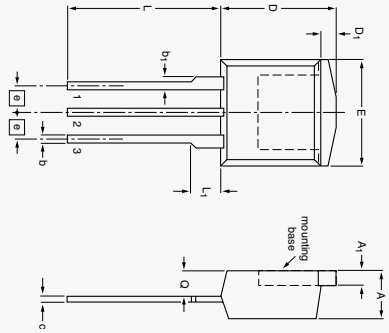

DIMENSIONS (mm are the original dimensions)

UNIT	A	A_1	b	b_1	c	D max	D_1	E	e	L	L_1	Q
mm	4.5 4.1	1.40 1.27	0.85 0.60	1.3 1.0	0.7 0.4	11	1.6 1.2	10.3 9.7	2.54	15.0 13.5	3.30 2.79	2.6 2.2



SOT226

Dimensions in mm

Index

Type number	Page Number
1N47xxA series	36
1PS10SB82	43
1PS300	38
1PS301	38
1PS302	38
1PS66SB17	43
1PS66SB82	43
1PS70SB20	47
1PS70SB82	43
1PS70SB84	43
1PS70SB85	43
1PS70SB86	43
1PS74SB23	47
1PS76SB17	43
1PS79SB17	43
1PS88SB82	43
2N7002BK	85
2N7002BKM	85
2N7002BKMB	94
2N7002BKS	85
2N7002BKW	85
2N7002CK	85
2N700BKM	94
2PA1576Q	14
2PA1576R	14
2PA1576S	14
2PA1774QM	14
2PA1774QMB	14
2PA1774RM	14
2PA1774RMB	14
2PA1774SM	14
2PA1774SMB	14
2PB1219AQ	14
2PB1219AR	14
2PB1219AS	14
2PB709ARL	14
2PB709ART	14
2PB709ARW	14
2PB709ASL	14
2PB709ASW	14
2PB709BRL	14
2PB709BSL	14
2PB710ARL	14
2PB710ASL	14
2PC4081Q	14
2PC4081R	14
2PC4081S	14
2PC4617QM	14
2PC4617QMB	14
2PC4617RM	14
2PC4617RMB	14
2PD1820AR	14
2PD1820AS	14
2PD601ARL	14
2PD601ART	14
2PD601ARW	14
2PD601ASL	14
2PD601ASW	14
2PD601BRL	14
2PD601BSL	14
2PD602AQL	14
2PD602ARL	14
2PD602ASL	14
74ABT00	150
74ABT04	129
74ABT08	148
74ABT125	129
74ABT126	129
74ABT162244	129
74ABT162245A	137
74ABT16240A	129
74ABT16244A	129
74ABT16245B	137
74ABT20	150
74ABT244	129
74ABT245	137
74ABT32	153
74ABTH162245A	137
74AHC00	150
74AHC00-Q100	113
74AHC02	152
74AHC02-Q100	113
74AHC04	129
74AHC04-Q100	107
74AHC08	148
74AHC08-Q100	113
74AHC123A	155
74AHC123A-Q100	116
74AHC125	129
74AHC125-Q100	107
74AHC126	129
74AHC126-Q100	107
74AHC132	138, 150
74AHC132-Q100	117
74AHC138	158
74AHC138-Q100	110
74AHC139	158
74AHC139-Q100	110
74AHC14	129, 138
74AHC14-Q100	117
74AHC157	159
74AHC157-Q100	111
74AHC164-Q100	118
74AHC1G00	150
74AHC1G00-Q100	125
74AHC1G02	152
74AHC1G02-Q100	125
74AHC1G04	129
74AHC1G04-Q100	122
74AHC1G07-Q100	122
74AHC1G08	148
74AHC1G08-Q100	125
74AHC1G09	148
74AHC1G09-Q100	125
74AHC1G125	129
74AHC1G125-Q100	122
74AHC1G126	129
74AHC1G126-Q100	122
74AHC1G14	129, 138
74AHC1G14-Q100	127
74AHC1G17	129, 138
74AHC1G17-Q100	122
74AHC1G32	153
74AHC1G32-Q100	125
74AHC1G4210	141
74AHC1G4212	141
74AHC1G4214	141
74AHC1G66	160
74AHC1G66-Q100	121
74AHC1G79	143
74AHC1G79-Q100	124
74AHC1G86	150
74AHC1G86-Q100	125
74AHC1GU04	129
74AHC1GU04-Q100	122
74AHC240-Q100	107
74AHC244	129
74AHC244-Q100	107
74AHC245	137
74AHC245-Q100	120
74AHC257	159
74AHC257-Q100	111
74AHC273	143
74AHC273-Q100	111
74AHC2G00	150
74AHC2G00-Q100	125
74AHC2G08	148
74AHC2G08-Q100	125
74AHC2G125	129
74AHC2G125-Q100	122
74AHC2G126	129
74AHC2G126-Q100	122
74AHC2G241	129
74AHC2G241-Q100	122
74AHC2G32	153
74AHC2G32-Q100	125
74AHC30	151
74AHC30-Q100	113
74AHC32	153
74AHC32-Q100	113
74AHC373	146
74AHC374	143
74AHC374-Q100	111
74AHC377	143
74AHC377-Q100	111
74AHC3G04	129
74AHC3G04-Q100	122
74AHC3G14	129, 138
74AHC3G14-Q100	127
74AHC3GU04	129
74AHC3GU04-Q100	122
74AHC541	129
74AHC541-Q100	107
74AHC573	146
74AHC573-Q100	115
74AHC574	143
74AHC594-Q100	118
74AHC595-Q100	118
74AHC74	143
74AHC74-Q100	111
74AHC86	150
74AHC86-Q100	113
74AHC9541A	11, 129
74AHCT00	150
74AHCT00-Q100	113
74AHCT02	152
74AHCT02-Q100	113
74AHCT04	129
74AHCT04-Q100	107
74AHCT04A	129
74AHCT07A	11, 129
74AHCT08	148
74AHCT08-Q100	113
74AHCT123A	155
74AHCT123A-Q100	116
74AHCT125	129
74AHCT125-Q100	107
74AHCT126	129
74AHCT126-Q100	107
74AHCT132	138, 150
74AHCT132-Q100	117
74AHCT138	158
74AHCT138-Q100	110
74AHCT139	158
74AHCT139-Q100	110
74AHCT14	129, 138
74AHCT14-Q100	117
74AHCT14A	129
74AHCT157	159
74AHCT157-Q100	111
74AHCT164-Q100	118
74AHCT17A	11, 129, 138
74AHCT1G00	151
74AHCT1G00-Q100	125
74AHCT1G02	152
74AHCT1G02-Q100	125
74AHCT1G04	129
74AHCT1G04-Q100	122
74AHCT1G08	148
74AHCT1G08-Q100	125
74AHCT1G125	129
74AHCT1G125-Q100	122
74AHCT1G126	129
74AHCT1G126-Q100	122
74AHCT1G14	129, 138
74AHCT1G14-Q100	127
74AHCT1G17	129, 138
74AHCT1G17-Q100	122
74AHCT1G32	153
74AHCT1G32-Q100	125
74AHCT1G66	160
74AHCT1G66-Q100	121
74AHCT1G79	143
74AHCT1G79-Q100	124
74AHCT1G86	150
74AHCT1G86-Q100	125
74AHCT240	130
74AHCT240-Q100	107
74AHCT244	130
74AHCT244-Q100	107
74AHCT244A	11, 130
74AHCT245	137
74AHCT245-Q100	120
74AHCT245A	137
74AHCT257	159
74AHCT257-Q100	111
74AHCT273	143
74AHCT273-Q100	111
74AHCT2G00	151
74AHCT2G00-Q100	125
74AHCT2G08	148
74AHCT2G08-Q100	125
74AHCT2G125	130
74AHCT2G125-Q100	122
74AHCT2G126	130
74AHCT2G126-Q100	122
74AHCT2G241	130
74AHCT2G241-Q100	122
74AHCT2G32	153
74AHCT2G32-Q100	125
74AHCT30	151
74AHCT30-Q100	113
74AHCT32	153
74AHCT32-Q100	113
74AHCT374	143
74AHCT374-Q100	111
74AHCT377	143
74AHCT377-Q100	111
74AHCT3G04	130
74AHCT3G04-Q100	122
74AHCT3G14	130, 138
74AHCT3G14-Q100	127
74AHCT541	130
74AHCT541-Q100	107
zzzzzzzzzz	11, 130
74AHCT573	146
74AHCT573-Q100	115
74AHCT574	143
74AHCT594-Q100	118
74AHCT595-Q100	118
74AHCT74	143
74AHCT74-Q100	111
74AHCT86	150
74AHCT86-Q100	113
74AHCU04	130
74AHCU04-Q100	107
74AHCV07A	11, 130, 138
74AHCV14A	130, 138
74AHCV17A	130, 138
74AHCV244A	11, 130, 138
74AHCV245A	137, 138
74AHCV541A	11, 130, 138
74ALVC00	151
74ALVC00-Q100	133
74ALVC02	152
74ALVC04	130
74ALVC08	148
74ALVC125	130
74ALVC125-Q100	107
74ALVC14	130, 138
74ALVC162334A	146
74ALVC16244	130
74ALVC16245	137
74ALVC162834A	146
74ALVC162835A	146

Type number	Page Number
74ALVC162836A	146
74ALVC164245	154
74ALVC164245-Q100	116
74ALVC16834A	146
74ALVC16835A	146
74ALVC16836A	146
74ALVC244	130
74ALVC245	137
74ALVC32	153
74ALVC32-Q100	114
74ALVC373	146
74ALVC374	143
74ALVC541	130
74ALVC541-Q100	107
74ALVC573	146
74ALVC574	143
74ALVC74	143
74ALVCH162244	130
74ALVCH162245	137
74ALVCH16244	130
74ALVCH16245	137
74ALVCH162601	137
74ALVCH162827	130
74ALVCH16373	146
74ALVCH16374	143
74ALVCH16500	137
74ALVCH16501	137
74ALVCH16543	137
74ALVCH16600	137
74ALVCH16601	137
74ALVCH16646	137
74ALVCH16652	137
74ALVCH16821	143
74ALVCH16823	143
74ALVCH16825	143
74ALVCH16827	130
74ALVCH16841	146
74ALVCH16843	146
74ALVCH16952	137
74ALVCH32973	146
74ALVT162245	137
74ALVT16244	130
74ALVT162821	143
74ALVT162823	143
74ALVT162827	130
74ALVT16373	146
74ALVT16821	143
74ALVT16823	143
74ALVT16827	130
74AUP1G00	151
74AUP1G02	152
74AUP1G02-Q100	125
74AUP1G04	130
74AUP1G04-Q100	122
74AUP1G06	130
74AUP1G06-Q100	122
74AUP1G07	130
74AUP1G08	148
74AUP1G08-Q100	125
74AUP1G0832	149
74AUP1G09	148

Type number	Page Number
74AUP1G11	148
74AUP1G125	130
74AUP1G125-Q100	122
74AUP1G126	130
74AUP1G132	138, 151
74AUP1G14	130, 138
74AUP1G157	159
74AUP1G158	159
74AUP1G16	130
74AUP1G17	138
74AUP1G175	143
74AUP1G175-Q100	124
74AUP1G18	158
74AUP1G19	158
74AUP1G240	130
74AUP1G32	149
74AUP1G32-Q100	125
74AUP1G3208	149
74AUP1G332	153
74AUP1G34	130
74AUP1G34-Q100	122
74AUP1G373	146
74AUP1G373-Q100	126
74AUP1G374	143
74AUP1G374-Q100	124
74AUP1G38	150
74AUP1G386	150
74AUP1G57	139, 149
74AUP1G58	139, 149
74AUP1G74	143
74AUP1G74-Q100	124
74AUP1G79	143
74AUP1G80	143
74AUP1G86	150
74AUP1G86-Q100	125
74AUP1G885	149
74AUP1G97	139, 149
74AUP1G98	139, 149
74AUP1GU04	130
74AUP1T34	154
74AUP1T34-Q100	128
74AUP1T45	154
74AUP1T57	149
74AUP1T58	149
74AUP1T97	149
74AUP1T98	149
74AUP1T98-Q100	125
74AUP1Z04	149
74AUP1Z125	149
74AUP2G00	151
74AUP2G02	152
74AUP2G04	131
74AUP2G04-Q100	122
74AUP2G06	131
74AUP2G0604	149
74AUP2G07	131
74AUP2G08	148
74AUP2G125	131
74AUP2G126	131
74AUP2G132	11, 139, 151
74AUP2G14	131, 139

Type number	Page Number
74AUP2G157	159
74AUP2G16	131
74AUP2G17	131, 139
74AUP2G240	131
74AUP2G241	131
74AUP2G32	153
74AUP2G34	149
74AUP2G3404	149
74AUP2G3407	149
74AUP2G38	151
74AUP2G57	149
74AUP2G58	139, 149
74AUP2G79	143
74AUP2G79-Q100	124
74AUP2G80	143
74AUP2G86	150
74AUP2G97	139, 149
74AUP2G98	139, 149
74AUP2GU04	131
74AUP2GU04-Q100	122
74AUP2T1326	149
74AUP3G04	149
74AUP3G0434	149
74AUP3G14	131, 139
74AUP3G16	131
74AUP3G17	131, 139
74AUP3G3404	149
74AVC16244	131
74AVC16245	137
74AVC16245-Q100	120
74AVC16334A	146
74AVC16373	146
74AVC16374	143
74AVC16374-Q100	111
74AVC16834A	146
74AVC16835A	146
74AVC16836A	146
74AVC16T245	154
74AVC16T245-Q100	116
74AVC1T1022	154
74AVC1T45	154
74AVC1T45-Q100	128
74AVC20T245	154
74AVC20T245-Q100	116
74AVC2T245	154
74AVC2T45	154
74AVC2T45-Q100	128
74AVC32T245	154
74AVC4T245	154
74AVC4T245-Q100	116
74AVC4TD245	154
74AVC8T245	154
74AVC8T245-Q100	116
74AVCH16244	131
74AVCH16245	137
74AVCH16T245	154
74AVCH1T45	154
74AVCH1T45-Q100	128
74AVCH20T245	154
74AVCH2T45	154
74AVCH4T245	154

Type number	Page Number
74AVCH4T245-Q100	116
74AVCH8T245	154
74AXP1G00	151
74AXP1G02	152
74AXP1G04	131
74AXP1G06	131
74AXP1G07	131
74AXP1G08	148
74AXP1G09	148
74AXP1G10	151
74AXP1G11	148
74AXP1G125	131
74AXP1G14	131, 139
74AXP1G157	159
74AXP1G17	131, 139
74AXP1G32	153
74AXP1G57	139, 149
74AXP1G58	139, 149
74AXP1G86	150
74AXP1G97	149
74AXP1G98	149
74AXP1T125	154
74AXP1T14	154
74AXP1T32	154
74AXP1T34	154
74AXP1T57	154
74AXP1T57-Q100	128
74AXP2G14	139
74AXP2G17	131, 139
74AXP2G34	131
74AXP2G3404	131
74AXP2T08	154
74AXP2T08-Q100	128
74AXP2T3407	154
74CB3Q3253	11, 157
74CB3Q3257	11, 157
74CBTLV16211	157
74CBTLV1G125	157
74CBTLV3125	157
74CBTLV3125-Q100	11, 110
74CBTLV3126	157
74CBTLV3126-Q100	110
74CBTLV3244	157
74CBTLV3245	157
74CBTLV3245-Q100	110
74CBTLV3253	157
74CBTLV3253-Q100	110
74CBTLV3257	157
74CBTLV3257-Q100	110
74CBTLV3306	157
74CBTLV3384	157
74CBTLV3861	157
74CBTLVD3244	157
74CBTLVD3245	157
74CBTLVD3245-Q100	110
74CBTLVD3384	157
74CBTLVD3861	157
74HC00	151
74HC00-Q100	114
74HC02	152
74HC02-Q100	114

Type number	Page Number
74HC03	151
74HC03-Q100	114
74HC04	131
74HC04-Q100	107
74HC05	131
74HC05-Q100	107
74HC08	148
74HC08-Q100	114
74HC10	151
74HC10-Q100	114
74HC107	143
74HC107-Q100	112
74HC109	144
74HC109-Q100	112
74HC11	148
74HC11-Q100	114
74HC112	144
74HC123	155
74HC123-Q100	116
74HC125	131
74HC125-Q100	107
74HC126	131
74HC126-Q100	107
74HC132	139, 151
74HC132-Q100	117
74HC137	158
74HC138	158
74HC138-Q100	110
74HC139	158
74HC139-Q100	110
74HC14	131, 139
74HC14-Q100	117
74HC151	159
74HC151-Q100	111
74HC153	159
74HC153-Q100	111
74HC154	158
74HC157	159
74HC157-Q100	111
74HC158	159
74HC160	141
74HC161	141
74HC161-Q100	11, 109
74HC163-Q100	109
74HC164-Q100	118
74HC165-Q100	118
74HC166-Q100	118
74HC173	144
74HC174	144
74HC174-Q100	112
74HC175	144
74HC175-Q100	112
74HC191	141
74HC193	141
74HC193-Q100	109
74HC1G00	151
74HC1G00-Q100	125
74HC1G02	152
74HC1G02-Q100	125
74HC1G04	131
74HC1G04-Q100	122

Index

Type number	Page Number
74HC1G08	148
74HC1G08-Q100	125
74HC1G125	131
74HC1G125-Q100	122
74HC1G126	131
74HC1G14	131, 139
74HC1G14-Q100	127
74HC1G32	153
74HC1G32-Q100	125
74HC1G66	160
74HC1G66-Q100	121
74HC1G86	150
74HC1G86-Q100	125
74HC1GU04	131
74HC1GU04-Q100	122
74HC20	151
74HC20-Q100	114
74HC21	148
74HC237	158
74HC237-Q100	110
74HC238	158
74HC238-Q100	110
74HC240	131
74HC240-Q100	107
74HC241	131
74HC244	131
74HC244-Q100	107
74HC245	137
74HC245-Q100	120
74HC251	159
74HC251-Q100	111
74HC253	159
74HC253-Q100	111
74HC257	159
74HC257-Q100	111
74HC259	146
74HC259-Q100	115
74HC27	152
74HC27-Q100	114
74HC273	144
74HC273-Q100	112
74HC280	155
74HC2G00	151
74HC2G00-Q100	125
74HC2G02	152
74HC2G02-Q100	125
74HC2G04	132
74HC2G04-Q100	123
74HC2G08	148
74HC2G08-Q100	125
74HC2G125	132
74HC2G125-Q100	123
74HC2G14	132, 139
74HC2G14-Q100	127
74HC2G17	132
74HC2G17-Q100	127
74HC2G32	153
74HC2G32-Q100	126
74HC2G34	132
74HC2G34-Q100	123
74HC2G66	160
74HC2G66-Q100	121
74HC2G86	150
74HC2G86-Q100	126
74HC2GU04	132
74HC2GU04-Q100	122
74HC30	151
74HC30-Q100	114
74HC32	153
74HC32-Q100	114
74HC365	132
74HC365-Q100	107
74HC366	132
74HC366-Q100	107
74HC368	132
74HC373	146
74HC373-Q100	115
74HC374	144
74HC377	144
74HC377-Q100	112
74HC390	141
74HC393	141
74HC393-Q100	109
74HC3G04	132
74HC3G04-Q100	123
74HC3G06	132
74HC3G07	132
74HC3G07-Q100	123
74HC3G14	132, 139
74HC3G14-Q100	127
74HC3G16	132
74HC3G34	132
74HC3G34-Q100	123
74HC3GU04	132
74HC3GU04-Q100	122
74HC4002	152
74HC4002-Q100	114
74HC40103	141
74HC40105	143
74HC4016	160
74HC4017	141
74HC4017-Q100	109
74HC4020	141
74HC4020-Q100	109
74HC4024	141
74HC4024-Q100	109
74HC4040	141
74HC4040-Q100	109
74HC4046A	156
74HC4049	154
74HC4050	154
74HC4050-Q100	116
74HC4051	160
74HC4051-Q100	106
74HC4052	160
74HC4052-Q100	106
74HC4053	160
74HC4053-Q100	106
74HC4060	141
74HC4060-Q100	109
74HC4066	160
74HC4066-Q100	106
74HC4067	160
74HC4067-Q100	106
74HC4075	153
74HC4075-Q100	114
74HC4094-Q100	118
74HC42	158
74HC423	155
74HC4316	160
74HC4351	160
74HC4511	158
74HC4514	158
74HC4515	158
74HC4520	141
74HC4520-Q100	109
74HC4538	155
74HC4538-Q100	116
74HC4851	160
74HC4851-Q100	106
74HC4852	160
74HC4852-Q100	106
74HC540	132
74HC540-Q100	107
74HC541	132
74HC541-Q100	107
74HC5555	141
74HC573	146
74HC573-Q100	115
74HC574	144
74HC574-Q100	112
74HC590	141
74HC594-Q100	118
74HC595-Q100	118
74HC597-Q100	118
74HC6323	141
74HC688	155
74HC7014	132, 139
74HC7014-Q100	117
74HC73	144
74HC74	144
74HC74-Q100	112
74HC75	146
74HC7540	132, 139
74HC7541	132, 139
74HC7541-Q100	117
74HC85	155
74HC86	150
74HC86-Q100	114
74HC9114	132, 139
74HC9115	132, 139
74HCT00	151
74HCT00-Q100	114
74HCT02	152
74HCT02-Q100	114
74HCT03	151
74HCT03-Q100	114
74HCT04	132
74HCT04-Q100	107
74HCT08	148
74HCT08-Q100	114
74HCT10	151
74HCT10-Q100	114
74HCT107	144
74HCT107-Q100	112
74HCT109	144
74HCT109-Q100	112
74HCT11	148
74HCT11-Q100	114
74HCT112	144
74HCT123	155
74HCT123-Q100	116
74HCT125	132
74HCT125-Q100	107
74HCT126	132
74HCT126-Q100	107
74HCT132	139, 151
74HCT132-Q100	117
74HCT138	158
74HCT138-Q100	110
74HCT139	158
74HCT139-Q100	110
74HCT14	132, 139
74HCT14-Q100	132
74HCT151	159
74HCT151-Q100	111
74HCT153	159
74HCT153-Q100	111
74HCT154	158
74HCT157	111
74HCT157-Q100	159
74HCT161	141
74HCT163	141
74HCT163-Q100	109
74HCT164-Q100	118
74HCT165-Q100	118
74HCT166-Q100	118
74HCT173	144
74HCT174	144
74HCT174-Q100	112
74HCT175	144
74HCT175-Q100	112
74HCT193	141
74HCT193-Q100	109
74HCT1G00	151
74HCT1G00-Q100	125
74HCT1G02	152
74HCT1G02-Q100	125
74HCT1G04	132
74HCT1G04-Q100	122
74HCT1G08	148
74HCT1G08-Q100	125
74HCT1G125	132
74HCT1G125-Q100	122
74HCT1G126	132
74HCT1G14	132, 139
74HCT1G14-Q100	127
74HCT1G32	153
74HCT1G32-Q100	125
74HCT1G66	160
74HCT1G66-Q100	121
74HCT1G86	150
74HCT1G86-Q100	126
74HCT20	151
74HCT20-Q100	114
74HCT221	155
74HCT238	158
74HCT238-Q100	110
74HCT240	132
74HCT240-Q100	107
74HCT241	132
74HCT244	132
74HCT244-Q100	107
74HCT245	137
74HCT245-Q100	120
74HCT251	159
74HCT251-Q100	111
74HCT253	159
74HCT253-Q100	111
74HCT257	159
74HCT257-Q100	111
74HCT259	146
74HCT259-Q100	115
74HCT27	152
74HCT27-Q100	114
74HCT273	144
74HCT273-Q100	114
74HCT280	155
74HCT2G00	151
74HCT2G00-Q100	125
74HCT2G02	152
74HCT2G02-Q100	125
74HCT2G04	132
74HCT2G04-Q100	123
74HCT2G08	148
74HCT2G08-Q100	126
74HCT2G125	132
74HCT2G125-Q100	123
74HCT2G14	132, 139
74HCT2G14-Q100	127
74HCT2G17	132, 139
74HCT2G17-Q100	127
74HCT2G32	153
74HCT2G32-Q100	126
74HCT2G34	133
74HCT2G34-Q100	123
74HCT2G66	160
74HCT2G66-Q100	121
74HCT2G86	150
74HCT2G86-Q100	126
74HCT30	151
74HCT30-Q100	114
74HCT32	153
74HCT32-Q100	114
74HCT365	133

Type number	Page Number
74HCT365-Q100	107
74HCT366	133
74HCT366-Q100	107
74HCT367	133
74HCT368	133
74HCT373	146
74HCT373-Q100	115
74HCT374	144
74HCT377	144
74HCT377-Q100	112
74HCT390	141
74HCT393	141
74HCT393-Q100	109
74HCT3G04	133
74HCT3G04-Q100	123
74HCT3G06	133
74HCT3G07	133
74HCT3G07-Q100	123
74HCT3G14	133
74HCT3G14-Q100	127
74HCT3G16	133
74HCT3G34	133
74HCT3G34-Q100	123
74HCT4002	152
74HCT4017	141
74HCT4017-Q100	109
74HCT4020	141
74HCT4020-Q100	109
74HCT4040	141
74HCT4040-Q100	109
74HCT4046A	156
74HCT4051	160
74HCT4051-Q100	106
74HCT4052	160
74HCT4052-Q100	106
74HCT4053	160
74HCT4053-Q100	106
74HCT4060	141
74HCT4060-Q100	109
74HCT4066	160
74HCT4066-Q100	106
74HCT4067	160
74HCT4067-Q100	106
74HCT4075	153
74HCT4075-Q100	114
74HCT4094-Q100	118
74HCT423	155
74HCT4316	160
74HCT4351	160
74HCT4511	158
74HCT4514	158
74HCT4520	141
74HCT4520-Q100	109
74HCT4538	155
74HCT4538-Q100	116
74HCT4851	106
74HCT4851-Q100	160
74HCT4852	160
74HCT4852-Q100	106
74HCT540	133
74HCT540-Q100	107
74HCT541	133
74HCT541-Q100	108
74HCT573	146
74HCT573-Q100	115
74HCT574	144
74HCT574-Q100	112
74HCT594-Q100	118
74HCT595-Q100	118
74HCT597-Q100	118
74HCT6323	141
74HCT688	155
74HCT74	144
74HCT74-Q100	112
74HCT7540	133
74HCT7541	133
74HCT7541-Q100	117
74HCT85	155
74HCT86	150
74HCT86-Q100	114
74HCT9046A	156
74HCT9114	140
74HCU04	133
74HCU04-Q100	108
74LV00	151
74LV02	152
74LV03	151
74LV04	133
74LV04AT	11, 133
74LV05A	11, 133
74LV07A	133
74LV07AT	11, 133
74LV08	148
74LV08-Q100	114
74LV123	155
74LV132	151
74LV132-Q100	117
74LV138	158
74LV14	140
74LV14A	140
74LV164-Q100	118
74LV165-Q100	118
74LV165A-Q100	118
74LV17A	11, 133
74LV244	133
74LV244-Q100	108
74LV244A	11, 133
74LV244AT	11, 133
74LV245	137
74LV245A	137
74LV245AT	137
74LV365	133
74LV393	141
74LV393-Q100	109
74LV4020	141
74LV4051	160
74LV4052	160
74LV4052-Q100	106
74LV4053	160
74LV4053-Q100	106
74LV4060	141
74LV4060-Q100	119
74LV4066	160
74LV4094	160
74LV540A	11, 133
74LV541A	133
74LV541AT	133
74LV74	144
74LV74-Q100	112
74LVC00A	151
74LVC00A-Q100	114
74LVC02A	152
74LVC02A-Q100	114
74LVC04A	133
74LVC04A-Q100	108
74LVC06A	133
74LVC06A-Q100	108
74LVC07A	133
74LVC07A-Q100	108
74LVC08	148
74LVC08A-Q100	114
74LVC10	
74LVC10A	151
74LVC11	148
74LVC125A	133
74LVC125A-Q100	108
74LVC126A	133
74LVC126A-Q100	108
74LVC132A	140
74LVC132A-Q100	117
74LVC138A	158
74LVC138A-Q100	110
74LVC139	158
74LVC14A	133
74LVC14A-Q100	117
74LVC157A	159
74LVC157A-Q100	111
74LVC161	141
74LVC162244A	133
74LVC162245A	137
74LVC162245A-Q100	120
74LVC162373A	146
74LVC16240A	134
74LVC16240A-Q100	108
74LVC16241A	134
74LVC16244A	134
74LVC16244A-Q100	108
74LVC16245A	137
74LVC163	142
74LVC16373A	146
74LVC16373A-Q100	115
74LVC16374A	144
74LVC16374A-Q100	113
74LVC1G00	151
74LVC1G00-Q100	126
74LVC1G02	152
74LVC1G02-Q100	126
74LVC1G04	134
74LVC1G04-Q100	123
74LVC1G06	134
74LVC1G06-Q100	123
74LVC1G07	134
74LVC1G07-Q100	123
74LVC1G08	148
74LVC1G08-Q100	126
74LVC1G10	151
74LVC1G10-Q100	126
74LVC1G11	148
74LVC1G11-Q100	126
74LVC1G123	155
74LVC1G123-Q100	127
74LVC1G125	134
74LVC1G125-Q100	123
74LVC1G126	134
74LVC1G126-Q100	123
74LVC1G14	134
74LVC1G14-Q100	127
74LVC1G157	159
74LVC1G157-Q100	124
74LVC1G16	134
74LVC1G17	134
74LVC1G17-Q100	127
74LVC1G175	144
74LVC1G175-Q100	124
74LVC1G18	158
74LVC1G18-Q100	124
74LVC1G19	158
74LVC1G19-Q100	11, 124
74LVC1G27	152
74LVC1G3157	160
74LVC1G3157-Q100	121
74LVC1G32	153
74LVC1G32-Q100	126
74LVC1G332	153
74LVC1G332-Q100	126
74LVC1G34	134
74LVC1G34-Q100	123
74LVC1G38	126
74LVC1G38-Q100	150
74LVC1G384	160
74LVC1G384-Q100	121
74LVC1G386	150
74LVC1G53	160
74LVC1G53-Q100	121
74LVC1G57	149
74LVC1G57-Q100	140
74LVC1G58	140
74LVC1G58-Q100	126
74LVC1G66	121
74LVC1G66-Q100	160
74LVC1G74	144
74LVC1G74-Q100	124
74LVC1G79	144
74LVC1G79-Q100	124
74LVC1G80	144
74LVC1G80-Q100	124
74LVC1G86	150
74LVC1G86-Q100	126
74LVC1G97	140
74LVC1G98	140
74LVC1G99	140
74LVC1GU04	134
74LVC1GU04-Q100	123
74LVC1GX04	149
74LVC1GX04-Q100	126
74LVC1T45	154
74LVC1T45-Q100	128
74LVC2244A	134
74LVC2245A	137
74LVC240A	134
74LVC244A	134
74LVC244A-Q100	108
74LVC245A	137
74LVC245A-Q100	120
74LVC257A	159
74LVC273	144
74LVC273-Q100	112
74LVC2G00	151
74LVC2G00-Q100	126
74LVC2G02	152
74LVC2G02-Q100	126
74LVC2G04	134
74LVC2G04-Q100	123
74LVC2G06	134
74LVC2G06-Q100	123
74LVC2G07	134
74LVC2G07-Q100	123
74LVC2G08	148
74LVC2G08-Q100	126
74LVC2G125	134
74LVC2G125-Q100	123
74LVC2G126	134
74LVC2G126-Q100	123
74LVC2G14	134
74LVC2G14-Q100	127
74LVC2G16	134
74LVC2G17	134
74LVC2G17-Q100	127
74LVC2G240	134
74LVC2G240-Q100	123
74LVC2G241	134
74LVC2G241-Q100	123
74LVC2G3157	160
74LVC2G32	153
74LVC2G32-Q100	126
74LVC2G34	134
74LVC2G34-Q100	126
74LVC2G38	151
74LVC2G53	160
74LVC2G66	160
74LVC2G66-Q100	121
74LVC2G74	144
74LVC2G74-Q100	124
74LVC2G86	150
74LVC2G86-Q100	126

Index

Type number	Page Number
74LVC2GU04	134
74LVC2GU04-Q100	123
74LVC2T45	154
74LVC2T45-Q100	128
74LVC30	151
74LVC30A	151
74LVC32A	153
74LVC32245A	137
74LVC32A-Q100	114
74LVC373A	146
74LVC373A-Q100	115
74LVC374A	144
74LVC374A-Q100	112
74LVC377	144
74LVC3G04	134
74LVC3G04-Q100	123
74LVC3G06	134
74LVC3G07	134
74LVC3G07-Q100	123
74LVC3G14	134, 140
74LVC3G16	134
74LVC3G17	134, 140
74LVC3G17-Q100	127
74LVC3G34	134
74LVC3G34-Q100	123
74LVC3GU04	134
74LVC4066	160
74LVC4066-Q100	106
74LVC4245	154
74LVC4245A	154
74LVC4245A-Q100	116
74LVC4T3144-Q100	11, 116
74LVC541A	134
74LVC541A-Q100	108
74LVC573A	146
74LVC573A-Q100	113
74LVC574A	144
74LVC594A-Q100	119
74LVC74A	144
74LVC74A-Q100	112
74LVC823A	144
74LVC823A-Q100	113
74LVC827A	134
74LVC86	150
74LVC8T245	154
74LVC8T245-Q100	116
74LVC8T595	11, 154
74LVCH162244A	134
74LVCH162245A	137
74LVCH162373A	146
74LVCH162374A	144
74LVCH16244A	135
74LVCH16244A-Q100	108
74LVCH16245A	137
74LVCH16373A	146
74LVCH16373A-Q100	115
74LVCH16374A	144
74LVCH16374A-Q100	113
74LVCH16541A	135
74LVCH1T45	154
74LVCH1T45-Q100	128
74LVCH244A	135
74LVCH244A-Q100	108
74LVCH245A	137
74LVCH245A-Q100	120
74LVCH2T45	154
74LVCH2T45-Q100	128
74LVCH8T245	154
74LVCH8T245-Q100	116
74LVCU04A	135
74LVCU04A-Q100	108
74LVCV2G66	160
74LVT02	152
74LVT04	135
74LVT04-Q100	108
74LVT08	148
74LVT125	135
74LVT126	135
74LVT14	135, 140
74LVT162240A	135
74LVT162244B	135
74LVT162245B	138
74LVT162373	147
74LVT162374	145
74LVT16240A	135
74LVT16244B	135
74LVT16245B	138
74LVT16373A	147
74LVT16374A	145
74LVT16543A	138
74LVT2241	135
74LVT2244	135
74LVT2245	138
74LVT240	135
74LVT241	135
74LVT244A	135
74LVT244A-Q100	108
74LVT244B	135
74LVT245	138
74LVT245B	138
74LVT573	147
74LVT640	138
74LVTH125	135
74LVTH16244B	135
74LVTH16245B	138
74LVTH16374A	145
74LVTH2245	138
74LVTH244A	135
74LVTH244A-Q100	108
74LVTH244B	135
74LVTN16244B	135
74LVTN16245B	138
74VHC02	152
74VHC02-Q100	114
74VHC08	148
74VHC08-Q100	114
74VHC125	135
74VHC126	135
74VHC126-Q100	108
74VHC14	135, 140
74VHC244	135
74VHC245	138
74VHC32	153
74VHC32-Q100	115
74VHC541	135
74VHC541-Q100	108
74VHC595-Q100	119
74VHCT02	152
74VHCT02-Q100	114
74VHCT08	148
74VHCT08-Q100	115
74VHCT125	135
74VHCT126	135
74VHCT126-Q100	108
74VHCT14	135, 140
74VHCT244	135
74VHCT245	138
74VHCT32	153
74VHCT32-Q100	115
74VHCT541	135
74VHCT541-Q100	108
74VHCT595-Q100	119
BAS21AVD	39
BAL74	38
BAL99	38
BAS16VV	38
BAS16VY	38
BAS101	39
BAS101S	39
BAS116	40
BAS116GW	40
BAS116H	40
BAS116L	40
BAS116QA	40
BAS16	38
BAS16GW	38
BAS16H	38
BAS16J	38
BAS16L	38
BAS16LD	38
BAS16QA	38
BAS16W	38
BAS20	39
BAS21	39
BAS21AW	39
BAS21GW	39
BAS21H	39
BAS21J	39
BAS21L(D)	39
BAS21PG	39
BAS21SW	39
BAS21VD	39
BAS21W	39
BAS28	38
BAS29	40
BAS31	40
BAS316	38
BAS321	39
BAS321J	9, 39
BAS32L	38
BAS35	40
BAS40	42
BAS40-04	42
BAS40-04W	43
BAS40-05	42
BAS40-05W	43
BAS40-06	42
BAS40-06W	43
BAS40-07	42
BAS40H	43
BAS40W	43
BAS416	40
BAS45A	40
BAS45AL	40
BAS516	38
BAS521	39
BAS56	40
BAS70	42
BAS70-04	42
BAS70-04W	43
BAS70-05	42
BAS70-05W	43
BAS70-06	42
BAS70-06W	43
BAS70-07	42
BAS70H	43
BAS70W	43
BAS716	40
BAS85	42
BAS86	42
BAT120A	48
BAT120C	48
BAT120S	48
BAT160A	48
BAT160C	48
BAT160S	48
BAT165A	47
BAT17	43
BAT46GW	42
BAT46WH	43
BAT54	42
BAT54A	42
BAT54AW	43
BAT54C	42
BAT54CW	43
BAT54GW	42
BAT54H	43
BAT54S	42
BAT54SW	43
BAT54W	43
BAT720	47
BAT721	42
BAT721A	42
BAT721C	42
BAT721S	42
BAT74	42
BAT754	42
BAT754A	42
BAT754C	42
BAT754S	42
BAT760	47
BAT85	42
BAT854AW	43
BAT854CW	43
BAT854SW	43
BAT854W	43
BAT86	42
BAT960	47
BAV102	39
BAV103	39
BAV170	40
BAV170M	40
BAV170QA	40
BAV199	40
BAV199W	40
BAV23	39
BAV23A	39
BAV23C	39
BAV23S	39
BAV70	38
BAV70M	38
BAV70QA	38
BAV70S	38
BAV70SRA	38
BAV70W	38
BAV74	38
BAV756S	38
BAV99	38
BAV99QA	38
BAV99S	38
BAV99W	38
BAW101	39
BAW101S	39
BAW156	40
BAW56	38
BAW56M	38
BAW56QA	38
BAW56S	38
BAW56SRA	38
BAW56W	38
BC51-10PA	17
BC51-10PAS	17
BC51-16PA	17
BC51PA	17
BC51PAS	17
BC52-10PA	17
BC52-10PAS	17
BC52-16PA	17
BC52PA	17
BC52PAS	17
BC53-10PA	17
BC53-10PAS	17
BC53-16PA	17
BC53PA	17
BC53PAS	17

Type number	Page Number
BC54-10PA	17
BC54-10PAS	17
BC54-16PA	17
BC54PA	17
BC54PAS	17
BC55-10PA	17
BC55-10PAS	17
BC55-16PA	17
BC55PA	17
BC55PAS	17
BC56-10PA	17
BC56-10PAS	17
BC56-16PA	17
BC569-16PAS	17
BC56PA	17
BC56PAS	17
BC68-25PA	17
BC68-25PAS	17
BC68PA	17
BC68PAS	17
BC69-16PA	17
BC69-25PA	17
BC69PA	17
BC69PAS	17
BC807	14
BC807-16	14
BC807-16W	14
BC807-25	14
BC807-25QA	14
BC807-25W	14
BC807-40	14
BC807-40QA	14
BC807-40W	14
BC807DS	15
BC807K-16	8, 15
BC807K-25	8, 15
BC807K-40	8, 15
BC807RA	15
BC807W	14
BC816	14
BC816W	14
BC817	14
BC817-25QA	14
BC817-40QA	14
BC817DPN	15
BC817DS	15
BC817K-16	15
BC817K-16H	17
BC817K-25	8, 15
BC817K-25H	8, 17
BC817K-40	8, 15
BC817K-40H	8, 17
BC817RA	15
BC817RAPN	15
BC817W	14
BC825	14
BC825W	14
BC840	14
BC840W	14
BC846	14
BC846A	14
BC846AW	14
BC846B	14
BC846BM	14
BC846BMB	14
BC846BPN	15
BC846BS	15
BC846DS	15
BC846S	15
BC846W	14
BC847	14
BC847A	14
BC847AM	14
BC847AMB	14
BC847AQA	14
BC847AW	14
BC847BM	14
BC847BMB	14
BC847BPN	15
BC847BQA	14
BC847BS	15
BC847BV	15
BC847BVN	15
BC847BW	14
BC847CM	14
BC847CMB	14
BC847CQA	14
BC847CW	14
BC847DS	15
BC847QAPN	15
BC847QAS	15
BC847RA	15
BC847RAPN	15
BC847W	14
BC848B	14
BC848W	14
BC849B	19
BC849BW	19
BC849C	19
BC849CW	19
BC850B	19
BC850BW	19
BC850C	19
BC850CW	19
BC856	14
BC856A	14
BC856AW	14
BC856B	14
BC856BM	14
BC856BMB	14
BC856BS	15
BC856BW	14
BC856S	15
BC856W	14
BC857	14
BC857A	14
BC857AM	14
BC857AMB	14
BC857AQA	14
BC857AW	14
BC857B	14
BC857BM	14
BC857BMB	14
BC857BQA	14
BC857BS	15
BC857BV	15
BC857BW	14
BC857C	14
BC857CM	14
BC857CMB	14
BC857CQA	14
BC857CW	14
BC857QAS	15
BC857RA	15
BC857W	14
BC858B	14
BC858W	14
BC859B	19
BC859BW	19
BC859C	19
BC859CW	19
BC860B	19
BC860BW	19
BC860C	19
BC860CW	19
BC868	17
BC868-25	17
BC869	17
BC869-16	17
BC869-25	17
BCM53DS	8, 20
BCM56DS	8, 20
BCM61B	20
BCM62B	20
BCM846BS	20
BCM847BS	20
BCM847BV	20
BCM847DS	20
BCM847QAS	8, 20
BCM856DS	20
BCM857DS	20
BCM857QAS	8, 20
BCP51	17
BCP51-10	17
BCP51-16	17
BCP52	17
BCP52-10	17
BCP52-16	17
BCP53	17
BCP53-10	17
BCP53-10H	8, 17
BCP53-16	17
BCP53-16H	8, 17
BCP53H	8, 17
BCP54	17
BCP54-10	17
BCP54-16	17
BCP55	17
BCP55-10	17
BCP55-16	17
BCP56	17
BCP56-10	17
BCP56-10H	8, 17
BCP56-16	17
BCP56-16H	8, 17
BCP56H	8, 17
BCP68	17
BCP68-25	17
BCP69	17
BCP69-16	17
BCP69-25	17
BCV26	19
BCV27	19
BCV28	19
BCV29	19
BCV46	19
BCV47	19
BCV48	19
BCV49	19
BCV61	20
BCV61A	20
BCV61B	20
BCV61C	20
BCV62	20
BCV62A	20
BCV62B	20
BCV62C	20
BCV63	19
BCV63	19
BCV63B	19
BCV64B	19
BCV65	21
BCV71	14
BCV72	14
BCW29	14
BCW30	14
BCW31	14
BCW32	14
BCW33	14
BCW60B	14
BCW60C	14
BCW60D	14
BCW61B	14
BCW61C	14
BCW61D	14
BCW66F	14
BCW66G	14
BCW66H	14
BCW68F	14
BCW68G	14
BCW68H	14
BCW69	14
BCW70	14
BCW71	14
BCW72	14
BCW89	14
BCX17	14
BCX18	14
BCX19	14
BCX51	17
BCX51-10	17
BCX51-16	17
BCX52	17
BCX52-10	17
BCX52-16	17
BCX53	17
BCX53-10	17
BCX53-16	17
BCX54	17
BCX54-10	17
BCX54-16	17
BCX55	17
BCX55-10	17
BCX55-16	17
BCX56	17
BCX56-10	17
BCX56-16	17
BCX70G	14
BCX70H	14
BCX70J	14
BCX70K	14
BCX71H	14
BCX71J	14
BCX71K	14
BF550	21
BF570	21
BF620	18
BF621	18
BF622	18
BF623	18
BF720	18
BF722	18
BF723	18
BF820	18
BF820W	18
BF821	18
BF822	18
BF823	18
BF824	21
BF824W	21
BF840	21
BFS19	21
BFS20	21
BFS20W	21
BSH111BK	99
BSH205G2	83, 101
BSN20BK	99
BSP19	18
BSP31	17
BSP32	17
BSP33	17
BSP41	17
BSP43	17
BSP50	19
BSP51	19

Index

Type number	Page Number
BSP52	19
BSP60	19
BSP61	19
BSP62	19
BSR14	16
BSR16	16
BSR19A	18
BSR30	17
BSR31	17
BSR33	17
BSR41	17
BSR43	17
BSS138AKA	85
BSS138BK	85
BSS138BKS	85
BSS138BKW	85
BSS138P	85
BSS138PS	85
BSS138PW	85
BSS63	14, 18
BSS84AK	85, 101
BSS84AKM	85, 94, 101
BSS84AKMB	94, 101
BSS84AKS	85, 103
BSS84AKV	85, 103
BSS84AKW	85, 101
BST39	18
BST50	19
BST51	19
BST52	19
BST60	19
BST61	19
BST62	19
BUK6D23-40E	83
BUK6D43-40P	83
BUK6D43-60E	83
BUK6Y12-30P	81
BUK6Y15-40P	81
BUK6Y20-30P	81
BUK6Y25-40P	81
BUK6Y32-60P	81
BUK6Y57-60P	81
BUK7208-40B	75
BUK7210-55B	77
BUK7212-55B	77
BUK7214-75B	79
BUK7215-55A	77
BUK72150-55A	77
BUK7219-55A	77
BUK7222-55A	77
BUK7225-55A	77
BUK7226-75A	79
BUK7227-100B	80
BUK7230-55A	77
BUK7237-55A	77
BUK7240-100A	80
BUK7275-100A	80
BUK7277-55A	77
BUK751R8-40E	75
BUK752R3-40E	75
BUK753R1-40E	75
BUK753R8-80E	79
BUK755R4-100E	80
BUK758R3-40E	75
BUK7607-30B	74
BUK7610-55AL	76
BUK7613-100E	80
BUK7613-60E	76
BUK7613-75B	79
BUK761R6-40E	75
BUK761R7-40E	75
BUK7620-55A	76
BUK7623-75A	79
BUK7624-55A	76
BUK7628-55A	76
BUK762R0-40E	75
BUK762R4-60E	76
BUK762R6-40E	75
BUK762R6-60E	76
BUK762R7-30B	74
BUK762R9-40E	75
BUK7631-100E	80
BUK7635-55A	76
BUK763R1-60E	76
BUK763R4-30B	74
BUK763R8-80E	79
BUK763R9-60E	76
BUK764R0-40E	75
BUK764R2-80E	79
BUK764R4-60E	76
BUK765R0-100E	80
BUK765R3-40E	75
BUK7660-100A	80
BUK766R0-60E	76
BUK7675-100A	80
BUK7675-55A	76
BUK768R1-100E	80
BUK768R1-40E	75
BUK768R3-60E	76
BUK769R6-80E	79
BUK78150-55A/CU	78
BUK7880-55A/CU	78
BUK7D25-40E	83
BUK7E13-60E	77
BUK7E1R8-40E	75
BUK7E1R9-40E	75
BUK7E2R3-40E	75
BUK7E2R6-60E	77
BUK7E3R1-40E	75
BUK7E3R5-60E	77
BUK7E4R6-60E	77
BUK7E5R2-100E	80
BUK7E8R3-40E	75
BUK7J1R4-40H	10, 75
BUK7K12-60E	78
BUK7K13-60E	78
BUK7K134-100E	81
BUK7K15-80E	79
BUK7K17-60E	78
BUK7K17-80E	79
BUK7K18-40E	75
BUK7K23-80E	79
BUK7K25-40E	75
BUK7K29-100E	81
BUK7K32-100E	81
BUK7K35-60E	78
BUK7K45-100E	81
BUK7K52-60E	78
BUK7K5R1-30E	74
BUK7K5R6-30E	74
BUK7K6R2-40E	75
BUK7K6R8-40E	75
BUK7K89-100E	81
BUK7K8R7-40E	75
BUK7M10-40E	76
BUK7M12-40E	76
BUK7M12-60E	78
BUK7M15-60E	78
BUK7M17-80E	79
BUK7M19-60E	78
BUK7M21-40E	76
BUK7M22-80E	79
BUK7M27-80E	79
BUK7M33-60E	78
BUK7M42-60E	78
BUK7M45-40E	76
BUK7M67-60E	78
BUK7M6R3-40E	76
BUK7M8R0-40E	76
BUK7M9R9-60E	78
BUK7Y07-30B	74
BUK7Y10-30B	74
BUK7Y113-100E	80
BUK7Y12-100E	80
BUK7Y12-40E	75
BUK7Y14-80E	79
BUK7Y15-100E	80
BUK7Y15-60E	77
BUK7Y153-100E	80
BUK7Y19-100E	80
BUK7Y1R7-40H	10, 75
BUK7Y20-30B	74
BUK7Y21-40E	75
BUK7Y22-100E	80
BUK7Y25-60E	77
BUK7Y25-80E	79
BUK7Y29-40E	75
BUK7Y2R0-40H	10, 75
BUK7Y2R5-40H	10, 75
BUK7Y38-100E	80
BUK7Y3R0-40H	10, 75
BUK7Y3R5-40E	75
BUK7Y41-80E	79
BUK7Y43-60E	77
BUK7Y4R4-40E	75
BUK7Y4R8-60E	77
BUK7Y59-60E	77
BUK7Y65-100E	80
BUK7Y6R0-60E	77
BUK7Y72-80E	79
BUK7Y7R2-60E	77
BUK7Y7R6-40E	75
BUK7Y7R8-80E	79
BUK7Y8R7-60E	77
BUK7Y98-80E	79
BUK7Y9R9-80E	79
BUK9209-40B	75
BUK9212-55B	77
BUK9215-55A	77
BUK92150-55A	77
BUK9217-75B	79
BUK9219-55A	77
BUK9222-55A	77
BUK9225-55A	77
BUK9226-75A	79
BUK9230-100B	80
BUK9230-55A	77
BUK9237-55A	77
BUK9240-100A	80
BUK9245-55A	77
BUK9275-100A	80
BUK9277-55A	77
BUK953R5-60E	76
BUK954R8-60E	76
BUK9607-30B	74
BUK9611-80E	79
BUK9614-60E	76
BUK9615-100E	80
BUK9616-75B	79
BUK96180-100A	80
BUK961R6-40E	75
BUK9620-55A	76
BUK9624-55A	76
BUK9628-55A	76
BUK962R5-60E	76
BUK962R6-40E	75
BUK962R8-30B	74
BUK962R8-60E	76
BUK9635-55A	76
BUK9637-100E	80
BUK963R1-40E	75
BUK963R3-60E	76
BUK964R1-40E	75
BUK964R2-60E	76
BUK964R2-80E	79
BUK964R7-80E	79
BUK964R8-60E	76
BUK965R4-40E	75
BUK965R8-100E	80
BUK9660-100A	80
BUK966R5-60E	76
BUK9675-100A	80
BUK9675-55A	76
BUK969R0-60E	76
BUK969R3-100E	80
BUK98150-55A/CU	78
BUK98180-100A/CU	81
BUK9832-55A/CU	78
BUK9875-100A/CU	81
BUK9880-55A/CU	78
BUK9D23-40E	83
BUK9K12-60E	78
BUK9K13-60E	78
BUK9K134-100E	81
BUK9K17-60E	78
BUK9K18-40E	75
BUK9K20-80E	79
BUK9K22-80E	79
BUK9K25-40E	75
BUK9K29-100E	81
BUK9K30-80E	79
BUK9K32-100E	81
BUK9K35-60E	78
BUK9K45-100E	81
BUK9K52-60E	78
BUK9K5R1-30E	74
BUK9K5R6-30E	74
BUK9K6R2-40E	75
BUK9K6R8-40E	75
BUK9K89-100E	81
BUK9K8R7-40E	75
BUK9M10-30E	74
BUK9M11-40E	76
BUK9M12-60E	78
BUK9M120-100E	81
BUK9M14-40E	76
BUK9M15-60E	78
BUK9M156-100E	81
BUK9M17-30E	74
BUK9M19-60E	78
BUK9M23-80E	79
BUK9M24-40E	76
BUK9M24-60E	78
BUK9M28-80E	79
BUK9M34-100E	81
BUK9M35-80E	79
BUK9M42-60E	78
BUK9M43-100E	81
BUK9M52-40E	76
BUK9M53-60E	78
BUK9M5R2-30E	74
BUK9M6R6-30E	74
BUK9M7R2-40E	76
BUK9M85-60E	78
BUK9M9R1-40E	76
BUK9Y07-30B	74
BUK9Y107-80E	79
BUK9Y11-30B	74
BUK9Y11-80E	79
BUK9Y113-100E	80
BUK9Y12-100E	80
BUK9Y12-40E	75
BUK9Y14-80E	79
BUK9Y15-100E	80
BUK9Y15-60E	77
BUK9Y153-100E	80
BUK9Y19-100E	80
BUK9Y21-40E	75
BUK9Y22-100E	80
BUK9Y22-30B	74

Type number	Page Number
BUK9Y25-60E	77
BUK9Y25-80E	79
BUK9Y29-40E	75
BUK9Y38-100E	80
BUK9Y3R0-40E	75
BUK9Y3R5-40E	75
BUK9Y41-80E	79
BUK9Y43-60E	77
BUK9Y4R4-40E	75
BUK9Y4R8-60E	77
BUK9Y59-60E	77
BUK9Y65-100E	80
BUK9Y6R0-60E	77
BUK9Y72-80E	79
BUK9Y7R2-60E	77
BUK9Y7R6-40E	75
BUK9Y8R5-80E	79
BUK9Y8R7-60E	77
BZA408B	59
BZA420A	59
BZA456A	59
BZA856A	59
BZB100A	36
BZB784 series	36
BZB84 series	36
BZB984 series	36
BZT52 series	36
BZT52H series	36
BZV49 series	36
BZV55 series	36
BZV85 series	36
BZV90 series	36
BZX100A	36
BZX384 series	36
BZX585 series	36
BZX79 series	36
BZX84 series	36
BZX84J series	36
BZX884 series	36
CBT16210	157
CBT3125	157
CBT3244A	157
CBT3245A	157
CBT3245A-Q100	110
CBT3251	157
CBT3253	157
CBT3253A	157
CBT3257A	157
CBT3306	157
CBT3306-Q100	121
CBT3861	157
CBTD16210	157
CBTD3306	157
CBTD3384	157
CBTD3861	157
ES1DR	9, 40
ES1DVR	9, 40
ES1GR	9, 40
ES2DP	9, 40
ES2DR	9, 40
ES2DVR	9, 40
ES3DP	9, 40
HEF4000	161
HEF4001B	152
HEF4001B-Q100	115
HEF4002B	152
HEF4007UB	149
HEF40098B	135
HEF40106B	140
HEF40106B-Q100	117
HEF4011B	151
HEF4011B-Q100	115
HEF4013B	145
HEF4013B-Q100	113
HEF4014B-Q100	119
HEF4016B	160
HEF40175B	145
HEF4017B	142
HEF4017B-Q100	109
HEF4020B	142
HEF4020B-Q100	109
HEF4021B-Q100	119
HEF40244B	135
HEF4024B	142
HEF4027B	145
HEF4027B-Q100	113
HEF4028B	158
HEF4030	150
HEF4030B-Q100	115
HEF40373B	147
HEF4040B	142
HEF4040B-Q100	109
HEF4043B	147
HEF4043B-Q100	115
HEF4046B	156
HEF4047B	155
HEF4049B	135
HEF4049B-Q100	108
HEF4050B	135
HEF4050B-Q100	108
HEF4051B	160
HEF4051B-Q100	106
HEF4052B	160
HEF4052B-Q100	106
HEF4053B	160
HEF4053B-Q100	106
HEF4060B	142
HEF4060B-Q100	109
HEF4066B	160
HEF4066B-Q100	106
HEF4067B	160
HEF4067B-Q100	106
HEF4069UB	135
HEF4069UB-Q100	108
HEF4070	150
HEF4070B-Q100	115
HEF4071	153
HEF4073B	148
HEF4075	213
HEF4077	150
HEF4081B	148
HEF4081B-Q100	115
HEF4082B	148
HEF4082B-Q100	115
HEF4093B	140, 151
HEF4094B-Q100	119
HEF4104B	154
HEF4104B-Q100	116
HEF4518B	142
HEF4520B	142
HEF4520B-Q100	109
HEF4521B	142
HEF4528B	155
HEF4528B-Q100	11, 116
HEF4538B	155
HEF4538B-Q100	116
HEF4541B	142
HEF4541B-Q100	109
HEF4543B	158
HEF4555B	158
HEF4555B-Q100	110
HEF4794B-Q100	119
HEF4894B-Q100	119
IP3319CX6	64, 168
IP4220CZ6	54, 63
IP4251CZ16-8-TTL	65
IP4252CZ16-8-TTL	65
IP4252CZ8-4 -TTL	65
IP4254CZ16-8-TTL	65
IP4254CZ8-4-TTL	65
IP4264CZ8-20-TTL	66
IP4283CZ10-TBR	54, 62
IP4292CZ10-TBR	62, 66
IP4294CZ10-TBR	55, 62, 66
IP4786CZ32	65
IP4788CZ32	65
IP4856CX25/C	65
MMBT2222A	16
MMBT3904	16
MMBT3906	16
MMBZ10VAL	67
MMBZ12VAL	67
MMBZ12VDL	67
MMBZ15VAL	67
MMBZ15VDL	67
MMBZ16VAL	10, 67
MMBZ16VTAL	10, 67
MMBZ18VAL	67
MMBZ18VCL	67
MMBZ20VAL	67
MMBZ20VCL	67
MMBZ27VAL	67
MMBZ27VCL	67
MMBZ33VAL	67
MMBZ33VCL	67
MMBZ5V6AL	67
MMBZ6V2AL	67
MMBZ6V8AL	67
MMBZ9V1AL	67
NCR401T	18
NCR401U	18
NCR402T	18
NCR402U	18
NCR405U	18
NMB2227A	16
NPIC6C4894-Q100	119
NPIC6C595-Q100	119
NPIC6C596-Q100	119
NPIC6C596A-Q100	119
NUP1301	53
NUP1301QA	53
NUP1301U	53
NX1029X	102
NX138AK	99
NX138AKS	103
NX138AKW	99
NX138BK	99
NX138BKS	103
NX138BKW	99
NX2301P	83, 101
NX3008CBKS	102
NX3008CBKV	102
NX3008NBK	85, 99
NX3008NBKS	85, 103
NX3008NBKV	85, 103
NX3008NBKW	85, 99
NX3008PBK	85, 101
NX3008PBKS	85, 103
NX3008PBKV	85, 103
NX3008PBKW	85, 101
NX3020NAK	99
NX3020NAKS	103
NX3020NAKV	103
NX3020NAKW	99
NX7002AK	99
NX7002AKS	103
NX7002AKW	99
NX7002BK	99
NX7002BKM	94, 99
NX7002BKMB	94, 99
NX7002BKS	103
NX7002BKW	99
NX7002BKXB	95, 103
NXP3875G	14
NXP3875Y	14
NZH series	36
NZX series	36, 37
PBHV2160Z	28
PBHV3160Z	28
PBHV8115T	28
PBHV8115TLH	28
PBHV8115X	28
PBHV8115Z	28
PBHV8118T	28
PBHV8140Z	28
PBHV8215Z	28
PBHV8515QA	28
PBHV8540T	28
PBHV8540X	28
PBHV8540Z	28
PBHV8560Z	28
PBHV9040T	28
PBHV9040X	28
PBHV9040Z	28
PBHV9050T	28
PBHV9050Z	28
PBHV9115T	28
PBHV9115TLH	28
PBHV9115X	28
PBHV9115Z	28
PBHV9215Z	28
PBHV9414Z	28
PBHV9515QA	28
pbhv9540x	8, 28
PBHV9540Z	28
PBHV9560Z	28
PBLS1501Y	27
PBLS1502Y	27
PBLS1503Y	27
PBLS1504Y	27
PBLS2001D	27
PBLS2002D	27
PBLS2003D	27
PBLS2004D	27
PBLS2021D	27
PBLS2022D	27
PBLS2023D	27
PBLS2024D	27
PBLS4001D	27
PBLS4001Y	27
PBLS4002D	27
PBLS4002Y	27
PBLS4003D	27
PBLS4003Y	27
PBLS4004D	27
PBLS4004Y	27
PBLS4005D	27
PBLS4005Y	27
PBLS6001D	27
PBLS6002D	27
PBLS6003D	27
PBLS6004D	27
PBLS6005D	27
PBLS6021D	27
PBLS6022D	27
PBLS6023D	27
PBLS6024D	27
PBRN113ET	28
PBRN113ZT	28
PBRN123ET	28
PBRN123YT	28
PBRP113ET	28
PBRP113ZT	28
PBRP123ET	28
PBRP123YT	28
PBSM5240PF	29
PBSM5240PFH	29
PBSS2515M	23
PBSS2515MB	23
PBSS2515VPN	26

Index

Type number	Page Number
PBSS2515VS	26
PBSS2540M	23
PBSS2540MB	23
PBSS301ND	22
PBSS301NX	22
PBSS301NZ	22
PBSS301PD	24
PBSS301PX	24
PBSS301PZ	24
PBSS302ND	22
PBSS302NX	22
PBSS302NZ	22
PBSS302PD	24
PBSS302PX	24
PBSS302PZ	24
PBSS303ND	22
PBSS303NX	22
PBSS303NZ	22
PBSS303PD	24
PBSS303PX	24
PBSS303PZ	24
PBSS304ND	22
PBSS304NX	22
PBSS304NZ	22
PBSS304PD	24
PBSS304PX	24
PBSS304PZ	24
PBSS305ND	22
PBSS305NX	22
PBSS305NZ	22
PBSS305PD	24
PBSS305PX	24
PBSS305PZ	24
PBSS306NX	22
PBSS306NZ	22
PBSS306PX	24
PBSS306PZ	24
PBSS3515M	25
PBSS3515MB	25
PBSS3515VS	26
PBSS3540M	25
PBSS3540MB	25
PBSS4021NT	23
PBSS4021NX	22
PBSS4021NZ	22
PBSS4021PT	25
PBSS4021PX	24
PBSS4021PZ	24
PBSS4021SN	26
PBSS4021SP	26
PBSS4021SPN	26
PBSS4032ND [3]	22
PBSS4032NT [3]	23
PBSS4032NX [3]	22
PBSS4032NZ [3]	22
PBSS4032PD [3]	24
PBSS4032PT	25
PBSS4032PX [3]	24
PBSS4032PZ [3]	24
PBSS4032SN [3]	26
PBSS4032SP [3]	26
PBSS4032SPN [3]	26
PBSS4041NT	23
PBSS4041NX	22
PBSS4041NZ	22
PBSS4041PT	25
PBSS4041PX	24
PBSS4041PZ	24
PBSS4041SN	26
PBSS4041SP	26
PBSS4041SPN	26
PBSS4112PAN	26
PBSS4112PANP	26
PBSS4120T	23
PBSS4130PAN	26
PBSS4130PANP	26
PBSS4130QA	23
PBSS4130T	23
PBSS4140DPN	26
PBSS4140T	23
PBSS4160DPN	26
PBSS4160DS	26
PBSS4160PAN	26
PBSS4160PANP	26
PBSS4160PANPS	26
PBSS4160PANS	26
PBSS4160QA	23
PBSS4160T	23
PBSS4160X	8, 22
PBSS4220PANS	26
PBSS4230PAN	26
PBSS4230PANP	26
PBSS4230QA	23
PBSS4230T	23
PBSS4240DPN	26
PBSS4240T	23
PBSS4240X	22
PBSS4240Y	23
PBSS4250X	22
PBSS4260PAN	26
PBSS4260PANP	26
PBSS4260PANPS	26
PBSS4260PANS	26
PBSS4260QA	23
PBSS4320T	23
PBSS4320X	22
PBSS4330PA	22
PBSS4330PAS	22
PBSS4330X	22
PBSS4350D	22
PBSS4350SPN	26
PBSS4350SS	26
PBSS4350T	23
PBSS4350X	22
PBSS4350Z	22
PBSS4360PAS	22
PBSS4360X	8, 22
PBSS4360Z	22
PBSS4480X	22
PBSS4520X	22
PBSS4540X	22
PBSS4540Z	22
PBSS4560PA	22
PBSS4580PA	22
PBSS4612PA	22
PBSS4620PA	22
PBSS4630PA	22
PBSS5112PAP	26
PBSS5120T	25
PBSS5130PAP	26
PBSS5130QA	25
PBSS5130T	25
PBSS5140T	25
PBSS5140U	25
PBSS5160DS	26
PBSS5160PAP	26
PBSS5160PAPS	26
PBSS5160QA	25
PBSS5160T	25
PBSS5160U	25
PBSS5220PAPS	26
PBSS5220T	25
PBSS5230PAP	26
PBSS5230QA	25
PBSS5230T	25
PBSS5240T	25
PBSS5240X	24
PBSS5240Y	25
PBSS5250T	25
PBSS5250TH	8, 25
PBSS5250X	24
PBSS5260PAP	26
PBSS5260PAPS	26
PBSS5260QA	25
PBSS5320D	24
PBSS5320T	25
PBSS5320X	24
PBSS5330PA	24
PBSS5330PAS	24
PBSS5330X	24
PBSS5350D	24
PBSS5350SS	26
PBSS5350T	25
PBSS5350TH	8, 25
PBSS5350X	24
PBSS5350Z	24
PBSS5360PAS	24
PBSS5360X	8, 24
PBSS5360Z	24
PBSS5480X	24
PBSS5520X	24
PBSS5540X	24
PBSS5540Z	24
PBSS5560PA	24
PBSS5580PA	24
PBSS5612PA	24
PBSS5620PA	24
PBSS5630PA	24
PBSS8110D	22
PBSS8110T	23
PBSS8110X	22
PBSS8110Y	23
PBSS8110Z	22
PBSS8510PA	22
PBSS9110D	24
PBSS9110T	25
PBSS9110X	24
PBSS9110Y	25
PBSS9110Z	24
PBSS9410PA	24
PCMF1HDMI2S	9, 64
PCMF1USB3S	55, 64, 66, 168
PCMF2HDMI2S	9, 64
PCMF2USB3S	55, 64, 168
PCMF3HDMI2S	9, 64
PCMF3USB3S	55, 64, 168
PDI1284P11	156
PDTA113EM	30
PDTA113EMB	30
PDTA113ET	30
PDTA113EU	30
PDTA113ZM	30
PDTA113ZMB	30
PDTA113ZT	30
PDTA113ZU	30
PDTA114EM	30
PDTA114EMB	30
PDTA114EQA	30
PDTA114ET	30
PDTA114EU	30
PDTA114TM	30
PDTA114TMB	30
PDTA114TT	30
PDTA114TU	30
PDTA114YM	30
PDTA114YMB	30
PDTA114YQA	30
PDTA114YT	30
PDTA114YU	30
PDTA115EM	30
PDTA115EMB	30
PDTA115ET	30
PDTA115EU	30
PDTA115TM	30
PDTA115TMB	30
PDTA115TT	30
PDTA115TU	30
PDTA123EM	30
PDTA123EMB	30
PDTA123ET	30
PDTA123EU	30
PDTA123JM	30
PDTA123JMB	30
PDTA123JT	30
PDTA123JU	30
PDTA123TM	30
PDTA123TMB	30
PDTA123TT	30
PDTA123TU	30
PDTA123XQA	30
PDTA123YM	30
PDTA123YMB	30
PDTA123YT	30
PDTA123YU	30
PDTA124EM	30
PDTA124EMB	30
PDTA124EQA	30
PDTA124ET	30
PDTA124EU	30
PDTA124TM	30
PDTA124TMB	30
PDTA124TT	30
PDTA124TU	30
PDTA124XM	30
PDTA124XMB	30
PDTA124XT	30
PDTA124XU	30
PDTA143EM	30
PDTA143EMB	30
PDTA143EQA	30
PDTA143ET	30
PDTA143EU	30
PDTA143TM	30
PDTA143TMB	30
PDTA143TT	30
PDTA143TU	30
PDTA143XM	30
PDTA143XMB	30
PDTA143XQA	30
PDTA143XT	30
PDTA143XU	30
PDTA143ZM	30
PDTA143ZMB	30
PDTA143ZQA	30
PDTA143ZT	30
PDTA143ZU	30
PDTA144EM	30
PDTA144EMB	30
PDTA144EQA	30
PDTA144ET	30
PDTA144EU	30
PDTA144TM	30
PDTA144TMB	30
PDTA144TT	30
PDTA144TU	30
PDTA144VM	30
PDTA144VMB	30
PDTA144VT	30
PDTA144VU	30
PDTA144WM	30
PDTA144WMB	30
PDTA144WT	30
PDTA144WU	30
PDTB113ET	31
PDTB113EU	31
PDTB113ZQA	31
PDTB113ZT	31
PDTB113ZU	31
PDTB114EQA	31
PDTB114ET	31

Type number	Page Number
PDTB114EU	31
PDTB123EQA	31
PDTB123ET	31
PDTB123EU	31
PDTB123TT	31
PDTB123YQA	31
PDTB123YT	31
PDTB123YU	31
PDTB143EQA	31
PDTB143ET	31
PDTB143EU	31
PDTB143XQA	31
PDTB143XT	31
PDTB143XU	31
PDTC114EM	30
PDTC114EMB	30
PDTC114EQA	30
PDTC114ET	30
PDTC114EU	30
PDTC114TM	30
PDTC114TMB	30
PDTC114TT	30
PDTC114TU	30
PDTC114YM	30
PDTC114YMB	30
PDTC114YQA	30
PDTC114YT	30
PDTC114YU	30
PDTC115EM	30
PDTC115EMB	30
PDTC115ET	30
PDTC115EU	30
PDTC115TM	30
PDTC115TMB	30
PDTC115TT	30
PDTC115TU	30
PDTC123EM	30
PDTC123EMB	30
PDTC123ET	30
PDTC123EU	30
PDTC123JM	30
PDTC123JMB	30
PDTC123JT	30
PDTC123JU	30
PDTC123TM	30
PDTC123TMB	30
PDTC123TT	30
PDTC123TU	30
PDTC123XQA	30
PDTC123YM	30
PDTC123YMB	30
PDTC123YT	30
PDTC123YU	30
PDTC124EM	30
PDTC124EMB	30
PDTC124EQA	30
PDTC124ET	30
PDTC124EU	30
PDTC124TM	30
PDTC124TMB	30
PDTC124TT	30
PDTC124TU	30
PDTC124XM	30
PDTC124XMB	30
PDTC124XT	30
PDTC124XU	30
PDTC143EM	30
PDTC143EMB	30
PDTC143EQA	30
PDTC143ET	30
PDTC143EU	30
PDTC143TM	30
PDTC143TMB	30
PDTC143TT	30
PDTC143TU	30
PDTC143XM	30
PDTC143XMB	30
PDTC143XQA	30
PDTC143XT	30
PDTC143XU	30
PDTC143ZM	30
PDTC143ZMB	30
PDTC143ZQA	30
PDTC143ZT	30
PDTC143ZU	30
PDTC144EM	30
PDTC144EMB	30
PDTC144EQA	30
PDTC144ET	30
PDTC144EU	30
PDTC144TM	30
PDTC144TMB	30
PDTC144TT	30
PDTC144TU	30
PDTC144VM	30
PDTC144VMB	30
PDTC144VT	30
PDTC144VU	30
PDTC144WM	30
PDTC144WMB	30
PDTC144WT	30
PDTC144WU	30
PDTD113EQA	31
PDTD113ET	31
PDTD113EU	31
PDTD113ZQA	31
PDTD113ZT	31
PDTD113ZU	31
PDTD114EQA	31
PDTD114ET	31
PDTD114EU	31
PDTD123EQA	31
PDTD123ET	31
PDTD123EU	31
PDTD123TT	31
PDTD123YQA	31
PDTD123YT	31
PDTD123YU	31
PDTD143EQA	31
PDTD143ET	31
PDTD143EU	31
PDTD143XQA	31
PDTD143XT	31
PDTD143XU	31
PDZ-B series	36
PDZ-GW series	36
PEMB1	31
PEMB10	31
PEMB11	31
PEMB13	31
PEMB14	31
PEMB15	31
PEMB16	31
PEMB17	31
PEMB18	31
PEMB19	31
PEMB2	31
PEMB20	31
PEMB24	31
PEMB3	31
PEMB30	31
PEMB4	31
PEMB9	31
PEMD10	31
PEMD12	31
PEMD13	31
PEMD14	31
PEMD15	31
PEMD16	31
PEMD17	31
PEMD18	31
PEMD19	31
PEMD2	31
PEMD20	31
PEMD24	31
PEMD3	31
PEMD30	31
PEMD4	31
PEMD48	31
PEMD6	31
PEMD9	31
PEMH1	31
PEMH10	31
PEMH11	31
PEMH13	31
PEMH14	31
PEMH15	31
PEMH16	31
PEMH17	31
PEMH18	31
PEMH19	31
PEMH2	31
PEMH20	31
PEMH24	31
PEMH30	31
PEMH4	31
PEMH7	31
PEMH9	31
PEMT1	15
PEMX1	15
PEMZ1	15
PEMZ7	15
PESD12VL1BA	57
PESD12VL2BT	58
PESD12VS1UA	56, 62
PESD12VS1UB	56
PESD12VS1UJ	56, 62
PESD12VS1UL	56
PESD12VS1ULD	56
PESD12VS2UQ	58
PESD12VS2UT	58
PESD12VU1UT	52
PESD12VV1BL	57, 60
PESD15VL1BA	57
PESD15VL2BT	58
PESD15VS1UB	56
PESD15VS1UL	56
PESD15VS1ULD	56
PESD15VS2UAT	58
PESD15VS2UQ	58
PESD15VS2UT	58
PESD15VU1UT	52
PESD16VX1UL	52
PESD18VF1BL	63
PESD18VF1BSF	52, 63
PESD1CAN	61
PESD1CAN-U	61
PESD1FLEX	61
PESD1IVN-U	61
PESD1IVN24-A	61
PESD1IVN27-A	61
PESD1IVN27-U	61
PESD1LIN	61
PESD1LVDS	61
PESD1NFC-L	63
PESD1NFC-SF	63
PESD1USB3S	55, 64, 66, 168
PESD24VF1BL	52, 63
PESD24VF1BSF	52, 63
PESD24VL1BA	57
PESD24VL2BT	58
PESD24VS1UA	56
PESD24VS1UB	56
PESD24VS1UL	56
PESD24VS1ULD	56
PESD24VS2UAT	58
PESD24VS2UQ	58
PESD24VS2UT	58
PESD24VS4UD	59
PESD24VS5UD	59
PESD24VU1UT	52
PESD2CAN	61
PESD2ETH-AD	9, 61
PESD2ETH-AX	61
PESD2ETH-D	9, 61
PESD2ETH-X	61
PESD2IVN-U	61
PESD2IVN24-T	61
PESD2IVN24-U	61
PESD2IVN27-T	61
PESD2IVN27-U	61
PESD2NFC-L	63
PESD2NFC-SF	63
PESD2USB3S	55, 64, 168
PESD36VS1UJ	56
PESD36VS1UL	56
PESD36VS2UT	58
PESD3USB3S	55, 64, 168
PESD3V3C1BSF	52, 55, 66
PESD3V3L1BA	57
PESD3V3L1UB	56
PESD3V3L1UL	56
PESD3V3L2BT	58
PESD3V3L2UM	58
PESD3V3L4UF	59
PESD3V3L4UG	59
PESD3V3L4UW	59
PESD3V3L5UF	59
PESD3V3L5UK	59
PESD3V3L5UV	59
PESD3V3L5UY	59
PESD3V3S1UB	56
PESD3V3S1UL	56
PESD3V3S2UAT	58
PESD3V3S2UQ	58
PESD3V3S2UT	58
PESD3V3S4UD	59
PESD3V3S4UF	59
PESD3V3S5UD	59
PESD3V3T1BL	9, 57, 60
PESD3V3U1BCSF	57
PESD3V3U1UA	56
PESD3V3U1UB	56
PESD3V3U1UL	56
PESD3V3U1UT	52
PESD3V3V1BCSF	57
PESD3V3V4UW	59
PESD3V3W1BSF	59
PESD3V3X1BCSF	52
PESD3V3X1BL	52
PESD3V3Z1BSF	52, 55, 66
PESD4V0W1BSF	52, 55, 66
PESD5V0C1BSF	52, 55, 66
PESD5V0C1USF	52, 55, 66
PESD5V0F1BL	52
PESD5V0F1BLD	52
PESD5V0F1BRLD	52
PESD5V0F1BRSF	52
PESD5V0F1BSF	52
PESD5V0F1BSH	52
PESD5V0F1USF	52
PESD5V0H1BSF	52, 55, 66
PESD5V0L1BA	57
PESD5V0L1BSF	57
PESD5V0L1UA	56
PESD5V0L1UB	56
PESD5V0L1UL	56
PESD5V0L1ULD	56
PESD5V0L1USF	56
PESD5V0L2BT	58

Index

Type number	Page Number
PESD5V0L2UM	58
PESD5V0L2UMB	58
PESD5V0L2UU	58
PESD5V0L4UF	59
PESD5V0L4UG	59
PESD5V0L4UW	59
PESD5V0L5UF	59
PESD5V0L5UV	59
PESD5V0L5UY	59
PESD5V0R1BSF	52, 55, 66
PESD5V0S1BA	57
PESD5V0S1BB	57
PESD5V0S1BL	57
PESD5V0S1BLD	57, 60
PESD5V0S1BSF	57
PESD5V0S1UA	56, 62
PESD5V0S1UB	56
PESD5V0S1UJ	56, 62
PESD5V0S1UL	56
PESD5V0S1ULD	56
PESD5V0S1USF	56
PESD5V0S2BQA	58, 60, 62
PESD5V0S2BT	58
PESD5V0S2UQ	58
PESD5V0S4UD	59
PESD5V0S4UF	59
PESD5V0S5UD	59
PESD5V0T1BLD	9
PESD5V0U1BA	57
PESD5V0U1BB	57
PESD5V0U1BL	57
PESD5V0U1BLD	57
PESD5V0U1UA	56
PESD5V0U1UB	56
PESD5V0U1UL	56
PESD5V0U1UT	52
PESD5V0U2BM	58
PESD5V0U2BMB	58
PESD5V0U2BT	58
PESD5V0U4BF	59
PESD5V0U4BW	59
PESD5V0U5BF	59
PESD5V0U5BV	59
PESD5V0V1BA	57
PESD5V0V1BB	57
PESD5V0V1BCSF	57
PESD5V0V1BDSF	57
PESD5V0V1BL	57, 60
PESD5V0V1BLD	57, 60
PESD5V0V1BSF	57
PESD5V0V2BM	58, 60
PESD5V0V2BMB	58, 60, 62
PESD5V0V4UW	59
PESD5V0X1BCAL	52
PESD5V0X1BCL	52
PESD5V0X1BCSF	52
PESD5V0X1BL	52
PESD5V0X1BQ	53
PESD5V0X1BT	53

Type number	Page Number
PESD5V0X1UAB	52
PESD5V0X1UALD	52
PESD5V0X1UB	52
PESD5V0X1ULD	52
PESD5V0X2UAM	53
PESD5V0X2UAMB	53
PESD5V0X2UM	53
PESD5V0X2UMB	53
PESD5V2S2UT	58
PESD5VOL5UK	59
PESD5VOS2UAT	58
PESD5Z12	56
PESD5Z2.5	56
PESD5Z3.3	56
PESD5Z5.0	56
PESD5Z6.0	56
PESD5Z7.0	56
PESD6V0L2UU	58
PESD6V5C1USF	9, 52, 66
PESD7V0C1BSF	9, 52, 66
PESD7V0H1BSF	9, 52, 66
PESD7V0R1BSF	9, 52, 66
PHB20NQ20T	91
PHB33NQ20T	91
PHB45NQ15T	91
PHD9NQ20T	91
PHDMI2AB4	9, 55, 62
PHDMI2F4	55, 62
PHDMI2FR4	9, 55, 62
PHP18NQ11T	90
PHP20NQ20T	90
PHP23NQ11T	90
PHP27NQ11T	90
PHP28NQ15T	90
PHP30NQ15T	90
PHP33NQ20T	90
PHP9NQ20T	90
PHPT60406NY	29
PHPT60406PY	29
PHPT60410NY	29
PHPT60410PY	29
PHPT60415NY	29
PHPT60415PY	29
PHPT60603NY	29
PHPT60603PY	29
PHPT60606NY	29
PHPT60606PY	29
PHPT60610NY	29
PHPT60610PY	29
PHPT61002NYC	29
PHPT61002NYCLH	8, 29
PHPT61002PYC	29
PHPT61002PYCLH	8, 29
PHPT610030NK	29
PHPT610030PK	29
PHPT610035NK	29
PHPT610035PK	29
PHPT61003NPK	29
PHPT61003NY	29

Type number	Page Number
PHPT61003PY	29
PHPT61006NY	29
PHPT61006PY	29
PHPT61010NY	29
PHPT61010PY	29
PIMC31	31
PIMN31	31
PIMT1	15
PIMZ2	15
PLVA600A series	36
PMBD353	43
PMBD354	43
PMBS3904	16
PMBS3906	16
PMBT2222	16
PMBT2222A	16
PMBT2222AYS	16
PMBT2369	16
PMBT2907	16
PMBT2907A	16
PMBT2907AYS	16
PMBT3904	16
PMBT3904M	16
PMBT3904MB	16
PMBT3904VS	16
PMBT3904YS	16
PMBT3906	16
PMBT3906M	16
PMBT3906MB	16
PMBT3906VS	16
PMBT3906YS	16
PMBT3946VPN	16
PMBT3946YPN	16
PMBT4401	16
PMBT4401YS	16
PMBT4403	16
PMBT4403YS	16
PMBT5550	18
PMBT5551	18
PMBT6428	14
PMBT6429	14
PMBTA06	14
PMBTA13	19
PMBTA14	19
PMBTA42	19
PMBTA42DS	19
PMBTA44	18
PMBTA45	28
PMBTA56	14
PMBTA64	19
PMBTA92	18
PMC85XP	96
PMCM4401UNE	10, 97
PMCM4401UPE	97
PMCM4401VNE	97, 168
PMCM4401VPE	97, 168
PMCM4402UPE	10, 97
PMCM6501CUNE	10, 97
PMCM6501UNE	10,97

Type number	Page Number
PMCM6501UPE	10, 97
PMCM6501VNE	97
PMCM6501VPE	97
PMCPB5530X	96, 102
PMCXB1000UE	95, 102
PMCXB900UE	95, 102
PMCXB900UEL	95, 102
PMD2001D	21
PMD3001D	21
PMDPB30XN	96, 103
PMDPB55XP	96, 103
PMDPB56XNEA	83, 85, 96, 103
PMDPB58UPE	96, 103
PMDPB70XP	96, 103
PMDPB70XPE	96, 103
PMDPB80XP	96, 103
PMDPB85UPE	96, 103
PMDPB95XNE2	96, 103
PMDT290UCE	102
PMDT290UNE	85, 103
PMDT670UPE	85, 103
PMDXB1200UPE	95, 103
PMDXB550UNE	95, 103
PMDXB600UNE	95, 103
PMDXB600UNEL	95
PMDXB950UPE	95, 103
PMDXB950UPEL	95
PMEG030V030EPD	46
PMEG030V050EPD	46
PMEG040V030EPD	46
PMEG040V050EPD	46
PMEG045T030EPD	9, 46
PMEG045T050EPD	9, 46
PMEG045T100EPD	9, 46
PMEG045T150EIPD	9, 46
PMEG045T150EPD	46
PMEG045V050EPD	46
PMEG045V100EPD	46
PMEG045V150EPD	46
PMEG050T150EPD	46
PMEG050V030EPD	46
PMEG050V150EPD	46
PMEG060V030EPD	46
PMEG060V050EPD	46
PMEG060V100EPD	46
PMEG10010ELR	46
PMEG10020AELP	46
PMEG10020AELR	46
PMEG10020ELR	46
PMEG10030ELP	46
PMEG100V060ELPD	46
PMEG100V080ELPD	46
PMEG100V100ELPD	46
PMEG1020EA	47
PMEG1020EH	47
PMEG1020EJ	47
PMEG1020EV	47
PMEG1030EH	47

Type number	Page Number
PMEG1030EJ	47
PMEG2002AESF	44
PMEG2002AESFB	44
PMEG2002ESF	44
PMEG2005AEA	47
PMEG2005AEL	45
PMEG2005AELD	45
PMEG2005AESF	44
PMEG2005AEV	47
PMEG2005BELD	45
PMEG2005CT	48
PMEG2005EB	47
PMEG2005EGW	47
PMEG2005EH	47
PMEG2005EJ	47
PMEG2005EL	45
PMEG2005ELD	45
PMEG2005EPK	45
PMEG2005ESF	44
PMEG2005ET	47
PMEG2010AEB	47
PMEG2010AEH	47
PMEG2010AEJ	47
PMEG2010AET	47
PMEG2010BEA	47
PMEG2010BELD	45
PMEG2010BER	46
PMEG2010BEV	47
PMEG2010EA	47
PMEG2010EH	47
PMEG2010EJ	47
PMEG2010EPA	45
PMEG2010EPAS	45
PMEG2010EPK	45
PMEG2010ER	46
PMEG2010ET	47
PMEG2010EV	47
PMEG2015EA	47
PMEG2015EH	47
PMEG2015EJ	47
PMEG2015EPK	45
PMEG2015EV	47
PMEG2020AEA	47
PMEG2020CPA	48
PMEG2020CPAS	48
PMEG2020EH	47
PMEG2020EJ	47
PMEG2020EPA	45
PMEG2020EPAS	45
PMEG2020EPK	45
PMEG3002AEB	47
PMEG3002AEL	45
PMEG3002AELD	45
PMEG3002AESF	44
PMEG3002EJ	47
PMEG3002ESF	44
PMEG3002TV	48
PMEG3005AEA	47
PMEG3005AESF	44

Type number	Page Number
PMEG3005AEV	47
PMEG3005CT	48
PMEG3005EB	47
PMEG3005EGW	47
PMEG3005EH	47
PMEG3005EJ	47
PMEG3005EL	45
PMEG3005ELD	45
PMEG3005ESF	44
PMEG3005ET	47
PMEG3010AESA	45
PMEG3010AESB	44
PMEG3010BEA	47
PMEG3010BEP	46
PMEG3010BER	46
PMEG3010BEV	47
PMEG3010CEH	47
PMEG3010CEJ	47
PMEG3010EB	47
PMEG3010EGW	47
PMEG3010EH	47
PMEG3010EJ	47
PMEG3010EP	46
PMEG3010ER	46
PMEG3010ESB	44
PMEG3010ET	47
PMEG3015EH	47
PMEG3015EJ	47
PMEG3015EV	47
PMEG3020BEP	46
PMEG3020BER	46
PMEG3020CEP	46
PMEG3020CPA	48
PMEG3020CPAS	48
PMEG3020DEP	46
PMEG3020EGW	47
PMEG3020EH	47
PMEG3020EJ	47
PMEG3020EP	47
PMEG3020EPA	45
PMEG3020EPAS	45
PMEG3020ER	46
PMEG3030BEP	46
PMEG3030EP	46
PMEG3050BEP	46
PMEG3050EP	46
PMEG4002AESF	44
PMEG4002EB	47
PMEG4002EJ	47
PMEG4002EL	45
PMEG4002ELD	45
PMEG4002ESF	44
PMEG4005AEA	47
PMEG4005AESF	44
PMEG4005AEV	47
PMEG4005CEA	47
PMEG4005CEJ	47
PMEG4005CT	48
PMEG4005EGW	47
PMEG4005EH	47
PMEG4005EJ	47
PMEG4005EPK	45
PMEG4005ESF	44
PMEG4005ET	47
PMEG4010AESB	44
PMEG4010BEA	47
PMEG4010BEV	47
PMEG4010CEA	47
PMEG4010CEGW	47
PMEG4010CEH	47
PMEG4010CEJ	47
PMEG4010CPA	48
PMEG4010CPAS	48
PMEG4010EGW	47
PMEG4010EH	47
PMEG4010EJ	47
PMEG4010EP	46
PMEG4010EPK	47
PMEG4010ER	46
PMEG4010ESB	44
PMEG4010ET	47
PMEG4010ETP	46
PMEG4010ETR	46
PMEG4015EPK	45
PMEG4020EP	46
PMEG4020EPA	45
PMEG4020EPAS	45
PMEG4020EPK	45
PMEG4020ER	46
PMEG4020ETP	46
PMEG4020ETR	46
PMEG4030EP	46
PMEG4030ER	46
PMEG4030ETP	46
PMEG4050EP	46
PMEG4050ETP	46
PMEG40T10ER	9, 46
PMEG40T20EP	9, 46
PMEG40T20ER	9, 46
PMEG40T30EP	9, 46
PMEG40T30ER	9, 46
PMEG40T50EP	9, 46
PMEG45A10EPD	46
PMEG45T15EPD	46
PMEG6002EB	47
PMEG6002EJ	47
PMEG6002EL	45
PMEG6002ELD	45
PMEG6002TV	48
PMEG6010AESB	44
PMEG6010CEGW	47
PMEG6010CEH	47
PMEG6010CEJ	47
PMEG6010CPA	48
PMEG6010CPAS	48
PMEG6010ELR	46
PMEG6010EP	46
PMEG6010ER	46
PMEG6010ESB	44
PMEG6010ETR	46
PMEG6020AELP	46
PMEG6020AELR	46
PMEG6020ELR	46
PMEG6020EP	46
PMEG6020EPA	45
PMEG6020EPAS	45
PMEG6020ER	46
PMEG6020ETP	46
PMEG6020ETR	46
PMEG6030ELP	46
PMEG6030EP	46
PMEG6030ETP	46
PMEG6030EVP	46
PMEG6045ETP	46
PMEG60T20ELR	9, 46
PMF170XP	101
PMF250XNE	99
PMF250XNEA	83
PMF63UNE	99
PMF63UNEA	83
PMFPB8032XP	96
PMFPB8040XP	100
PMG85XP	101
PMGD175XNE	103
PMGD175XNEA	85
PMGD290UCEA	85
PML260SN	92
PML340SN	92
PMMT491A	23
PMMT591A	25
PMN16XNE	99
PMN27XPEA	83
PMN30UN	99
PMN30UNE	99
PMN30XP	101
PMN40ENE	99
PMN40UPEA	83
PMN42XPEA	83
PMN48XP	101
PMN52XP	101
PMN70EPE	10, 101
PMN70XP	101
PMN70XPE	101
PMN70XPEA	83
PMP4201G	20
PMP4201V	20
PMP4201Y	20
PMP4501G	20
PMP4501QAS	8, 20
PMP4501V	20
PMP4501Y	20
PMP5501QAS	8, 20
PMPB10XNE	96
PMPB10XNEA	83
PMPB11EN	96
PMPB12UNE	96
PMPB12UNEA	83
PMPB13XNE	96
PMPB13XNEA	83
PMPB15XN	96
PMPB15XP	96
PMPB15XPA	83
PMPB19XP	96
PMPB20EN	96
PMPB20XNEA	96
PMPB20XPE	96
PMPB20XPEA	83
PMPB215ENEA	83, 96
PMPB23XNE	96
PMPB27EP	96
PMPB27EPA	83
PMPB29XNE	96
PMPB29XNEA	83
PMPB29XPE	96
PMPB29XPEA	83
PMPB33XN	96
PMPB33XP	96
PMPB43XPE	96
PMPB43XPEA	83
PMPB45EPA	83
PMPB47XP	96
PMPB48EP	96
PMPB50EPEA	83
PMPB55ENEA	83, 96
PMPB85ENEA	83, 96
PMPB95ENEA	83, 96
PMSS3904	16
PMSS3906	16
PMST2222	16
PMST2222A	16
PMST2369	16
PMST2907A	16
PMST3904	16
PMST3906	16
PMST4401	16
PMST4403	16
PMST5088	14
PMST5089	14
PMST5550	18
PMST5551	18
PMST6428	14
PMST6429	14
PMSTA05	14
PMSTA06	14
PMSTA42	18
PMSTA55	14
PMSTA56	14
PMSTA92	18
PMT200EPEA	83, 101
PMT280ENEA	83, 99
PMT560ENEA	83, 99
PMV100ENEA	83
PMV100XPEA	83, 101
PMV120ENEA	83, 99
PMV130ENEA	83, 99
PMV160UP	101
PMV16XN	99
PMV20EN	99
PMV20XNE	99
PMV20XNEA	83,99
PMV230ENEA	83, 99
PMV250EPEA	83, 101
PMV25ENEA	83, 99
PMV27UPE	101
PMV27UPEA	83
PMV280ENEA	10, 83, 99
PMV28UNEA	83, 99
PMV30UN2	99
PMV30XPEA	83, 101
PMV32UP	101
PMV33UPE	101
PMV35EPE	101
PMV37EN2	99
PMV40UN2	99
PMV42ENE	99
PMV450ENEA	83, 99
PMV45EN2	99
PMV48XP	101
PMV48XPA	83
PMV50ENEA	83, 99
PMV50EPEA	83
PMV50UPE	101
PMV50XP	101
PMV55ENEA	83, 99
PMV65ENEA	83, 99
PMV65UNE	99
PMV65UNEA	83
PMV65XP	101
PMV65XPE	101
PMV65XPEA	83
PMV75UP	101
PMV90ENE	99
PMXB120EPE	95
PMXB350UPE	95
PMXB360ENEA	83, 95
PMXB40UNE	95
PMXB43UNE	95
PMXB56EN	95
PMXB65ENE	95
PMXB65UPE	95
PMXB75UPE	95
PMZ1200UPE	94, 101
PMZ130UNE	94, 99
PMZ200UNE	94, 99
PMZ290UNE2	94, 99
PMZ320UPE	94, 101
PMZ350UPE	94, 101
PMZ390UNE	94, 99
PMZ550UNE	94, 99
PMZ600UNE	94, 99
PMZ600UNEL	95
PMZ950UPE	94, 101
PMZ950UPEL	95
PMZB1200UPE	94, 101
PMZB150UNE	94, 99

Index

Type number	Page Number
PMZB200UNE	94, 99
PMZB290UNE2	94, 99
PMZB320UPE	94, 101
PMZB350UPE	94, 101
PMZB390UNE	94, 99
PMZB550UNE	94, 99
PMZB600UNE	94, 99
PMZB600UNEL	95
PMZB950UPE	94, 101
PMZB950UPEL	95
PNE20010ER	9, 41
PNE20020EP	9, 41
PNE20020ER	9, 41
PNE20030EP	9, 41
PNS40010ER	41
PQMB11	31
PQMD10	31
PQMD12	31
PQMD13	31
PQMD16	31
PQMD2	31
PQMD3	31
PQMH10	31
PQMH11	31
PQMH13	31
PQMH2	31
PQMH9	31
PRMB11	8, 31
PRMD10	8, 31
PRMD12	8, 31
PRMD13	8, 31
PRMD16	8, 31
PRMD2	8, 31
PRMD3	8, 31
PRMH10	8, 31
PRMH11	8, 31
PRMH13	8, 31
PRMH2	8, 31
PRMH9	8, 31
PRTR5V0U2AX	53, 63
PRTR5V0U2F	53, 63
PRTR5V0U2X	53, 63
PRTR5V0U4D	54, 61, 63
PSMN010-80YL	92
PSMN011-30YLC	87
PSMN011-60ML	89
PSMN011-60MS	89
PSMN011-80YS	92
PSMN012-100YL	92
PSMN012-100YS	92
PSMN012-60YS	89
PSMN012-80BS	91
PSMN012-80PS	90
PSMN013-100BS	91
PSMN013-100ES	91
PSMN013-100PS	90
PSMN013-100YSE	92
PSMN013-30MLC	88
PSMN013-30YLC	87
PSMN013-60YL	89
PSMN013-80YS	92
PSMN014-40YS	89
PSMN014-80YL	92
PSMN015-100YL	92
PSMN015-110P	90
PSMN015-60BS	89
PSMN015-60PS	88
PSMN016-100BS	91
PSMN016-100PS	90
PSMN016-100YS	92
PSMN017-30BL	86
PSMN017-30EL	86
PSMN017-30PL	86
PSMN017-60YS	89
PSMN017-80BS	91
PSMN017-80PS	90
PSMN018-100BSF	91
PSMN018-100ESF	10, 91
PSMN018-100PSF	10, 90
PSMN018-80YS	92
PSMN019-100YL	92
PSMN020-100YS	92
PSMN020-30MLC	88
PSMN021-100YL	92
PSMN022-30BL	86
PSMN022-30PL	86
PSMN025-80YL	92
PSMN026-80YS	92
PSMN027-100BS	91
PSMN027-100PS	90
PSMN028-100YS	92
PSMN030-150P	90
PSMN030-60YS	89
PSMN034-100BS	91
PSMN034-100PS	90
PSMN038-100YL	92
PSMN039-100YS	92
PSMN040-100MSE	92
PSMN041-80YL	92
PSMN045-80YS	92
PSMN050-80BS	91
PSMN057-200B	91
PSMN057-200P	90
PSMN059-150Y	92
PSMN063-150D	91
PSMN069-100YS	92
PSMN075-100MSE	92
PSMN0R7-25YLD	86
PSMN0R9-25YLD	86
PSMN0R9-30YLD	87
PSMN102-200Y	92
PSMN130-200D	91
PSMN1R0-25YLD	86
PSMN1R0-30YLC	87
PSMN1R0-30YLD	87
PSMN1R0-40YLD	89
PSMN1R1-25YLC	86
PSMN1R1-30EL	86
PSMN1R1-30PL	86
PSMN1R1-40BS	89
PSMN1R2-25YL	86
PSMN1R2-25YLC	86
PSMN1R2-25YLD	86
PSMN1R2-30YLC	87
PSMN1R2-30YLD	87
PSMN1R3-30YL	87
PSMN1R4-30YLD	87
PSMN1R4-40YLD	89
PSMN1R5-25YL	86
PSMN1R5-30BLE	86
PSMN1R5-30YL	87
PSMN1R5-30YLC	87
PSMN1R5-40ES	89
PSMN1R5-40PS	88
PSMN1R6-30BL	86
PSMN1R6-30MLH	88
PSMN1R6-30MLH	88
PSMN1R6-30PL	86
PSMN1R7-25YLD	86
PSMN1R7-30YL	87
PSMN1R7-60BS	89
PSMN1R8-30BL	86
PSMN1R8-30PL	86
PSMN1R8-40YLC	89
PSMN1R9-40PL	88
PSMN2R0-25MLD	88
PSMN2R0-25YLD	86
PSMN2R0-30BL	86
PSMN2R0-30PL	86
PSMN2R0-30YL	87
PSMN2R0-30YLD	87
PSMN2R0-30YLE	87
PSMN2R0-60ES	89
PSMN2R0-60PS	88
PSMN2R0-60PSR	88
PSMN2R1-40PL	88
PSMN2R2-30YLC	87
PSMN2R2-40BS	89
PSMN2R2-40PS	88
PSMN2R4-30MLD	88
PSMN2R4-30YLD	87
PSMN2R5-30YL	87
PSMN2R5-60PL	88
PSMN2R6-30YLC	87
PSMN2R6-40YS	89
PSMN2R6-60PS	88
PSMN2R7-30BL	86
PSMN2R7-30PL	86
PSMN2R8-25MLC	88
PSMN2R8-40BS	89
PSMN2R8-40PS	88
PSMN2R8-80BS	90
PSMN2R9-25YLC	86
PSMN3R0-30MLC	88
PSMN3R0-30YL	87
PSMN3R0-30YLD	87
PSMN3R0-60BS	89
PSMN3R0-60ES	89
PSMN3R0-60PS	88
PSMN3R2-30YLC	87
PSMN3R3-40YS	89
PSMN3R3-60PL	88
PSMN3R3-80ES	91
PSMN3R3-80PS	90
PSMN3R4-30BL	86
PSMN3R4-30BLE	86
PSMN3R4-30PL	86
PSMN3R5-25MLD	88
PSMN3R5-30YL	87
PSMN3R5-80ES	91
PSMN3R5-80PS	90
PSMN3R8-100BS	91
PSMN3R9-25MLC	88
PSMN3R9-60PS	88
PSMN4R0-25YLC	86
PSMN4R0-30YL	87
PSMN4R0-30YLD	87
PSMN4R0-40YS	89
PSMN4R0-60YS	89
PSMN4R1-30YLC	87
PSMN4R1-60YL	89
PSMN4R2-30MLD	88
PSMN4R2-60PL	88
PSMN4R3-100ES	91
PSMN4R3-100PS	90
PSMN4R3-30BL	86
PSMN4R3-30PL	86
PSMN4R3-80ES	91
PSMN4R3-80PS	90
PSMN4R4-30MLC	88
PSMN4R4-80BS	90
PSMN4R4-80PS	90
PSMN4R5-30YLC	87
PSMN4R5-40BS	89
PSMN4R5-40PS	88
PSMN4R6-60BS	89
PSMN4R6-60PS	88
PSMN4R8-100BSE	91
PSMN4R8-100PSE	90
PSMN5R0-100ES	91
PSMN5R0-100PS	90
PSMN5R0-30YL	87
PSMN5R0-80BS	90
PSMN5R0-80PS	90
PSMN5R2-60YL	89
PSMN5R3-25MLD	88
PSMN5R4-25YLD	86
PSMN5R5-60YS	89
PSMN5R6-100BS	91
PSMN5R6-100PS	90
PSMN5R6-100YSF	10, 92
PSMN5R6-60YL	89
PSMN5R8-40YS	89
PSMN6R0-25YLB	86
PSMN6R0-25YLD	86
PSMN6R0-30YL	87
PSMN6R0-30YLB	87
PSMN6R0-30YLD	87
PSMN6R1-25MLD	88
PSMN6R1-30YLD	87
PSMN6R3-120ES	91
PSMN6R3-120PS	90
PSMN6R4-30MLD	88
PSMN6R5-30MLD	88
PSMN6R5-80BS	91
PSMN6R5-80PS	90
PSMN6R9-100YSF	92
PSMN7R0-100BS	91
PSMN7R0-100BSF	91
PSMN7R0-100ES	91
PSMN7R0-100PS	90
PSMN7R0-30MLC	88
PSMN7R0-30YL	87
PSMN7R0-30YLC	87
PSMN7R0-60YS	89
PSMN7R5-30MLD	88
PSMN7R5-30YLD	87
PSMN7R5-60YL	89
PSMN7R6-100BSE	91
PSMN7R6-60BS	89
PSMN7R6-60PS	88
PSMN7R8-100PSE	90
PSMN7R8-120ES	91
PSMN7R8-120PS	90
PSMN8R0-40BS	89
PSMN8R0-40PS	88
PSMN8R0-80YL	92
PSMN8R2-80YS	92
PSMN8R3-40YS	89
PSMN8R5-100ES	91
PSMN8R5-100ESF	10, 91
PSMN8R5-100PS	90
PSMN8R5-100PSF	10, 90
PSMN8R5-60YS	89
PSMN8R7-100YSF	10, 92
PSMN8R7-80BS	91
PSMN8R7-80PS	90
PSMN9R0-25MLC	88
PSMN9R1-30YL	87
PSMN9R5-100BS	91
PSMN9R5-100PS	90
PSMN9R5-30YLC	87
PSMN9R8-30MLC	88
PSMNR51-25YLH	86
PSMNR58-30YLH	87
PSMNR60-25YLH	86
PSMNR70-30YLH	87
PSMNR90-30BL	86
PSMP012-30YE	92
PSMP015-40YE	92
PSMP020-30YE	92
PSMP025-40YE	92
PSMP032-60YE	92
PSMP057-60YE	92
PSSI2021SAY	18

Type number	Page Number
PTVS10VP1UP	69
PTVS10VP1UTP	69
PTVS10VS1UR	68
PTVS10VS1UTR	68
PTVS10VU1UPA	67
PTVS10VZ1USK	67
PTVS11VP1UP	69
PTVS11VP1UTP	69
PTVS11VS1UR	68
PTVS11VS1UTR	68
PTVS12VP1UP	69
PTVS12VP1UTP	69
PTVS12VS1UR	68
PTVS12VS1UTR	68
PTVS12VU1UPA	67
PTVS12VZ1USK	67
PTVS13VP1UP	69
PTVS13VP1UTP	69
PTVS13VS1UR	68
PTVS13VS1UTR	68
PTVS14VP1UP	69
PTVS14VP1UTP	69
PTVS14VS1UR	68
PTVS14VS1UTR	68
PTVS15VP1UP	69
PTVS15VP1UTP	69
PTVS15VS1UR	68
PTVS15VS1UTR	68
PTVS15VU1UPA	67
PTVS15VZ1USK	67
PTVS16VP1UP	69
PTVS16VP1UTP	69
PTVS16VS1UR	68
PTVS16VS1UTR	68
PTVS17VP1UP	69
PTVS17VP1UTP	69
PTVS17VS1UR	68
PTVS17VS1UTR	68
PTVS18VP1UP	69
PTVS18VP1UTP	69
PTVS18VS1UR	68
PTVS18VS1UTR	68
PTVS18VU1UPA	67
PTVS18VZ1USK	67
PTVS20VP1UP	69
PTVS20VP1UTP	69
PTVS20VS1UR	68
PTVS20VS1UTR	68
PTVS20VU1UPA	10, 67
PTVS20VZ1USK	67
PTVS22VP1UP	69
PTVS22VP1UTP	69
PTVS22VS1UR	68
PTVS22VS1UTR	68
PTVS22VU1UPA	10, 67
PTVS22VZ1USK	67
PTVS24VP1UP	69
PTVS24VP1UTP	69
PTVS24VS1UR	68
PTVS24VS1UTR	68
PTVS24VU1UPA	10, 67
PTVS26VP1UP	67
PTVS26VP1UTP	69
PTVS26VS1UR	68
PTVS26VS1UTR	68
PTVS26VU1UPA	67
PTVS26VZ1USK	67
PTVS28VP1UP	69
PTVS28VP1UTP	69
PTVS28VS1UR	68
PTVS28VS1UTR	68
PTVS30VP1UP	69
PTVS30VP1UTP	69
PTVS30VS1UR	68
PTVS30VS1UTR	68
PTVS33VP1UP	69
PTVS33VP1UTP	69
PTVS33VS1UR	68
PTVS33VS1UTR	68
PTVS36VP1UP	69
PTVS36VP1UTP	69
PTVS36VS1UR	68
PTVS36VS1UTR	68
PTVS3V3P1UP	69
PTVS3V3P1UTP	69
PTVS3V3S1UR	68
PTVS3V3S1UTR	68
PTVS40VP1UP	69
PTVS40VP1UTP	69
PTVS40VS1UR	68
PTVS40VS1UTR	68
PTVS43VP1UP	69
PTVS43VP1UTP	69
PTVS43VS1UR	68
PTVS43VS1UTR	68
PTVS45VP1UP	69
PTVS45VP1UTP	69
PTVS45VS1UR	68
PTVS45VS1UTR	68
PTVS48VP1UP	69
PTVS48VP1UTP	69
PTVS48VS1UR	68
PTVS48VS1UTR	68
PTVS4V5D1BL	10, 57, 60, 62, 67
PTVS51VP1UP	69
PTVS51VP1UTP	69
PTVS51VS1UR	68
PTVS51VS1UTR	68
PTVS54VP1UP	69
PTVS54VP1UTP	69
PTVS54VS1UR	68
PTVS54VS1UTR	68
PTVS58VP1UP	69
PTVS58VP1UTP	69
PTVS58VS1UR	68
PTVS58VS1UTR	68
PTVS5V0P1UP	69
PTVS5V0P1UTP	69
PTVS5V0S1UR	68
PTVS5V0S1UTR	68
PTVS5V0Z1USK	67
PTVS5V0Z1USKP	10, 67
PTVS60VP1UP	69
PTVS60VP1UTP	69
PTVS60VS1UR	68
PTVS60VS1UTR	68
PTVS64VP1UP	69
PTVS64VP1UTP	69
PTVS64VS1UR	68
PTVS64VS1UTR	68
PTVS6V0P1UP	69
PTVS6V0P1UTP	69
PTVS6V0S1UR	68
PTVS6V0S1UTR	68
PTVS6V5P1UP	69
PTVS6V5P1UTP	69
PTVS6V5S1UR	68
PTVS6V5S1UTR	68
PTVS7V0P1UP	69
PTVS7V0P1UTP	69
PTVS7V0S1UR	68
PTVS7V0S1UTR	68
PTVS7V5P1UP	69
PTVS7V5P1UTP	69
PTVS7V5S1UR	68
PTVS7V5S1UTR	68
PTVS7V5U1UPA	67
PTVS7V5Z1USK	67
PTVS8V0P1UP	69
PTVS8V0P1UTP	69
PTVS8V0S1UR	68
PTVS8V0S1UTR	68
PTVS8V5P1UP	69
PTVS8V5P1UTP	69
PTVS8V5S1UR	68
PTVS8V5S1UTR	68
PTVS9V0P1UP	69
PTVS9V0P1UTP	69
PTVS9V0S1UR	68
PTVS9V0S1UTR	68
PUMB1	31
PUMB10	31
PUMB11	31
PUMB13	31
PUMB14	31
PUMB15	31
PUMB16	31
PUMB17	31
PUMB18	31
PUMB19	31
PUMB2	31
PUMB20	31
PUMB24	31
PUMB3	31
PUMB30	31
PUMB4	31
PUMB9	31
PUMD10	31
PUMD12	31
PUMD13	31
PUMD14	31
PUMD15	31
PUMD16	31
PUMD17	31
PUMD18	31
PUMD19	31
PUMD2	31
PUMD20	31
PUMD24	31
PUMD3	31
PUMD30	31
PUMD4	31
PUMD48	31
PUMD6	31
PUMD9	31
PUMH1	31
PUMH10	31
PUMH11	31
PUMH13	31
PUMH14	31
PUMH15	31
PUMH16	31
PUMH17	31
PUMH18	31
PUMH19	31
PUMH2	31
PUMH20	31
PUMH24	31
PUMH30	31
PUMH4	31
PUMH7	31
PUMH9	31
PUMT1	15
PUMX1	15
PUMX2	15
PUMZ1	15
PUMZ2	15
PUSB2X4D	54, 62, 63
PUSB2X4Y	54, 62, 63
PUSB3AB4	55, 66
PUSB3AB6	9, 55, 66
PUSB3F96	55, 66
PUSB3F97	9, 66
PUSB3F99	66
PUSB3FA0	66
PUSB3FR4	55, 66
PUSB3FR6	9, 55, 66
PUSB3TB6	55, 66
PUSBM12VX4-TL	63
PUSBM5V5X4-TL	63
PXT2222A	16
PXT2907A	16
PXT4401	16
PXT4403	16
PXTA14	19
PXTA42	18
PXTA92	18
PZT2222A	16
PZT2907A	16
PZT4401	16
PZT4403	16
PZTA14	19
PZTA42	18
PZTA44	18
PZTA92	18
PZU10DB2 series	36
PZUxB series	36
PZUxBA series	36
PZUxBL series	36
TDZxJ series	36
TL431ACDBZR	32
TL431AFDT	32
TL431AIDBZR	32
TL431AMFDT	32
TL431AQDBZR	32
TL431BCDBZR	32
TL431BFDT	32
TL431BIDBZR	32
TL431BMFDT	32
TL431BQDBZR	32
TL431CDBZR	32
TL431FDT	32
TL431IDBZR	32
TL431MFDT	32
TL431QDBZR	32
TLVH431NACDBZR	32
TLVH431NAIDBZR	32
TLVH431NAMQDBZR	32
TLVH431NAQDBZR	32
TLVH431NCDBZR	32
TLVH431NIDBZR	32
TLVH431NMQDBZR	32
TLVH431NQDBZR	32
XC7SET02	152
XC7SET04	135
XC7SET08	148
XC7SET125	136
XC7SET14	136,140
XC7SET32	153
XC7SET86	150
XC7SH02	152
XC7SH04	136
XC7SH08	148
XC7SH125	136
XC7SH14	136,140
XC7SH32	153
XC7SH86	150
XC7SHU04	136
XC7WH126	136
XC7WH14	136,140
XC7WT14	136, 140

© 2018 Nexperia B.V.
All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Date of release:
January 2018

Printed:
In the Netherlands

nexperia.com

OCEAN CHIPS
Океан Электроники
Поставка электронных компонентов

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «**JONHON**», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «**FORSTAR**».

AVIC JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).

FORSTAR®

Телефон: 8 (812) 309-75-97 (многоканальный)
Факс: 8 (812) 320-03-32
Электронная почта: ocean@oceanchips.ru
Web: http://oceanchips.ru/
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А