


RPi Compute LoRa Gateway PoE

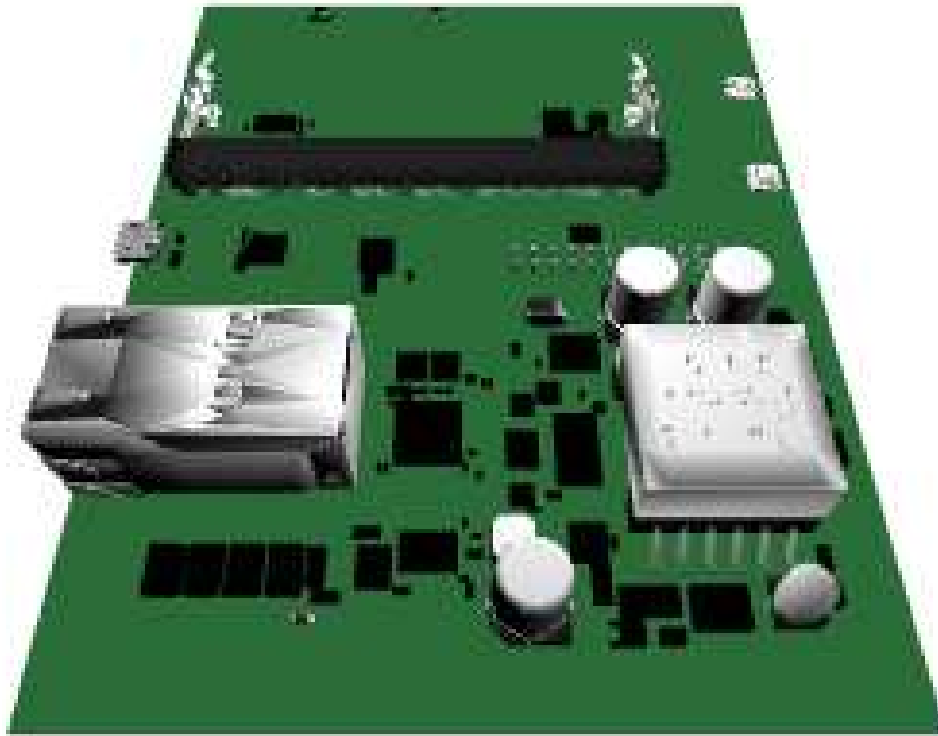

This board was designed and built by Geppetto

Free automated documentation anytime.
Design for free @ <https://geppetto.gumstix.com/>

No Minimum Order

Automated Supply Chain

Reduce Cost and Errors




geppetto
by gumstix™

Thanks for using Geppetto to design this board!

One Stop Design-to-Order

Simply place displays, sensors, processors, and Geppetto connects it all.
No routing needed.

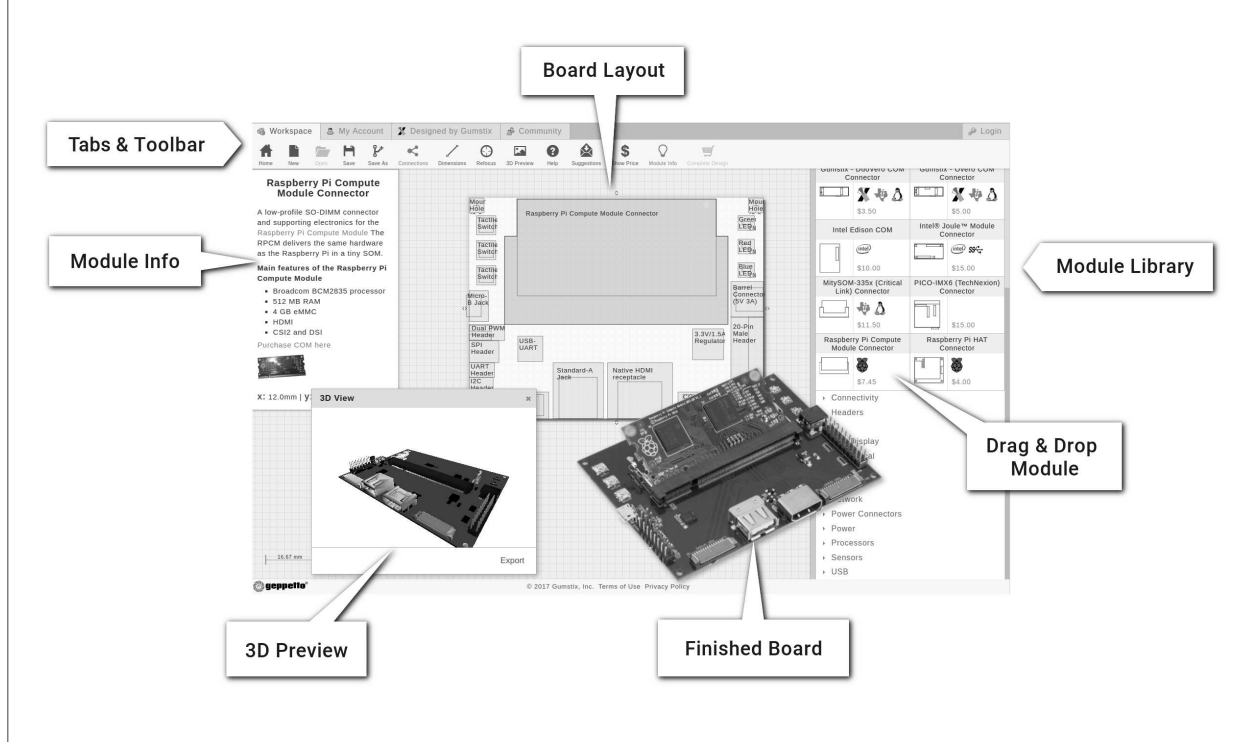

Gumstix, Inc. shall have no liability of any kind, express or implied, arising out of the use of the Information in this document, including direct, indirect, special or consequential damages.

Gumstix, Inc. may have patents, patent applications, trademarks, copyrights, trade secrets or other intellectual property rights pertaining to Gumstix products described in this document (collectively "Gumstix Intellectual Property").

Except as expressly provided in any written license or agreement from Gumstix, Inc., this document and the information contained therein does not create any license to Gumstix's Intellectual Property.

The Information contained herein is subject to change without notice. Revisions may be issued regarding changes and/or additions.

Copyright © 2017, Gumstix, Inc. All rights reserved.

Built in Geppetto
No engineering required.
Delivered in 15 days.




Board Description

Raspberry Pi Compute Module based LoRa gateway using the RisingHF RHF0M301 LoRa Gateway and Concentrator Module. The board is powered using Power over Ethernet (POE), facilitating easy deployment by combining power and network connectivity into a single connection.


Board Dimensions

9.35cm x 12cm

Geppetto Makes Hardware Easy

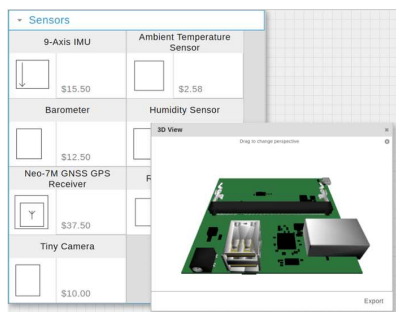

Custom Library and
3D Design Preview

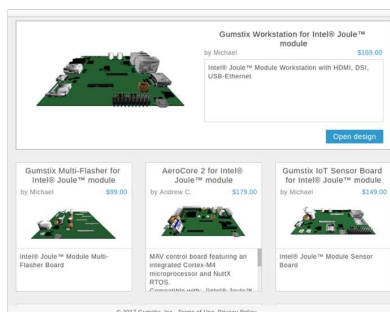

Design and Save
Your Work Online



Free Automated
Documentation on Demand


Start your next design at geppetto.gumstix.com

Built in Geppetto
No engineering required.
Delivered in 15 days.

Contents

1	Modules on Board	1
1.1	Network	2
1.1.1	LoRa Gateway and Concentrator Module (v1) (1)	2
1.1.2	Gigabit with PoE via USB (v2) (10)	2
1.2	COM Connectors	2
1.2.1	Raspberry Pi Compute Module Connector (v15) (2)	2
1.3	Power	3
1.3.1	3.3V/1.5A Regulator (v11) (3)	3
1.4	IO	3
1.4.1	Tactile Switch (v16) (4)	3
1.4.2	Tactile Switch (v16) (5)	3
1.4.3	Top-side LED (v4) (6)	4
1.4.4	Top-side LED (v4) (7)	4
1.5	USB	4
1.5.1	Micro-B Jack (v10) (8)	4
1.6	Connectivity	4
1.6.1	USB-UART (v16) (9)	4
2	Module Connections Graph	5
3	Module Power Graph	6

1 Modules on Board

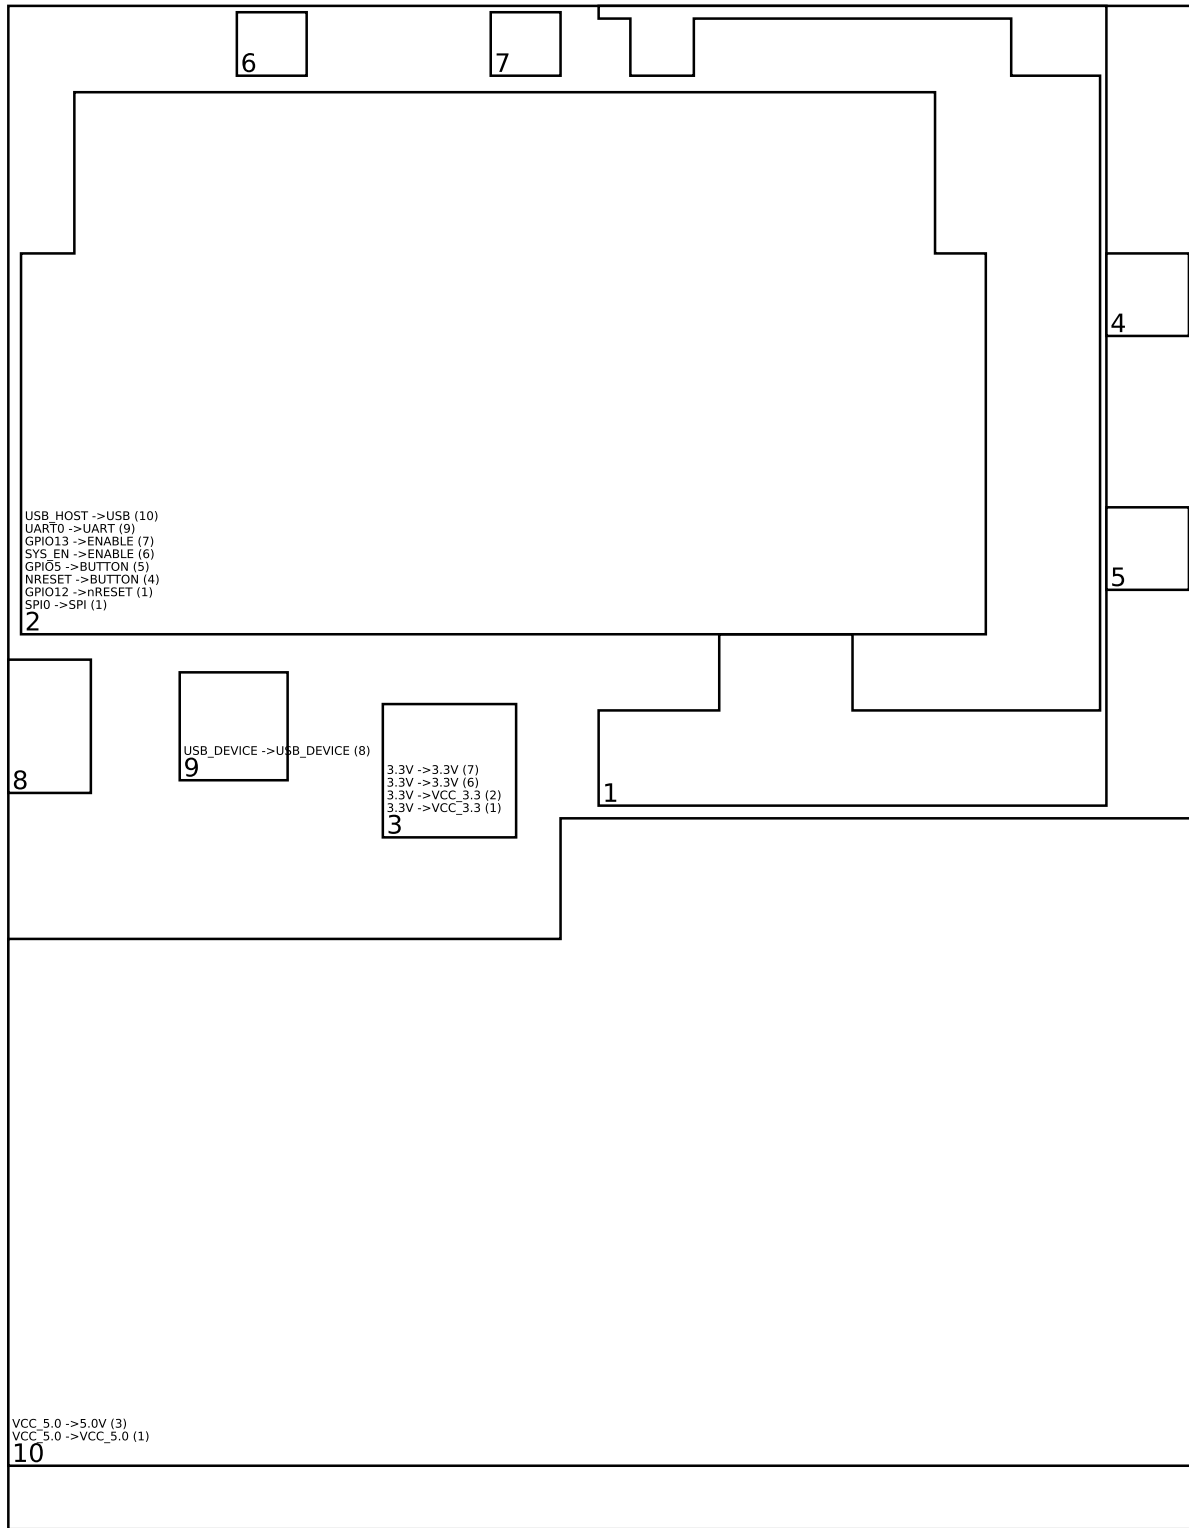

1.1 Network

1.1.1 LoRa Gateway and Concentrator Module (v1) (1)

LoRa Gateway

1.1.2 Gigabit with PoE via USB (v2) (10)

This module provides a gigabit ethernet interface using the USB 3.0 bus Raspberry Pi Compute Module Connector (2). This Power over Ethernet module provides 5V to the following modules:

- LoRa Gateway and Concentrator Module (1)
- 3.3V/1.5A Regulator (3)

1.2 COM Connectors

1.2.1 Raspberry Pi Compute Module Connector (v15) (2)

The **Raspberry Pi Compute Module (RPCM)** connector is a SODIMM socket powering the RPCM and providing the module's function to Geppetto designs. The RPCM COM connector is pin-compatible with 3 variants of the module: RPCM1, RPCM3 and RPCM3L.

Module features:

	RPCM1	RPCM3	RPCM3L
SoC	BCM2835	BCM2837	BCM2837
CPU Clock	700MHz	1.0GHz	1.0GHz
Cores	1x32-bit	4x64-bit	4x64-bit
DDR2 RAM	512 MB	1.0 GB	1.0 GB
eMMC	4 GB	4 GB	N/A

More technical details for the RPCM modules can be found at:

<https://www.raspberrypi.org/documentation/hardware/computemodule/datasheet.md>

It requires:

- VCC_3.3 from 3.3V/1.5A Regulator (3)

The Geppetto Pi Compute connector provides the following outputs:

- SPI0 to LoRa Gateway and Concentrator Module (1)
- VLOGIC to:
 - LoRa Gateway and Concentrator Module (1)
 - Tactile Switch (4)
 - Tactile Switch (5)
 - USB-UART (9)

- GPIO12 to LoRa Gateway and Concentrator Module (1)
- NRESET to Tactile Switch (4)
- GPIO5 to Tactile Switch (5)
- SYS_EN to Top-side LED (6)
- GPIO13 to Top-side LED (7)
- UART0 to USB-UART (9)
- USB_HOST to Gigabit with PoE via USB (10)

1.3 Power

1.3.1 3.3V/1.5A Regulator (v11) (3)

This DC to DC step down regulator provides a 3.3V DC output at 1.5A needed by certain components on this board. It is capable of accepting an input voltage between 3.1 to 16V DC and output is controlled by the TI TPS6211 buck regulator. It receives 5.0V from Gigabit with PoE via USB (10).

The dataheet for the TPS6211 regulator is available at:

<http://www.ti.com/lit/ds/symlink/tps62110.pdf>

This regulator provides 3.3V to:

- LoRa Gateway and Concentrator Module (1)
- Raspberry Pi Compute Module Connector (2)
- Top-side LED (6)
- Top-side LED (7)

1.4 IO

1.4.1 Tactile Switch (v16) (4)

This 4.9 sq. mm pull-down touch switch provides a user input for the signal NRESET on Raspberry Pi Compute Module Connector (2).

1.4.2 Tactile Switch (v16) (5)

This 4.9 sq. mm pull-down touch switch provides a user input for the signal GPIO5 on Raspberry Pi Compute Module Connector (2).

1.4.3 Top-side LED (v4) (6)

The top-side LED module contains a 1608 standard size LED of a user-selected color, mounted on the top side of a Geppetto board.

The LED is active-high on SYS_EN from Raspberry Pi Compute Module Connector (2).

1.4.4 Top-side LED (v4) (7)

The top-side LED module contains a 1608 standard size LED of a user-selected color, mounted on the top side of a Geppetto board.

The LED is active-high on GPIO13 from Raspberry Pi Compute Module Connector (2).

1.5 USB

1.5.1 Micro-B Jack (v10) (8)

The USB micro-B port module allows your design to connect as a USB device to a USB host.

This module is connected to USB_DEVICE on USB-UART (9).

This module does not supply power.

1.6 Connectivity

1.6.1 USB-UART (v16) (9)

Also known as an FTDI, this USB to UART converter allows a USB connection to the board to behave as a virtual RS232 serial connection. It offers direct and complete access to the system from a development machine by way of the FTDI FT232RQ USB – UART IC.

Technical documentation for the FT232RQ is available at:

http://www.ftdichip.com/Support/Documents/DataSheets/ICs/DS_FT232R.pdf

This USB to UART converter connects a host machine from Micro-B Jack (8) to UART0 on Raspberry Pi Compute Module Connector (2).

2 Module Connections Graph


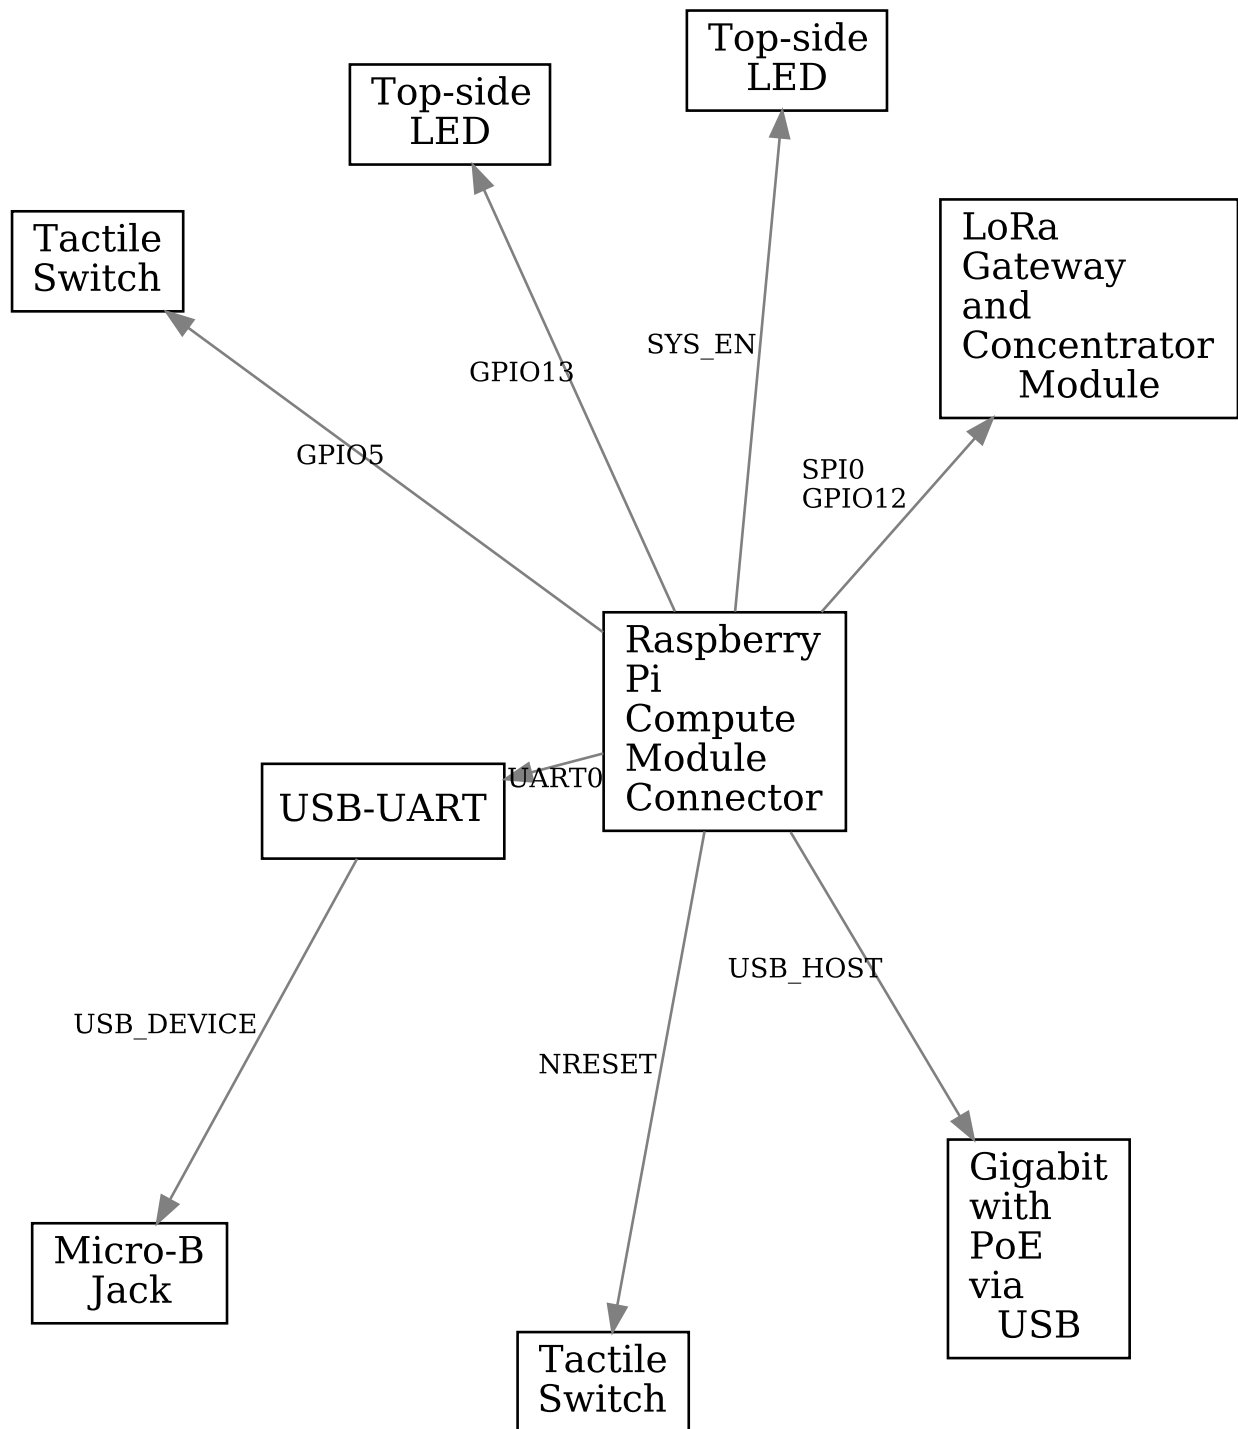


Figure 1: excludes power modules

3 Module Power Graph

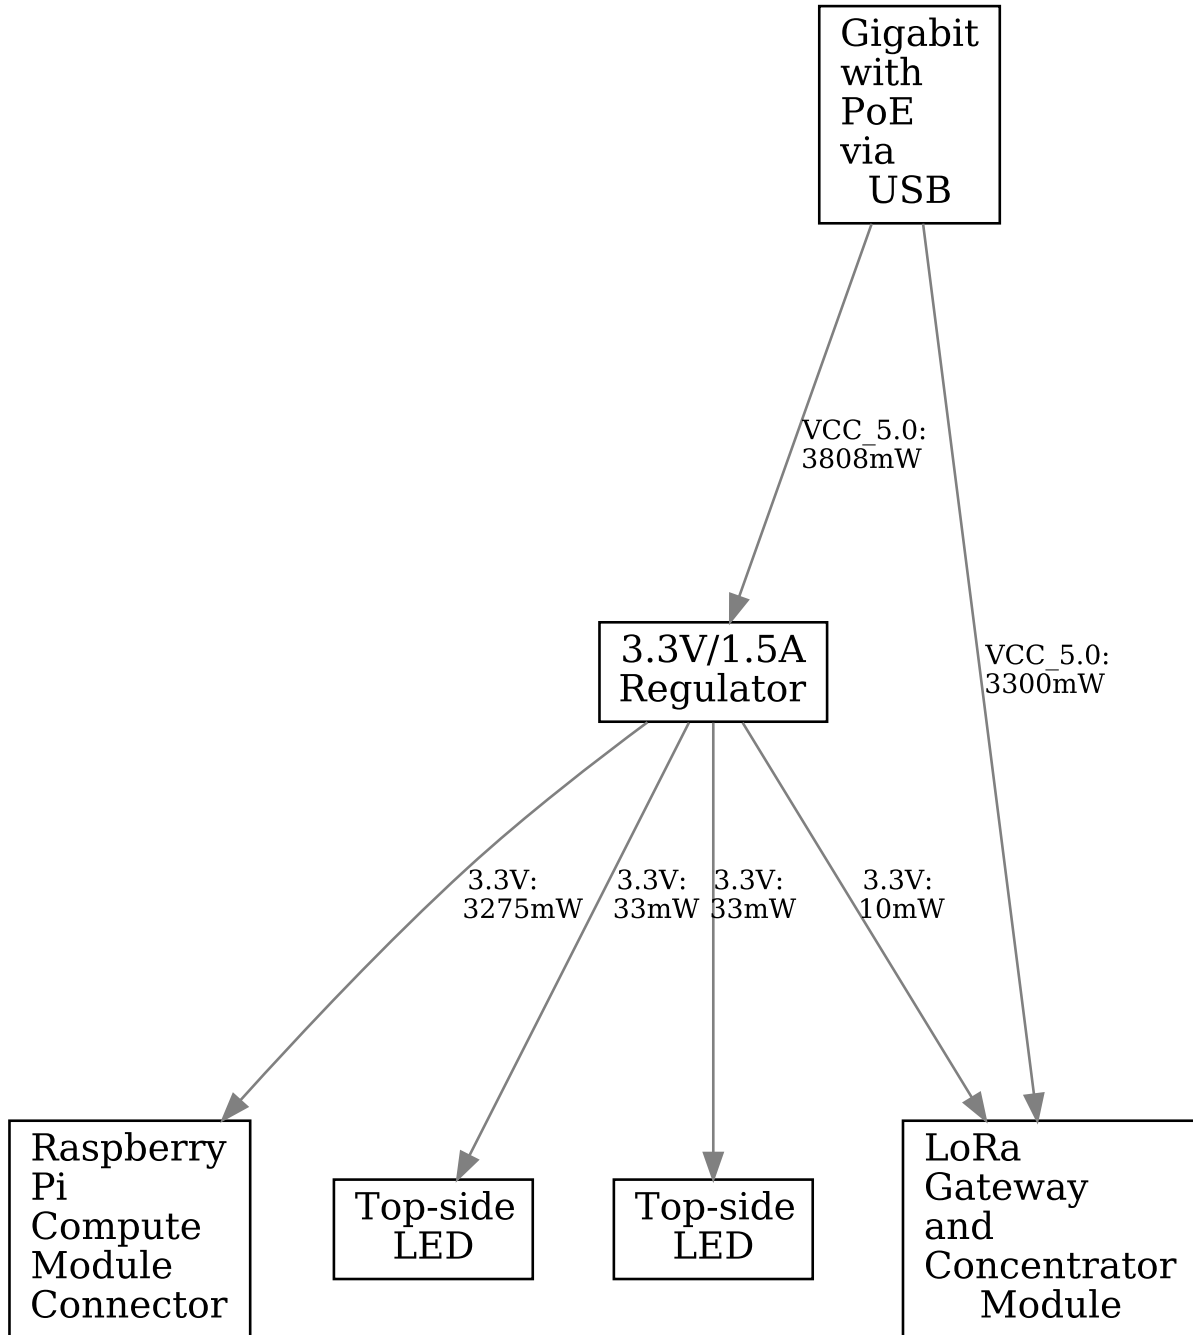

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А