



050-117

PRODUCT BRIEF

Line Replaceable Unit (LRU) Copper to Fiber Media Converter,
Single or Dual Channel, Flange Mount
10/100/1000BASE-T to Fiber Optic Ethernet
(1000BASE-SX, 1000 BASE-LX10 or 100BASE-FX) 28VDC (DO-160
Audio Conducted Susceptibility Cat Z),
Lightning Strike (DO-160 level 3 waveform 3/3)
M38999 (ARINC801), M38999 (Quadrax), M38999 (Power)

REV	DESCRIPTION	DATE	APPROVED
19	Preliminary	01/07/2016	MF
20	Add ECCN	05/24/2016	RAS
21	Add new part number to have two different fiber channels	09/29/2016	GC
22	Corrected J1 Mating plot	12/08/2016	TC
23	Add Flow Control Option	03/31/2017	RAS/GC
24	Update Copyright date	05/26/2017	GC

BF14U2-6875

THIS COPYRIGHTED DOCUMENT IS THE PROPERTY OF GLENAIR, INC. AND IS FURNISHED ON THE CONDITION THAT IT IS NOT TO BE DISCLOSED, REPRODUCED IN WHOLE OR IN PART, OR USED TO SOLICIT QUOTATIONS FROM COMPETITIVE SOURCES, OR USED FOR MANUFACTURE BY ANYONE OTHER THAN GLENAIR, INC. WITHOUT WRITTEN PERMISSION FROM GLENAIR, INC. THE INFORMATION HEREIN HAS BEEN DEVELOPED AT GLENAIR'S EXPENSE AND MAY BE USED FOR ENGINEERING EVALUATION AND INCORPORATION INTO TECHNICAL SPECIFICATIONS AND OTHER DOCUMENTS WHICH SPECIFY PROCUREMENT OF PRODUCTS FROM GLENAIR, INC.

050-117 PRODUCT BRIEF

Line Replaceable Unit (LRU) Media Converter, Flange Mount 10/100/1000BASE-T to Fiber Optic Ethernet (SX, LX10 or FX)



10/100/1000BASE-T to 1000BASE-SX or 1000BASE-LX10



The Glenair 050-117 Flange Mount Copper to Fiber Media Converter can be configured as either Single Channel or Dual Channel and can convert 10/100/1000BASE-T to 1000BASE-SX, 1000BASE-LX or 100BASE-FX protocols. It is designed for harsh environments and incorporates electronics in an environmentally sealed enclosure that incorporates three environmental M38999 connectors. The power supply is designed to accept a wide DC input voltage range, 18V to 36V and dirty 28V power as defined in DO-160. Power is supplied through a 38999 with standard #22D contacts. Signal I/O passes through a 38999 with a combination of Quadrax and #22D contacts and Fiber Optics passes through a 38999 using ARINC 801 contacts which can be configured to support either single mode or multi-mode fiber applications.

KEY FEATURES/BENEFITS

- 1310nm FP Lasers for 1000BASE-LX10
- InGaAs PIN PD for 1000BASE-LX10
- 850nm Lasers for 1000BASE-SX
- GaAs PIN PD for 1000BASE-SX
- 1300nm LED for 100BASE-FX
- PIN PD for 100BASE-FX
- Wide Input Voltage Range: 18-36V
- Electrical Interface compliant with IEEE 802.3 (10/100/1000BASE-T)
- Optical Interface compliant with IEEE 802.3 (1000BASE-LX10/-SX, 100BASE-FX)
- DO-160 – Compliant to Lightning Strike Category A3J3XX & Voltage Spike Category A
- DO-160 – Compliant to Audio Frequency Conducted Susceptibility input, Category Z
- Option to implement Flow Control

- Ethernet MDI/MDIX automatic crossover
- Magnetics on the electrical signal input side to support 10/100/1000BASE-T operation over 100m Cat 5E
- IP67 in mated condition
- M38999 Quadrax & pin for Signal, BIT and service port
- M38999 Power
- M38999 ARINC 801 for Fiber Optic
- Flange Mount
- Single or Dual Channel Configurations


OPTIONAL FEATURES

- Built In Test Console Port accessible via USB2.0
- Built in Test Console Port accessible via UART-RS422

APPLICATIONS

- Harsh Environment such as: Airborne, Tactical, Railway, Industrial, Oil and Gas and Shipboard applications

How To Order

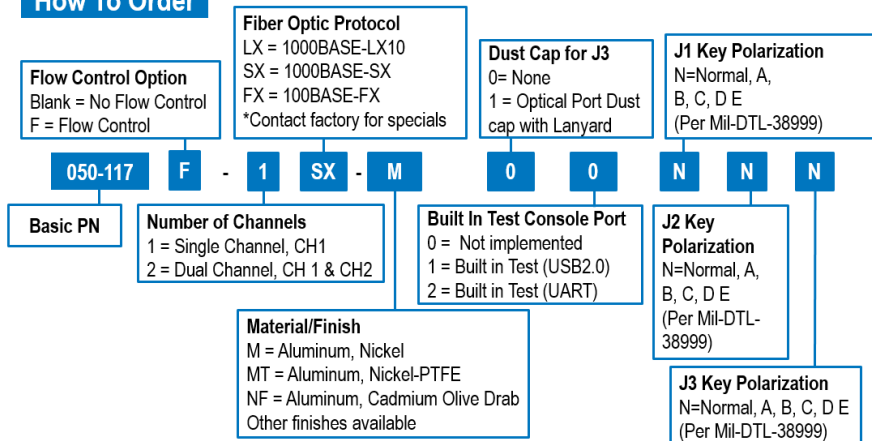


050-117 PRODUCT BRIEF

Line Replaceable Unit (LRU) Media Converter, Flange Mount
10/100/1000BASE-T to Fiber Optic Ethernet (SX, LX10 or FX)



Functional Block Diagram

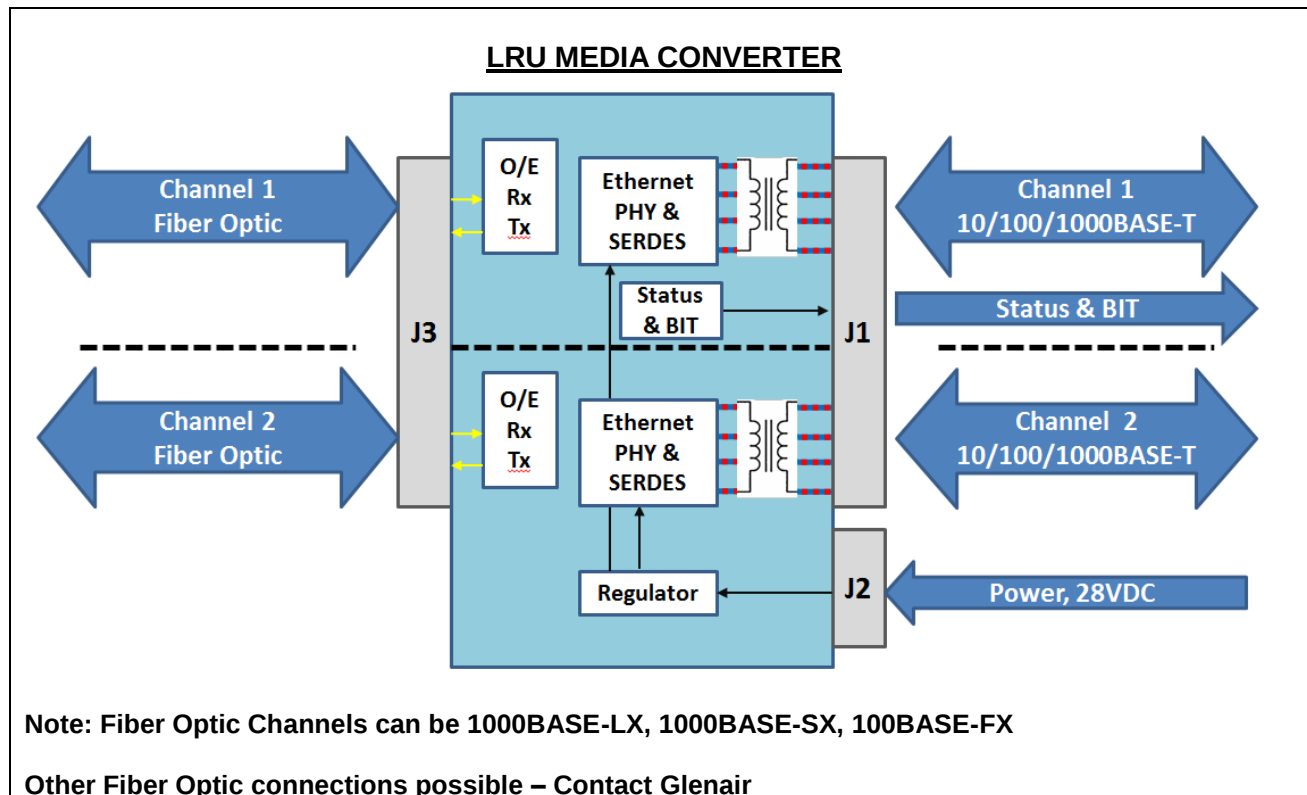

Flow Control




Ethernet flow control is a mechanism for temporarily stopping the transmission of data on Ethernet computer networks. If data flow between the two devices connected to the media converter will vary in rate, it is up to the end user to ensure their higher speed devices are throttled correctly to ensure loss of data does not occur over time. Flow control can be enabled at the factory if so desired. Contact the factory for more details.

050-117 PRODUCT BRIEF

Line Replaceable Unit (LRU) Media Converter, Flange Mount
10/100/1000BASE-T to Fiber Optic Ethernet (SX, LX10 or FX)



Connectors

NAME	Insert Arrangement	Function	Media Converter	Mating PLUG Connector
J1		Electrical Signal, Status and Built In Test (BIT)	D38999 Series III type, 19Q-18 14X SIZE 22D Pins 4X SIZE 8 QUADRAx Pins (AS39029/119)	Generic PN D38999/26#F18SN type with Quadrax polarization Glenair PN 257-606##G6-19-18BN
J2		Power	D38999 Series III type, 11-35 13X SIZE 22D Pins	Generic PN D38999/26#B35SN Glenair PN 233-105-G6##11-35SN
J3	 ARR. 15-6 SHELL SIZE 15	Fiber Optic Signal	D38999 Series III Insert Arrangement per ARINC 801 <u>CONTACTS</u> ARINC 801 LX CONFIGURATION: SX CONFIGURATION: Contacts: Radiall pn F725003419	Glenair PN 180-159##06-15-6N-R (D38999 Style Plug, ARINC 801 15-6 arrangement) <u>CONTACTS:</u> LX10 CONFIGURATION Glenair PN 181-076-P-126S 126.0 micron, pull proof design, SMF SX or FX CONFIGURATION Glenair PN 181-076-P-126 126.0 micron, pull proof design, MMF

Note: # = Environmental Class (Material/Finish)


050-117 PRODUCT BRIEF

Line Replaceable Unit (LRU) Media Converter, Flange Mount
10/100/1000BASE-T to Fiber Optic Ethernet (SX, LX10 or FX)



Built In Test (BIT) Functionality – USB 2.0

This media converter can be offered with built in test functionality accessible through a Console Port via Universal Serial Bus 2.0 (USB 2.0) or via RS422 UART (TXD) or both options can be made available. Functional block diagram for this is shown below.

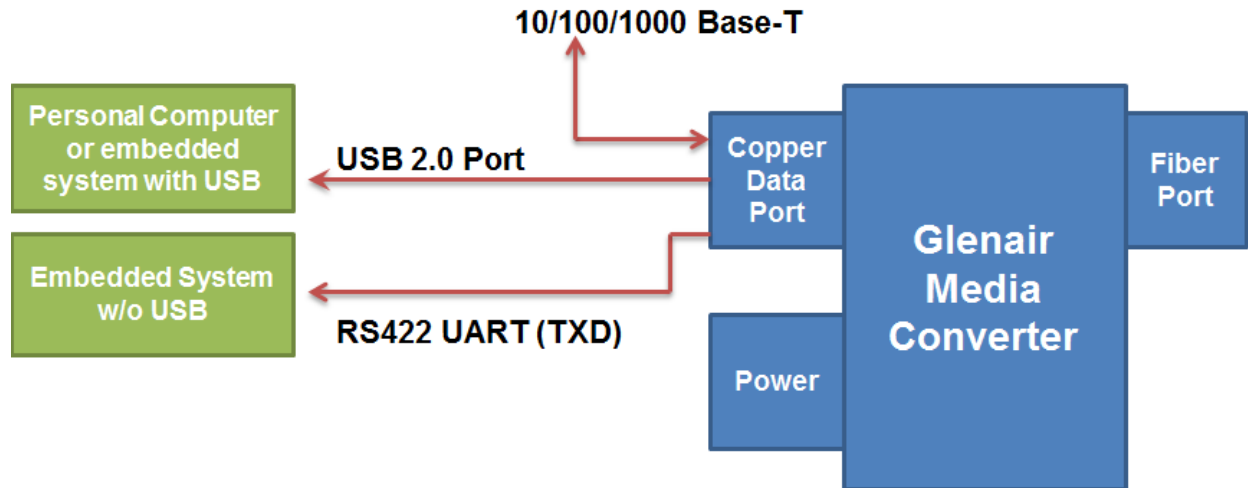

Universal Serial Bus (2.0) BIT

- Presents itself as a "Virtual" Communications Port
- Compatible with Microsoft Windows, Mac, and Linux OS's.
- On the computer side, open any terminal application (PuTTY, HyperTERM, TeraTERM, etc.) to communicate with the media converter hardware.
- Simple "Human Readable" status messages.

ALARM STATUS MESSAGES

Unit Identification Information

- Unit Serial Number
- Unit Product Code

Fiber Side Alarm/Status

- Temperature
- Transmitter TX Fault
- Transmitter Disable Status
- Receiver loss of signal (LOS) or signal Detect (SD) Status

Copper Side Status

- Link Status (Up or Down)

050-117 PRODUCT BRIEF

Line Replaceable Unit (LRU) Media Converter, Flange Mount
10/100/1000BASE-T to Fiber Optic Ethernet (SX, LX10 or FX)



TYPICAL CONSOLE PORT WINDOW (PuTTY)

```
COM1 - PuTTY
*****
Glenair                                     *
Media Converter Service Port             *
*****
Unit Identification Information
*****
Product Code: 050-117-1SX
Unit Serial Number: 0145
Firmware Revision: 1.2.0
Product Description: 10/100/1000 Mbps Ethernet Copper to Fiber Media Converter

*****
Unit Status
*****
Temperature: 45 degrees C
Power Supply Status: Good
RX Loss of Signal, CH1: False
Transceiver Disable, CH1: False
Transceiver, TX Fault, CH1: False
Copper-Side Link Status, CH1: Up
Fiber-Side Link Status, CH1: Up
```

050-117 PRODUCT BRIEF

Line Replaceable Unit (LRU) Media Converter, Flange Mount
10/100/1000BASE-T to Fiber Optic Ethernet (SX, LX10 or FX)



Built In Test (BIT) Functionality – UART

This media converter can be offered with built in test functionality accessible via an RS-422 Port. The UART Bit message is a 10 bit message with an update rate of 1 Hz. The message format can be seen below.


ALARM STATUS MESSAGES

- Fiber Link Status (Up or Down)
- Copper Link Status (Up or Down)
- Power Supply Status (In Range, or Fault)

Ethernet Media Converter Status Message Format

Standard UART-Type Format (Start and Stop Bits, 8 Data bits, no parity)

Data Rate = 9600 baud, RS422 Output, Message Repetition Rate = 1 Sec

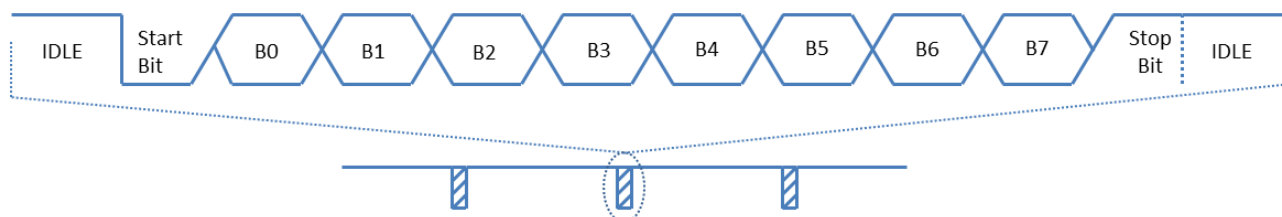

SERIAL STATUS MESSAGE BIT MAPPING

Bit	Description
0	Channel 1 Fiber Optic TX Fault (1 = Fault, 0 = No Fault)
1	Channel 1 Ethernet copper Link UP (1 = Link Up, 0 = Link Down)
2	Channel 1 Power Supply Voltage "In Range" Fault (1 = Fault, 0 = No Fault)
3	Not used
4	Channel 2 Fiber Optic TX Fault (1 = Fault, 0 = No Fault)
5	Channel 2 Ethernet copper Link UP (1 = Link Up, 0 = Link Down)
6	Channel 2 Power Supply Voltage "In Range" Fault (1 = Fault, 0 = No Fault)
7	Not Used

050-117 PRODUCT BRIEF

Line Replaceable Unit (LRU) Media Converter, Flange Mount
10/100/1000BASE-T to Fiber Optic Ethernet (SX, LX10 or FX)



Ratings and Specifications – LX10 VERSION

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Min	Typ	Max	Units	Notes
Storage Temperature	T _s	-55		+100	°C	
Supply Voltage	V _{cc}	-0.5		40	V	

OPERATING CONDITIONS

Parameter	Symbol	Min	Typ	Max	Units	Notes
Operating Temperature	T _{op}	-40		+85	°C	
Supply Voltage	V _{cc}	18	28	36	V	
Supply Current	I _{cc}		100	150	mA	@28VDC PER CHANNEL
Power Supply Noise (Peak-Peak)	V _{cc_ripple}			**	V	** Per DO-160G, Table 18-3, Category Z for 28VDC

OPTICAL CHARACTERISTICS – TRANSMITTER

Parameter	Symbol	Min	Typ	Max	Units	Notes
Optical Output Power	P _{OUT}	-8.5	-4	-3	dBm	1310nm Fabry-Perot
Optical Wavelength	λ _{OUT}	1270	1310	1355	nm	
Spectral Width	Δλ			2.5	nm	

OPTICAL CHARACTERISTICS – RECEIVER

Parameter	Symbol	Min	Typ	Max	Units	Notes
Optical Sensitivity (Input Power Range)	P _{IN_OP}	-20		0	dBm	
Min. Sensitivity, BER 10 ⁻¹² , PRBS 2 ⁻⁷ -1	P _{IN_MIN}		-22	-20	dBm	PIN PD, LX10 source
Overload, BER 10 ⁻¹² , PRBS 2 ⁻⁷ -1	P _{IN_MAX}	0			dBm	
Optical Wavelength	λ _{IN}	1100	1310	1590	nm	

ETHERNET COMPLIANCE

Parameter	Medium Type	Distance	Notes
Gigabit Ethernet, IEEE 802.3ab, 1000BASE-T	TIA/EIA-568-B Cat 5E	100m	
Gigabit Ethernet, IEEE 802.3z, 1000BASE-LX10	Single Mode Fiber (9/125μm)	10km	

050-117 PRODUCT BRIEF

Line Replaceable Unit (LRU) Media Converter, Flange Mount
10/100/1000BASE-T to Fiber Optic Ethernet (SX, LX10 or FX)



Ratings and Specifications – SX VERSION

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Min	Typ	Max	Units	Notes
Storage Temperature	T _s	-55		+100	°C	
Supply Voltage	V _{cc}	-0.5		40	V	

OPERATING CONDITIONS

Parameter	Symbol	Min	Typ	Max	Units	Notes
Operating Temperature	T _{op}	-40		+85	°C	
Supply Voltage	V _{cc}	18	28	36	V	
Supply Current	I _{cc}		100	150	mA	@28VDC PER CHANNEL
Power Supply Noise (Peak-Peak)	V _{cc_ripple}			**	V	** Per DO-160G, Table 18-3, Category Z for 28VDC

OPTICAL CHARACTERISTICS – TRANSMITTER

Parameter	Symbol	Min	Typ	Max	Units	Notes
Optical Output Power	P _{OUT}	-9.5		-1	dBm	VCSEL, 62.5/125μm MM
Optical Wavelength	λ _{OUT}	830	850	860	nm	
Spectral Width	Δλ			0.85	nm	

OPTICAL CHARACTERISTICS - RECEIVER

Parameter	Symbol	Min	Typ	Max	Units	Notes
Optical Sensitivity (Input Power Range)	P _{IN_OP}	-17		-1	dBm	
Min. Sensitivity, BER 10 ⁻¹² , PRBS 2 ⁻⁷ -1	P _{IN_MIN}		-19	-17	dBm	PIN PD
Overload, BER 10 ⁻¹² , PRBS 2 ⁻⁷ -1	P _{IN_MAX}	-1	0		dBm	
Optical Wavelength	λ _{IN}	770	850	860	nm	

ETHERNET COMPLIANCE

Parameter	Medium Type	Distance	Notes
Gigabit Ethernet, IEEE 802.3ab, 1000BASE-T	TIA/EIA-568-B Cat 5E	100m	
Gigabit Ethernet, IEEE 802.3z, 1000BASE-SX	OM3 MMF (50/125μm) OM1 MMF (62.5/125μm)	550m 275m	850nm VCSEL

050-117 PRODUCT BRIEF

**Line Replaceable Unit (LRU) Media Converter, Flange Mount
10/100/1000BASE-T to Fiber Optic Ethernet (SX, LX10 or FX)**



Ratings and Specifications – FX VERSION

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Min	Typ	Max	Units	Notes
Storage Temperature	T _s	-55		+100	°C	
Supply Voltage	V _{cc}	-0.5		40	V	

OPERATING CONDITIONS

Parameter	Symbol	Min	Typ	Max	Units	Notes
Operating Temperature	T _{op}	-40		+85	°C	
Supply Voltage	V _{cc}	18	28	36	V	
Supply Current	I _{cc}		100	150	mA	@28VDC, PER CHANNEL
Power Supply Noise (Peak-Peak)	V _{cc_ripple}			**	V	** Per DO-160G, Table 18-3, Category Z for 28VDC

OPTICAL CHARACTERISTICS – TRANSMITTER

Parameter	Symbol	Min	Typ	Max	Units	Notes
Optical Output Power	P _{OUT}	-19		-14	dBm	1300nm LED (IEC 9314-3)
Optical Wavelength	λ _{OUT}	1270	1310	1380	nm	
Spectral Width	Δλ		150		nm	

OPTICAL CHARACTERISTICS - RECEIVER

Parameter	Symbol	Min	Typ	Max	Units	Notes
Sensitivity, BER 10 ⁻¹⁰ , PRBS 2 ⁻⁷ -1	P _{IN}			-32	dBm	PIN PD
Overload, BER 10 ⁻¹⁰ , PRBS 2 ⁻⁷ -1	P _{IN}	-14			dBm	
Optical Wavelength	λ _{IN}	1270	1310	1380	nm	

ETHERNET COMPLIANCE

Parameter	Medium Type	Distance	Notes
Fast Ethernet, IEEE 802.3u, 100BASE-T	TIA/EIA-568-B Cat 5E	100m	
Fast Ethernet, IEEE 802.3u, 100BASE-FX, IEC 9314-3	MMF (50/125μm) & (62.5/125μm)	2km	

050-117 PRODUCT BRIEF

**Line Replaceable Unit (LRU) Media Converter, Flange Mount
10/100/1000BASE-T to Fiber Optic Ethernet (SX, LX10 or FX)**



Ratings and Specifications - (continued)

COMPLIANCE SPECIFICATIONS

CHARACTERISTIC	Standard	Condition	Notes
Mechanical Shock	MIL-STD-810	40g	6-9 ms
Mechanical Vibration	MIL-STD-810	30g rms	Per Addendum
Power Input	DO-160G, Section 16	28VDC, Category Z	No damage, Normal Operation (BER free) before and after test
Voltage Spike	DO-160G, Section 17	Category A	No damage, Normal Operation (BER free) before and after test
Power supply, Audio Frequency Conducted Susceptibility	DO-160G, Section 18	Category Z	Normal Operation (BER free) in the presence of "Dirty Power"
Induced Signal Susceptibility	DO-160G, Section 19	Category Z	No damage, Normal Operation (BER free) before and after test
RF Frequency Susceptibility Conducted Susceptibility	DO-160G Section 20.4	Category R	
RF Frequency Susceptibility Radiated Susceptibility	DO-160G Section 20.5	Category R	
Emission of Radio Frequency Energy Conducted Emissions	DO-160G, Section 21.4	Category M	
Emission of Radio Frequency Energy Radiated Emissions	DO-160G, Section 21.3	Category M	
Lightning Strike	DO-160G, Section 22	Category A3J3XX	No damage, Operate error free before and after application of the pin injection tests. Will operate error free during shielded cable bundle injection tests
ESD	IEC 61000-4-2		Min 8KV (contact) Min 15KV (Air)
Mating Durability	MIL-DTL--38999/20	500 Cycles	
Eye Safety	CDRH and IEC-825	Class 1 Laser Product	

050-117 PRODUCT BRIEF

**Line Replaceable Unit (LRU) Media Converter, Flange Mount
10/100/1000BASE-T to Fiber Optic Ethernet (SX, LX10 or FX)**



Ratings and Specifications - (continued)

Material/Finish


Item	Material/Finish
Housing & Connector Shell	Aluminum
Plating Finish: M	Nickel
Plating Finish: MT	Nickel PTFE
Plating Finish: NF	Olive Drab Cadmium
Contacts	Copper alloy, 50 µInch gold plated
D38999 Inserts	Thermoplastics
Interfacial Seals, 38999 only	Elastomer, Fluorosilicon
Optical Ferrules & Sleeves	Zirconia, Ceramic
Insulators	Liquid crystal polymer (LCP)
Contact retention clip	Beryllium copper alloy
Seal, O-rings	Fluorosilicone or EPDM
Seal	Fluorosilicone or EPDM
Spring	Nickel-plated beryllium copper
PC tail contacts	Copper alloy/gold plated
PCB flex	FR4 & Polyimide
Solder type: Connector PC Tails to PCBA	Sn63Pb37 or Sn60Pb40
Encapsulant	HYSOL EE4215
Solder type	RoHS compliant Sn95/Sb5 (232°C melting temp) & RoHS compliant Sn96.5/Ag3.0/Cu0.5 (217° melting)

050-117 PRODUCT BRIEF

Line Replaceable Unit (LRU) Media Converter, Flange Mount
10/100/1000BASE-T to Fiber Optic Ethernet (SX, LX10 or FX)



OUTLINE DRAWING

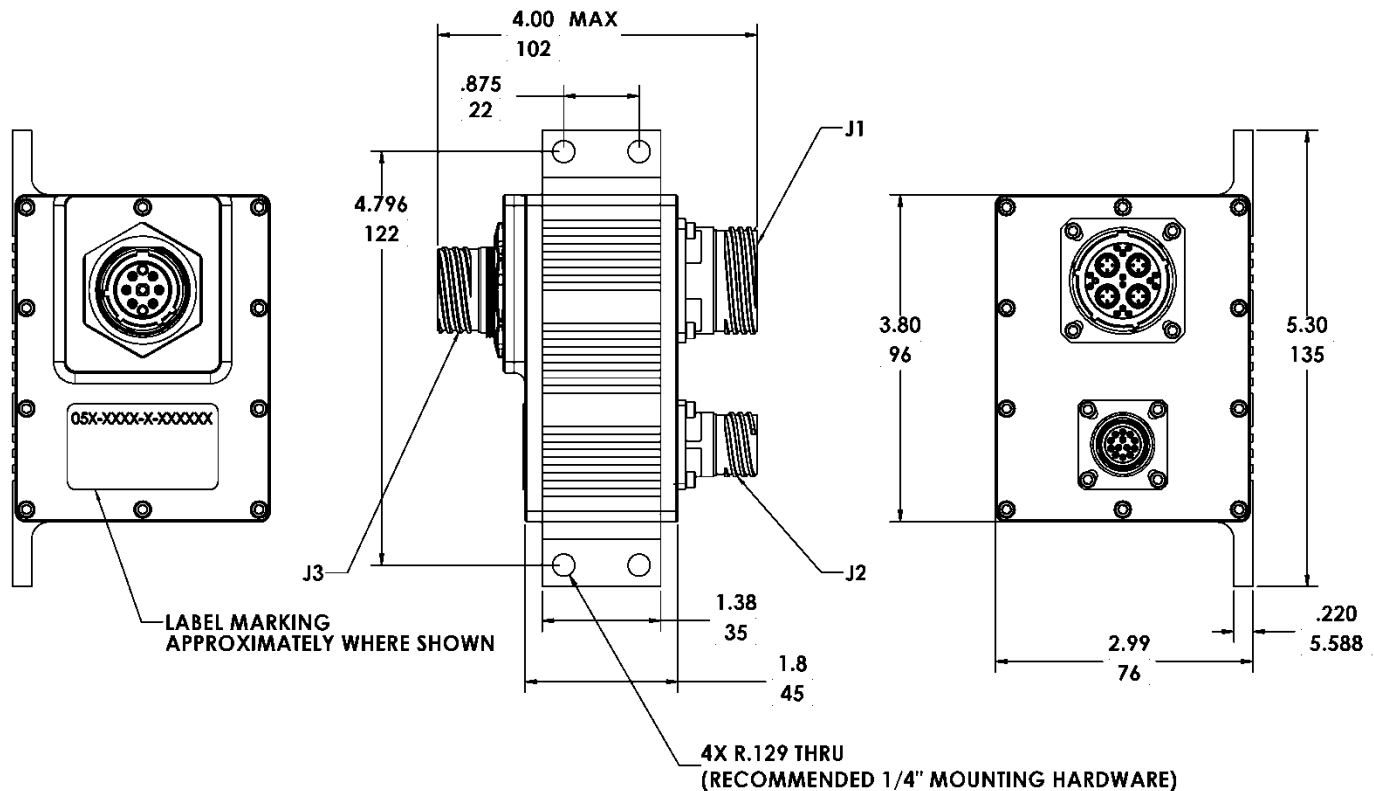

Dimensional Tolerances Unless specified otherwise:

$0.x \pm 0.1"$

$0.xx \pm 0.03"$

$0.xxx \pm 0.015"$

Marking

Assembly is identified with Manufacture's Name, Cage Code, Part Number, Date Code and Serial Number in approximate location shown

Weight:

Description	Weight	Comments
050-117-1 Single Channel Media Converter	1.42 lbs Max.	exclude dust caps
050-117-2 Dual Channel Media Converter	1.45 lbs Max.	

Connectors will be covered with protective caps at time of shipment


Please contact Glenair for other configurations

050-117 PRODUCT BRIEF

Line Replaceable Unit (LRU) Media Converter, Flange Mount
10/100/1000BASE-T to Fiber Optic Ethernet (SX, LX10 or FX)



Center of Gravity (Preliminary Calculation)

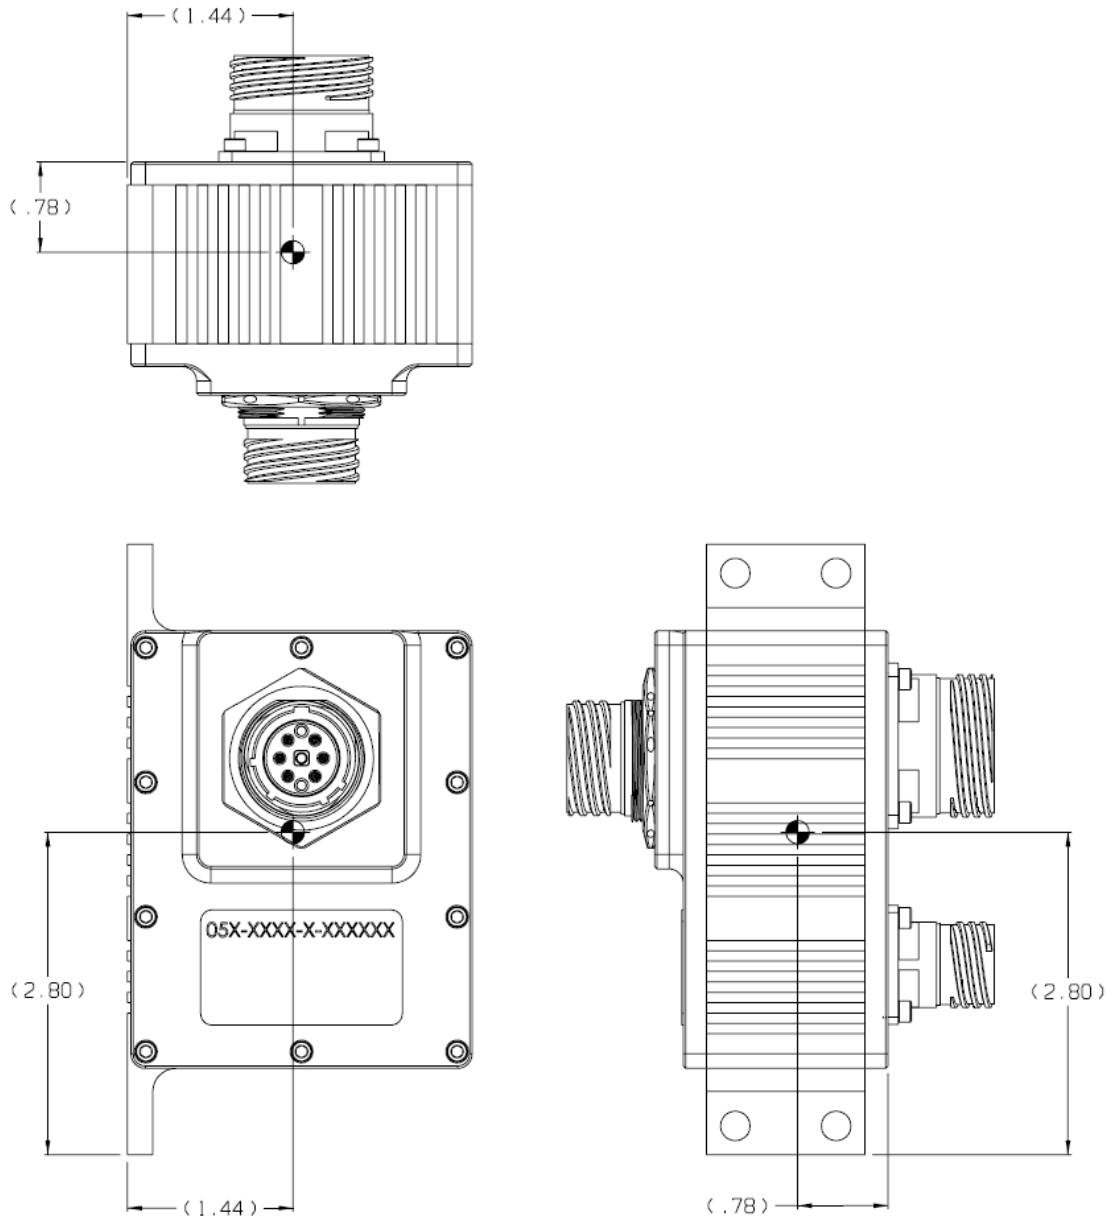


Center of Gravity dimensions are calculated on preliminary 3D models and are for reference only.

Line Replaceable Unit (LRU) Media Converter, Flange Mount 10/100/1000BASE-T to Fiber Optic Ethernet (SX, LX10 or FX)



MOUNTING HOLE LOCATIONS

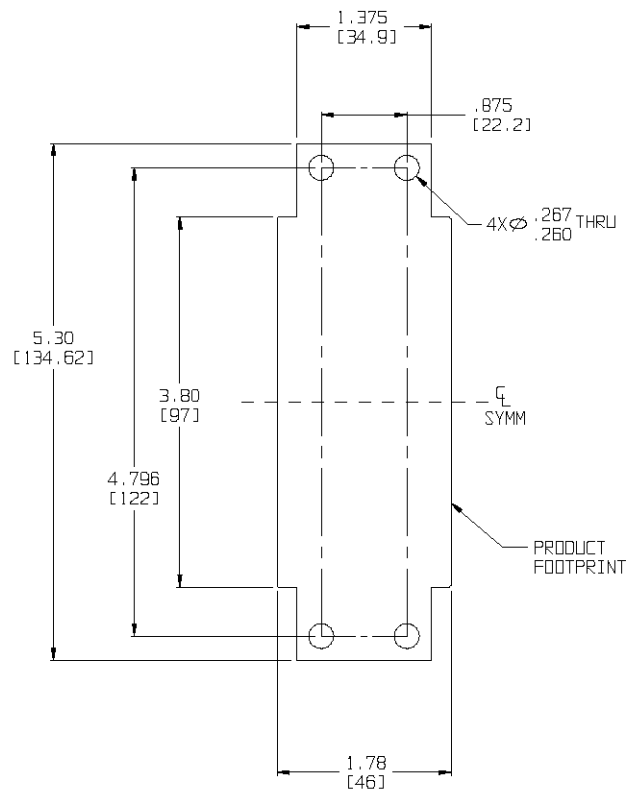

RECOMMENDED MOUNTING HOLES FOR BASEPLATE
1/4" HARWARE REQUIRED FOR MOUNTING

Dimensional Tolerances Unless specified otherwise:

 $0.x \pm 0.1''$ $0.xx \pm 0.03''$

0.XXX ± 0.015"

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А