
Overvoltage Protector IC with Reverse Current Protection

NO.EA-313-151124

OUTLINE

The R5528Z001A is a CMOS-based overvoltage protector IC with reverse current protection that use an NMOS pass transistor to achieve ultra-low on resistance (Typ. 54mΩ). Overvoltage protection threshold is as high as 6.8V±3%. Also, continuous current capability is as high as 3A.

Internally, the R5528Z001A consists of a reverse current protection circuit, a soft-start circuit, a startup debounce circuit, an undervoltage lockout (UVLO) circuit, and a thermal shutdown circuit.

The R5528Z001A is offered in a small and thin WLCSP-9-P1 package which achieves the smallest possible footprint solution on boards where area is limited.

FEATURES

- Input Voltage Range (V_{IN}) 2.3V to 36V
- Output Current (I_{OUT}) Max. DC 3A
- Switch On Resistance (R_{ON}) 54mΩ ($V_{IN} = 5.0V$, $I_{OUT} = 100mA$)
- OVP Threshold Accuracy 6.8V±3%
- PG Function
- Reverse Current Protection Circuit
- Soft-start Circuit
- Startup Debounce Circuit 15ms
- Thermal Shutdown Circuit
- Package WLCSP-9-P1

APPLICATIONS

- Smartphones, Tablet PCs
- Portable devices

PIN DESCRIPTION

Pin No.	Symbol	Pin Description
A1	PG	Open Drain Flag Output Pin PG is driven low after input voltage is stable between minimum V_{IN} and $V_{IN-OVLO}$ after debounce (delay).
A2	OVLO	Overvoltage Lockout Input Pin Applying a voltage less than OVLO threshold (V_{OVLO_TH}) to the overvoltage lockout input pin can turn off a switch. When the overvoltage lockout input pin is Open, it outputs an OVLO open voltage (V_{OVLO_OP}).
A3	ENB	Active-Low ENB Input Pin
B1, C1	V_{IN}	Input Pin
B2	I.C	Internally Connected to Ground Unconnected or connected to GND
B3, C3	V_{OUT}	Output Pin
C2	GND	Ground Pin

ABSOLUTE MAXIMUM RATINGS

Symbol	Item	Rating	Unit
V_{IN}	Input Voltage	-0.3 to 40	V
V_{OUT}	Output Voltage	-0.3 to 8.0	V
V_{ENB}	ENB Pin Input Voltage	-0.3 to 6.5	V
V_{PG}	PG Pin Voltage	-0.3 to 6.5	V
V_{OVLO}	OVLO Pin Input Voltage	-0.3 to 6.5	V
I_{PG}	PG Pin Current	14	mA
I_{OUT}	Output Current	3.0	A
P_D	Power Dissipation (High Wattage Land Pattern)*1	1190	mW
T_{opt}	Operating Temperature Range	-40 to +85	°C
T_{stg}	Storage Temperature	-55 to +125	°C

*1 Refer to **POWER DISSIPATION** for detailed information about Power Dissipation and High Wattage Land Pattern.

ABSOLUTE MAXIMUM RATINGS

Electronic and mechanical stress momentarily exceeded absolute maximum ratings may cause the permanent damages and may degrade the life time and safety for both device and system using the device in the field. The functional operation at or over these absolute maximum ratings is not assured.

RECOMMENDED OPERATING CONDITIONS (ELECTRICAL CHARACTERISTICS)

All of electronic equipment should be designed that the mounted semiconductor devices operate within the recommended operating conditions. The semiconductor devices cannot operate normally over the recommended operating conditions, even if when they are used over such conditions by momentary electronic noise or surge. And the semiconductor devices may receive serious damage when they continue to operate over the recommended operating conditions.

POWER DISSIPATION (WLCSP-9-P1)

Power Dissipation (P_D) of the package is dependent on PCB material, layout, and environmental conditions. The following conditions are used in this measurement.


Measurement Conditions

	High Wattage Land Pattern
Environment	Mounting on Board (Wind Velocity 0m/s)
Board Material	Glass Cloth Epoxy Plastic (Four-layers)
Board Dimensions	76.2mm x 114.3mm x 1.6mm
Copper Ratio	Top, Back side: Approx. 60%, 2nd, 3rd: 100%
Through - hole	ϕ 0.5mm x 29pcs


Measurement Result

($T_a=25^\circ\text{C}$, $T_{j\text{max}}=125^\circ\text{C}$)

	High Wattage Land Pattern
Power Dissipation	1190mW
Thermal Resistance	$\theta_{ja} = (125-25^\circ\text{C})/1.19\text{W} = 84^\circ\text{C/W}$

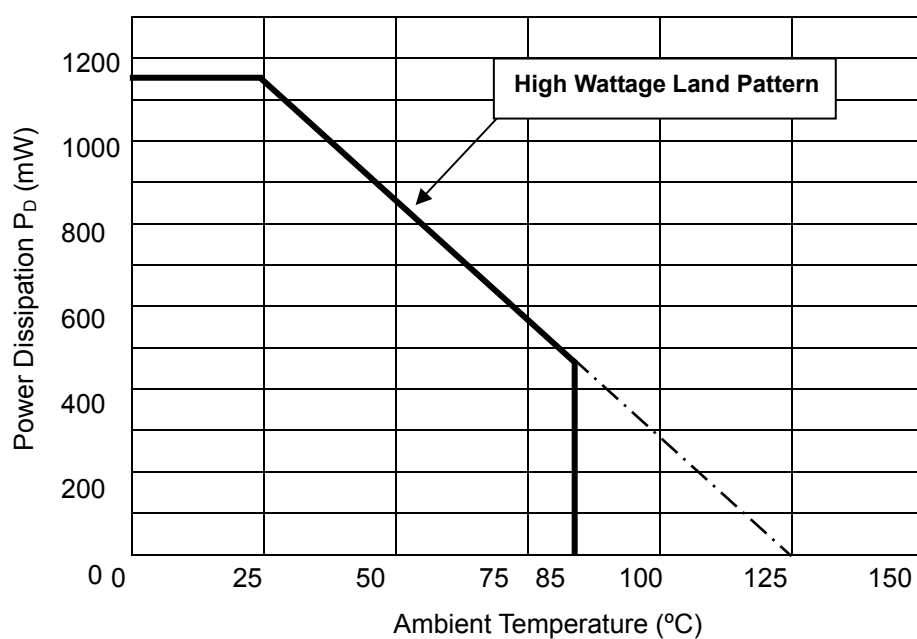

Power Dissipation

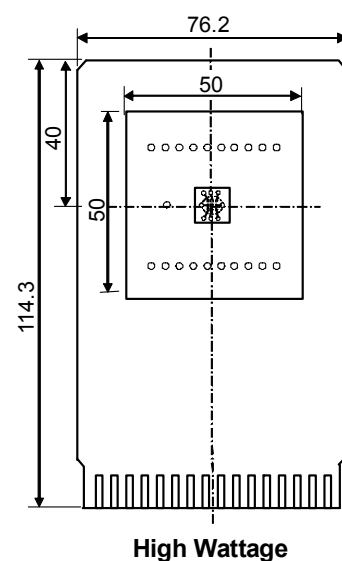

Measurement Board Pattern

○ IC Mount Area (Unit: mm)

ELECTRICAL CHARACTERISTICS

$V_{IN} = 2.3V$ to $36V$, $I_{OUT} = 1mA$, $C_{IN} = 1\mu F$, $C_{OUT} = 1\mu F$, unless otherwise noted. Typical values are $V_{IN} = 5V$ and $T_a = 25^\circ C$.

The specifications surrounded by are guaranteed by Design Engineering at $-40^\circ C \leq T_a \leq 85^\circ C$.

($T_a = 25^\circ C$)

Symbol	Item	Conditions	Min.	Typ.	Max.	Unit
V_{IN}	Input Voltage		2.3		36	V
I_{IN}	Input Supply Current	$V_{ENB} = 0V$, $V_{IN} = 5V$, $I_{OUT} = 0mA$		50	120	μA
I_{IN_DIS}	Input Disable Current	$V_{ENB} = 0V$, $V_{IN} = 5V$, $V_{OVLO} = 0V$		40	120	μA
I_{IN_Q}	Input Shutdown Current	$V_{ENB} = 5V$, $V_{IN} = 5V$, $V_{OUT} = 0V$		1.0	12	μA
I_{OUT_DIS}	Output Disable Current	$V_{ENB} = 0V$, $V_{OUT} = 5V$, $V_{IN} = 5V$, $V_{OVLO} < V_{OVLO_TH}$			3	μA
		$V_{ENB} = 0V$, $V_{OUT} = 5V$, $V_{IN} > V_{IN_OVLO}$				
I_{OUT_SD}	Output Shutdown Current	$V_{ENB} = 5V$, $V_{OUT} = 5V$, $V_{IN} = 5V$			5.5	μA
R_{ON}	On Resistance	$V_{IN} = 5V$, $I_{OUT} = 100mA$		54	100	m Ω
V_{IN_OVLO}	Overvoltage Protection Threshold	IN rising	6.6	6.8	7.0	V
		IN falling	6.4			V
C_{OUT}	OUT Load Capacitance				1000	μF
V_{OVLO_OP}	OVLO Open voltage	$V_{ENB} = 0V$, $V_{IN} = 5.0V$		3.0	3.6	V
R_{OVLO_PU}	OVLO Pull-up Resistance			500		k Ω
V_{OVLO_TH}	OVLO Force Off Voltage		0.6	1.0	1.4	V
V_{IH}	ENB Input High Voltage		1.4			V
V_{IL}	ENB Input Low Voltage				0.4	V
I_{ENB}	ENB Input Leakage		-1		1	μA
V_{OL}	PG Output Low Voltage	$I_{SINK} = 1mA$			0.4	V
V_{PG_LEAK}	PG Leakage Current	$V_{IO} = 3.3V^{*2}$	-1		1	μA
t_{DEB}	IN Debounce Time	starts when $2.3V < V_{IN}(5V) < V_{IN_OVLO}$ and ends when charge-pump is turned on ^{*3}	10	15	35	ms
t_{SS}	Soft-start Time	starts when $2.3V < V_{IN} < V_{IN_OVLO}$ and ends when $V_{OUT} = 90\%$ of V_{IN}		30		ms
t_{ON}	Turn-on Time During Soft-start	$V_{IN} = 5V$, $R_L = 50\Omega$, $C_L = 10\mu F$, starts when $V_{OUT} = 20\%$ of V_{IN} and ends when $V_{OUT} = 80\%$ of V_{IN} ^{*3}	1.5	-		ms
t_{OFF}	Turn-off Time	$R_L = 50\Omega$, starts when $V_{IN} > V_{OVLO}$ (2V/ μs) and ends when $V_{OUT} = 80\%$ of V_{IN}		1.5		μs
		starts when V_{ENB} is switched from "L" to "H", ends when $V_{OUT} = 80\%$ of V_{IN} , $R_L = 50\Omega$		84		
T_{SHDN}	Thermal Shut Down			150		$^\circ C$
T_{HYST}	Thermal Hysteresis			20		$^\circ C$
V_{UVREL}	UVLO Release Voltage	V_{IN} rising		2.05	2.3	V
V_{UVHYS}	UVLO Hysteresis	V_{IN} falling		0.15		V

All test items listed under *ELECTRICAL CHARACTERISTICS* are done under the pulse load condition ($T_J \approx T_a = 25^\circ C$) except Soft-Start Time and Turn-off Time and UVLO Hysteresis.

^{*2} Refer to *TYPICAL APPLICATION AND TECHNICAL NOTES*.

^{*3} Refer to *TIMING CHART*.

TIMING CHART

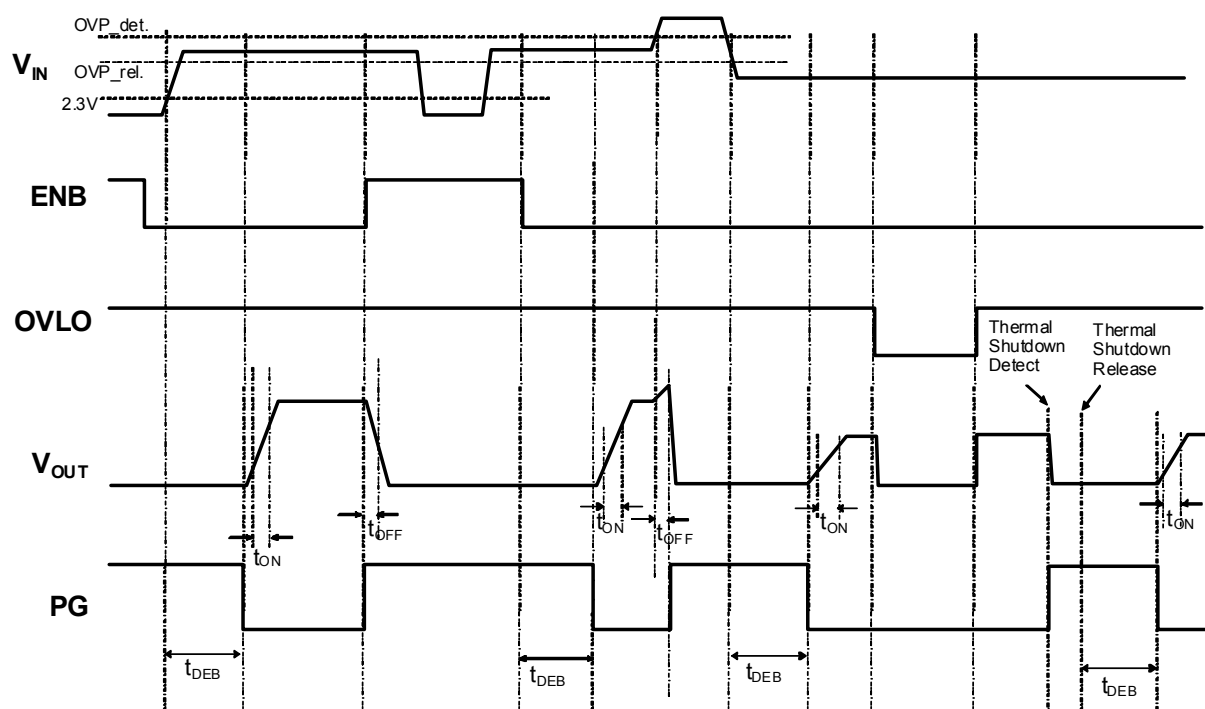


Figure 4. Timing Chart

TYPICAL APPLICATIONS AND TECHNICAL NOTES

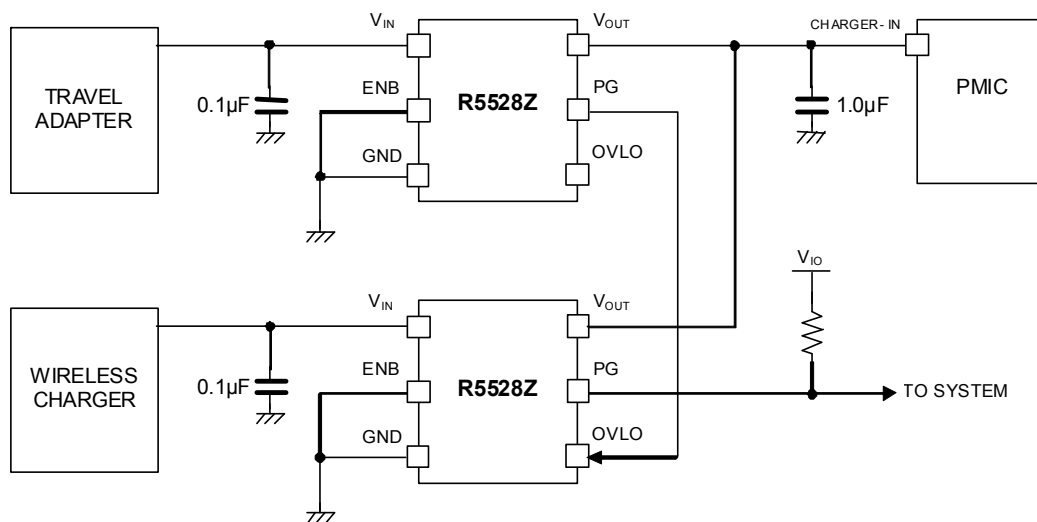


Figure 5. Typical Applications


Technical Notes

The R5528Z001A does not require any bypass capacitor between V_{IN} and GND. However, connecting a $0.1\mu\text{F}$ or more capacitor between V_{IN} and GND may improve the performance against the noise.


If there's any possibility of generating spike noise due to the parasitic element (inductance) of V_{IN} , connect an appropriate-sized capacitor between V_{IN} and GND.

TYPICAL CHARACTERISTIC


1) Input Shutdown Current VS. Input Voltage
R5528Z001A

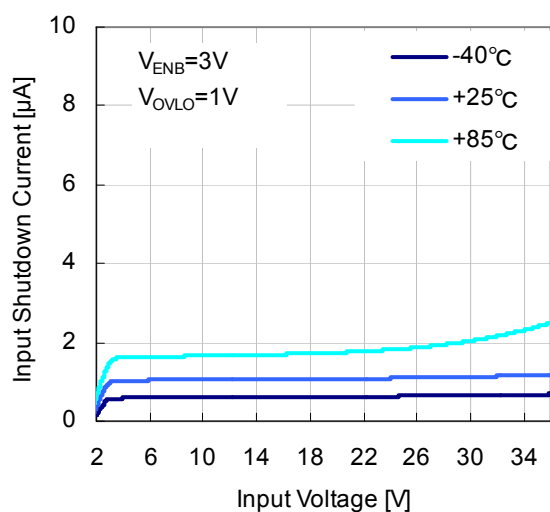


2) Input Supply Current VS. Input Voltage
R5528Z001A

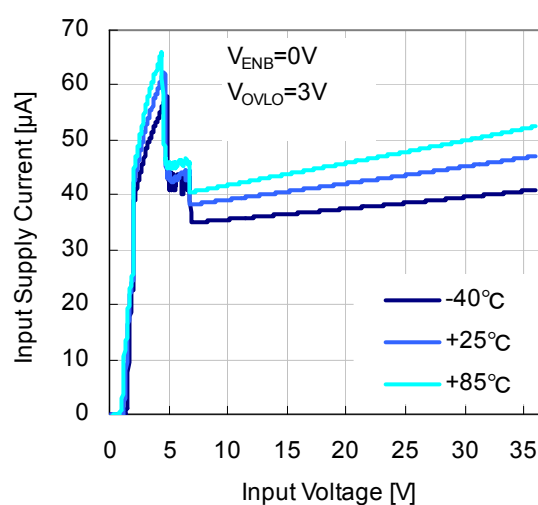


3) Input Disable Current VS. Input Voltage
R5528Z001A

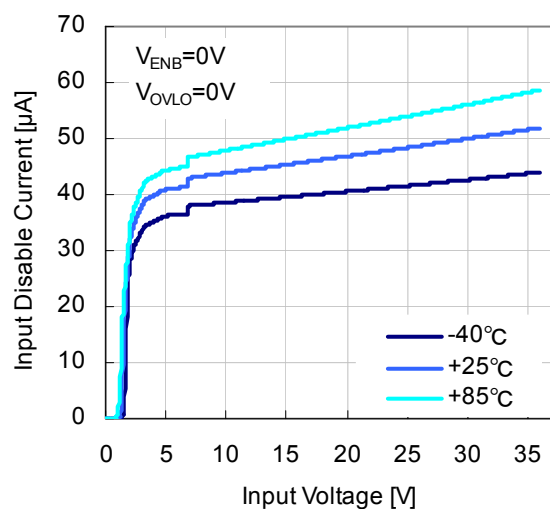


4) Input Supply Current VS. Temperature
R5528Z001A

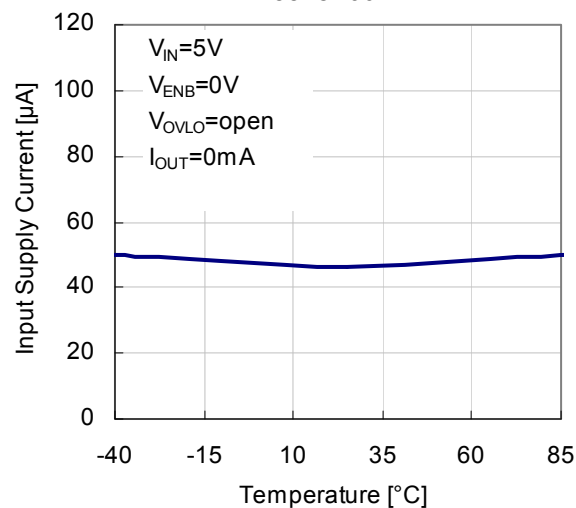


5) Output Leakage Current (6V) VS. Output Voltage
R5528Z001A

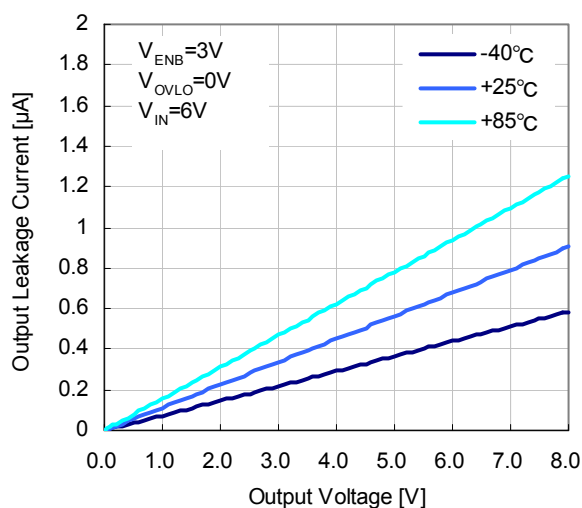


6) Output Leakage Current (0V) VS. Output Voltage
R5528Z001A

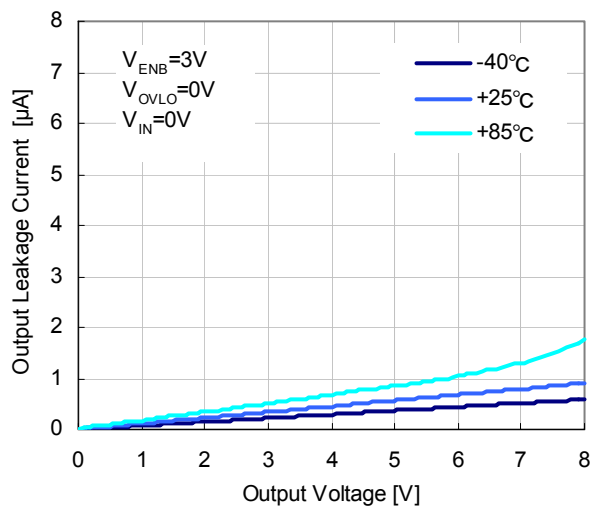


7) Normalized On-Resistance VS. Temperature R5528Z001A

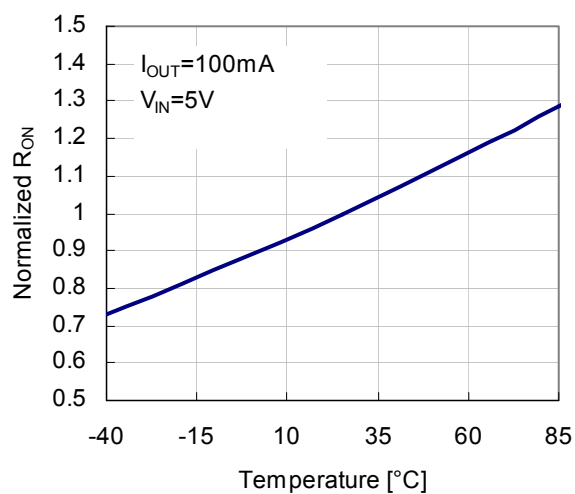


8) Normalized Overvoltage Protection Threshold (IN rising) VS. Temperature R5528Z001A

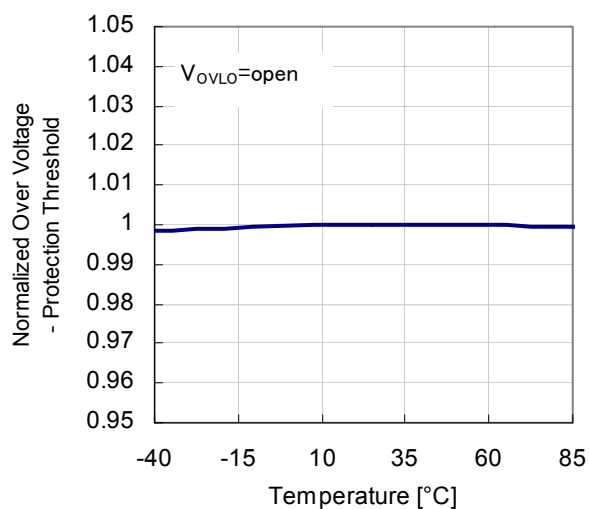

9) Debounce Time VS. Temperature R5528Z001A

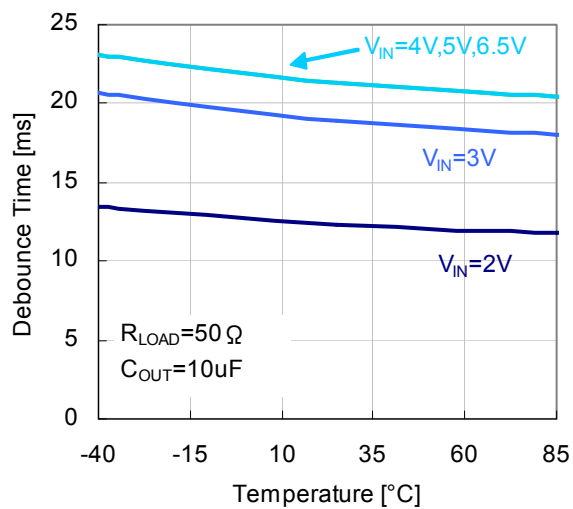


10) Debounce Time VS. Input Voltage R5528Z001A



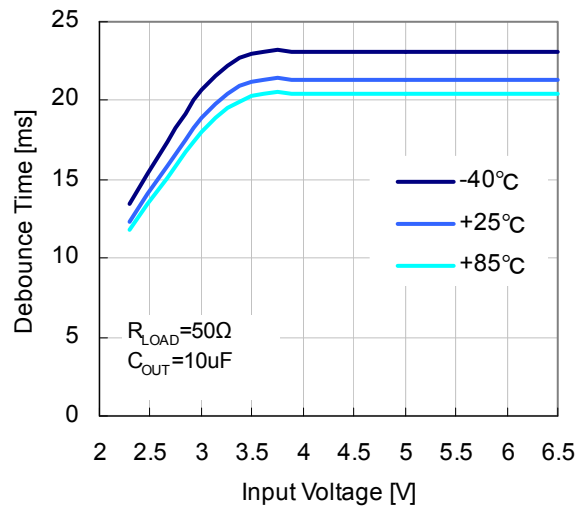


11) Trun-On Time VS. Temperature

R5528Z001A

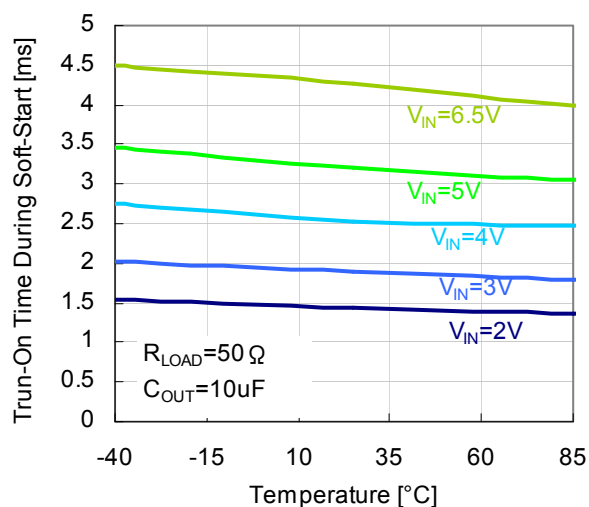12) Power-Up Response ($V_{IN} = 2.3V/ 3.0V/ 4.0V/ 5.0V$)


R5528Z001A

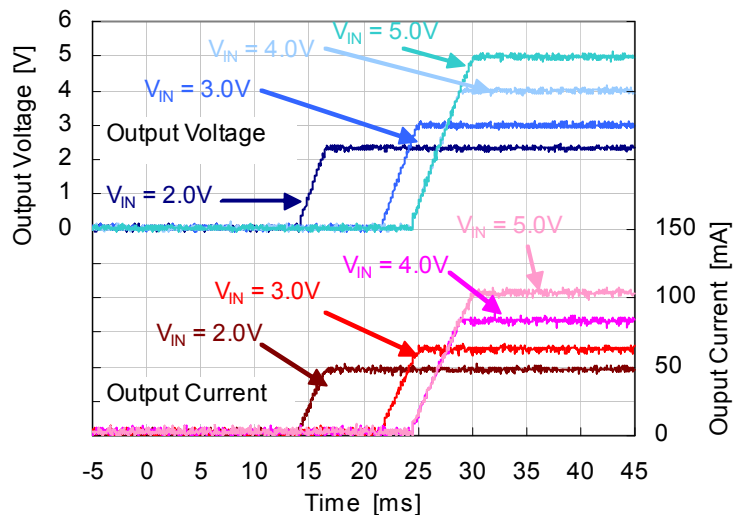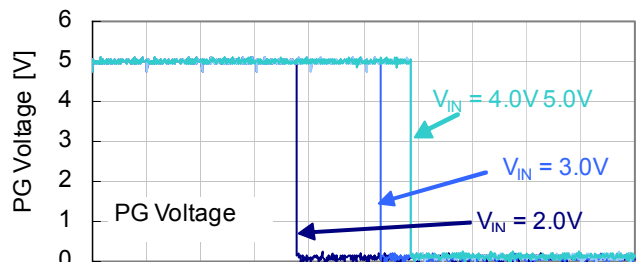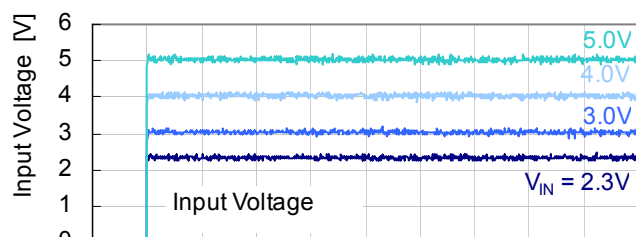 $R_{LOAD} = 50 \Omega / C_{OUT} = 10 \mu F / PG = 10 K \Omega \text{ to } 5V / V_{ENB} = 0V / T_a = 25^\circ C$ 


13) Power-Up Response ($R_{OUT} = 10\Omega / 50\Omega / 5K\Omega / 50K\Omega$)

R5528Z001A


$V_{IN}=5.0V/C_{OUT}=10\mu F/PG=10K\Omega$ to $5V/V_{ENB}=0V/Ta=25^\circ C$

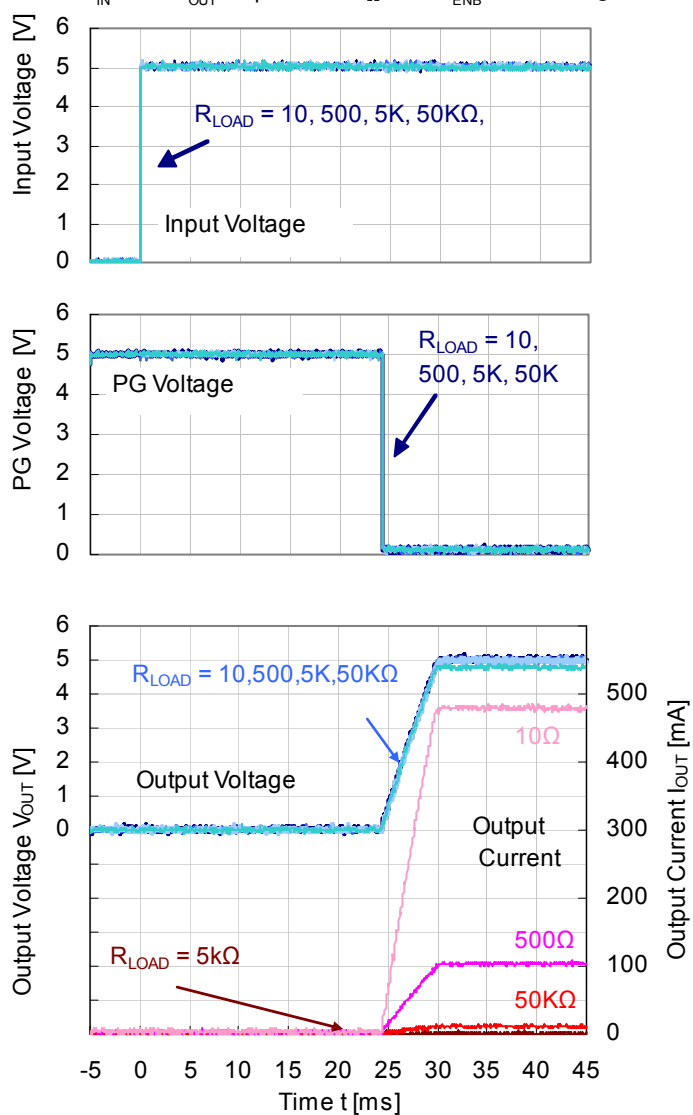

14) Power-Up Response ($C_{OUT} = 1\mu F / 10\mu F / 100\mu F / 1000\mu F$)

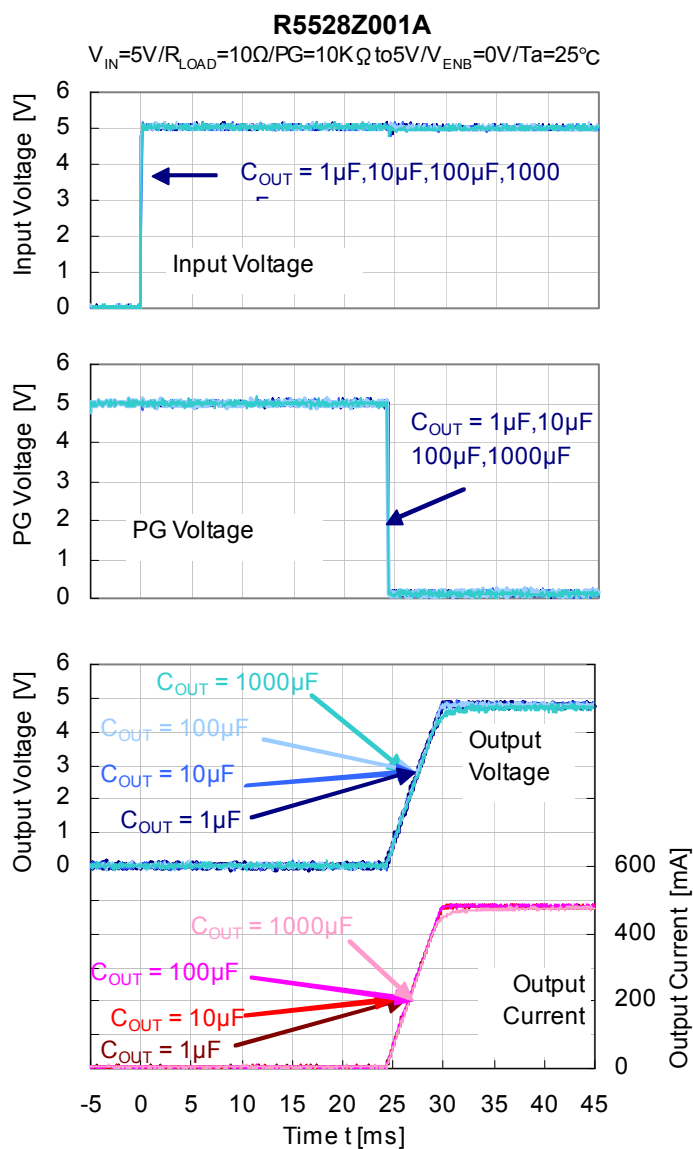

15) Overvoltage Fault Response

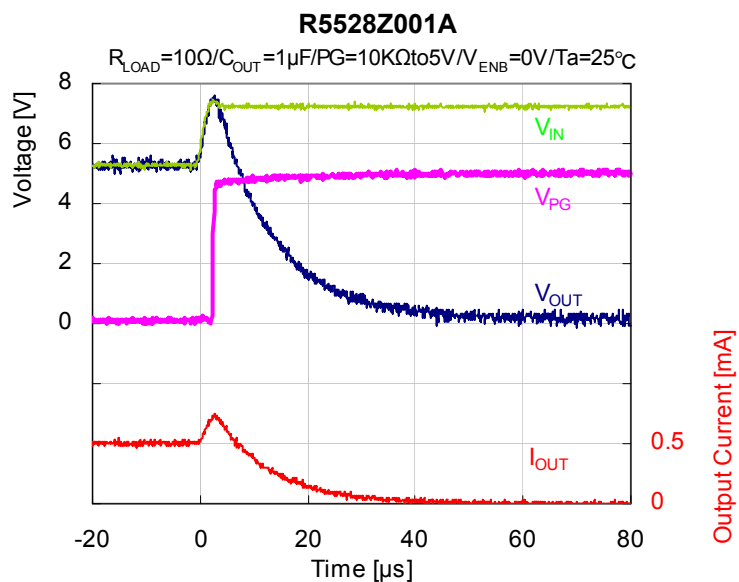



1. The products and the product specifications described in this document are subject to change or discontinuation of production without notice for reasons such as improvement. Therefore, before deciding to use the products, please refer to Ricoh sales representatives for the latest information thereon.
2. The materials in this document may not be copied or otherwise reproduced in whole or in part without prior written consent of Ricoh.
3. Please be sure to take any necessary formalities under relevant laws or regulations before exporting or otherwise taking out of your country the products or the technical information described herein.
4. The technical information described in this document shows typical characteristics of and example application circuits for the products. The release of such information is not to be construed as a warranty of or a grant of license under Ricoh's or any third party's intellectual property rights or any other rights.
5. The products listed in this document are intended and designed for use as general electronic components in standard applications (office equipment, telecommunication equipment, measuring instruments, consumer electronic products, amusement equipment etc.). Those customers intending to use a product in an application requiring extreme quality and reliability, for example, in a highly specific application where the failure or misoperation of the product could result in human injury or death (aircraft, spacevehicle, nuclear reactor control system, traffic control system, automotive and transportation equipment, combustion equipment, safety devices, life support system etc.) should first contact us.
6. We are making our continuous effort to improve the quality and reliability of our products, but semiconductor products are likely to fail with certain probability. In order to prevent any injury to persons or damages to property resulting from such failure, customers should be careful enough to incorporate safety measures in their design, such as redundancy feature, fire containment feature and fail-safe feature. We do not assume any liability or responsibility for any loss or damage arising from misuse or inappropriate use of the products.
7. Anti-radiation design is not implemented in the products described in this document.
8. Please contact Ricoh sales representatives should you have any questions or comments concerning the products or the technical information.



Ricoh is committed to reducing the environmental loading materials in electrical devices with a view to contributing to the protection of human health and the environment.

Ricoh has been providing RoHS compliant products since April 1, 2006 and Halogen-free products since April 1, 2012.

RICOH RICOH ELECTRONIC DEVICES CO., LTD.

<http://www.e-devices.ricoh.co.jp/en/>

Sales & Support Offices

RICOH ELECTRONIC DEVICES CO., LTD.

Higashi-Shinagawa Office (International Sales)
3-32-3, Higashi-Shinagawa, Shinagawa-ku, Tokyo 140-8655, Japan
Phone: +81-3-5479-2857 Fax: +81-3-5479-0502

RICOH EUROPE (NETHERLANDS) B.V.

Semiconductor Support Centre
Prof. W.H. Keesomlaan 1, 1183 DJ Amstelveen, The Netherlands
Phone: +31-20-5474-309

RICOH INTERNATIONAL B.V. - German Branch

Semiconductor Sales and Support Centre
Oberrather Strasse 6, 40472 Düsseldorf, Germany
Phone: +49-211-6546-0

RICOH ELECTRONIC DEVICES KOREA CO., LTD.

3F, Haesung Bldg, 504, Teheran-ro, Gangnam-gu, Seoul, 135-725, Korea
Phone: +82-2-2135-5700 Fax: +82-2-2051-5713

RICOH ELECTRONIC DEVICES SHANGHAI CO., LTD.

Room 403, No.2 Building, No.690 Bibo Road, Pu Dong New District, Shanghai 201203, People's Republic of China
Phone: +86-21-5027-3200 Fax: +86-21-5027-3299

RICOH ELECTRONIC DEVICES CO., LTD.

Taipei office
Room 109, 10F-1, No.51, Hengyang Rd., Taipei City, Taiwan (R.O.C.)
Phone: +886-2-2313-1621/1622 Fax: +886-2-2313-1623

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Ricoch Electronics:](#)

[R5528Z001A-E2-F](#)

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А