

FEATURES

- 5 V single-supply operation
- 7 ns propagation delay
- Low power
- Separate input and output sections
- TTL/CMOS logic-compatible outputs
- Wide output swing
- TSSOP, SOIC, and PDIP packages

APPLICATIONS

- High speed timing
- Line receivers
- Data communications
- High speed V-to-F converters
- Battery operated instrumentation
- High speed sampling systems
- Window comparators
- PCMCIA cards
- Upgrade for MAX901 designs

GENERAL DESCRIPTION

The AD8564 is a quad 7 ns comparator with separate input and output supplies, thus enabling the input stage to be operated from ± 5 V dual supplies or a 5 V single supply while maintaining a CMOS-/TTL-compatible output.

Fast 7 ns propagation delay makes the AD8564 a good choice for timing circuits and line receivers. Independent analog and digital supplies provide excellent protection from supply pin interaction. The AD8564 is pin compatible with the MAX901 and has lower supply currents.

All four comparators have similar propagation delays. The propagation delay for rising and falling signals is similar, and tracks over temperature and voltage. These characteristics make the AD8564 a good choice for high speed timing and data communications circuits. For a similar single comparator with latch function, refer to the AD8561 data sheet.

The AD8564 is specified over the industrial temperature range (-40°C to $+125^{\circ}\text{C}$). The quad AD8564 is available in the 16-lead TSSOP, 16-lead narrow body SOIC, and 16-lead plastic DIP packages.

PIN CONFIGURATIONS



Figure 1. 16-Lead TSSOP (RU-16)




Figure 2. 16-Lead Narrow Body SOIC (R-16)

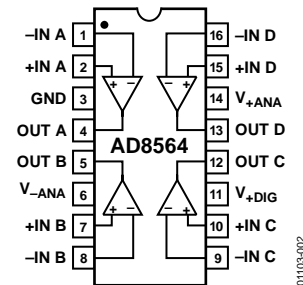


Figure 3. 16-Lead PDIP (N-16)

Rev. B

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

TABLE OF CONTENTS

| | | | |
|--------------------------------|---|---|----|
| Features | 1 | ESD Caution..... | 5 |
| Applications..... | 1 | Typical Performance Characteristics | 6 |
| Pin Configurations | 1 | Applications Information | 9 |
| General Description | 1 | Optimizing High Speed Performance | 9 |
| Revision History | 2 | Output Loading Considerations..... | 9 |
| Specifications..... | 3 | Input Stage and Bias Currents | 9 |
| Electrical Specifications..... | 3 | Using Hysteresis | 10 |
| Absolute Maximum Ratings..... | 5 | Outline Dimensions | 11 |
| Thermal Resistance | 5 | Ordering Guide | 12 |

REVISION HISTORY**8/07—Rev. A to Rev. B**

| | |
|---|-----------|
| Updated Format..... | Universal |
| Changes to Applications | 1 |
| Changes to General Description | 1 |
| Changes to Specifications..... | 3 |
| Changes to the Absolute Maximum Ratings Section | 5 |
| Changes to the Applications Information Section..... | 9 |
| Deleted Spice Model Section..... | 11 |
| Updated Outline Dimensions | 12 |
| Changes to Ordering Guide | 13 |

6/99—Rev. 0 to Rev. A

SPECIFICATIONS

ELECTRICAL SPECIFICATIONS

$V_{+ANA} = V_{+DIG} = 5.0\text{ V}$, $V_{-ANA} = 0\text{ V}$, $T_A = 25^\circ\text{C}$, unless otherwise noted.

Table 1.

| Parameter | Symbol | Conditions | Min | Typ | Max | Unit |
|---|--------------------------|---|-----|------|---------|------------------------------|
| INPUT CHARACTERISTICS | | | | | | |
| Offset Voltage | V_{OS} | $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}^1$ | | 2.3 | 7 | mV |
| Offset Voltage Drift | $\Delta V_{OS}/\Delta T$ | | | 4 | 8 | $\mu\text{V}/^\circ\text{C}$ |
| Input Bias Current | I_B | $V_{CM} = 0\text{ V}$ $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}^1$ | | | ± 4 | μA |
| Input Offset Current | I_{OS} | $V_{CM} = 0\text{ V}$ | | | ± 3 | μA |
| Input Common-Mode Voltage Range | V_{CM} | | 0 | | 2.75 | V |
| Common-Mode Rejection Ratio | CMRR | $0\text{ V} \leq V_{CM} \leq 3.0\text{ V}$ | 65 | 85 | | dB |
| Large Signal Voltage Gain | A_{VO} | $R_L = 10\text{ k}\Omega$ | | 3000 | | V/V |
| Input Capacitance | C_{IN} | | | 3.0 | | pF |
| DIGITAL OUTPUTS | | | | | | |
| Logic 1 Voltage | V_{OH} | $I_{OH} = -3.2\text{ mA}$, $\Delta V_{IN} > 250\text{ mV}$ | 2.4 | 3.5 | | V |
| Logic 0 Voltage | V_{OL} | $I_{OL} = 3.2\text{ mA}$, $V_{IN} > 250\text{ mV}$ | | 0.3 | 0.4 | V |
| DYNAMIC PERFORMANCE² | | | | | | |
| Propagation Delay | t_P | 200 mV step with 100 mV overdrive $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}^1$ | | 6.75 | 9.8 | ns |
| Differential Propagation Delay (Rising Propagation Delay vs. Falling Propagation Delay) | Δt_P | 100 mV step with 5 mV overdrive 100 mV step with 20 mV overdrive | | 8 | 13 | ns |
| Rise Time | | 20% to 80% | | 3.8 | | ns |
| Fall Time | | 20% to 80% | | 1.5 | | ns |
| POWER SUPPLY | | | | | | |
| Power Supply Rejection Ratio | PSRR | $4.5\text{ V} \leq V_{+ANA}$ and $V_{+DIG} \leq 5.5\text{ V}$ | | 80 | | dB |
| Analogue Supply Current | I_{+ANA} | $-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}^1$ $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}^1$ | | 10.5 | 14.0 | mA |
| Digital Supply Current | I_{DIG} | $V_O = 0\text{ V}$, $R_L = \infty$ $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}^1$ | | 6.0 | 7.0 | mA |
| Analogue Supply Current | I_{-ANA} | $-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}^1$ $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}^1$ | | -7.0 | +14.0 | mA |

¹ Full electrical specifications to -55°C , but these package types are guaranteed for operation from -40°C to $+125^\circ\text{C}$ only. Package reliability below -40°C is not guaranteed.

² Guaranteed by design.

AD8564

$V_{+ANA} = V_{+DIG} = 5.0\text{ V}$, $V_{-ANA} = -5\text{ V}$, $T_A = 25^\circ\text{C}$, unless otherwise noted.

Table 2.

| Parameter | Symbol | Conditions | Min | Typ | Max | Unit |
|---|--------------------------|---|------|------|---------|------------------------------|
| INPUT CHARACTERISTICS | | | | | | |
| Offset Voltage | V_{OS} | $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}^1$ | | 2.3 | 7 | mV |
| Offset Voltage Drift | $\Delta V_{OS}/\Delta T$ | | | 4 | 10 | $\mu\text{V}/^\circ\text{C}$ |
| Input Bias Current | I_B | $V_{CM} = 0\text{ V}$ $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}^1$ | | | ± 4 | μA |
| Input Offset Current | I_{OS} | $V_{CM} = 0\text{ V}$ | | | ± 9 | μA |
| Input Common-Mode Voltage Range | V_{CM} | | -4.9 | | +3.5 | V |
| Common-Mode Rejection Ratio | CMRR | $0\text{ V} \leq V_{CM} \leq 3.0\text{ V}$ | 65 | 85 | | dB |
| Large Signal Voltage Gain | A_{VO} | $R_L = 10\text{ k}\Omega$ | | 3000 | | V/V |
| Input Capacitance | C_{IN} | | | 3.0 | | pF |
| DIGITAL OUTPUTS | | | | | | |
| Logic 1 Voltage | V_{OH} | $I_{OH} = -3.2\text{ mA}$, $\Delta V_{IN} > +250\text{ mV}$ | 2.6 | 3.6 | | V |
| Logic 0 Voltage | V_{OL} | $I_{OL} = 3.2\text{ mA}$, $\Delta V_{IN} > 250\text{ mV}$ | | 0.2 | 0.3 | V |
| DYNAMIC PERFORMANCE² | | | | | | |
| Propagation Delay | t_P | 200 mV step with 100 mV overdrive $-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}^1$ | | 6.75 | 9.8 | ns |
| | | | | 8 | 13 | ns |
| Differential Propagation Delay (Rising Propagation Delay vs. Falling Propagation Delay) | Δt_P | 100 mV step with 5 mV overdrive 100 mV step with 20 mV overdrive | | 8 | | ns |
| Rise Time | | 20% to 80% | | 0.5 | 2.0 | ns |
| Fall Time | | 20% to 80% | | 3 | | ns |
| POWER SUPPLY | | | | | | |
| Power Supply Rejection Ratio | PSRR | $4.5\text{ V} \leq V_{+ANA}$ and $V_{+DIG} \leq 5.5\text{ V}$ | 50 | 70 | | dB |
| Analogue Supply Current | I_{+ANA} | $-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}^1$ $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}^1$ | | 10.8 | 14.0 | mA |
| | | | | | 15.6 | mA |
| | | | | | 17 | mA |
| Digital Supply Current | I_{DIG} | $V_O = 0\text{ V}$, $R_L = \infty$ $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}^1$ | | 3.6 | 4.4 | mA |
| | | | | | 5.6 | mA |
| Analogue Supply Current | I_{-ANA} | $-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}^1$ $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}^1$ | | -8.2 | +14.0 | mA |
| | | | | | 15.6 | mA |
| | | | | | 17 | mA |

¹ Full electrical specifications to -55°C , but these package types are guaranteed for operation from -40°C to $+125^\circ\text{C}$ only. Package reliability below -40°C is not guaranteed.

² Guaranteed by design.

ABSOLUTE MAXIMUM RATINGS

Table 3.

| Parameter | Rating |
|---|-----------------|
| Total Analog Supply Voltage | 14 V |
| Digital Supply Voltage | 17 V |
| Analog Positive Supply to Digital Positive Supply | -600 mV |
| Input Voltage ¹ | ±7 V |
| Differential Input Voltage | ±8 V |
| Output Short-Circuit Duration to GND | Indefinite |
| Storage Temperature Range | -65°C to +150°C |
| Operating Temperature Range | -55°C to +125°C |
| Junction Temperature Range | -65°C to +150°C |
| Lead Temperature Range (Soldering, 10 sec) | 300°C |

¹ The analog input voltage is equal to ±7 V or the analog supply voltage, whichever is less.

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

THERMAL RESISTANCE

θ_{JA} is specified for the worst-case conditions, that is, a device soldered in a circuit board for surface-mount packages (SOIC and TSSOP). θ_{JA} is specified for device in socket for PDIP.

Table 4. Thermal Resistance

| Package Type | θ_{JA} | θ_{JC} | Unit |
|------------------------------|---------------|---------------|------|
| 16-Lead PDIP (N) | 90 | 47 | °C/W |
| 16-Lead Narrow Body SOIC (R) | 113 | 37 | °C/W |
| 16-Lead TSSOP (RU) | 180 | 37 | °C/W |

ESD CAUTION



ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

TYPICAL PERFORMANCE CHARACTERISTICS

$V_{+ANA} = V_{+DIG} = 5\text{ V}$, $V_{-ANA} = 0\text{ V}$, $T_A = 25^\circ\text{C}$, unless otherwise noted.



Figure 4. Input Offset Voltage vs. Temperature

01103-004



Figure 7. Input Offset Voltage Distribution

01103-007

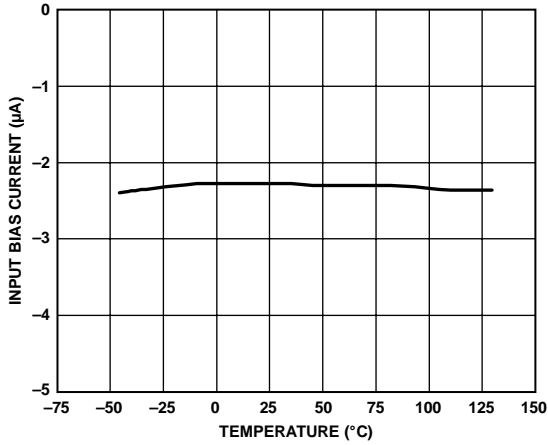


Figure 5. Input Bias Current vs. Temperature

01103-005

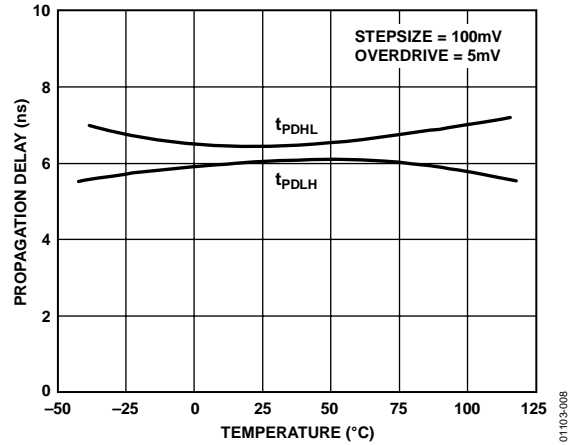


Figure 8. Propagation Delay, t_{PDHL}/t_{PDLH} vs. Temperature

01103-008

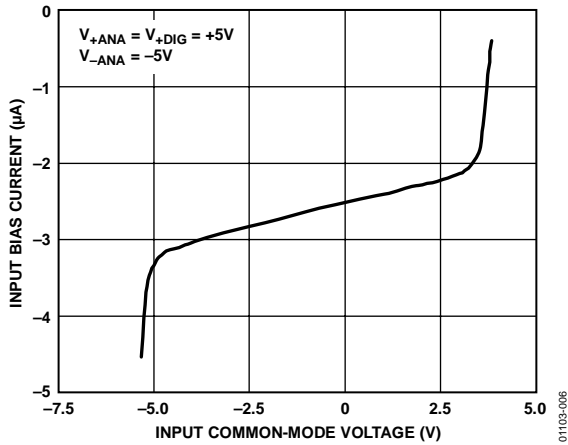


Figure 6. Input Bias Current vs. Input Common-Mode Voltage

01103-006

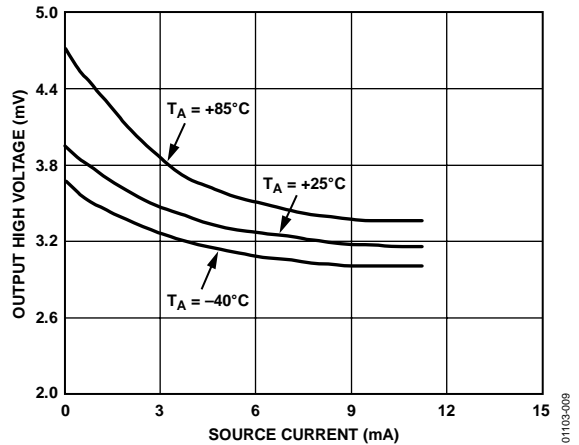


Figure 9. Output High Voltage, V_{OH} vs. Source Current

01103-009

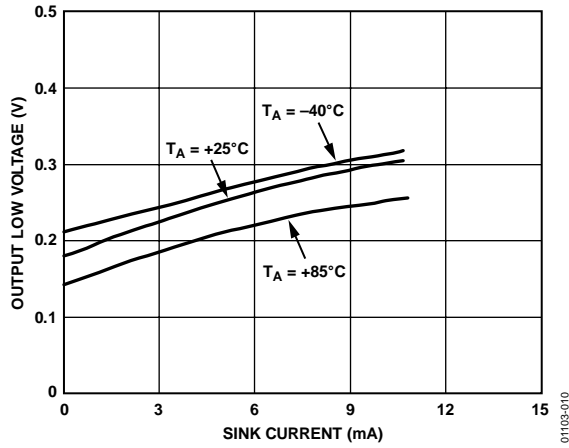


Figure 10. Output Low Voltage, V_{OL} vs. Sink Current

01103-010

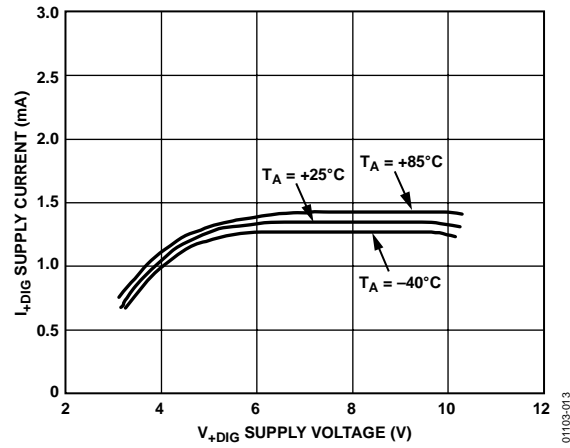


Figure 13. I_{+DIG} Supply Current/Comparator vs. V_{+DIG} Supply Voltage

01103-013

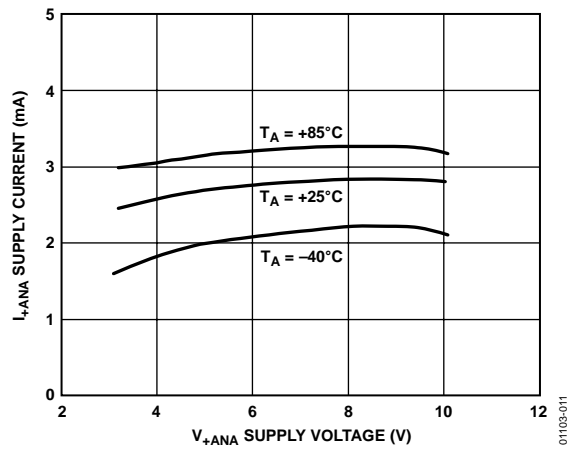


Figure 11. I_{+ANA} Supply Current/Comparator vs. V_{+ANA} Supply Voltage

01103-011

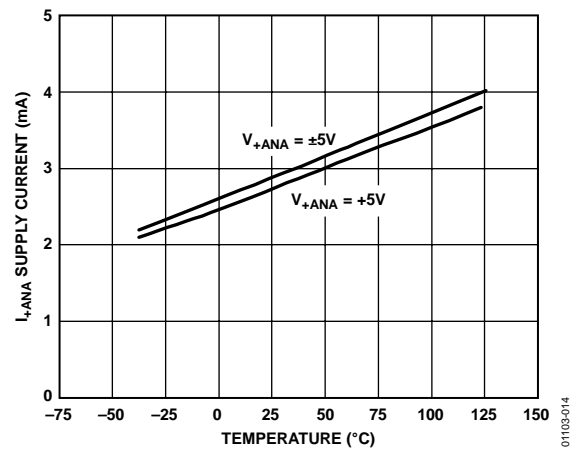


Figure 14. I_{+ANA} Supply Current/Comparator vs. Temperature

01103-014

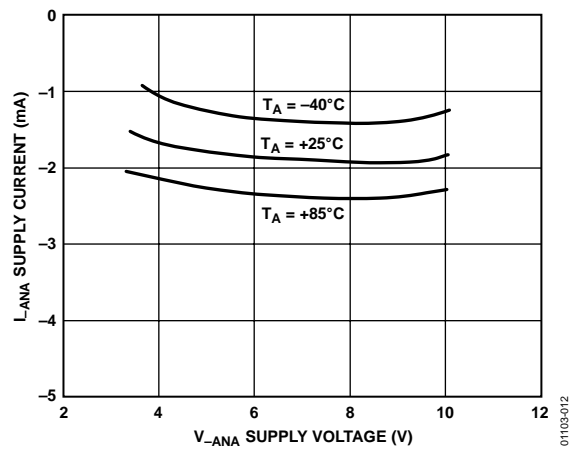


Figure 12. I_{-ANA} Supply Current/Comparator vs. V_{-ANA} Supply Voltage

01103-012

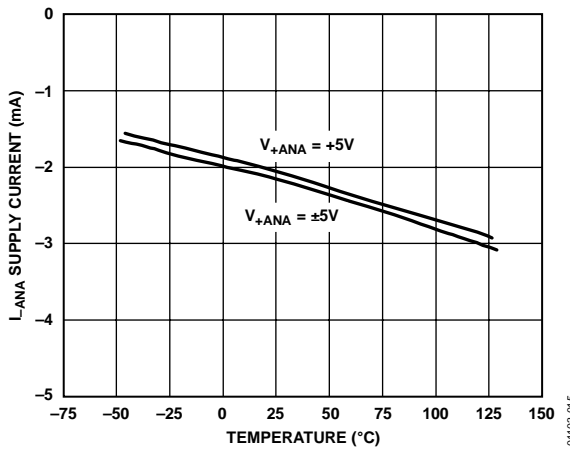


Figure 15. I_{-ANA} Supply Current/Comparator vs. Temperature

01103-015

AD8564

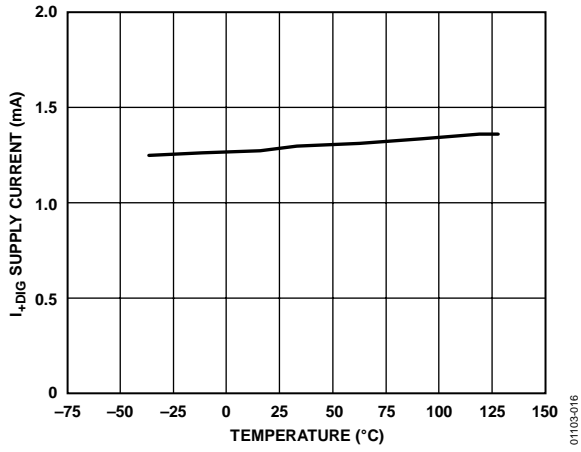


Figure 16. I+DIG Supply Current/Comparator vs. Temperature

APPLICATIONS INFORMATION

OPTIMIZING HIGH SPEED PERFORMANCE

As with any high speed comparator or amplifier, proper design and layout techniques should be used to ensure optimal performance from the AD8564. The performance limits of high speed circuitry can easily be a result of stray capacitance, improper ground impedance, or other layout issues.

Minimizing resistance from the source to the input is an important consideration in maximizing the high speed operation of the AD8564. Source resistance, in combination with equivalent input capacitance, may cause a lagged response at the input, thus delaying the output. The input capacitance of the AD8564, in combination with stray capacitance from an input pin to ground, may result in several picofarads of equivalent capacitance. A combination of 3 k Ω source resistance and 5 pF of input capacitance yields a time constant of 15 ns, which is slower than the 5 ns capability of the AD8564. Source impedances should be less than 1 k Ω for the best performance.

It is also important to provide bypass capacitors for the power supply in a high speed application. A 1 μ F electrolytic bypass capacitor should be placed within 0.5 inches of each power supply pin to ground. These capacitors reduce any potential voltage ripples from the power supply. In addition, a 10 nF ceramic capacitor should be placed as close as possible to the power supply pins to ground. These capacitors act as a charge reservoir for the device during high frequency switching.

A ground plane is recommended for proper high speed performance. This can be created by using a continuous conductive plane over the surface of the circuit board, only allowing breaks in the plane for necessary current paths. The ground plane provides a low inductance ground, eliminating any potential differences at different ground points throughout the circuit board caused from ground bounce. A proper ground plane also minimizes the effects of stray capacitance on the circuit board.

OUTPUT LOADING CONSIDERATIONS

The AD8564 output can deliver up to 40 mA of output current without any significant increase in propagation delay. The output of the device should not be connected to more than 20 TTL input logic gates or drive a load resistance less than 100 Ω .

To ensure the best performance from the AD8564, it is important to minimize capacitive loading of the output of the device. Capacitive loads greater than 50 pF cause ringing on the output waveform and reduce the operating bandwidth of the comparator. Propagation delay also increases with capacitive loads above 100 pF.

INPUT STAGE AND BIAS CURRENTS

The AD8564 uses a PNP differential input stage that enables the input common-mode range to extend all the way from the negative supply rail to within 2.2 V of the positive supply rail. The input common-mode voltage can be found as the average of the voltage at the two inputs of the device. To ensure the fastest response time, care should be taken to not allow the input common-mode voltage to exceed this voltage.

The input bias current for the AD8564 is 4 μ A. As with any PNP differential input stage, this bias current goes to 0 on an input that is high and doubles on an input that is low. Care should be taken in choosing resistor values to be connected to the inputs because large resistors could cause significant voltage drops due to the input bias current.

The input capacitance for the AD8564 is typically 3 pF. This can be measured by inserting a large source resistance to the input and measuring the change in propagation delay.

USING HYSTERESIS

Hysteresis can easily be added to a comparator through the addition of positive feedback. Adding hysteresis to a comparator offers an advantage in noisy environments where it is not desirable for the output to toggle between states when the input signal is near the switching threshold. Figure 17 shows a method for configuring the AD8564 with hysteresis.

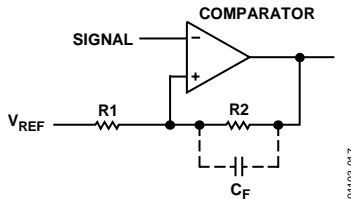


Figure 17. Configuring the AD8564 with Hysteresis

The input signal is connected directly to the inverting input of the comparator. The output is fed back to the noninverting input through R2 and R1. The ratio of R1 to R1 + R2 and the output swing establishes the width of the hysteresis window, with V_{REF} setting the center of the window or the average switching voltage. The output switches high when the input

voltage is greater than V_{HI} and does not switch low again until the input voltage is less than V_{LO}, as given in Equation 2.

$$V_{HI} = \left(V_+ - 1 - V_{REF} \right) \frac{R1}{R1 + R2} V_{REF} \quad (1)$$

$$V_{LO} = V_{REF} \left(1 - \frac{R1}{R1 + R2} \right) \quad (2)$$


where V₊ is the positive supply voltage.

The C_F capacitor may also be added to introduce a pole into the feedback network. This has the effect of increasing the amount of hysteresis at high frequencies. This can be useful when comparing a relatively slow signal in a high frequency noise environment.

At frequencies greater than $f_p = \frac{1}{2\pi C_F R2}$, the hysteresis window approaches V_{HI} = V₊ - 1 V and V_{LO} = 0 V.

At frequencies less than f_p, the threshold voltages remain as it is in Equation 1.

OUTLINE DIMENSIONS

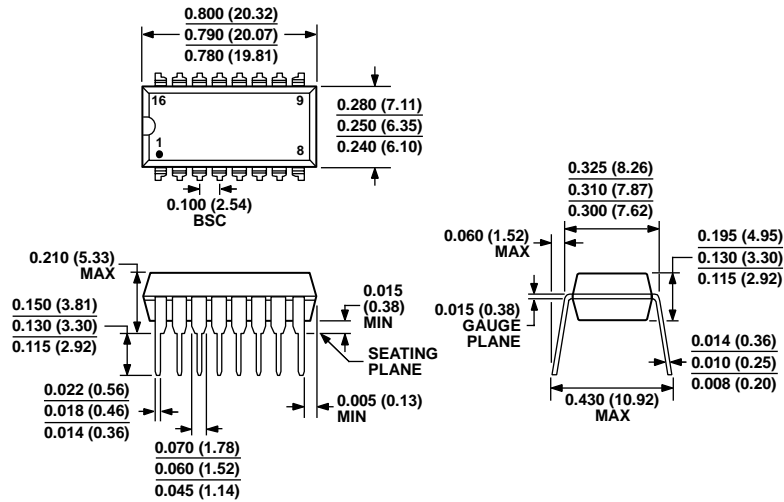

COMPLIANT TO JEDEC STANDARDS MS-001-AB
 CONTROLLING DIMENSIONS ARE IN INCHES; MILLIMETER DIMENSIONS (IN PARENTHESES) ARE ROUNDED-OFF INCH EQUIVALENTS FOR REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN. CORNER LEADS MAY BE CONFIGURED AS WHOLE OR HALF LEADS.

Figure 18. 16-Lead Plastic Dual In-Line Package [PDIP] (N-16)

Dimensions shown in inches and (millimeters)

073106-B



COMPLIANT TO JEDEC STANDARDS MS-012-AC
 CONTROLLING DIMENSIONS ARE IN MILLIMETERS; INCH DIMENSIONS (IN PARENTHESES) ARE ROUNDED-OFF MILLIMETER EQUIVALENTS FOR REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN.

Figure 19. 16-Lead Standard Small Outline Package [SOIC_N] Narrow Body (R-16)

Dimensions shown in millimeters and (inches)

069606-A

AD8564



COMPLIANT TO JEDEC STANDARDS MO-153-AB

Figure 20. 16-Lead Thin Shrink Small Outline Package [TSSOP]
(RU-16)

Dimensions shown in millimeters

ORDERING GUIDE

| Model | Temperature Range | Package Description | Package Option |
|------------------------------|-------------------|---|----------------|
| AD8564AN | -40°C to +125°C | 16-Lead Plastic Dual In-Line Package [PDIP] | N-16 |
| AD8564ANZ ¹ | -40°C to +125°C | 16-Lead Plastic Dual In-Line Package [PDIP] | N-16 |
| AD8564AR | -40°C to +125°C | 16-Lead Standard Small Outline Package [SOIC_N] | R-16 |
| AD8564AR-REEL | -40°C to +125°C | 16-Lead Standard Small Outline Package [SOIC_N] | R-16 |
| AD8564AR-REEL7 | -40°C to +125°C | 16-Lead Standard Small Outline Package [SOIC_N] | R-16 |
| AD8564ARZ ¹ | -40°C to +125°C | 16-Lead Standard Small Outline Package [SOIC_N] | R-16 |
| AD8564ARZ-REEL ¹ | -40°C to +125°C | 16-Lead Standard Small Outline Package [SOIC_N] | R-16 |
| AD8564ARZ-REEL7 ¹ | -40°C to +125°C | 16-Lead Standard Small Outline Package [SOIC_N] | R-16 |
| AD8564ARU-REEL | -40°C to +125°C | 16-Lead Thin Shrink Small Outline Package [TSSOP] | RU-16 |
| AD8564ARUZ-REEL ¹ | -40°C to +125°C | 16-Lead Thin Shrink Small Outline Package [TSSOP] | RU-16 |

¹ Z = RoHS Compliant Part.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А