

# Cylindrical Style EMI Filters

GK Series – .375/.410 Dia.

Hermetically Sealed – Circuits Available – C, L,  $\pi$ , T



## APPLICATIONS

The GK series offers effective filtering from 30 KHz to 10 GHz. Glass sealed for hermeticity, this series is impervious to high moisture, solvents, or other severe environmental conditions commonly encountered in military applications. It is designed for bulkhead mounting in a slotted hole with nut and lockwasher supplied.

The “L” and “T” configurations are designed to provide effective attenuation over a wide range of circuit impedances. For current ratings under 10 Amps toroidal wound

inductor elements offer increased filter performance and protection against circuit transients. Data showing the actual inductance versus various levels of DC or AC bias current are available as well as the attenuation in any combination of source and load impedances.

Alternate lead configurations or special capacitance/inductance values may be ordered.

Custom packages or filter arrays utilizing the GK series can be furnished.

## CHARACTERISTICS

- .410 Dia. version (HK) meets or exceeds the applicable requirements of MIL-F-28861/2,/3,/4,/5. See QPL listing.
- Glass hermetic seal on both ends.
- Wound toroidal inductor used in current ratings up through 5 Amps. Ferrite bead inductor used in 10 and 15 Amp designs.
- High DC current rating: 15 Amps.
- High capacitance values available.

## SPECIFICATIONS

1. Case/Terminal Plating:  
Electro-tin standard –  
Silver or gold available
  2. Material:  
Case: Brass standard – Steel available  
End Seal: Mild steel  
Terminals: Nickel-iron alloy
  3. Operating Temperature Range:  
-55°C to +125°C
  4. Electrical Characteristics:  
A. Rated Voltage and Current: See chart  
B. Insulation Resistance:  
At 25°C: 1,000 megohm-microfarad min., or 50,000 megohms min., whichever is less, at the rated DC voltage  
At 125°C: 100 megohm-microfarad min., or 5,000 megohms min., whichever is less
  5. Marking:  
Standard Marking: AVX, AVX part number, rated current, voltage, lot code, schematic  
NOTE: Schematic to indicate location of inductor (standard or reverse) for GK2 L-Section Filters.
  6. Dielectric Withstanding Voltage (DWW):  
R-level designs:  
2.0 times rated DC voltage  
Class B, Class S designs:  
2.5 times rated DC voltage  
D. Capacitance: Total capacitance listed in chart for each filter type is “guaranteed minimum value” (GMV)
  6. Installation:  
A. Mounting Torque: 44 oz-in.  $\pm$  4 oz-in.  
B. Refer to “Installation, Handling, Hardware Options” section of the catalog.
- See Reliability Codes section for definition of Reliability Level marking. See How to Order section for part number construction.


# Cylindrical Style EMI Filters

GK Series – .375/.410 Dia.


Hermetically Sealed – Circuits Available – C, L,  $\pi$ , T




## STANDARD CONFIGURATION

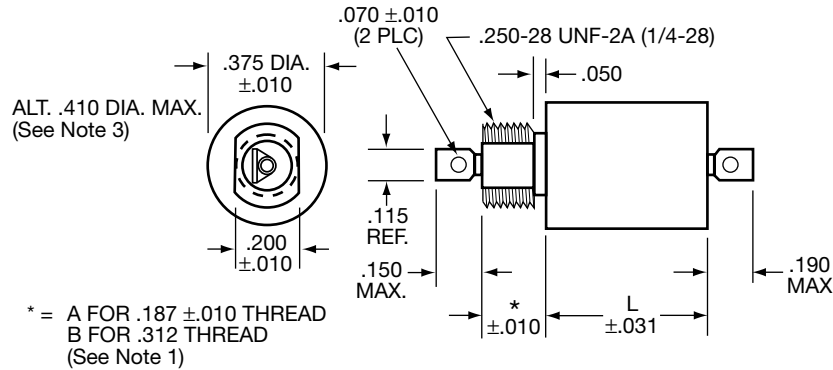


## CIRCUIT DIAGRAMS



GK2 - Standard



GK2 - Reverse



GK3



GK4

### millimeters (inches)

0.25 (.010)	4.75 (.187)
0.79 (.031)	4.83 (.190)
1.27 (.050)	5.08 (.200)
1.78 (.070)	7.93 (.312)
2.92 (.115)	9.53 (.375)
3.81 (.150)	13.72 (.540)

(See Note 2)

### Notes:

1. Thread length option. Standard part numbers shown (e.g., GK2BA-S02) are  $.187$ " thread length. Optional  $.312$ " length available (e.g., GK2BB-S02).
2. Metric equivalent dimensions given for information only.

3. All QPL MIL-F-28861, and Hi-rel, will be supplied with  $.410$  diameter (HK). See applicable slash sheet for mechanical dimensions.

\* = A for  $.187 \pm .010$  Thread  
 B for  $.312$  Thread  
 (See Note 1)

# Cylindrical Style EMI Filters

## GK Series – .375/.410 Dia. – Hermetically Sealed –

### Circuits Available – L, $\pi$ , T



## SPECIFICATIONS

AVX P/N	Current AMP	CKT	L. dim	DCR	Insertion Loss <sup>2</sup> Per MIL-STD-220, +25°C							
					10 KHz	30 KHz	150 KHz	300 KHz	1 MHz	10 MHz	100 MHz	1 GHz
<b>50 VDC, 1.4 <math>\mu</math>F</b>												
GK2CA-S01	.06	L2	.540	12	16	44	70	70	70	70	70	70
GK2CA-S02	.1	L2	.540	10	15	34	62	70	70	70	70	70
GK2CA-S03	.15	L2	.540	4	7	24	52	64	70	70	70	70
GK2CA-S04	.25	L2	.540	4	6	25	53	65	70	70	70	70
GK2CA-S05	.30	L2	.540	0.5	5	16	35	45	66	70	70	70
GK2CA-S06	.45	L2	.540	0.3	5	15	33	44	65	70	70	70
GK2CA-S07	.50	L2	.540	1	5	16	41	54	70	70	70	70
GK2CA-S08	1.0	L2	.540	.25	5	15	31	42	63	70	70	70
GK2CA-S09	2.0	L2	.540	.063	5	15	28	35	51	70	70	70
GK2CA-S10	3.0	L2	.540	.027	5	15	28	34	45	70	70	70
GK2CA-S12	10	L2	.540	.008	5	15	28	34	44	52	65	65
GK3CA-P02	.1	$\pi$	.540	10	12	44	70	70	70	70	70	70
GK3CA-P04	.25	$\pi$	.540	4	8	36	70	70	70	70	70	70
GK3CA-P07	.5	$\pi$	.540	1	7	24	66	70	70	70	70	70
GK3CA-P08	1	$\pi$	.540	.25	5	15	54	70	70	70	70	70
GK3CA-P09	2	$\pi$	.540	.063	5	15	40	60	70	70	70	70
GK3CA-P10	3	$\pi$	.540	.027	5	15	30	50	70	70	70	70
GK3CA-P12	10	$\pi$	.540	.008	5	15	28	34	40	52	70	70
GK4CA-T08	1	T	1.020	.5	5	16	34	56	70	70	70	70
GK4CA-T09	2	T	1.020	.09	5	15	26	37	61	70	70	70
GK4CA-T16	4	T	1.020	.03	5	15	26	34	47	70	70	70
GK4CA-T12	10	T	1.020	.008	5	17	27	34	44	60	70	70

<sup>2</sup> Insertion loss limits are based on theoretical values. Actual measurements may vary due to internal capacitor resonances and other design constraints.

**NOTE:** All "L2" circuits are also available as "L1". Insertion loss and other parameters are identical. Only the part number changes (e.g., L2 = GK2LA-S04, L1 = GK2LA-R04).

# Cylindrical Style EMI Filters

## GK Series – .375/.410 Dia. – Hermetically Sealed –

### Circuits Available – L, $\pi$ , T



## SPECIFICATIONS

AVX P/N	Current AMP	CKT	L. dim	CAP <sup>1</sup>	DCR	Insertion Loss <sup>2</sup> Per MIL-STD-220, +25°C									
						15 KHz	30 KHz	50 KHz	100 KHz	150 KHz	300 KHz	1 MHz	10 MHz	100 MHz	1 GHz
<b>70 VDC, .7–1.4 <math>\mu</math>F</b>															
GK2NA-S02	.1	L2	.540	.7	1.7	9	20	29	41	48	60	70	70	70	70
GK2NA-S05	.3	L2	.540	.7	.77	6	15	23	35	42	54	70	70	70	70
GK2NA-S07	.5	L2	.540	.7	.36	5	12	19	29	36	48	69	70	70	70
GK2NA-S08	1	L2	.540	.7	.14	5	11	15	21	26	36	55	70	70	70
GK2NA-S10	3	L2	.540	.7	.05	5	10	14	20	24	31	45	70	70	70
GK2NA-S11	5	L2	.540	.7	.015	–	–	–	14	17	24	36	60	70	70
GK2NA-S12	10	L2	.540	.7	.008	–	10	14	20	24	30	40	40	64	70
GK3NA-P02	.1	$\pi$	.540	1.4	1.7	15	36	50	69	79	80	80	80	80	80
GK3NA-P05	.3	$\pi$	.540	1.4	.77	–	29	44	62	73	80	80	80	80	80
GK3NA-P07	.5	$\pi$	.540	1.4	.36	–	21	37	56	67	80	80	80	80	80
GK3NA-P08	1	$\pi$	.540	1.4	.14	–	–	20	46	57	75	80	80	80	80
GK3NA-P10	3	$\pi$	.540	1.4	.05	–	–	–	17	36	51	80	80	80	80
GK3NA-P11	5	$\pi$	.540	1.4	.015	–	–	–	–	16	38	75	80	80	80
GK3NA-P12	10	$\pi$	.540	1.4	.008	5	15	20	24	28	34	40	52	80	80
GK4NA-T08	1	T	1.020	.75	–	–	10	15	21	26	49	70	70	70	70
GK4NA-T09	2	T	1.020	.75	–	–	10	13	17	20	32	55	70	70	70
GK4NA-T16	4	T	1.020	.75	–	–	9	12	15	19	29	42	70	70	70
GK4NA-T12	10	T	1.020	.75	–	–	9	12	15	19	28	38	55	70	70

<sup>1</sup> Decimal point values indicate capacitance in microfarads.  
Non-decimal point values indicate capacitance in picofarads.

<sup>2</sup> Insertion loss limits are based on theoretical values.  
Actual measurements may vary due to internal capacitor resonances and other design constraints.

**NOTE:** All “L2” circuits are also available as “L1”.  
Insertion loss and other parameters are identical.  
Only the part number changes  
(e.g., L2 = GK2LA-S04, L1 = GK2LA-R04).

# Cylindrical Style EMI Filters

## GK Series – .375/.410 Dia. – Hermetically Sealed –

### Circuits Available – L, $\pi$



## SPECIFICATIONS

AVX P/N	Current AMP	CKT	L. dim	CAP <sup>1</sup>	DCR	Insertion Loss <sup>2</sup> Per MIL-STD-220, +25°C							
						10 KHz	30 KHz	150 KHz	300 KHz	1 MHz	10 MHz	100 MHz	1 GHz
<b>100 VDC, .45–1.4 <math>\mu</math>F</b>													
GK2AA-S01	.06	L2	.540	1.4	12	15	44	70	70	70	70	70	70
GK2AA-S02	.1	L2	.540	1.4	10	12	34	62	70	70	70	70	70
GK2AA-S03	.15	L2	.540	1.4	4	7	24	52	64	70	70	70	70
GK2AA-S05	.3	L2	.540	1.4	.5	–	14	35	45	66	70	70	70
GK2AA-S06	.45	L2	.540	1.4	.3	–	14	33	44	65	70	70	70
GK2AA-S07	.5	L2	.540	1.4	1	–	16	41	54	70	70	70	70
GK2AA-S09	2	L2	.540	1.4	.063	–	15	28	35	51	70	70	70
GK2AA-S12	10	L2	.540	1.4	.008	–	14	28	33	44	52	70	70
GK3AA-P02	.1	$\pi$	.540	1.0	10	12	40	70	70	70	70	70	70
GK3AA-P07	.5	$\pi$	.540	1.0	1	–	18	60	70	70	70	70	70
GK3AA-P09	2	$\pi$	.540	1.0	.063	–	9	36	53	70	70	70	70
GK3AA-P12	10	$\pi$	1.020	1.0	.008	–	9	24	29	40	70	70	70
GK4AA-T08	1	T	1.020	.75	.5	–	10	25	49	70	70	70	70
GK4AA-T09	2	T	1.020	.75	.09	–	10	20	32	56	70	70	70
GK4AA-T16	4	T	1.020	.75	.03	–	10	19	29	42	70	70	70
GK4AA-T12	10	T	1.020	.75	.008	–	9	19	28	39	58	65	65
GK2AA-S04	.25	L2	.540	.45	1.5	–	–	38	50	60	60	60	60
GK3AA-P04	.25	$\pi$	.540	.90	1.5	–	–	64	80	80	80	80	80
GK2AA-S08	1.0	L2	.540	.45	.25	–	–	23	34	55	60	60	60
GK3AA-P08	1.0	$\pi$	.540	.90	.25	–	–	52	70	80	80	80	80
GK2AA-S10	3.0	L2	.540	.45	.05	–	–	18	27	45	60	60	60
GK3AA-P10	3.0	$\pi$	.540	.90	.05	–	–	25	51	80	80	80	80
GK2AA-S11	5.0	L2	.540	.45	.015	–	–	17	24	36	60	60	60
GK3AA-P11	5.0	$\pi$	.540	.90	.015	–	–	–	38	75	80	80	80

<sup>1</sup> Decimal point values indicate capacitance in microfarads.  
Non-decimal point values indicate capacitance in picofarads.

<sup>2</sup> Insertion loss limits are based on theoretical values.  
Actual measurements may vary due to internal capacitor resonances and other design constraints.

**NOTE:** All “L2” circuits are also available as “L1”.  
Insertion loss and other parameters are identical.  
Only the part number changes  
(e.g., L2 = GK2LA-S04, L1 = GK2LA-R04).

# Cylindrical Style EMI Filters

## GK Series – .375/.410 Dia. – Hermetically Sealed –

### Circuits Available – L, $\pi$ , T



## SPECIFICATIONS

AVX P/N	Current AMP	CKT	L. dim	CAP <sup>1</sup>	DCR	Insertion Loss <sup>2</sup> Per MIL-STD-220, +25°C							
						100 KHz	150 KHz	300 KHz	1 MHz	10 MHz	100 MHz	1 GHz	
<b>150 VDC, .25–.50 <math>\mu</math>F</b>													
GK2HA-S02	.1	L2	.540	.25	1.7	32	39	51	60	60	60	70	
GK2HA-S05	.3	L2	.540	.25	.77	25	30	44	60	60	60	70	
GK2HA-S07	.5	L2	.540	.25	.36	20	26	39	59	60	60	70	
GK2HA-S08	1.0	L2	.540	.25	.14	12	16	26	48	60	60	70	
GK2HA-S10	3.0	L2	.540	.25	.05	11	15	20	36	60	60	70	
GK2HA-S11	5.0	L2	.540	.25	.015	8	12	20	32	60	60	70	
GK2HA-S12	10.0	L2	.540	.25	.008	6	12	20	32	40	56	70	
GK3HA-P02	0.1	$\pi$	.540	.50	1.7	49	60	70	80	80	80	80	
GK3HA-P05	0.3	$\pi$	.540	.50	.77	43	53	70	80	80	80	80	
GK3HA-P07	0.5	$\pi$	.540	.50	.36	37	48	66	80	80	80	80	
GK3HA-P08	1.0	$\pi$	.540	.50	.14	28	40	58	80	80	80	80	
GK3HA-P10	3.0	$\pi$	.540	.50	.05	–	–	38	70	80	80	80	
GK3HA-P11	5.0	$\pi$	.540	.50	.015	–	–	20	63	80	80	80	
GK3HA-P12	10.0	$\pi$	.540	.50	.008	–	–	15	35	60	80	80	
GK4HA-T08	1	T	1.020	.25	.5	15	23	42	70	80	80	80	
GK4HA-T09	2	T	1.020	.25	.09	9	13	32	50	70	80	80	
GK4HA-T16	4	T	1.020	.25	.03	6	10	21	40	60	80	80	
GK4HA-T12	10	T	1.020	.25	.006	–	9	21	28	44	60	80	
<b>200 VDC, .15–.36 <math>\mu</math>F</b>													
AVX P/N	Current AMP	CKT	L. dim	CAP <sup>1</sup>	DCR	10 KHz	30 KHz	150 KHz	300 KHz	1 MHz	10 MHz	100 MHz	1 GHz
GK2BA-S02	.1	L2	.540	.15	10	–	21	50	61	70	70	70	70
GK2BA-S04	.25	L2	.540	.15	.4	–	11	39	51	70	70	70	70
GK2BA-S07	.5	L2	.540	.15	1	–	3	29	41	63	70	70	70
GK2BA-S08	1	L2	.540	.15	.25	–	–	18	28	49	70	70	70
GK2BA-S09	2	L2	.540	.15	.063	–	–	15	21	38	70	70	70
GK2BA-S10	3	L2	.540	.15	.027	–	–	15	21	31	70	70	70
GK2BA-S12	10	L2	.540	.15	.008	–	–	15	21	31	51	60	60
GK3BA-P02	.1	$\pi$	.540	.36	10	–	21	61	70	70	70	70	70
GK3BA-P04	.25	$\pi$	.540	.36	4	–	10	52	68	70	70	70	70
GK3BA-P07	.5	$\pi$	.540	.36	1	–	–	44	63	70	70	70	70
GK3BA-P08	1	$\pi$	.540	.36	.25	–	–	30	46	70	70	70	70
GK3BA-P09	2	$\pi$	.540	.36	.063	–	–	16	33	63	70	70	70
GK3BA-P10	3	$\pi$	.540	.36	.027	–	–	–	21	55	70	70	70
GK3BA-P12	10	$\pi$	.540	.36	.008	–	–	–	20	30	60	70	70
GK4BA-T08	1	T	1.020	.15	.5	–	3	17	42	70	70	70	70
GK4BA-T09	2	T	1.020	.15	.09	–	–	12	24	48	70	70	70
GK4BA-T16	4	T	1.020	.15	.03	–	–	12	21	34	70	70	70
GK4BA-T12	10	T	1.020	.15	.008	–	3	12	21	31	50	60	60

<sup>1</sup> Decimal point values indicate capacitance in microfarads. Non-decimal point values indicate capacitance in picofarads.

<sup>2</sup> Insertion loss limits are based on theoretical values.

Actual measurements may vary due to internal capacitor resonances and other design constraints.

**NOTE:** All “L2” circuits are also available as “L1”. Insertion loss and other parameters are identical.

Only the part number changes (e.g., L2 = GK2LA-S04, L1 = GK2LA-R04).

# Cylindrical Style EMI Filters

## GK Series – .375/.410 Dia. – Hermetically Sealed –

### Circuits Available – L, $\pi$ , T



## SPECIFICATIONS

AVX P/N	Current AMP	CKT	L. dim	CAP <sup>1</sup>	DCR	Insertion Loss <sup>2</sup> Per MIL-STD-220, +25°C							
						10 KHz	30 KHz	150 KHz	300 KHz	1 MHz	10 MHz	100 MHz	1 GHz
<b>200 VDC (125 VAC/400 Hz) .15–.30 <math>\mu</math>F</b>													
GK2LA-S02	.1	L2	.540	.15	10	–	14	42	54	70	70	70	70
GK2LA-S07	.5	L2	.540	.15	1	–	–	23	35	56	70	70	70
GK2LA-S09	2	L2	.540	.15	.063	–	–	8	14	30	70	70	70
GK2LA-S12	10	L2	.540	.15	.008	–	–	8	14	25	45	60	60
GK3LA-P02	.1	$\pi$	.540	.3	10	–	21	60	70	70	70	70	70
GK3LA-P07	.5	$\pi$	.540	.3	1	–	–	40	56	70	70	70	70
GK3LA-P10	3	$\pi$	.540	.3	.027	–	–	–	25	54	70	70	70
GK3LA-P12	10	$\pi$	.540	.3	.008	–	–	–	20	30	70	70	70
GK2LA-S04	.25	L2	.540	.15	1.5	–	6	28	40	60	60	60	70
GK2LA-S08	1	L2	.540	.15	.25	–	–	13	24	45	60	60	70
GK2LA-S10	3	L1	.540	.15	.05	–	–	8	16	30	60	60	70
GK2LA-S11	5	L2	.540	.15	.015	–	–	8	14	26	55	55	70
GK3LA-P04	.25	$\pi$	.540	.3	1.5	–	8	44	62	80	80	80	80
GK3LA-P08	1	$\pi$	.540	.3	.25	–	–	32	50	80	80	80	80
GK3LA-P10	3	$\pi$	.540	.3	.05	–	–	–	19	59	80	80	80
GK3LA-P11	5	$\pi$	.540	.3	.015	–	–	–	–	51	80	80	80
GK4LA-T08	1	T	1.020	.15	.5	–	–	10	36	66	70	70	70
GK4LA-T09	2	T	1.020	.15	.09	–	–	7	18	41	70	70	70
GK4LA-T16	4	T	1.020	.15	.03	–	–	8	15	27	70	70	70
GK4LA-T12	10	T	1.020	.15	.008	–	–	8	15	25	70	70	70

<sup>1</sup> Decimal point values indicate capacitance in microfarads.  
Non-decimal point values indicate capacitance in picofarads.

<sup>2</sup> Insertion loss limits are based on theoretical values.  
Actual measurements may vary due to internal capacitor resonances and other design constraints.

**NOTE:** All “L2” circuits are also available as “L1”.  
Insertion loss and other parameters are identical.  
Only the part number changes  
(e.g., L2 = GK2LA-S04, L1 = GK2LA-R04).

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А