

# MAX11192/MAX11195/ MAX11198

## 12-/14-/16-Bit, 2Msps, Dual Simultaneous Sampling SAR ADCs with Internal Reference

### General Description

The MAX11192/MAX11195/MAX11198 is a dual-channel SAR ADCs with simultaneous sampling at 2Msps, 12-/14-/16-bit resolution, and differential inputs. Available in a tiny 16-pin, 3mm x 2mm ultra TDFN package, this ADC delivers excellent static and dynamic performance while operating from a supply voltage over the range of 3.0V to 5.25V. An integrated reference further reduces board area and component count.

The MAX11192/MAX11195/MAX11198 output conversion data using an SPI-compatible serial interface with a dual DOUT bus. Specifications apply over the extended industrial temperature range of -40°C to +125°C.

### Benefits and Features


- Tiny 16-Pin, 3mm x 2mm, TDFN Package
- Up to 2Msps Throughput Rate
- Two Simultaneous-Sampling ADC Cores
- 2.5V Integrated Reference and Reference Buffers
- Two Data Outputs for the Two Simultaneous-Sampling ADCs
- No Overhead Clock Cycles; 12/14/16 Clock Cycles for 12-/14-/16-Bit Result
- Balanced, Differential Input Range of  $\pm V_{REF}$

### Applications

- Encoders
- Resolvers
- LVDT
- Current Sensing in Motors
- PLC

Ordering Information appears at end of data sheet.

### Application Diagram

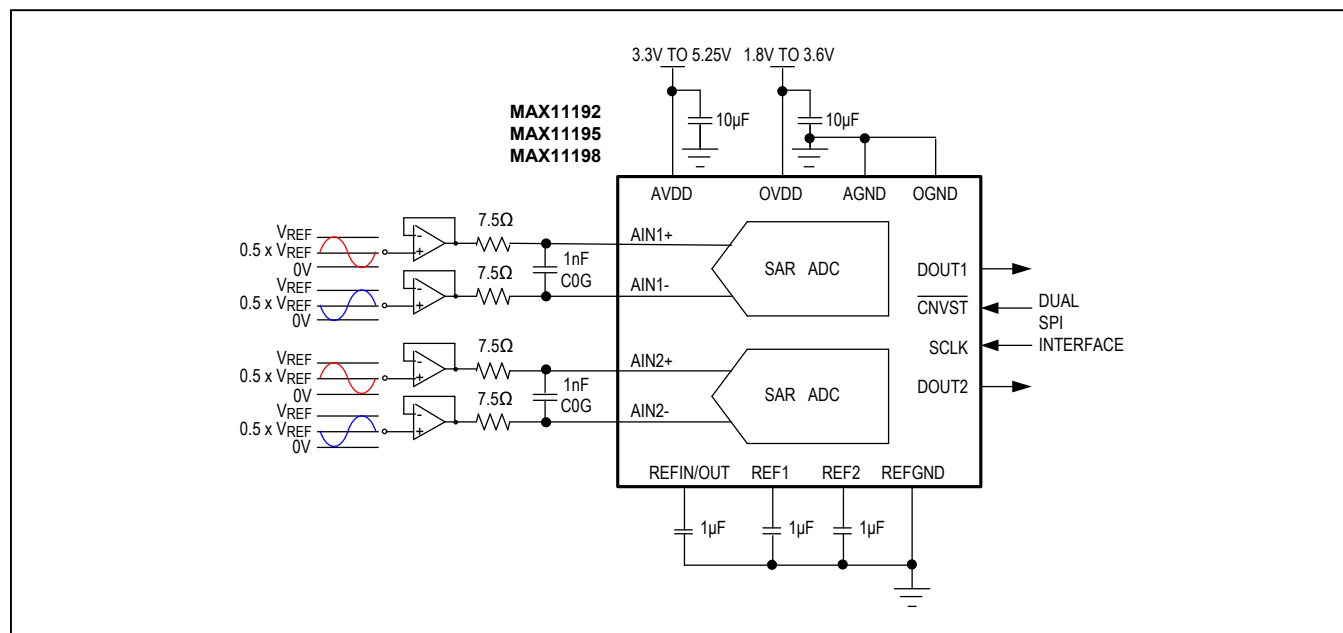

# MAX11192/MAX11195/ MAX11198

## 12-/14-/16-Bit, 2Msps, Dual Simultaneous Sampling SAR ADCs with Internal Reference

### Absolute Maximum Ratings

AVDD to GND, REFGND, OGND ..... -0.3V to +5.5V  
OVDD to GND, REFGND, OGND ..... -0.3V to +5.5V  
AINn+, AINn- to GND, REFGND, OGND.. -0.3V to The lower of  
(V<sub>AVDD</sub> + 0.3V) and +5.5V  
REFIN, REF1, REF2 to GND, REFGND, OGND ..... -0.3V to  
The lower of (V<sub>AVDD</sub> + 0.3V) and +5.5V  
CNVST, SCLK, DOUT1, DOUT2 to OGND ..... -0.3V to  
The lower of (V<sub>OVDD</sub> + 0.3V) and +5.5V  
GND to REFGND to OGND ..... -0.3V to +0.3V

Maximum Current Into Any Pin ..... -50mA to +50mA  
Continuous Power Dissipation (16 TDFN; T<sub>A</sub> = +70°C;  
derate 16.7mW/°C above +70°C) ( ) ..... 1333mW  
Operating Temperature Range ..... -40°C to 125°C  
Junction Temperature ..... +150°C  
Storage Temperature Range ..... -65°C to +150°C  
Lead Temperature (soldering, 10s) ..... +300°C  
Soldering Temperature (reflow) ..... +260°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

### Package Information

#### 16 TDFN

| PACKAGE CODE                                 | T1623CN+1                 |
|----------------------------------------------|---------------------------|
| Outline Number                               | <a href="#">21-100030</a> |
| Land Pattern Number                          | —                         |
| <b>Thermal Resistance, Four-Layer Board:</b> |                           |
| Junction to Ambient (θ <sub>JA</sub> )       | 60                        |
| Junction to Case (θ <sub>JC</sub> )          | 11                        |

For the latest package outline information and land patterns (footprints), go to [www.maximintegrated.com/packages](http://www.maximintegrated.com/packages). Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

Package thermal resistances were obtained using the method described in JEDEC specification JESD51-7, using a four-layer board. For detailed information on package thermal considerations, refer to [www.maximintegrated.com/thermal-tutorial](http://www.maximintegrated.com/thermal-tutorial).

### Electrical Characteristics—MAX11192

(f<sub>Sample</sub> = 2MSPS; V<sub>AVDD</sub> = 5.0V, V<sub>OVDD</sub> = 1.8V; V<sub>REFIN/OUT</sub> = 2.5V (Internal Reference); T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub> (Note 1). Typical values are at T<sub>A</sub> = +25°C, unless otherwise noted.)

| PARAMETER                       | SYMBOL                | CONDITIONS                  | MIN                          | TYP               | MAX                          | UNITS |
|---------------------------------|-----------------------|-----------------------------|------------------------------|-------------------|------------------------------|-------|
| <b>ANALOG INPUTS</b>            |                       |                             |                              |                   |                              |       |
| Input Voltage Range             | V <sub>IN(DIFF)</sub> | AINn+ – AINn-               |                              | ±V <sub>REF</sub> |                              | V     |
| Absolute Input Voltage Range    | V <sub>IN(RNG)</sub>  | AINn+/AINn- relative to GND | -0.1                         |                   | V <sub>AVDD</sub><br>+ 0.1   | V     |
| Common-Mode Input Voltage Range | CM <sub>IRNG</sub>    | (AINn+ + AINn-)/2           | V <sub>REF</sub> /2<br>- 0.1 |                   | V <sub>REF</sub> /2<br>+ 0.1 | V     |
| Input Leakage Current           | I <sub>IN_LEAK</sub>  | Acquisition phase           |                              | 1                 |                              | μA    |
| Input Capacitance               | C <sub>IN</sub>       |                             |                              | 10                |                              | pF    |

# MAX11192/MAX11195/ MAX11198

## 12-/14-/16-Bit, 2Msps, Dual Simultaneous Sampling SAR ADCs with Internal Reference

### Electrical Characteristics—MAX11192 (continued)

( $f_{\text{Sample}} = 2\text{MSPS}$ ;  $V_{\text{AVDD}} = 5.0\text{V}$ ,  $V_{\text{OVDD}} = 1.8\text{V}$ ;  $V_{\text{REFIN/OUT}} = 2.5\text{V}$  (Internal Reference);  $T_A = T_{\text{MIN}}$  to  $T_{\text{MAX}}$  (Note 1). Typical values are at  $T_A = +25^\circ\text{C}$ , unless otherwise noted.)

| PARAMETER                                                     | SYMBOL | CONDITIONS                                             | MIN   | TYP   | MAX             | UNITS   |
|---------------------------------------------------------------|--------|--------------------------------------------------------|-------|-------|-----------------|---------|
| STATIC PERFORMANCE (VREFIN/OUT = 2.5V, INTERNAL REFERENCE)    |        |                                                        |       |       |                 |         |
| Resolution                                                    | N      |                                                        | 12    |       |                 | Bits    |
| No Missing Codes                                              |        |                                                        | 12    |       |                 | Bits    |
| Offset Error                                                  | OE     |                                                        | -1    |       | +1              | LSB     |
| Offset Error TC                                               |        |                                                        |       | 1.2   |                 | mLSB/°C |
| Gain Error                                                    | GE     | (Note 2)                                               | -1    |       | +1              | LSB     |
| Gain Error TC                                                 |        | (Note 2)                                               |       | 1.2   |                 | mLSB/°C |
| Integral Nonlinearity                                         | INL    |                                                        | -0.5  |       | +0.5            | LSB     |
| Differential Nonlinearity                                     | DNL    |                                                        | -0.25 |       | +0.25           | LSB     |
| Analog Input CMR                                              | CMRR   | Common Mode Range;<br>VREF/2 - 100mV to VREF/2 + 100mV |       | 75    |                 | dB      |
| Power-Supply Rejection                                        | PSRR   | AVDD                                                   |       | 85    |                 | dB      |
| Power Supply Rejection                                        | PSRR   | OVDD                                                   |       | 90    |                 | dB      |
| INTERNAL REFERENCE                                            |        |                                                        |       |       |                 |         |
| Initial Accuracy                                              |        | TA = +25°C                                             | 2.498 | 2.500 | 2.502           | V       |
| Temperature Drift                                             |        |                                                        |       | 5     |                 | ppm     |
| EXTERNAL REFERENCE                                            |        |                                                        |       |       |                 |         |
| Input Voltage Range                                           |        | External reference applied to REFIN                    | 2.5   |       | VAVDD<br>- 0.25 | V       |
|                                                               |        | External reference applied to REF1<br>or REF2          | 2.5   |       | VAVDD<br>+ 0.1  |         |
| REFERENCE BUFFERS                                             |        |                                                        |       |       |                 |         |
| Bypass Capacitor                                              |        |                                                        | 1.0   |       |                 | μF      |
| DYNAMIC PERFORMANCE (VREFIN/OUT = 2.5V, INTERNAL REFERENCE)   |        |                                                        |       |       |                 |         |
| Signal-to-Noise Ratio                                         | SNR    | 10kHz input                                            | 73    | 73.5  |                 | dB      |
| Signal-to-Noise And Distortion Ratio                          | SINAD  | 10kHz input                                            |       | 73.5  |                 | dB      |
| Spurious-Free Dynamic Range                                   | SFDR   | 10kHz input                                            |       | 102   |                 | dB      |
| Total Harmonic Distortion                                     | THD    | 10kHz input                                            |       | -108  |                 | dB      |
| Crossalk                                                      |        | 10kHz input                                            |       | -100  |                 | dB      |
| DYNAMIC PERFORMANCE (VREFIN/OUT = 4.096V, EXTERNAL REFERENCE) |        |                                                        |       |       |                 |         |
| Signal-to-Noise Ratio                                         | SNR    | 10kHz input                                            | 73    | 73.5  |                 | dB      |
| Signal-to-Noise And Distortion Ratio                          | SINAD  | 10kHz input                                            |       | 73.5  |                 | dB      |
| Spurious-Free Dynamic Range                                   | SFDR   | 10kHz input                                            |       | 102   |                 | dB      |
| Total Harmonic Distortion                                     | THD    | 10kHz input                                            |       | -108  |                 | dB      |
| Crossalk                                                      |        | 10kHz input                                            |       | -100  |                 | dB      |
| SAMPLING DYNAMICS                                             |        |                                                        |       |       |                 |         |
| Throughput                                                    |        |                                                        |       | 2     |                 | Msps    |
| Aperture Delay Match                                          |        |                                                        |       | 150   |                 | ps      |
| Input -3db Bandwidth                                          | f-3dB  |                                                        |       | 50    |                 | MHz     |

# MAX11192/MAX11195/ MAX11198

## 12-/14-/16-Bit, 2Msps, Dual Simultaneous Sampling SAR ADCs with Internal Reference

### Electrical Characteristics—MAX11192 (continued)

( $f_{\text{Sample}} = 2\text{MSPS}$ ;  $V_{\text{AVDD}} = 5.0\text{V}$ ,  $V_{\text{OVDD}} = 1.8\text{V}$ ;  $V_{\text{REFIN/OUT}} = 2.5\text{V}$  (Internal Reference);  $T_A = T_{\text{MIN}}$  to  $T_{\text{MAX}}$  (Note 1). Typical values are at  $T_A = +25^\circ\text{C}$ , unless otherwise noted.)

| PARAMETER                                            | SYMBOL                | CONDITIONS                          | MIN                     | TYP  | MAX                     | UNITS |
|------------------------------------------------------|-----------------------|-------------------------------------|-------------------------|------|-------------------------|-------|
| POWER SUPPLIES                                       |                       |                                     |                         |      |                         |       |
| Analog Supply Voltage                                | AVDD                  |                                     | 3.0                     | 5.0  | 5.25                    | V     |
| Interface Supply Voltage                             | OVDD                  |                                     | 1.7                     |      | 3.6                     | V     |
| Analog Supply Current                                | I(AVDD)               |                                     |                         | 5.5  | 6.2                     | mA    |
| Interface Supply Current                             | I(OVDD)               | DOUT load: C <sub>LOAD</sub> = 10pF |                         | 0.75 | 1                       | mA    |
| Analog Standby Current                               | I <sub>S</sub> (AVDD) | (Note 3)                            |                         | 1    |                         | mA    |
| Interface Standby Current                            | I <sub>S</sub> (OVDD) | (Note 3)                            |                         | 1    |                         | μA    |
| DIGITAL INPUTS                                       |                       |                                     |                         |      |                         |       |
| Input Voltage High                                   | V <sub>IH</sub>       |                                     | 0.8 x V <sub>OVDD</sub> |      |                         | V     |
| Input Voltage Low                                    | V <sub>IL</sub>       |                                     |                         |      | 0.2 x V <sub>OVDD</sub> | V     |
| Input Capacitance                                    |                       |                                     | 2                       |      |                         | pF    |
| Input Leakage                                        |                       |                                     | 1                       |      |                         | μA    |
| DIGITAL OUTPUTS                                      |                       |                                     |                         |      |                         |       |
| Output Voltage High                                  | V <sub>OH</sub>       | I <sub>SOURCE</sub> = 2mA           | V <sub>OVDD</sub> - 0.4 |      |                         | V     |
| Output Voltage Low                                   | V <sub>OL</sub>       | I <sub>SINK</sub> = 2mA             |                         |      | V <sub>OGND</sub> + 0.4 | V     |
| TIMING                                               |                       |                                     |                         |      |                         |       |
| Conversion Period                                    | t <sub>1</sub>        |                                     | 500                     |      |                         | ns    |
| SCLK to DOUT Hold                                    | t <sub>2</sub>        |                                     | 1                       |      |                         | ns    |
| SCLK to DOUT Valid                                   | t <sub>3</sub>        |                                     | 14                      |      |                         | ns    |
| SCLK High                                            | t <sub>4</sub>        |                                     | 8                       |      |                         | ns    |
| SCLK Period                                          | t <sub>5</sub>        |                                     | 20                      |      |                         | ns    |
| SCLK low                                             | t <sub>6</sub>        |                                     | 8                       |      |                         | ns    |
| CNVST <sub>‾</sub> Rising Edge to SCLK Rising Edge   | t <sub>7</sub>        |                                     | 5                       |      |                         | ns    |
| SCLK Rising Edge to CNVST <sub>‾</sub> Rising Edge   | t <sub>8</sub>        |                                     | 5                       |      |                         | ns    |
| CNVST <sub>‾</sub> High                              | t <sub>9</sub>        |                                     | 60                      |      |                         | ns    |
| CNVST <sub>‾</sub> Falling Edge to SCLK Rising Edge  | t <sub>10</sub>       |                                     | 10                      |      |                         | ns    |
| SCLK Falling Edge to CNVST <sub>‾</sub> Falling Edge | t <sub>11</sub>       |                                     | 0                       |      |                         | ns    |
| CNVST <sub>‾</sub> Low Time for Valid Sample         | t <sub>12</sub>       |                                     | 400                     |      |                         | ns    |

# MAX11192/MAX11195/ MAX11198

## 12-/14-/16-Bit, 2Msps, Dual Simultaneous Sampling SAR ADCs with Internal Reference

### Electrical Characteristics—MAX11195

(f<sub>Sample</sub> = 2MSPS; V<sub>AVDD</sub> = 5.0V, V<sub>OVDD</sub> = 1.8V; V<sub>REFIN/OUT</sub> = 2.5V (Internal Reference); T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub> (Note 1). Typical values are at T<sub>A</sub> = +25°C, unless otherwise noted.)

| PARAMETER                                                   | SYMBOL                | CONDITIONS                                                                       | MIN                          | TYP                          | MAX   | UNITS   |
|-------------------------------------------------------------|-----------------------|----------------------------------------------------------------------------------|------------------------------|------------------------------|-------|---------|
| ANALOG INPUTS                                               |                       |                                                                                  |                              |                              |       |         |
| Input Voltage Range                                         | V <sub>IN(DIFF)</sub> | AINn+ – AINn-                                                                    | ±V <sub>REF</sub>            |                              |       | V       |
| Absolute Input Voltage Range                                | V <sub>IN(RNG)</sub>  | AINn+/AINn- relative to GND                                                      | -0.1                         | V <sub>AVDD</sub><br>+ 0.1   |       | V       |
| Common-Mode Input Voltage Range                             | CM <sub>I</sub> RNG   | (AINn+ + AINn-)/2                                                                | V <sub>REF</sub> /2<br>- 0.1 | V <sub>REF</sub> /2<br>+ 0.1 |       | V       |
| Input Leakage Current                                       | I <sub>IN_LEAK</sub>  | Acquisition phase                                                                | 1                            |                              |       | μA      |
| Input Capacitance                                           | C <sub>IN</sub>       |                                                                                  | 10                           |                              |       | pF      |
| STATIC PERFORMANCE (VREFIN/OUT = 2.5V, INTERNAL REFERENCE)  |                       |                                                                                  |                              |                              |       |         |
| Resolution                                                  | N                     |                                                                                  | 14                           |                              |       | Bits    |
| No Missing Codes                                            |                       |                                                                                  | 14                           |                              |       | Bits    |
| Offset Error                                                | OE                    |                                                                                  | -1.5                         |                              | +1.5  | LSB     |
| Offset Error TC                                             |                       |                                                                                  | 4                            |                              |       | mLSB/°C |
| Gain Error                                                  | GE                    | (Note 2)                                                                         | -3.5                         |                              | +3.5  | LSB     |
| Gain Error TC                                               |                       | (Note 2)                                                                         | 2                            |                              |       | mLSB/°C |
| Integral Nonlinearity                                       | INL                   |                                                                                  | -1.0                         |                              | +1.0  | LSB     |
| Differential Nonlinearity                                   | DNL                   |                                                                                  | -0.5                         |                              | +0.5  | LSB     |
| Analog Input CMR                                            | CMRR                  | Common Mode Range;<br>V <sub>REF</sub> /2 - 100mV to V <sub>REF</sub> /2 + 100mV | 80                           |                              |       | dB      |
| Power-Supply Rejection                                      | PSRR                  | AVDD                                                                             | 85                           |                              |       | dB      |
| Power Supply Rejection                                      | PSRR                  | OVDD                                                                             | 90                           |                              |       | dB      |
| INTERNAL REFERENCE                                          |                       |                                                                                  |                              |                              |       |         |
| Initial Accuracy                                            |                       | T <sub>A</sub> = +25°C                                                           | 2.498                        | 2.500                        | 2.502 | V       |
| Temperature Drift                                           |                       |                                                                                  | 5                            |                              |       | ppm     |
| EXTERNAL REFERENCE                                          |                       |                                                                                  |                              |                              |       |         |
| Input Voltage Range                                         |                       | External reference applied to REFIN                                              | 2.5                          | V <sub>AVDD</sub><br>- 0.25  |       | V       |
|                                                             |                       | External reference applied to REF1 or REF2                                       | 2.5                          | V <sub>AVDD</sub><br>+ 0.1   |       |         |
| REFERENCE BUFFERS                                           |                       |                                                                                  |                              |                              |       |         |
| Bypass Capacitor                                            |                       |                                                                                  | 1.0                          |                              |       | μF      |
| DYNAMIC PERFORMANCE (VREFIN/OUT = 2.5V, INTERNAL REFERENCE) |                       |                                                                                  |                              |                              |       |         |
| Signal-to-Noise Ratio                                       | SNR                   | 10kHz input                                                                      | 82                           | 83.7                         |       | dB      |
| Signal-to-Noise And Distortion Ratio                        | SINAD                 | 10kHz input                                                                      | 83.7                         |                              |       | dB      |
| Spurious-Free Dynamic Range                                 | SFDR                  | 10kHz input                                                                      | 115                          |                              |       | dB      |
| Total Harmonic Distortion                                   | THD                   | 10kHz input                                                                      | -117                         |                              |       | dB      |
| Crossalk                                                    |                       | 10kHz input                                                                      | -100                         |                              |       | dB      |

# MAX11192/MAX11195/ MAX11198

## 12-/14-/16-Bit, 2Msps, Dual Simultaneous Sampling SAR ADCs with Internal Reference

### Electrical Characteristics—MAX11195 (continued)

( $f_{\text{Sample}} = 2\text{MSPS}$ ;  $V_{\text{AVDD}} = 5.0\text{V}$ ,  $V_{\text{OVDD}} = 1.8\text{V}$ ;  $V_{\text{REFIN/OUT}} = 2.5\text{V}$  (Internal Reference);  $T_A = T_{\text{MIN}}$  to  $T_{\text{MAX}}$  (Note 1). Typical values are at  $T_A = +25^\circ\text{C}$ , unless otherwise noted.)

| PARAMETER                                                                                          | SYMBOL                      | CONDITIONS                                 | MIN                          | TYP                          | MAX  | UNITS         |
|----------------------------------------------------------------------------------------------------|-----------------------------|--------------------------------------------|------------------------------|------------------------------|------|---------------|
| <b>DYNAMIC PERFORMANCE (<math>V_{\text{REFIN/OUT}} = 4.096\text{V}</math>, EXTERNAL REFERENCE)</b> |                             |                                            |                              |                              |      |               |
| Signal-to-Noise Ratio                                                                              | SNR                         | 10kHz input                                | 84                           | 84.6                         |      | dB            |
| Signal-to-Noise And Distortion Ratio                                                               | SINAD                       | 10kHz input                                |                              | 84.7                         |      | dB            |
| Spurious-Free Dynamic Range                                                                        | SFDR                        | 10kHz input                                |                              | 112                          |      | dB            |
| Total Harmonic Distortion                                                                          | THD                         | 10kHz input                                |                              | -110                         |      | dB            |
| Crossalk                                                                                           |                             | 10kHz input                                |                              | -100                         |      | dB            |
| <b>SAMPLING DYNAMICS</b>                                                                           |                             |                                            |                              |                              |      |               |
| Throughput                                                                                         |                             |                                            |                              | 2                            |      | Msp           |
| Aperture Delay Match                                                                               |                             |                                            |                              | 150                          |      | ps            |
| Input -3db Bandwidth                                                                               | $f_{-3\text{dB}}$           |                                            |                              | 50                           |      | MHz           |
| <b>POWER SUPPLIES</b>                                                                              |                             |                                            |                              |                              |      |               |
| Analog Supply Voltage                                                                              | AVDD                        |                                            | 3.0                          | 5.0                          | 5.25 | V             |
| Interface Supply Voltage                                                                           | OVDD                        |                                            | 1.7                          |                              | 3.6  | V             |
| Analog Supply Current                                                                              | $I(\text{AVDD})$            |                                            |                              | 5.9                          | 6.5  | mA            |
| Interface Supply Current                                                                           | $I(\text{OVDD})$            | DOUT load: $C_{\text{LOAD}} = 10\text{pF}$ |                              | 0.75                         | 1.1  | mA            |
| Analog Standby Current                                                                             | $I_{\text{S}}(\text{AVDD})$ | (Note 3)                                   |                              | 1                            |      | mA            |
| Interface Standby Current                                                                          | $I_{\text{S}}(\text{OVDD})$ | (Note 3)                                   |                              | 1                            |      | $\mu\text{A}$ |
| <b>DIGITAL INPUTS</b>                                                                              |                             |                                            |                              |                              |      |               |
| Input Voltage High                                                                                 | $V_{\text{IH}}$             |                                            | $0.8 \times V_{\text{OVDD}}$ |                              |      | V             |
| Input Voltage Low                                                                                  | $V_{\text{IL}}$             |                                            |                              | $0.2 \times V_{\text{OVDD}}$ |      | V             |
| Input Capacitance                                                                                  |                             |                                            |                              | 2                            |      | pF            |
| Input Leakage                                                                                      |                             |                                            |                              | 1                            |      | $\mu\text{A}$ |
| <b>DIGITAL OUTPUTS</b>                                                                             |                             |                                            |                              |                              |      |               |
| Output Voltage High                                                                                | $V_{\text{OH}}$             | $I_{\text{SOURCE}} = 2\text{mA}$           | $V_{\text{OVDD}} - 0.4$      |                              |      | V             |
| Output Voltage Low                                                                                 | $V_{\text{OL}}$             | $I_{\text{SINK}} = 2\text{mA}$             |                              | $V_{\text{OGND}} + 0.4$      |      | V             |
| <b>TIMING</b>                                                                                      |                             |                                            |                              |                              |      |               |
| Conversion Period                                                                                  | $t_1$                       |                                            | 500                          |                              |      | ns            |
| SCLK to DOUT Hold                                                                                  | $t_2$                       |                                            | 1                            |                              |      | ns            |
| SCLK to DOUT Valid                                                                                 | $t_3$                       |                                            | 14                           |                              |      | ns            |
| SCLK High                                                                                          | $t_4$                       |                                            | 8                            |                              |      | ns            |
| SCLK Period                                                                                        | $t_5$                       |                                            | 20                           |                              |      | ns            |
| SCLK low                                                                                           | $t_6$                       |                                            | 8                            |                              |      | ns            |
| CNVST Rising Edge to SCLK Rising Edge                                                              | $t_7$                       |                                            | 5                            |                              |      | ns            |

# MAX11192/MAX11195/ MAX11198

# 12-/14-/16-Bit, 2Msps, Dual Simultaneous Sampling SAR ADCs with Internal Reference

## Electrical Characteristics—MAX11195 (continued)

( $f_{\text{Sample}} = 2\text{MSPS}$ ;  $V_{\text{AVDD}} = 5.0\text{V}$ ,  $V_{\text{OVDD}} = 1.8\text{V}$ ;  $V_{\text{REFIN/OUT}} = 2.5\text{V}$  (Internal Reference);  $T_A = T_{\text{MIN}}$  to  $T_{\text{MAX}}$  (Note 1). Typical values are at  $T_A = +25^\circ\text{C}$ , unless otherwise noted.)

| PARAMETER                                                   | SYMBOL   | CONDITIONS | MIN | TYP | MAX | UNITS |
|-------------------------------------------------------------|----------|------------|-----|-----|-----|-------|
| SCLK Rising Edge to $\overline{\text{CNVST}}$ Rising Edge   | $t_8$    |            | 5   |     |     | ns    |
| $\overline{\text{CNVST}}$ High                              | $t_9$    |            | 60  |     |     | ns    |
| $\overline{\text{CNVST}}$ Falling Edge to SCLK Rising Edge  | $t_{10}$ |            | 10  |     |     | ns    |
| SCLK Falling Edge to $\overline{\text{CNVST}}$ Falling Edge | $t_{11}$ |            | 0   |     |     | ns    |
| $\overline{\text{CNVST}}$ Low Time for Valid Sample         | $t_{12}$ |            | 400 |     |     | ns    |

## Electrical Characteristics—MAX11198

( $f_{\text{Sample}} = 2\text{MSPS}$ ;  $V_{\text{AVDD}} = 5.0\text{V}$ ,  $V_{\text{OVDD}} = 1.8\text{V}$ ;  $V_{\text{REFIN/OUT}} = 2.5\text{V}$  (Internal Reference);  $T_A = T_{\text{MIN}}$  to  $T_{\text{MAX}}$  (Note 1). Typical values are at  $T_A = +25^\circ\text{C}$ , unless otherwise noted.)

| PARAMETER                                                                                       | SYMBOL                    | CONDITIONS                                                                                   | MIN                      | TYP                  | MAX                      | UNITS                  |
|-------------------------------------------------------------------------------------------------|---------------------------|----------------------------------------------------------------------------------------------|--------------------------|----------------------|--------------------------|------------------------|
| <b>ANALOG INPUTS</b>                                                                            |                           |                                                                                              |                          |                      |                          |                        |
| Input Voltage Range                                                                             | $V_{\text{IN(DIFF)}}$     | $\text{AINn+} - \text{AINn-}$                                                                |                          | $\pm V_{\text{REF}}$ |                          | V                      |
| Absolute Input Voltage Range                                                                    | $V_{\text{IN(RNG)}}$      | $\text{AINn+}/\text{AINn-}$ relative to GND                                                  | -0.1                     |                      | $V_{\text{AVDD}} + 0.1$  | V                      |
| Common-Mode Input Voltage Range                                                                 | $\text{CMI}_{\text{RNG}}$ | $(\text{AINn+} + \text{AINn-})/2$                                                            | $V_{\text{REF}}/2 - 0.1$ |                      | $V_{\text{REF}}/2 + 0.1$ | V                      |
| Input Leakage Current                                                                           | $I_{\text{IN\_LEAK}}$     | Acquisition phase                                                                            |                          | 1                    |                          | $\mu\text{A}$          |
| Input Capacitance                                                                               | $C_{\text{IN}}$           |                                                                                              |                          | 10                   |                          | pF                     |
| <b>STATIC PERFORMANCE (<math>V_{\text{REFIN/OUT}} = 2.5\text{V}</math>, INTERNAL REFERENCE)</b> |                           |                                                                                              |                          |                      |                          |                        |
| Resolution                                                                                      | N                         |                                                                                              | 16                       |                      |                          | Bits                   |
| No Missing Codes                                                                                |                           |                                                                                              | 16                       |                      |                          | Bits                   |
| Offset Error                                                                                    | OE                        |                                                                                              | -4                       |                      | +4                       | LSB                    |
| Offset Error TC                                                                                 |                           |                                                                                              |                          | 10                   |                          | mLSB/ $^\circ\text{C}$ |
| Gain Error                                                                                      | GE                        | (Note 2)                                                                                     | -4                       |                      | +4                       | LSB                    |
| Gain Error TC                                                                                   |                           | (Note 2)                                                                                     |                          | 5                    |                          | mLSB/ $^\circ\text{C}$ |
| Integral Nonlinearity                                                                           | INL                       |                                                                                              | -1.5                     |                      | +1.5                     | LSB                    |
| Differential Nonlinearity                                                                       | DNL                       |                                                                                              | -0.5                     |                      | +0.5                     | LSB                    |
| Analog Input CMR                                                                                | CMRR                      | Common Mode Range;<br>$V_{\text{REF}}/2 - 100\text{mV}$ to $V_{\text{REF}}/2 + 100\text{mV}$ |                          | 80.5                 |                          | dB                     |
| Power-Supply Rejection                                                                          | PSRR                      | AVDD                                                                                         |                          | 85                   |                          | dB                     |
| Power Supply Rejection                                                                          | PSRR                      | OVDD                                                                                         |                          | 90                   |                          | dB                     |
| <b>INTERNAL REFERENCE</b>                                                                       |                           |                                                                                              |                          |                      |                          |                        |
| Initial Accuracy                                                                                |                           | $T_A = +25^\circ\text{C}$                                                                    | 2.498                    | 2.500                | 2.502                    | V                      |
| Temperature Drift                                                                               |                           |                                                                                              |                          | 5                    |                          | ppm                    |

# MAX11192/MAX11195/ MAX11198

## 12-/14-/16-Bit, 2Msps, Dual Simultaneous Sampling SAR ADCs with Internal Reference

### Electrical Characteristics—MAX11198 (continued)

( $f_{\text{Sample}} = 2\text{MSPS}$ ;  $V_{\text{AVDD}} = 5.0\text{V}$ ,  $V_{\text{OVDD}} = 1.8\text{V}$ ;  $V_{\text{REFIN/OUT}} = 2.5\text{V}$  (Internal Reference);  $T_A = T_{\text{MIN}}$  to  $T_{\text{MAX}}$  (Note 1). Typical values are at  $T_A = +25^\circ\text{C}$ , unless otherwise noted.)

| PARAMETER                                                     | SYMBOL                | CONDITIONS                                 | MIN                     | TYP                     | MAX                      | UNITS |
|---------------------------------------------------------------|-----------------------|--------------------------------------------|-------------------------|-------------------------|--------------------------|-------|
| EXTERNAL REFERENCE                                            |                       |                                            |                         |                         |                          |       |
| Input Voltage Range                                           |                       | External reference applied to REFIN        | 2.5                     |                         | V <sub>AVDD</sub> - 0.25 | V     |
|                                                               |                       | External reference applied to REF1 or REF2 | 2.5                     |                         | V <sub>AVDD</sub> + 0.1  |       |
| REFERENCE BUFFERS                                             |                       |                                            |                         |                         |                          |       |
| Bypass Capacitor                                              |                       |                                            | 1.0                     |                         |                          | μF    |
| DYNAMIC PERFORMANCE (VREFIN/OUT = 2.5V, INTERNAL REFERENCE)   |                       |                                            |                         |                         |                          |       |
| Signal-to-Noise Ratio                                         | SNR                   | 10kHz input                                | 86                      | 89                      |                          | dB    |
| Signal-to-Noise And Distortion Ratio                          | SINAD                 | 10kHz input                                |                         | 88.8                    |                          | dB    |
| Spurious-Free Dynamic Range                                   | SFDR                  | 10kHz input                                |                         | 115                     |                          | dB    |
| Total Harmonic Distortion                                     | THD                   | 10kHz input                                |                         | -117                    |                          | dB    |
| Crossalk                                                      |                       | 10kHz input                                |                         | -100                    |                          | dB    |
| DYNAMIC PERFORMANCE (VREFIN/OUT = 4.096V, EXTERNAL REFERENCE) |                       |                                            |                         |                         |                          |       |
| Signal-to-Noise Ratio                                         | SNR                   | 10kHz input                                | 90                      | 91.7                    |                          | dB    |
| Signal-to-Noise And Distortion Ratio                          | SINAD                 | 10kHz input                                |                         | 91.6                    |                          | dB    |
| Spurious-Free Dynamic Range                                   | SFDR                  | 10kHz input                                |                         | 114                     |                          | dB    |
| Total Harmonic Distortion                                     | THD                   | 10kHz input                                |                         | -111                    |                          | dB    |
| Crossalk                                                      |                       | 10kHz input                                |                         | -100                    |                          | dB    |
| SAMPLING DYNAMICS                                             |                       |                                            |                         |                         |                          |       |
| Throughput                                                    |                       |                                            |                         | 2                       |                          | Msps  |
| Aperture Delay Match                                          |                       |                                            |                         | 150                     |                          | ps    |
| Input -3db Bandwidth                                          | f <sub>-3dB</sub>     |                                            |                         | 50                      |                          | MHz   |
| POWER SUPPLIES                                                |                       |                                            |                         |                         |                          |       |
| Analog Supply Voltage                                         | AVDD                  |                                            | 3.0                     | 5.0                     | 5.25                     | V     |
| Interface Supply Voltage                                      | OVDD                  |                                            | 1.7                     |                         | 3.6                      | V     |
| Analog Supply Current                                         | I(AVDD)               |                                            |                         | 6.3                     | 7                        | mA    |
| Interface Supply Current                                      | I(OVDD)               | DOUT load: C <sub>LOAD</sub> = 10pF        |                         | 0.75                    | 1.2                      | mA    |
| Analog Standby Current                                        | I <sub>S</sub> (AVDD) | (Note 3)                                   |                         | 1                       |                          | mA    |
| Interface Standby Current                                     | I <sub>S</sub> (OVDD) | (Note 3)                                   |                         | 1                       |                          | μA    |
| DIGITAL INPUTS                                                |                       |                                            |                         |                         |                          |       |
| Input Voltage High                                            | V <sub>IH</sub>       |                                            | 0.8 x V <sub>OVDD</sub> |                         |                          | V     |
| Input Voltage Low                                             | V <sub>IL</sub>       |                                            |                         | 0.2 x V <sub>OVDD</sub> |                          | V     |
| Input Capacitance                                             |                       |                                            |                         | 2                       |                          | pF    |
| Input Leakage                                                 |                       |                                            |                         | 1                       |                          | μA    |

## Electrical Characteristics—MAX11198 (continued)

( $f_{\text{Sample}} = 2\text{MSPS}$ ;  $V_{\text{AVDD}} = 5.0\text{V}$ ,  $V_{\text{OVDD}} = 1.8\text{V}$ ;  $V_{\text{REFIN/OUT}} = 2.5\text{V}$  (Internal Reference);  $T_A = T_{\text{MIN}}$  to  $T_{\text{MAX}}$  (Note 1). Typical values are at  $T_A = +25^\circ\text{C}$ , unless otherwise noted.)

| PARAMETER                                                   | SYMBOL          | CONDITIONS                       | MIN                     | TYP | MAX                     | UNITS |
|-------------------------------------------------------------|-----------------|----------------------------------|-------------------------|-----|-------------------------|-------|
| <b>DIGITAL OUTPUTS</b>                                      |                 |                                  |                         |     |                         |       |
| Output Voltage High                                         | $V_{\text{OH}}$ | $I_{\text{SOURCE}} = 2\text{mA}$ | $V_{\text{OVDD}} - 0.4$ |     |                         | V     |
| Output Voltage Low                                          | $V_{\text{OL}}$ | $I_{\text{SINK}} = 2\text{mA}$   |                         |     | $V_{\text{OGND}} + 0.4$ | V     |
| <b>TIMING</b>                                               |                 |                                  |                         |     |                         |       |
| Conversion Period                                           | $t_1$           |                                  | 500                     |     |                         | ns    |
| SCLK to DOUT Hold                                           | $t_2$           |                                  | 1                       |     |                         | ns    |
| SCLK to DOUT Valid                                          | $t_3$           |                                  | 14                      |     |                         | ns    |
| SCLK High                                                   | $t_4$           |                                  | 8                       |     |                         | ns    |
| SCLK Period                                                 | $t_5$           |                                  | 20                      |     |                         | ns    |
| SCLK low                                                    | $t_6$           |                                  | 8                       |     |                         | ns    |
| CNVST Rising Edge to SCLK Rising Edge                       | $t_7$           |                                  | 5                       |     |                         | ns    |
| SCLK Rising Edge to $\overline{\text{CNVST}}$ Rising Edge   | $t_8$           |                                  | 5                       |     |                         | ns    |
| $\overline{\text{CNVST}}$ High                              | $t_9$           |                                  | 60                      |     |                         | ns    |
| $\overline{\text{CNVST}}$ Falling Edge to SCLK Rising Edge  | $t_{10}$        |                                  | 10                      |     |                         | ns    |
| SCLK Falling Edge to $\overline{\text{CNVST}}$ Falling Edge | $t_{11}$        |                                  | 0                       |     |                         | ns    |
| $\overline{\text{CNVST}}$ Low Time for Valid Sample         | $t_{12}$        |                                  | 400                     |     |                         | ns    |










**Note 1:** Units are 100% production tested at  $T_A = +25^\circ\text{C}$  and are guaranteed by design and characterization from  $T_A = T_{\text{MIN}}$  to  $T_{\text{MAX}}$ .

**Note 2:** Exclude the reference drift and offset error.

**Note 3:** This current is drawn when the device has completed conversion and SCLK is idle.










## Typical Operating Characteristics—MAX11192

( $f_{\text{SAMPLE}} = 2\text{MSPS}$ ;  $V_{\text{AVDD}} = 5.0\text{V}$ ,  $V_{\text{OVDD}} = 1.8\text{V}$ ;  $V_{\text{REFIN/OUT}} = 2.5\text{V}$  (Internal Reference);  $T_A = T_{\text{MIN}}$  to  $T_{\text{MAX}}$ . Typical values are at  $T_A = +25^\circ\text{C}$ , unless otherwise noted.)

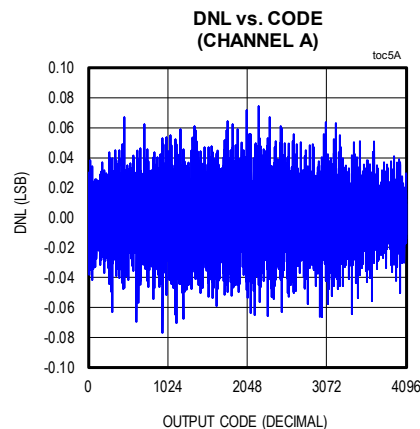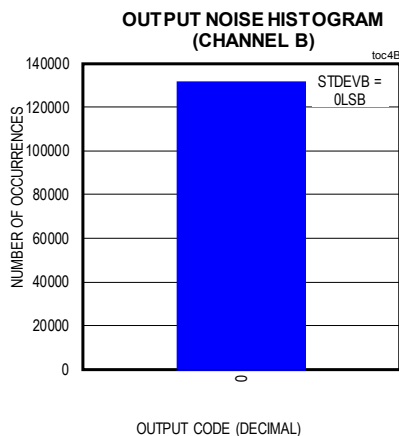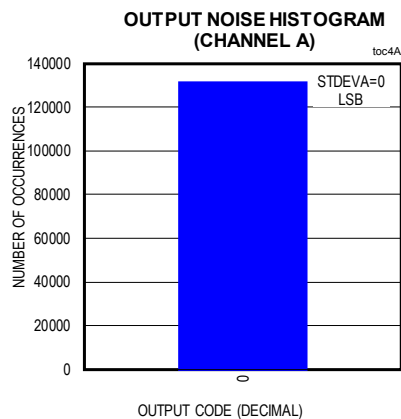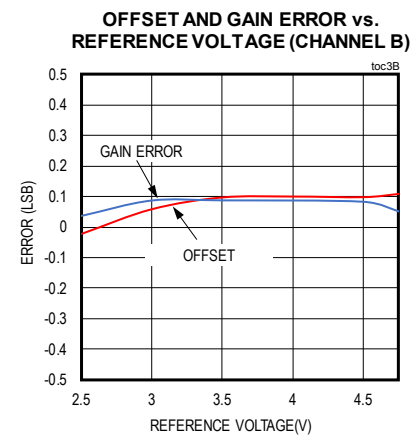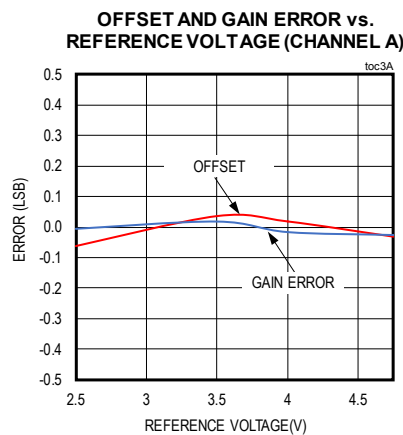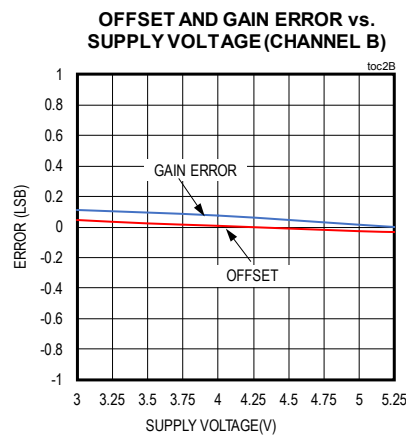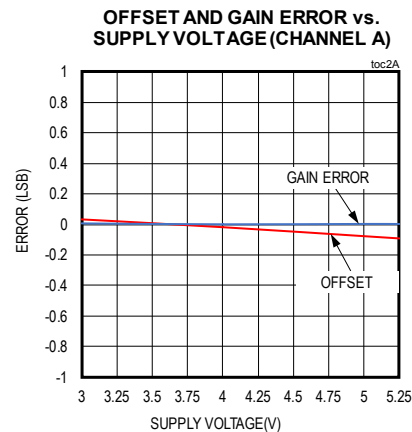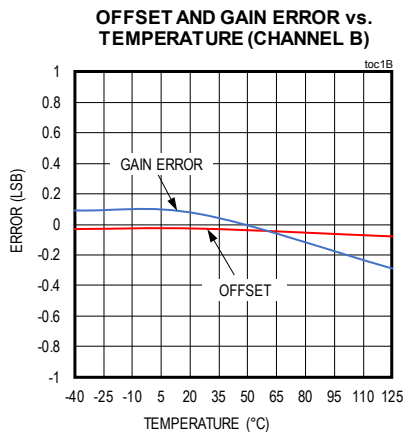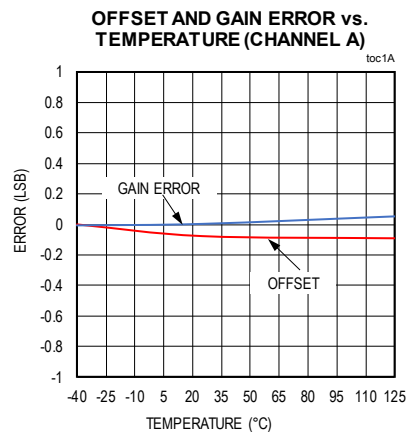










## Typical Operating Characteristics—MAX11192 (continued)

( $f_{\text{SAMPLE}} = 2\text{Mps}$ ;  $V_{\text{AVDD}} = 5.0\text{V}$ ,  $V_{\text{OVDD}} = 1.8\text{V}$ ;  $V_{\text{REFIN/OUT}} = 2.5\text{V}$  (Internal Reference);  $T_A = T_{\text{MIN}}$  to  $T_{\text{MAX}}$ . Typical values are at  $T_A = +25^\circ\text{C}$ , unless otherwise noted.)

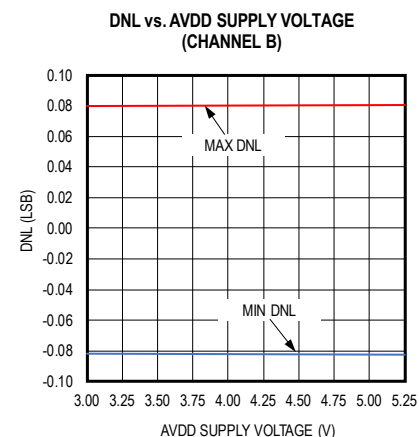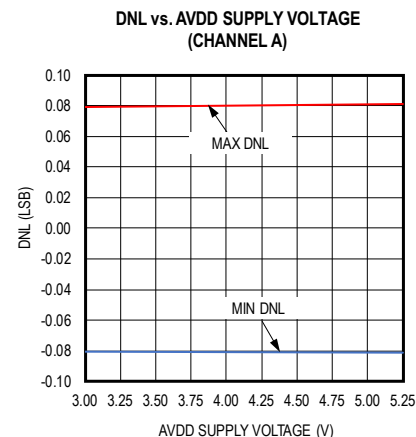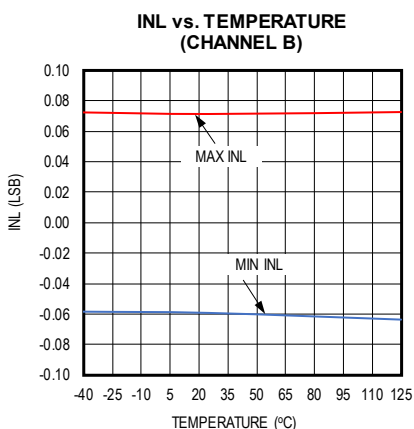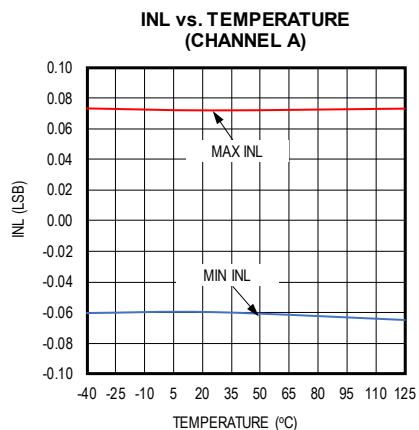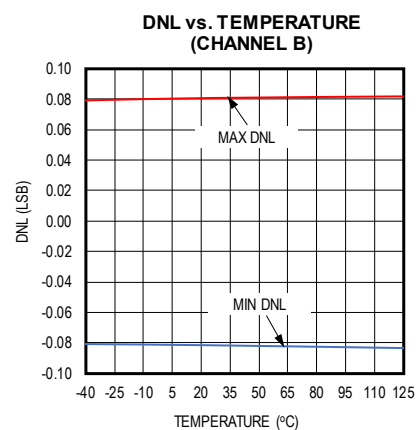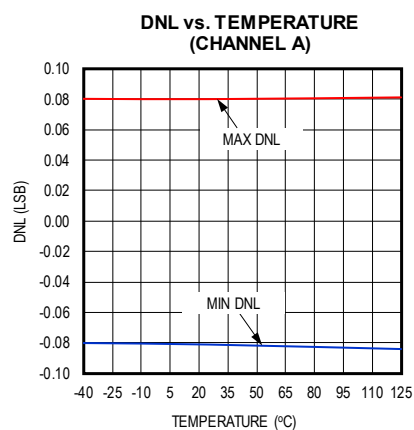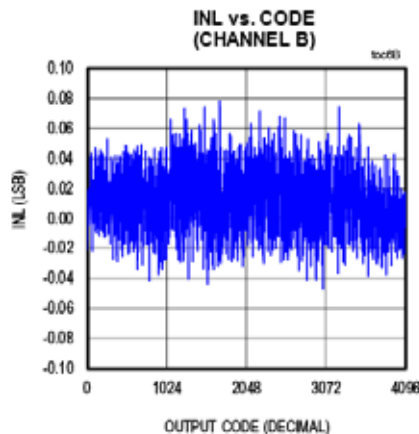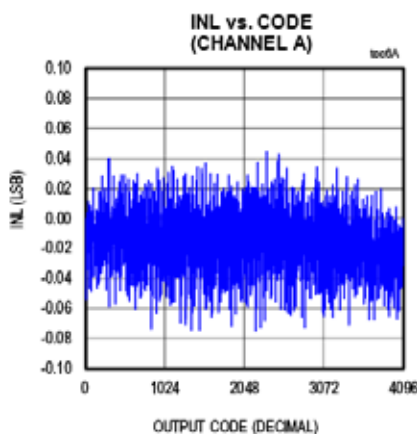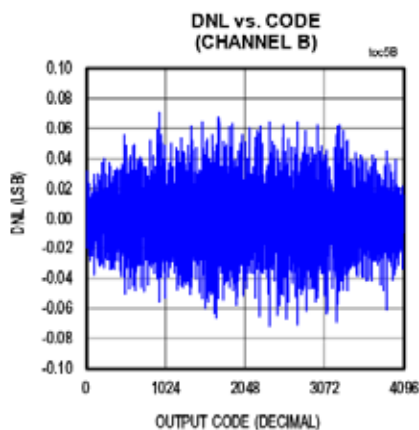










## Typical Operating Characteristics—MAX11192 (continued)

( $f_{\text{SAMPLE}} = 2\text{MSPS}$ ;  $V_{\text{AVDD}} = 5.0\text{V}$ ,  $V_{\text{OVDD}} = 1.8\text{V}$ ;  $V_{\text{REFIN/OUT}} = 2.5\text{V}$  (Internal Reference);  $T_A = T_{\text{MIN}}$  to  $T_{\text{MAX}}$ . Typical values are at  $T_A = +25^\circ\text{C}$ , unless otherwise noted.)

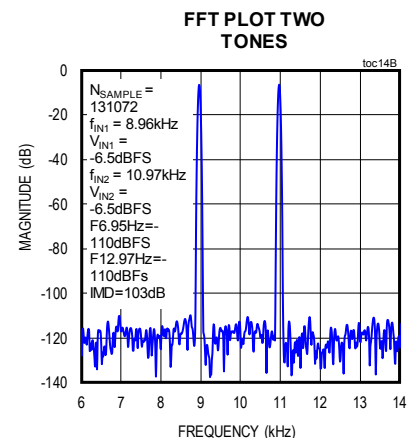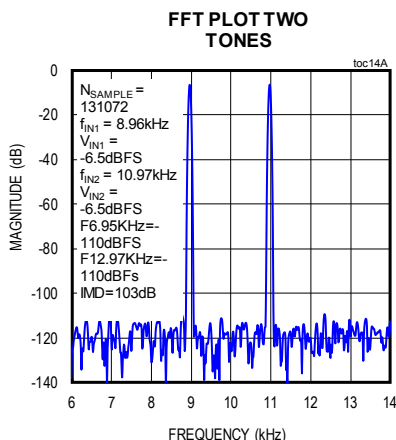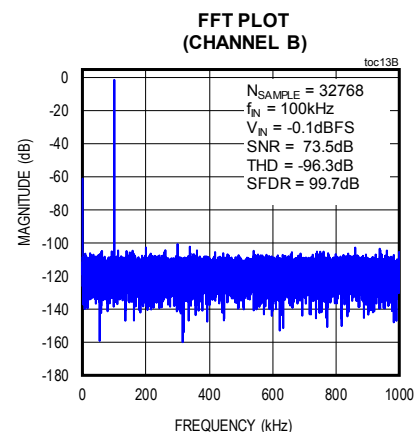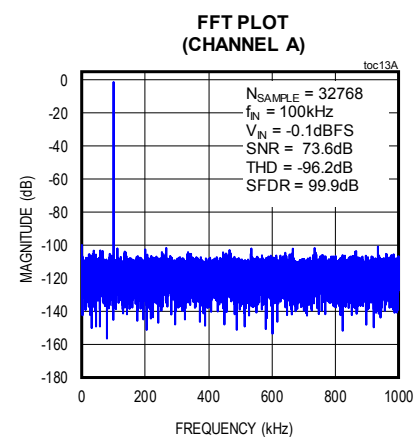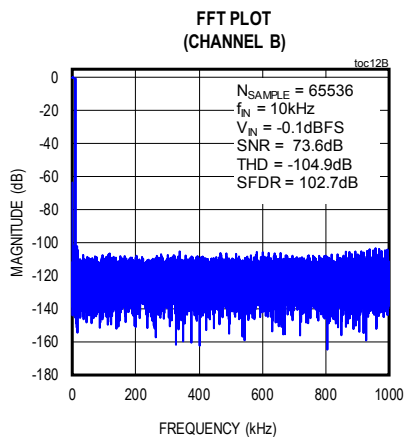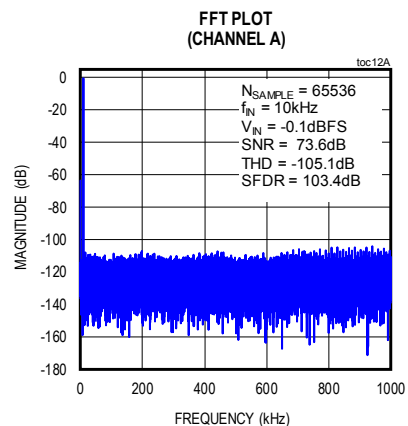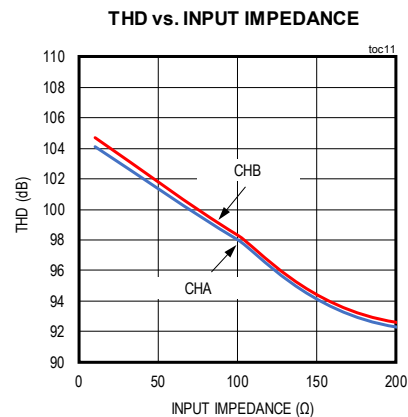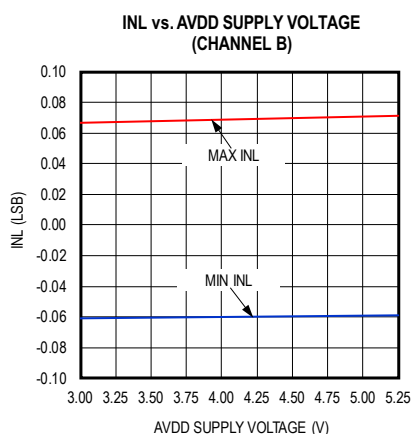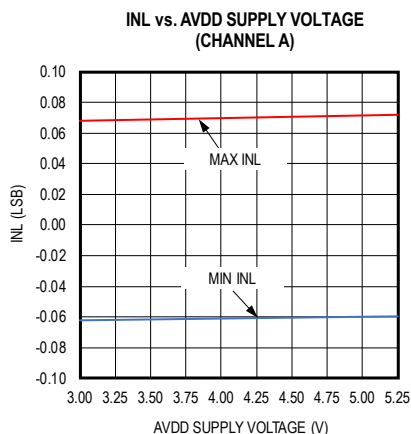










## Typical Operating Characteristics—MAX11192 (continued)

( $f_{\text{SAMPLE}} = 2\text{MSPS}$ ;  $V_{\text{AVDD}} = 5.0\text{V}$ ,  $V_{\text{OVDD}} = 1.8\text{V}$ ;  $V_{\text{REFIN/OUT}} = 2.5\text{V}$  (Internal Reference);  $T_A = T_{\text{MIN}}$  to  $T_{\text{MAX}}$ . Typical values are at  $T_A = +25^\circ\text{C}$ , unless otherwise noted.)

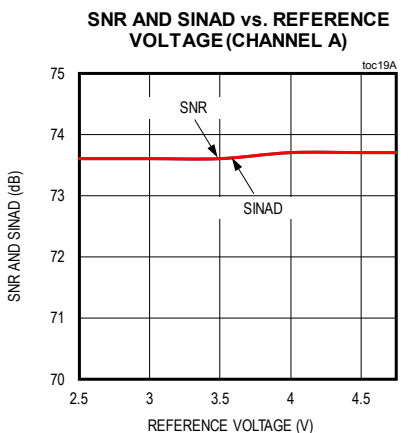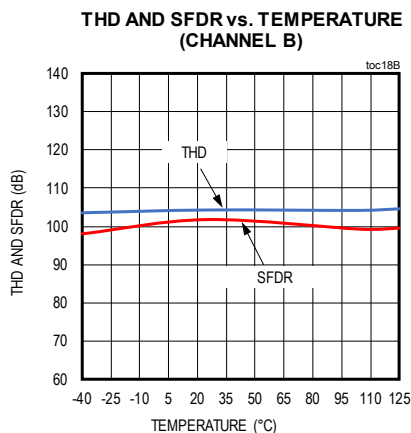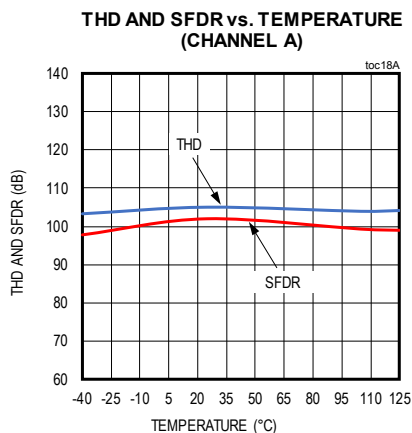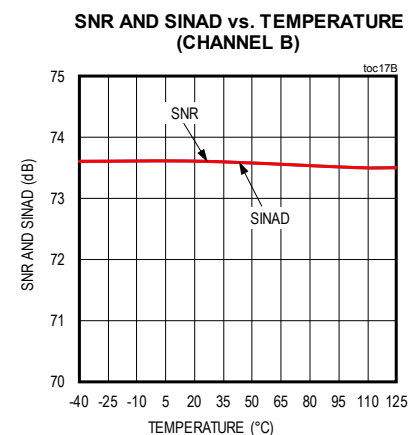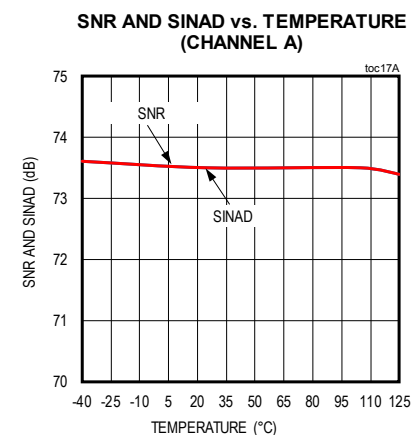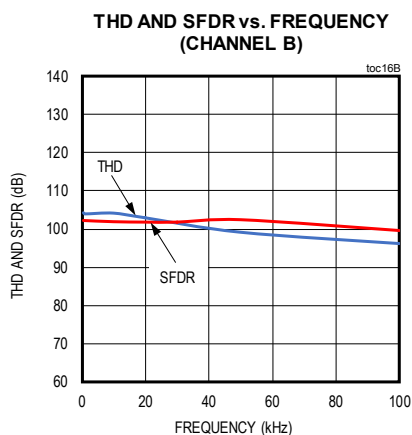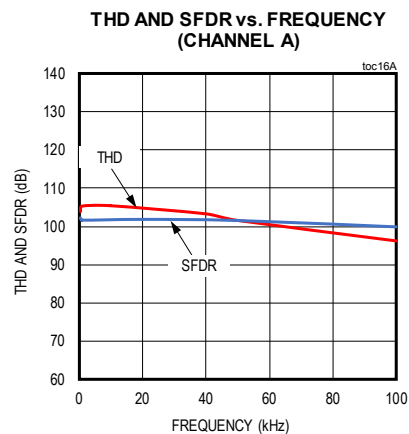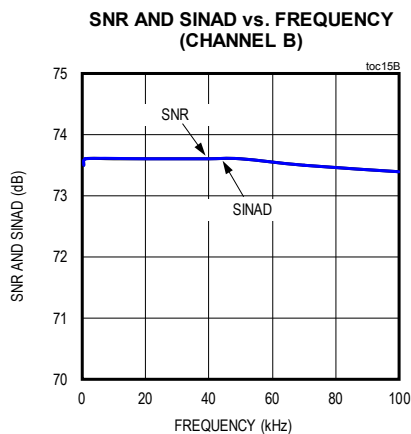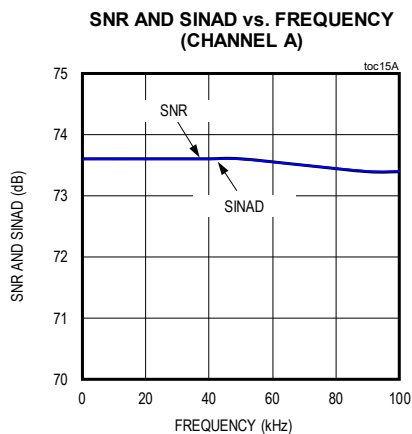










## Typical Operating Characteristics—MAX11192 (continued)

( $f_{\text{SAMPLE}} = 2\text{Msps}$ ;  $V_{\text{AVDD}} = 5.0\text{V}$ ,  $V_{\text{OVDD}} = 1.8\text{V}$ ;  $V_{\text{REFIN/OUT}} = 2.5\text{V}$  (Internal Reference);  $T_A = T_{\text{MIN}}$  to  $T_{\text{MAX}}$ . Typical values are at  $T_A = +25^\circ\text{C}$ , unless otherwise noted.)

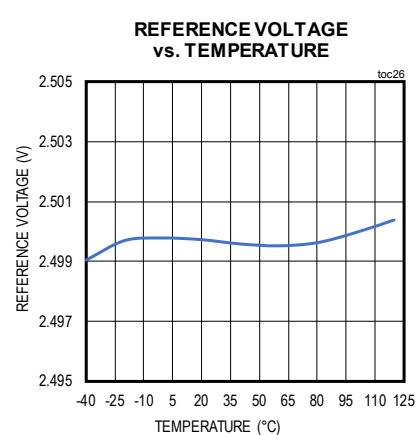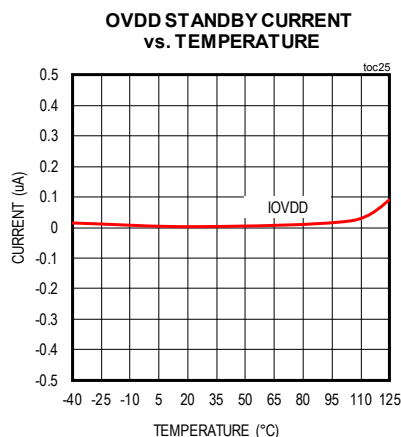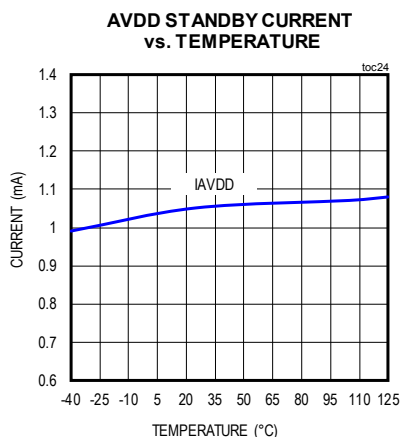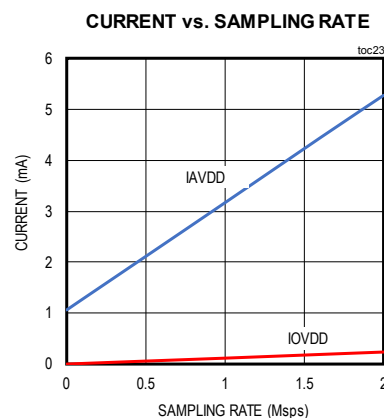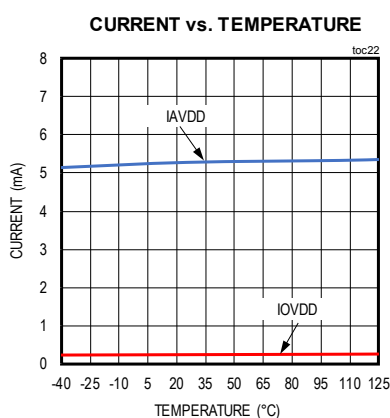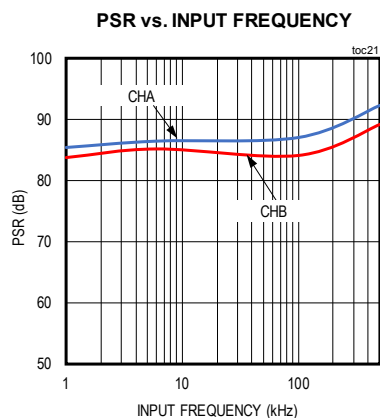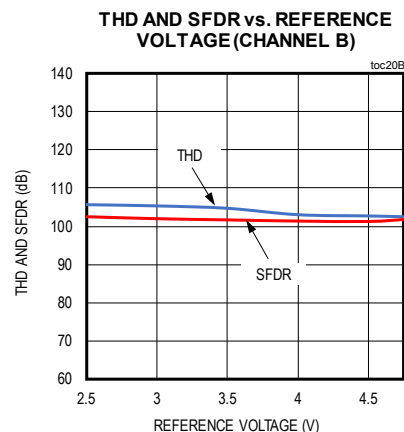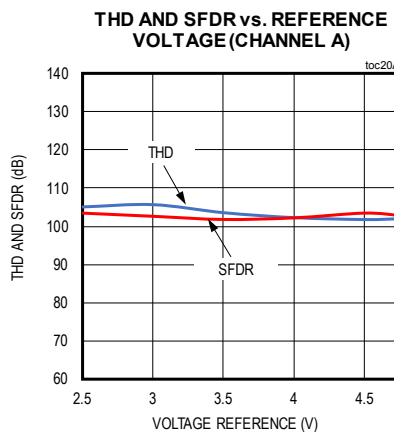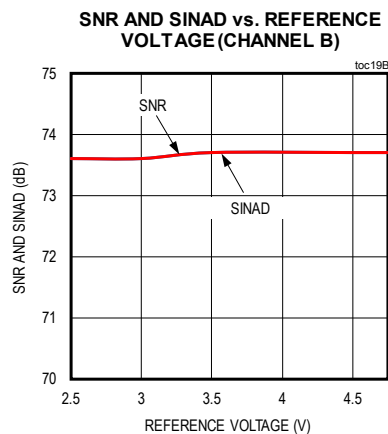










## Typical Operating Characteristics—MAX11195

( $f_{\text{SAMPLE}} = 2\text{MSPS}$ ;  $V_{\text{AVDD}} = 5.0\text{V}$ ,  $V_{\text{OVDD}} = 1.8\text{V}$ ;  $V_{\text{REFIN/OUT}} = 2.5\text{V}$  (Internal Reference);  $T_A = T_{\text{MIN}}$  to  $T_{\text{MAX}}$ . Typical values are at  $T_A = +25^\circ\text{C}$ , unless otherwise noted.)

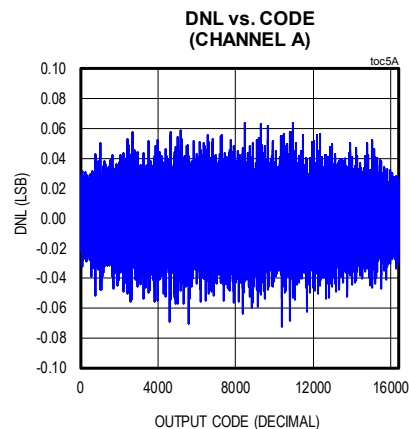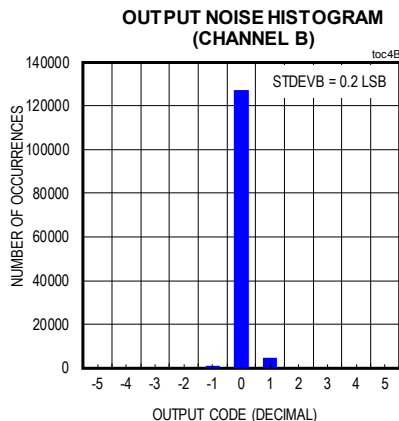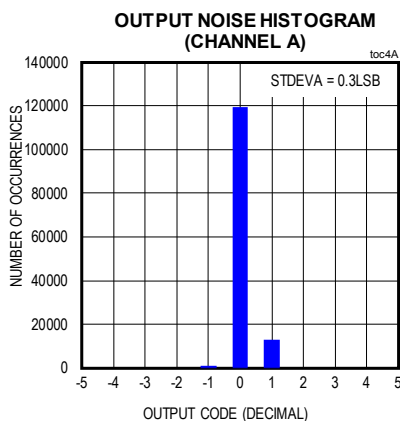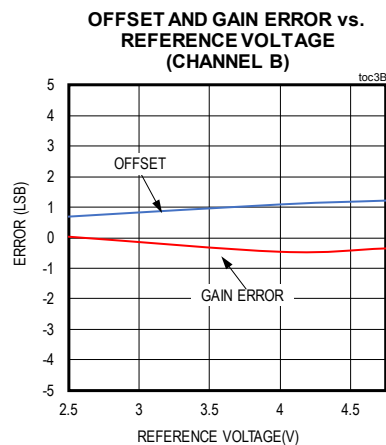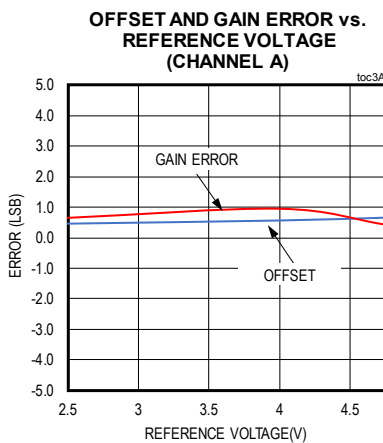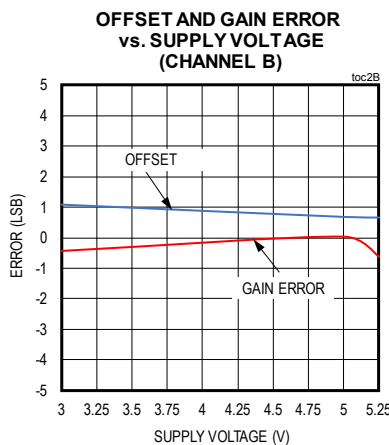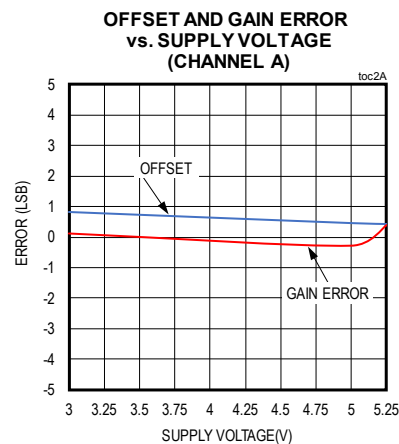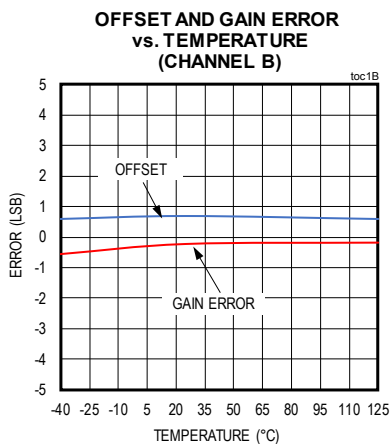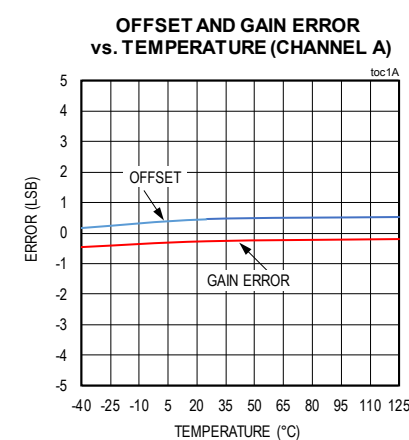










## Typical Operating Characteristics—MAX11195 (continued)

( $f_{\text{SAMPLE}} = 2\text{MSPS}$ ;  $V_{\text{AVDD}} = 5.0\text{V}$ ,  $V_{\text{OVDD}} = 1.8\text{V}$ ;  $V_{\text{REFIN/OUT}} = 2.5\text{V}$  (Internal Reference);  $T_A = T_{\text{MIN}}$  to  $T_{\text{MAX}}$ . Typical values are at  $T_A = +25^\circ\text{C}$ , unless otherwise noted.)

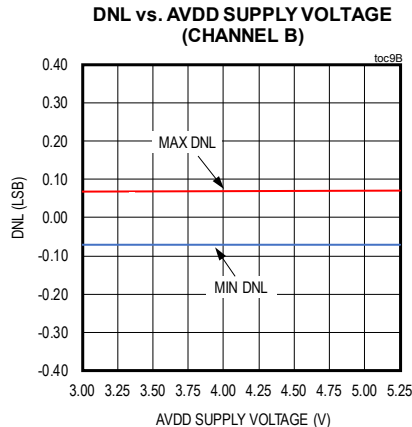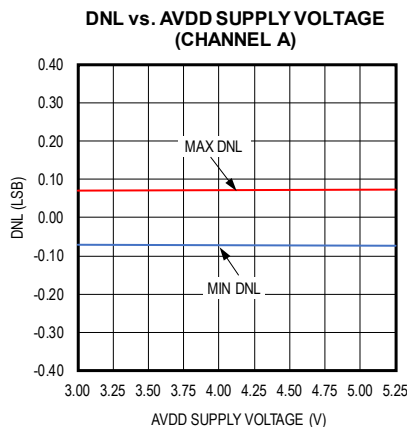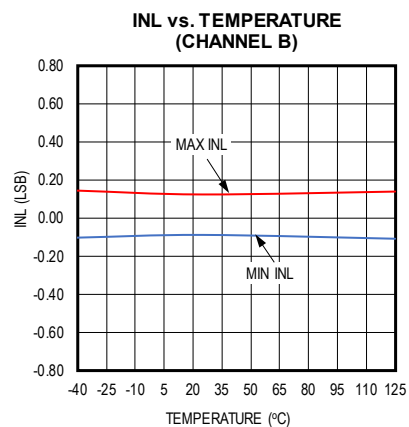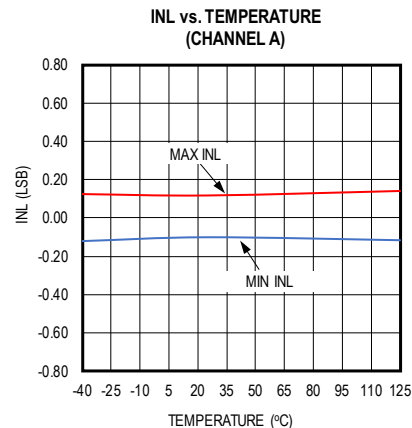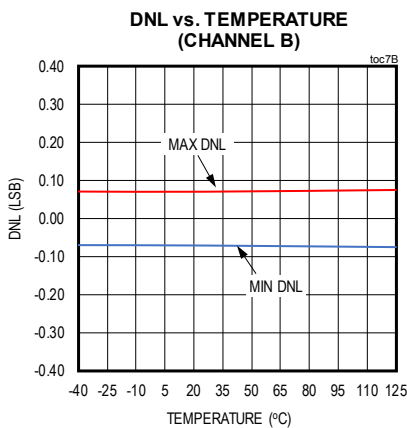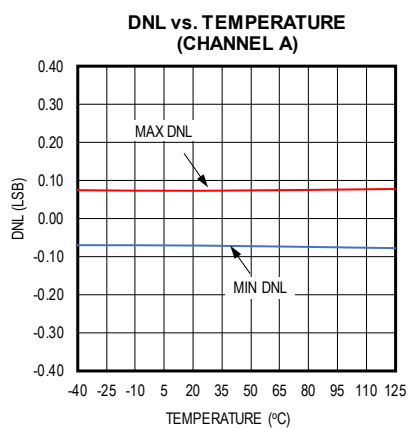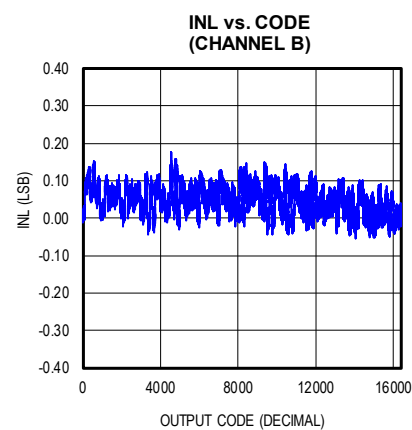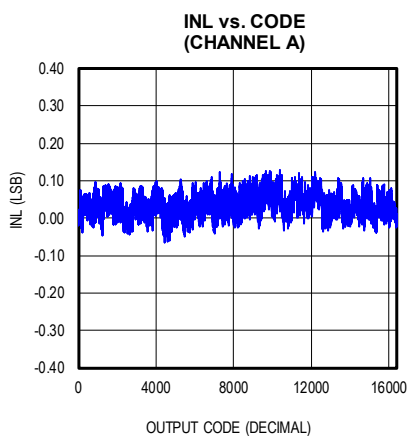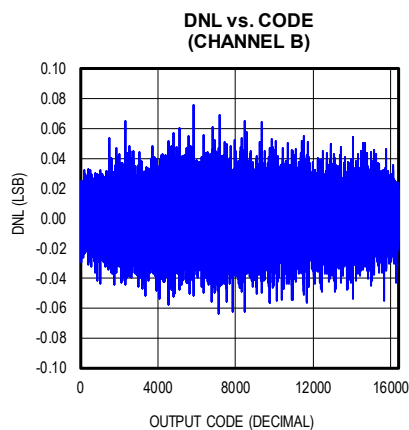


## Typical Operating Characteristics—MAX11195 (continued)

( $f_{\text{SAMPLE}} = 2\text{MSPs}$ ;  $V_{\text{AVDD}} = 5.0\text{V}$ ,  $V_{\text{OVDD}} = 1.8\text{V}$ ;  $V_{\text{REFIN/OUT}} = 2.5\text{V}$  (Internal Reference);  $T_A = T_{\text{MIN}}$  to  $T_{\text{MAX}}$ . Typical values are at  $T_A = +25^\circ\text{C}$ , unless otherwise noted.)

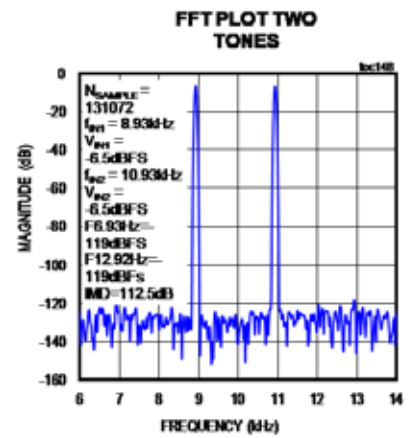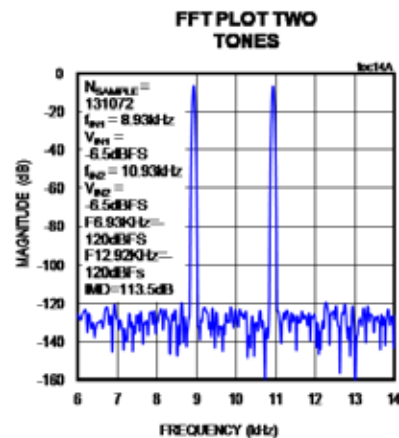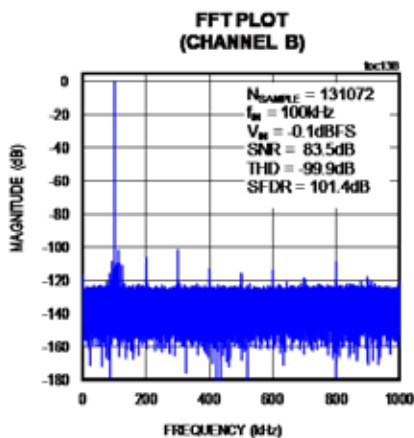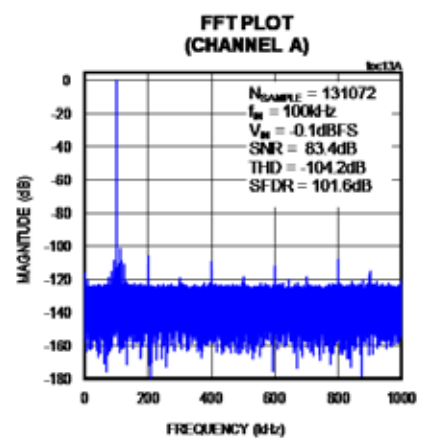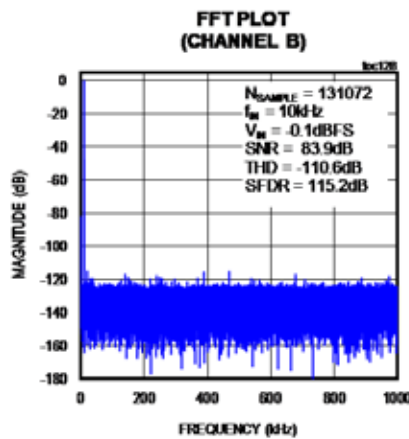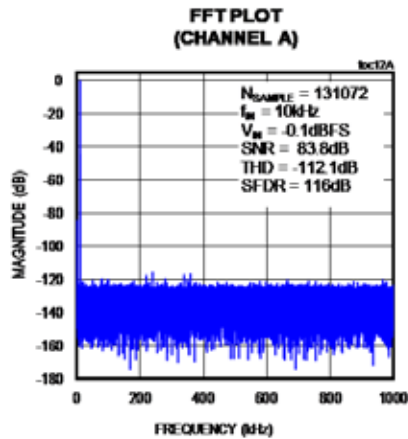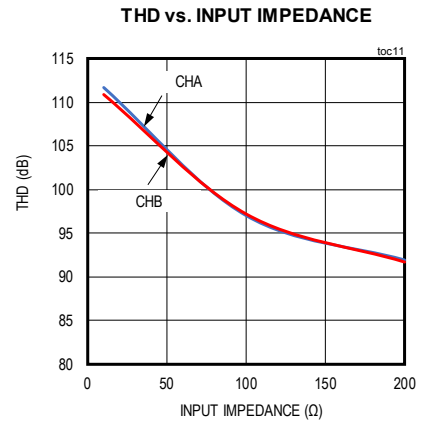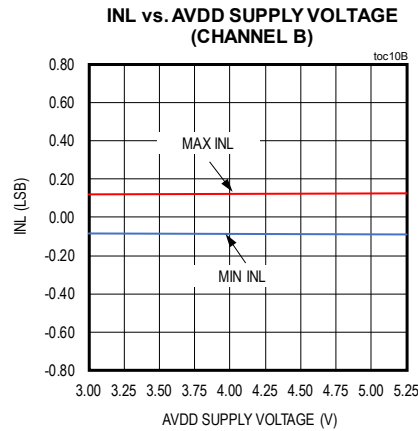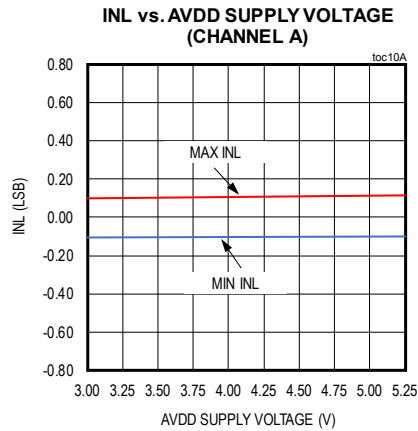










## Typical Operating Characteristics—MAX11195 (continued)

( $f_{\text{SAMPLE}} = 2\text{Msps}$ ;  $V_{\text{AVDD}} = 5.0\text{V}$ ,  $V_{\text{OVDD}} = 1.8\text{V}$ ;  $V_{\text{REFIN/OUT}} = 2.5\text{V}$  (Internal Reference);  $T_A = T_{\text{MIN}}$  to  $T_{\text{MAX}}$ . Typical values are at  $T_A = +25^\circ\text{C}$ , unless otherwise noted.)

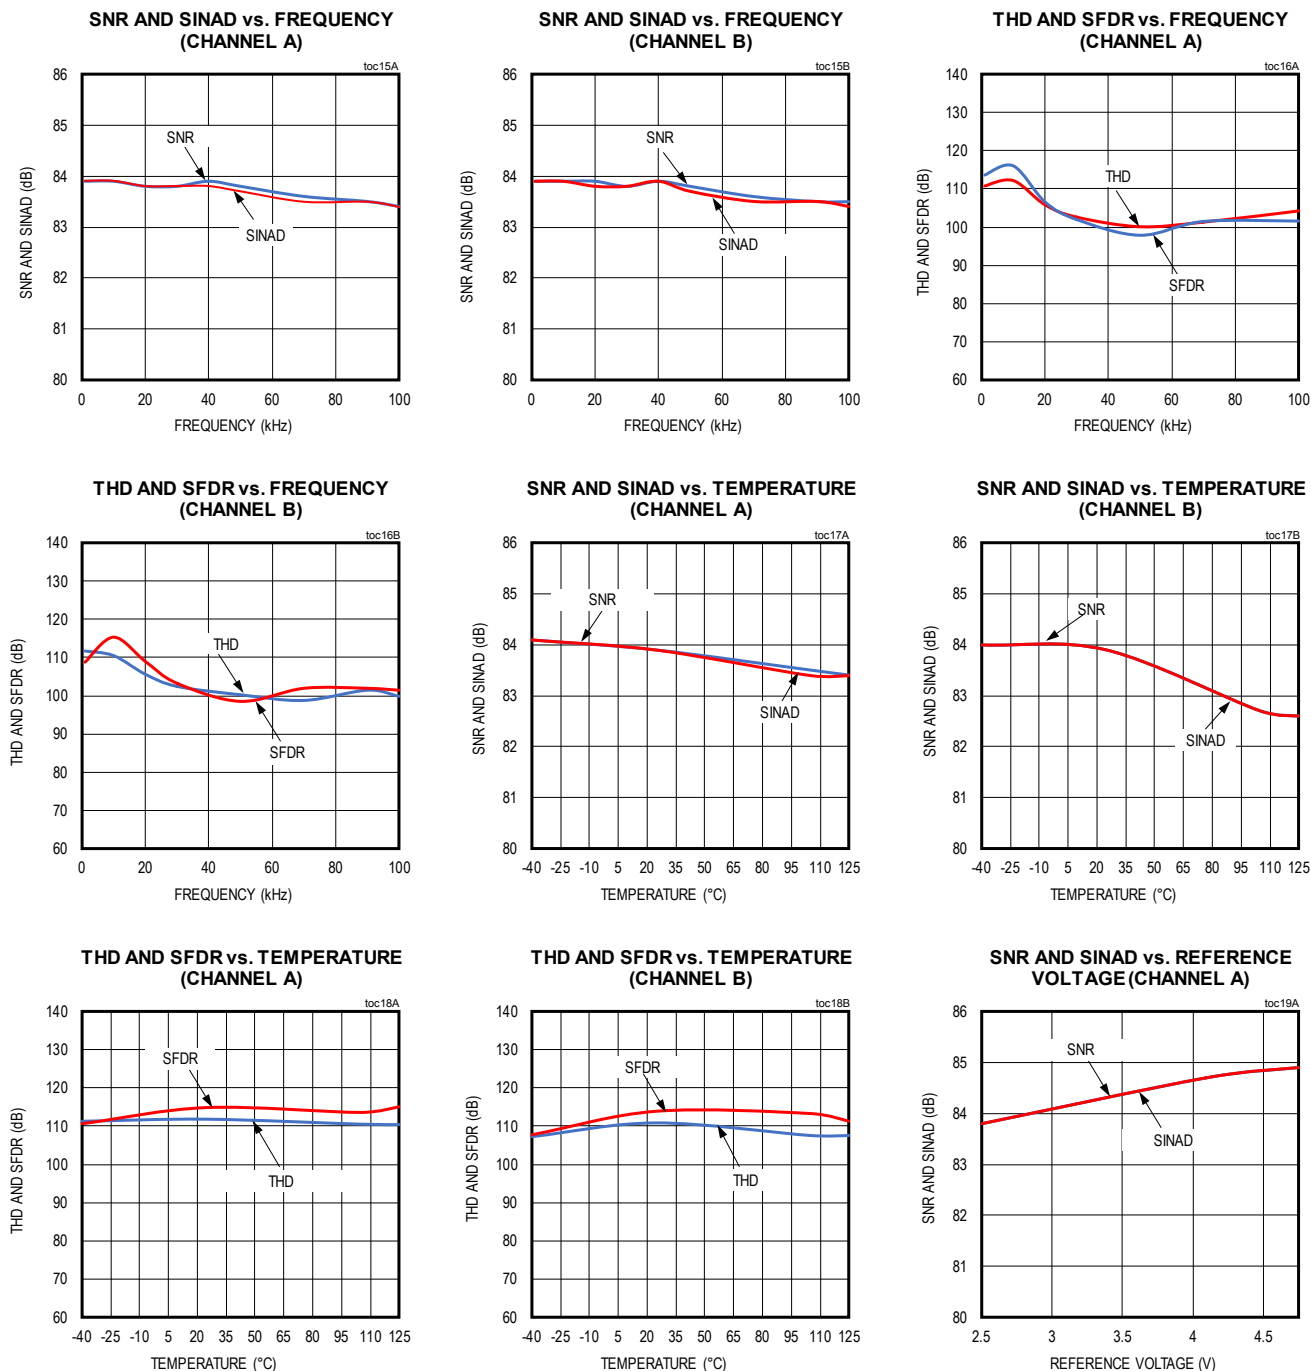


## Typical Operating Characteristics—MAX11195 (continued)

( $f_{\text{SAMPLE}} = 2\text{Mps}$ ;  $V_{\text{AVDD}} = 5.0\text{V}$ ,  $V_{\text{OVDD}} = 1.8\text{V}$ ;  $V_{\text{REFIN/OUT}} = 2.5\text{V}$  (Internal Reference);  $T_A = T_{\text{MIN}}$  to  $T_{\text{MAX}}$ . Typical values are at  $T_A = +25^\circ\text{C}$ , unless otherwise noted.)

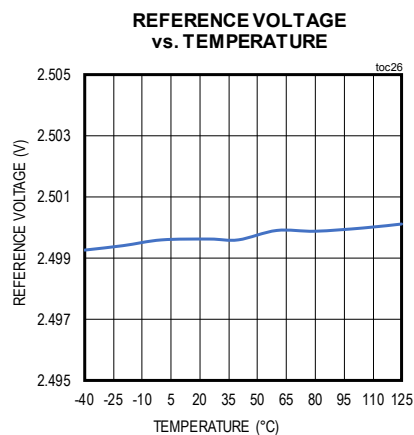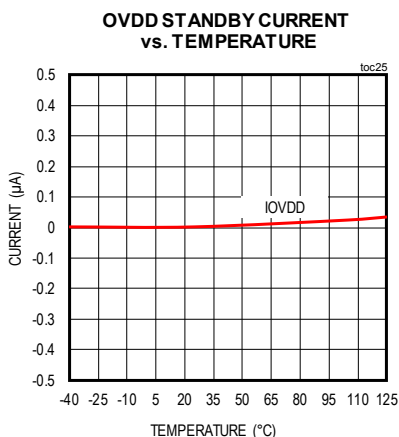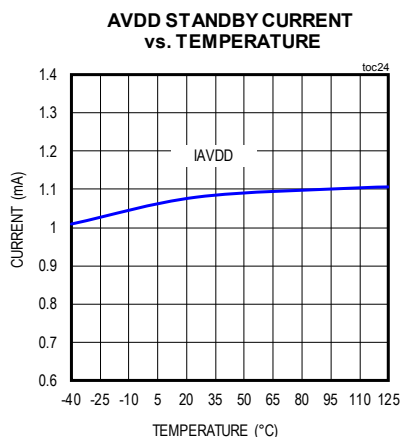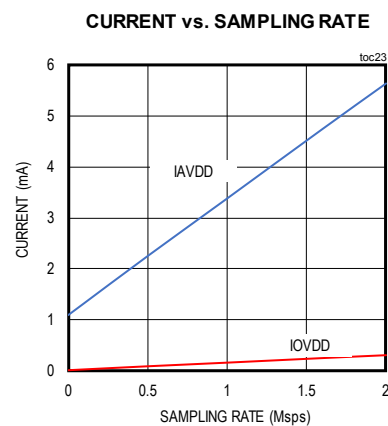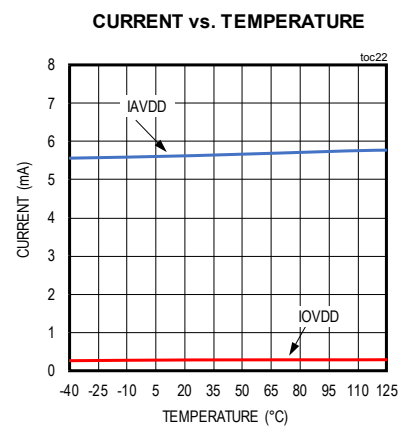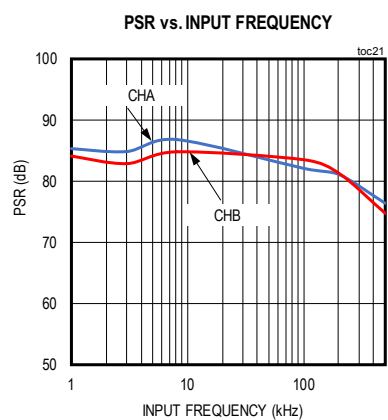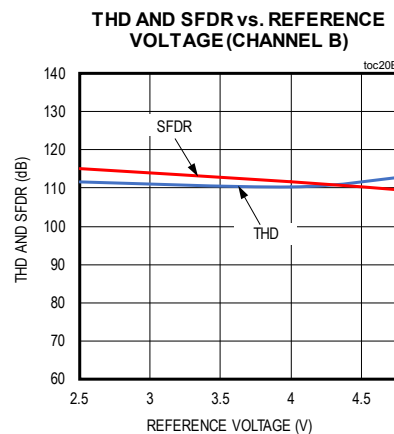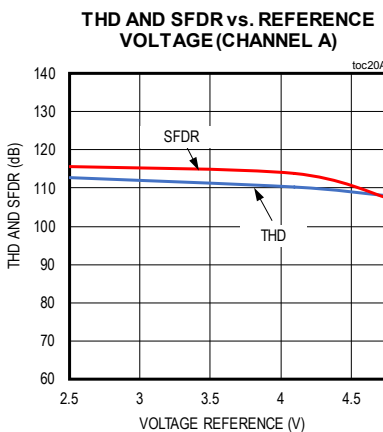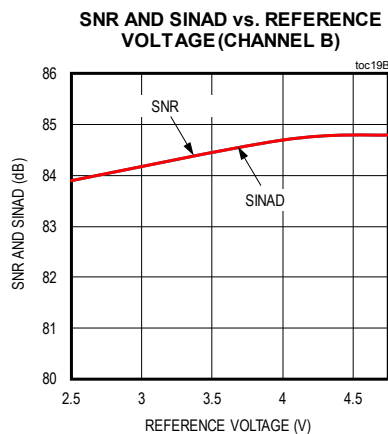










## Typical Operating Characteristics—MAX11198

( $f_{\text{SAMPLE}} = 2\text{MSPS}$ ;  $V_{\text{AVDD}} = 5.0\text{V}$ ,  $V_{\text{OVDD}} = 1.8\text{V}$ ;  $V_{\text{REFIN/OUT}} = 2.5\text{V}$  (Internal Reference);  $T_A = T_{\text{MIN}}$  to  $T_{\text{MAX}}$ . Typical values are at  $T_A = +25^\circ\text{C}$ , unless otherwise noted.)

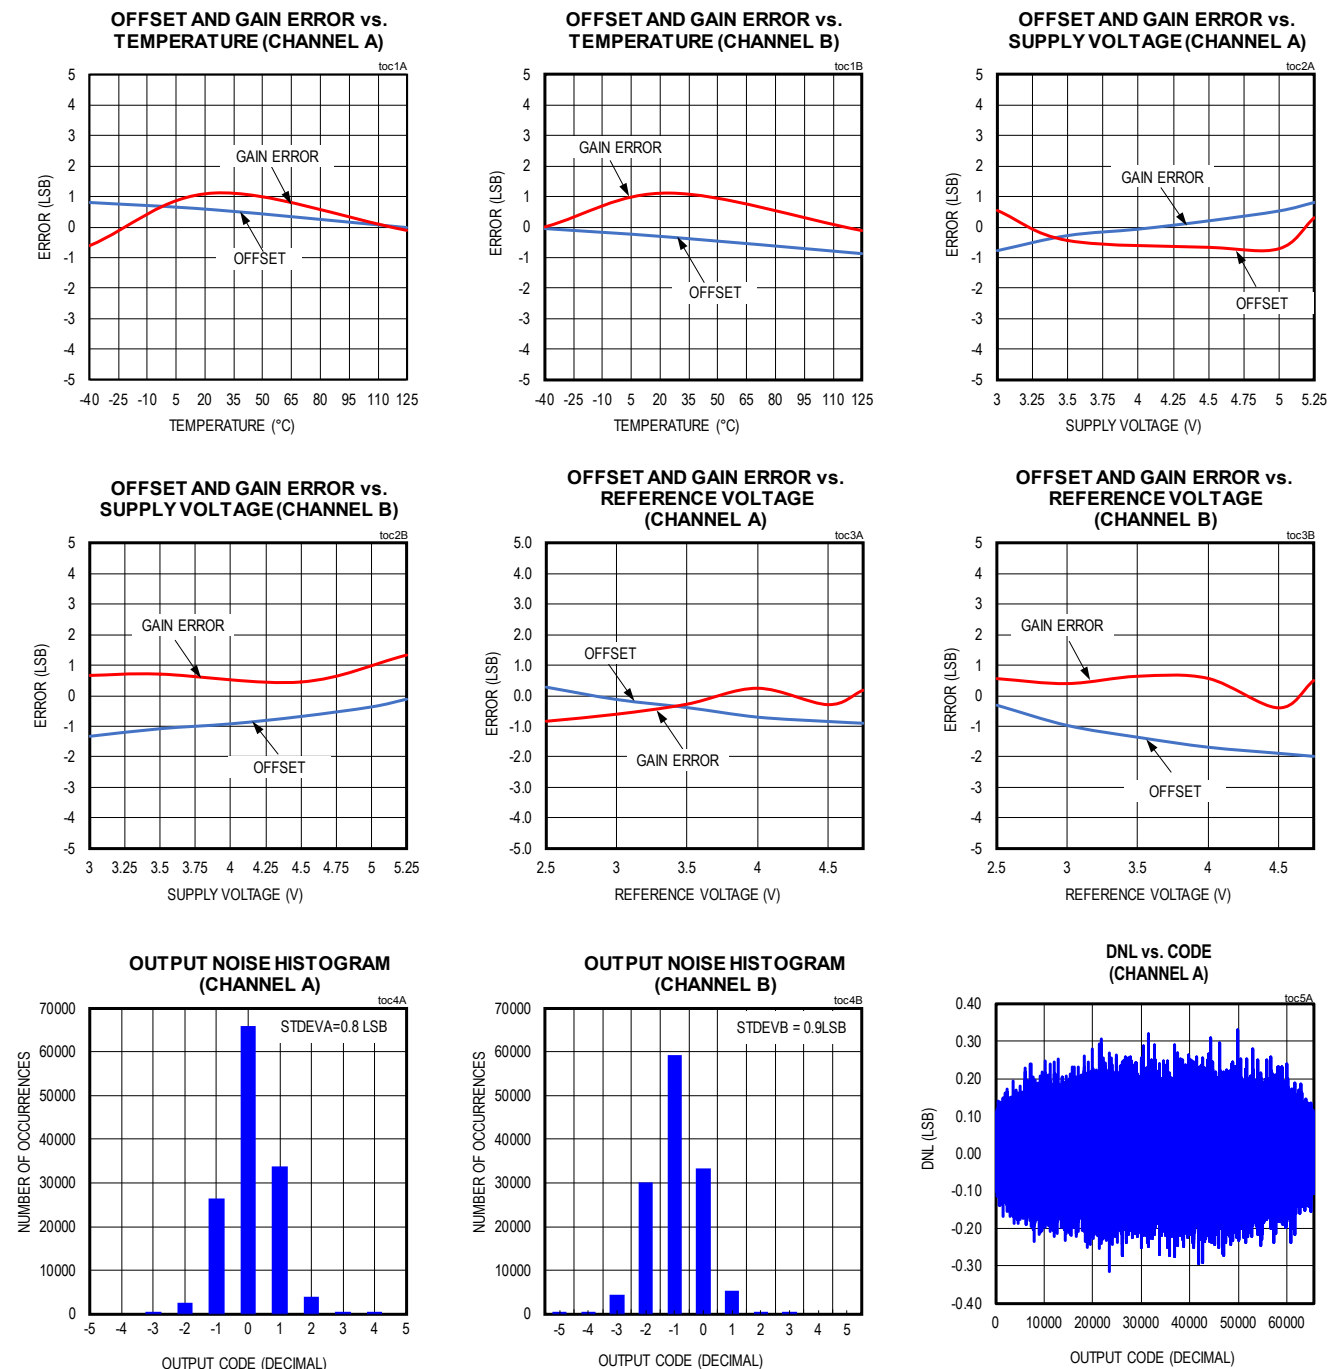










## Typical Operating Characteristics—MAX11198 (continued)

( $f_{\text{SAMPLE}} = 2\text{MSPS}$ ;  $V_{\text{AVDD}} = 5.0\text{V}$ ,  $V_{\text{OVDD}} = 1.8\text{V}$ ;  $V_{\text{REFIN/OUT}} = 2.5\text{V}$  (Internal Reference);  $T_A = T_{\text{MIN}}$  to  $T_{\text{MAX}}$ . Typical values are at  $T_A = +25^\circ\text{C}$ , unless otherwise noted.)

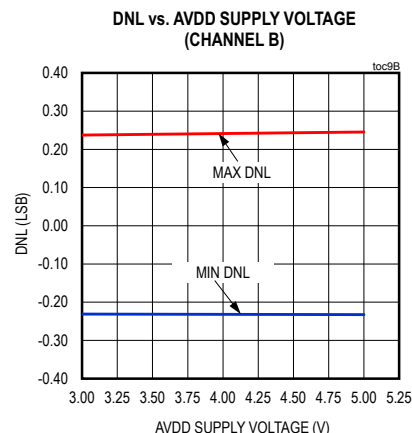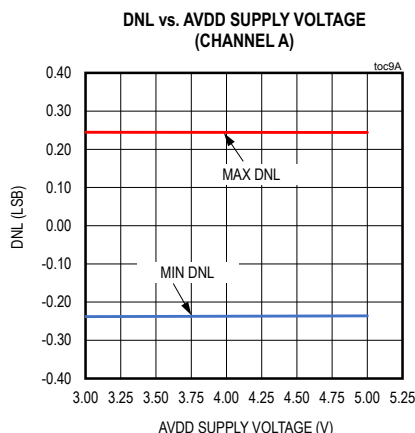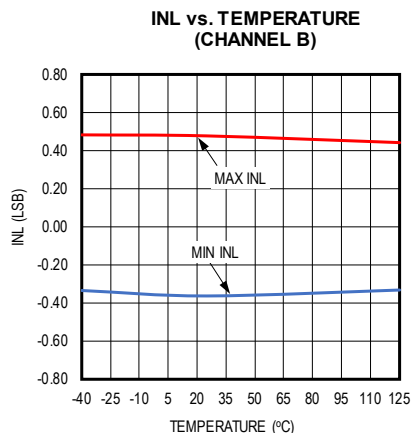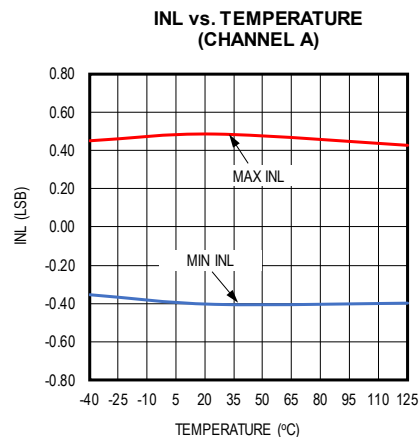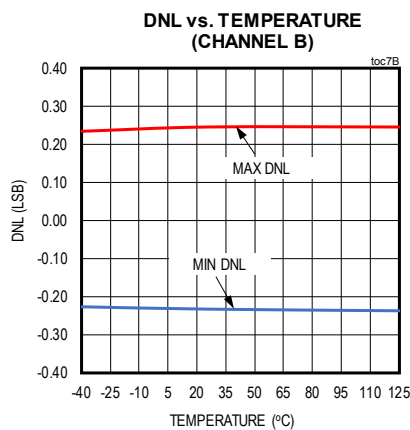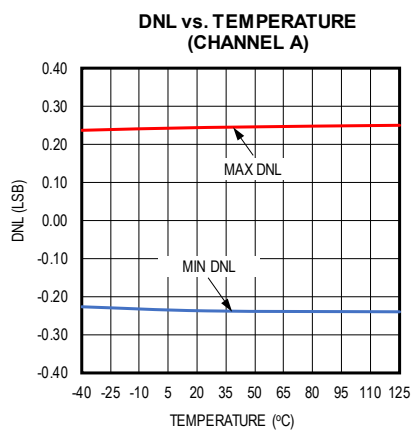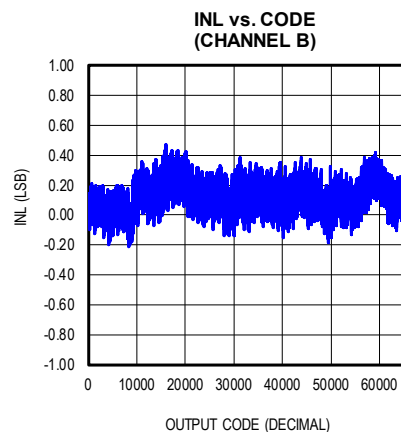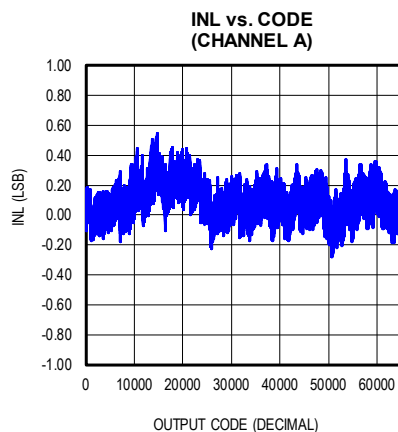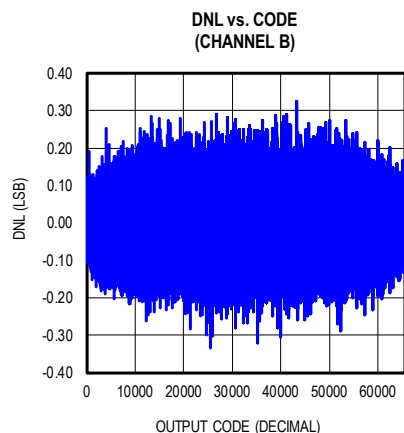










## Typical Operating Characteristics—MAX11198 (continued)

( $f_{\text{SAMPLE}} = 2\text{MSPs}$ ;  $V_{\text{AVDD}} = 5.0\text{V}$ ,  $V_{\text{OVDD}} = 1.8\text{V}$ ;  $V_{\text{REFIN/OUT}} = 2.5\text{V}$  (Internal Reference);  $T_A = T_{\text{MIN}}$  to  $T_{\text{MAX}}$ . Typical values are at  $T_A = +25^\circ\text{C}$ , unless otherwise noted.)

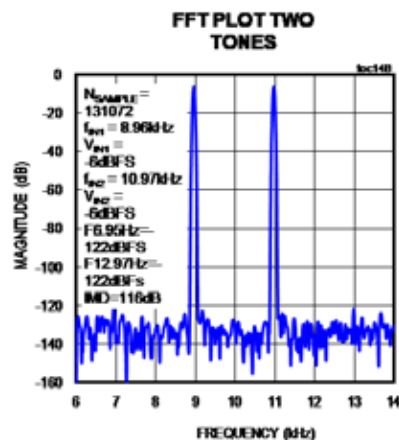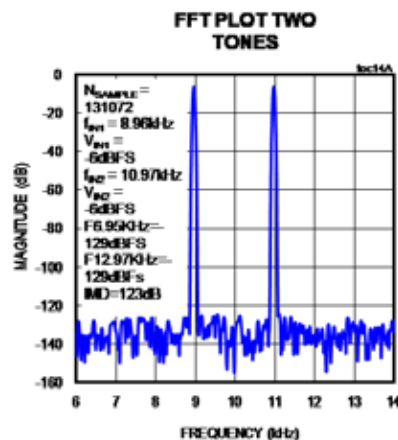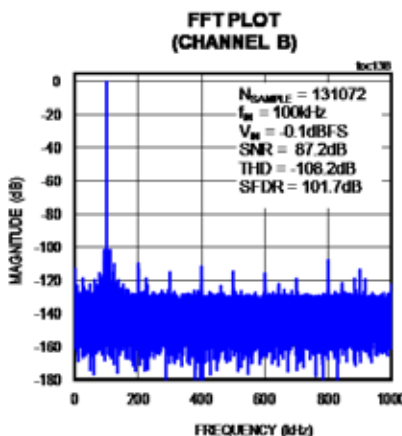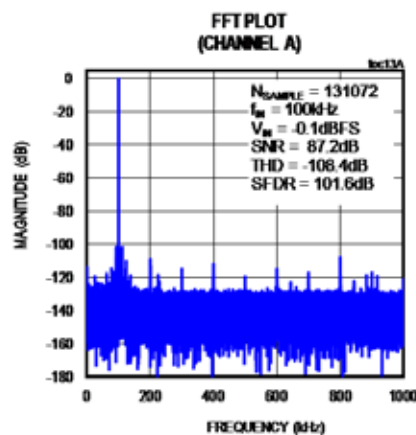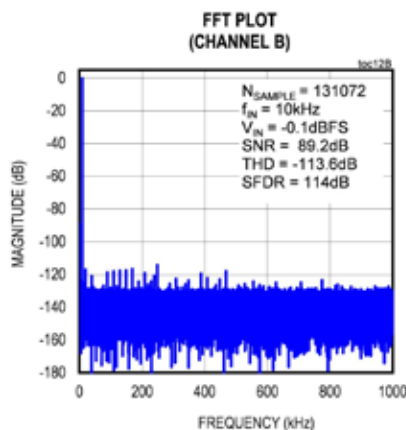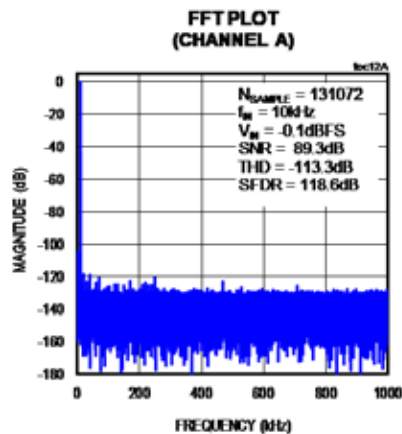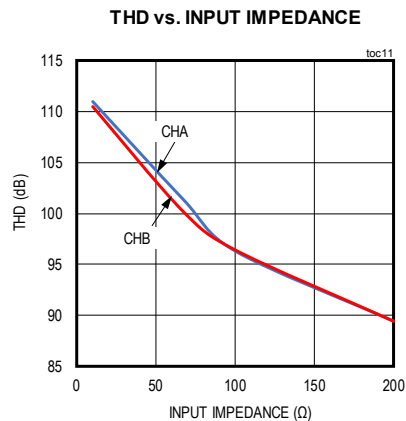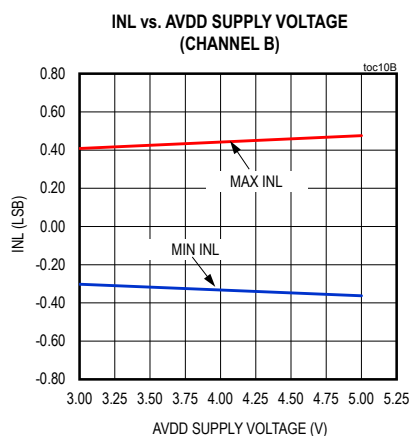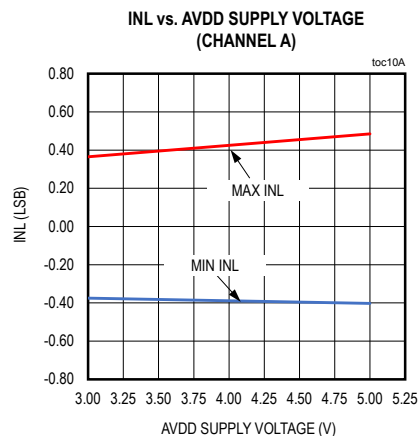










## Typical Operating Characteristics—MAX11198 (continued)

( $f_{\text{SAMPLE}} = 2\text{MSPS}$ ;  $V_{\text{AVDD}} = 5.0\text{V}$ ,  $V_{\text{OVDD}} = 1.8\text{V}$ ;  $V_{\text{REFIN/OUT}} = 2.5\text{V}$  (Internal Reference);  $T_A = T_{\text{MIN}}$  to  $T_{\text{MAX}}$ . Typical values are at  $T_A = +25^\circ\text{C}$ , unless otherwise noted.)

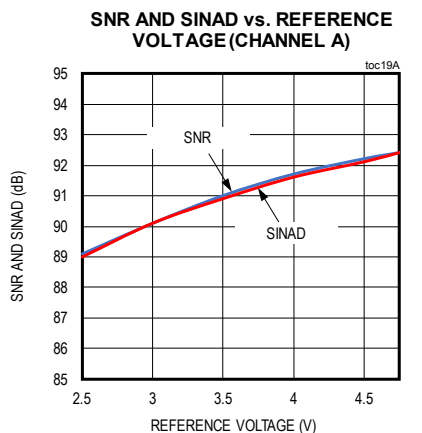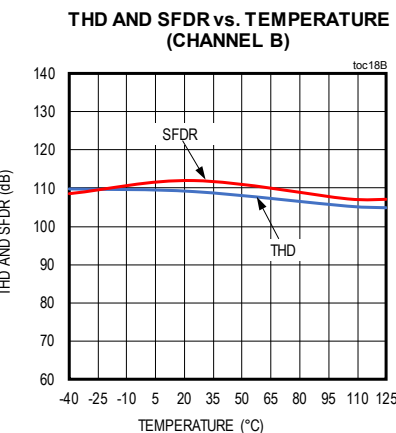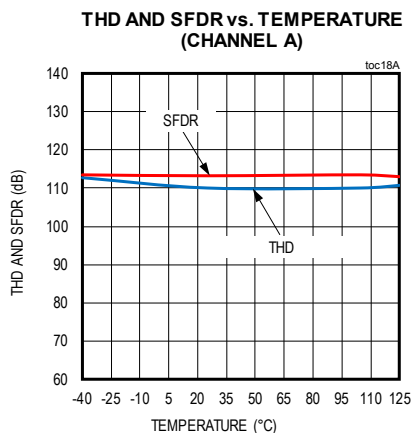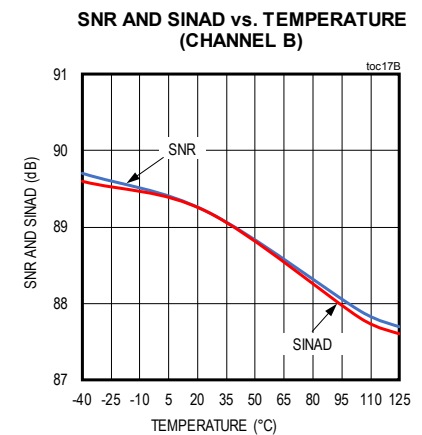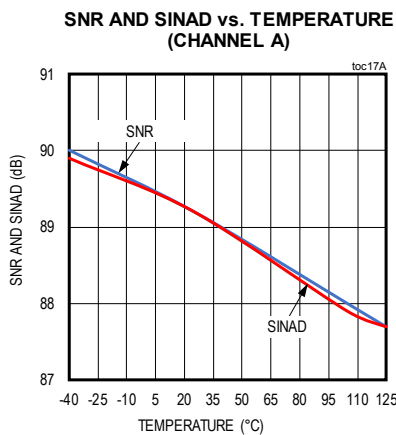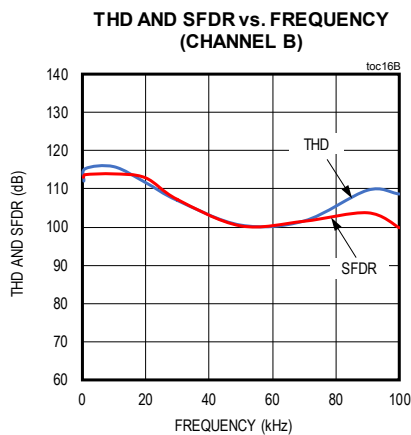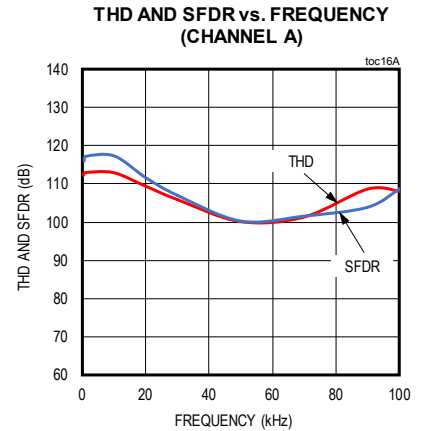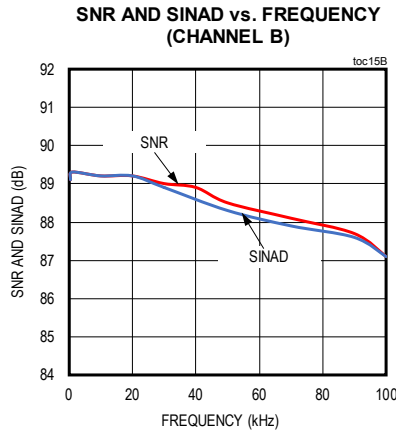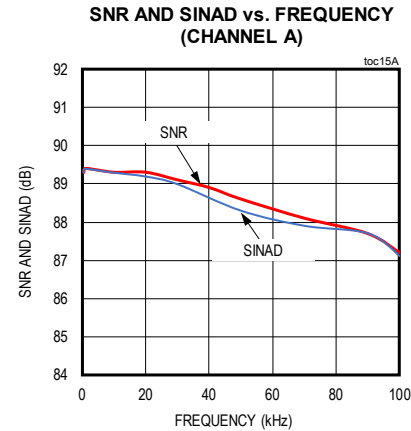


## Typical Operating Characteristics—MAX11198 (continued)

( $f_{\text{SAMPLE}} = 2\text{Msps}$ ;  $V_{\text{AVDD}} = 5.0\text{V}$ ,  $V_{\text{OVDD}} = 1.8\text{V}$ ;  $V_{\text{REFIN/OUT}} = 2.5\text{V}$  (Internal Reference);  $T_A = T_{\text{MIN}}$  to  $T_{\text{MAX}}$ . Typical values are at  $T_A = +25^\circ\text{C}$ , unless otherwise noted.)

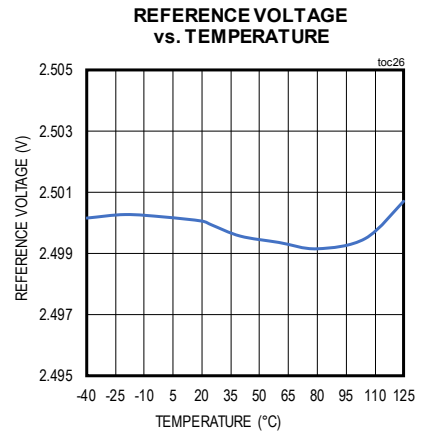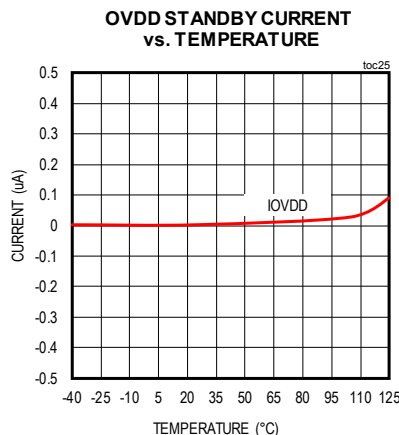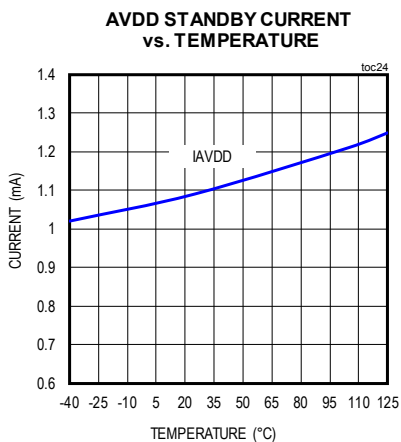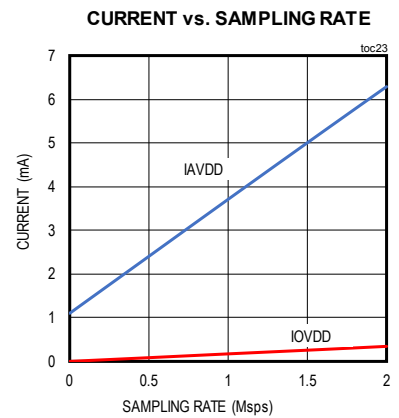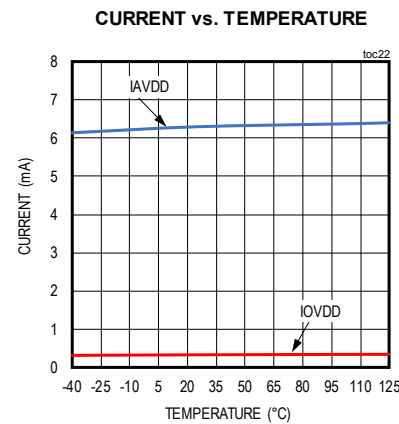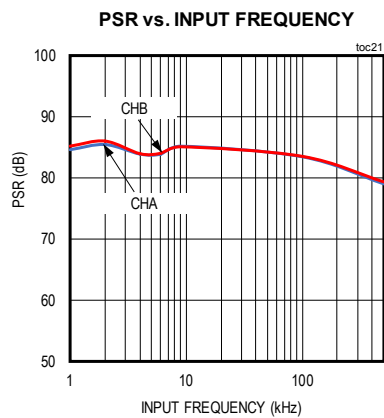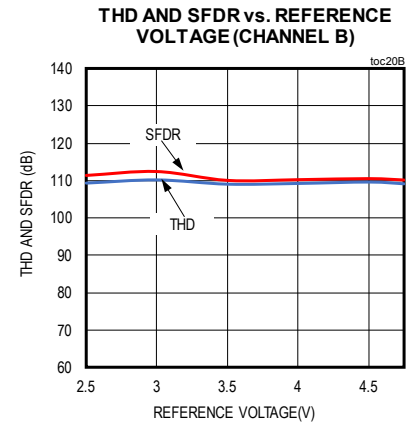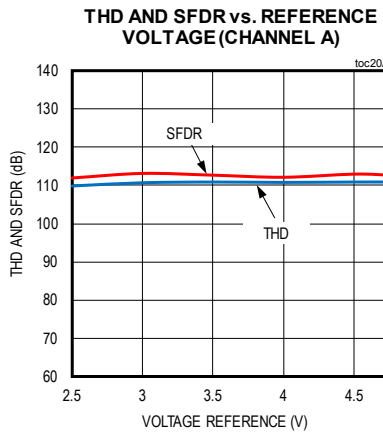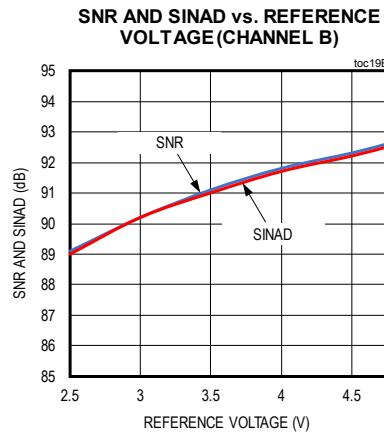


## Pin Configuration

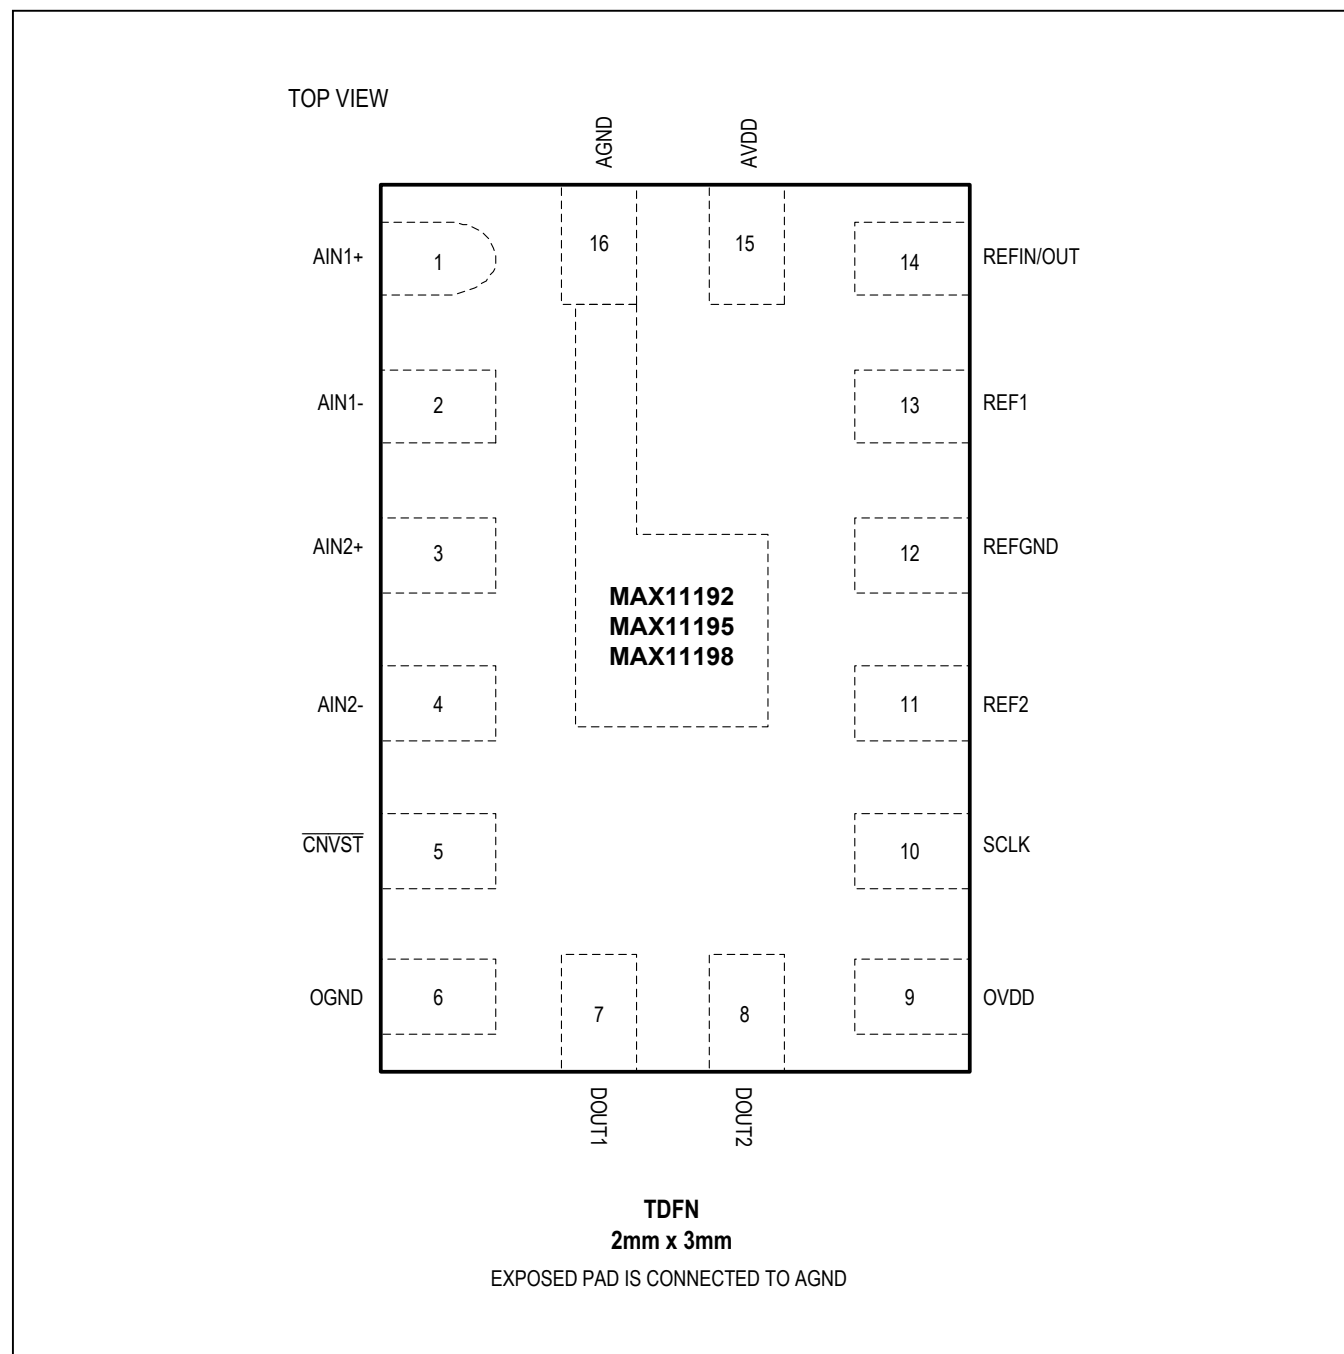

## Pin Description

| PIN | NAME                      | FUNCTION                                                                                             |
|-----|---------------------------|------------------------------------------------------------------------------------------------------|
| 1   | AIN1+                     | ADC1 Positive (+) Analog Input                                                                       |
| 2   | AIN1-                     | ADC1 Negative (-) Analog Input                                                                       |
| 3   | AIN2+                     | ADC2 Positive (+) Analog Input                                                                       |
| 4   | AIN2-                     | ADC2 Negative (-) Analog Input                                                                       |
| 5   | $\overline{\text{CNVST}}$ | Conversion Start Input                                                                               |
| 6   | OGND                      | Ground (IO Ground)                                                                                   |
| 7   | DOUT1                     | Serial Interface Data Out for ADC1                                                                   |
| 8   | DOUT2                     | Serial Interface Data Out for ADC2                                                                   |
| 9   | OVDD                      | IO Supply. Bypass with a 10 $\mu$ F capacitor to ground                                              |
| 10  | SCLK                      | Serial Interface Clock                                                                               |
| 11  | REF2                      | REF2 Bypass Pin. Bypass with a 1 $\mu$ F capacitor to ground                                         |
| 12  | REFGND                    | Ground (Reference Ground)                                                                            |
| 13  | REF1                      | REF1 Bypass Pin. Bypass with a 1 $\mu$ F capacitor to ground                                         |
| 14  | REFIN/OUT                 | External Reference Input or Internal Reference Decoupling. Bypass with 1 $\mu$ F capacitor to ground |
| 15  | AVDD                      | Analog Supply Pin. Bypass with a 10 $\mu$ F capacitor to ground                                      |
| 16  | AGND                      | Ground                                                                                               |

## Functional Diagram

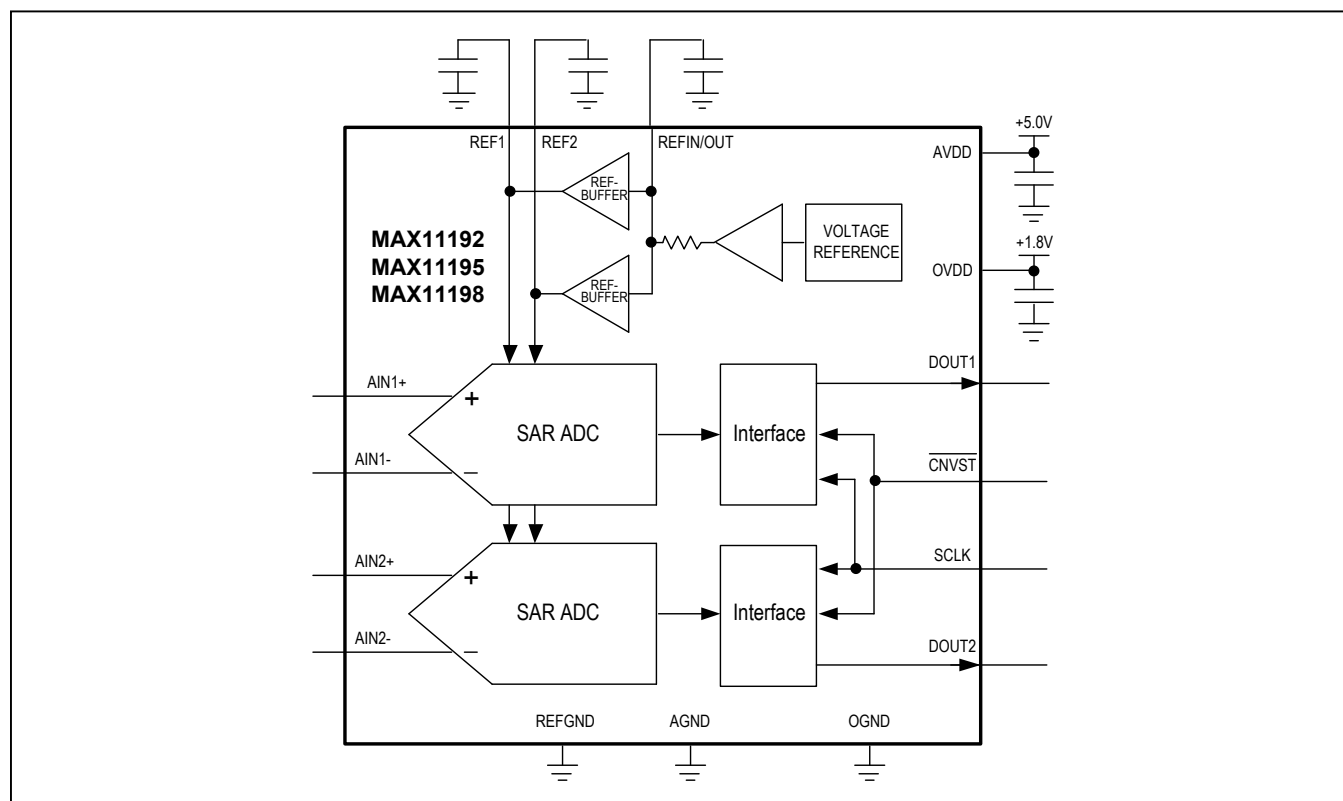

## Detailed Description

The MAX11192/MAX11195/MAX11198 are a family of 12-/14-/16-bit, 2-channel, 2Msps, SAR ADCs with simultaneous sampling, balanced differential inputs, and a separate data output for each channel. These ADCs feature best-in-class sample rate and resolution in a tiny 2mm x 3mm package. An integrated voltage reference and reference buffers help to minimize board space, component count, and system cost. An internal oscillator sets conversion time, thereby simplifying external timing requirements.

For fast throughput, the SPI-compatible digital interface includes two data out pins (DOUT1 and DOUT2). DOUT1 provides conversion data from ADC1, while DOUT2 provides conversion data from ADC2. Data bits are clocked out on the rising edge of SCLK.

## Analog Inputs

The analog inputs of the MAX11192/MAX11195/MAX11198, AINn+ and AINn-, should be driven with balanced differential signals. The input signals can range from 0V to V<sub>REF</sub>. Thus, the differential input interval V<sub>DIFF</sub> = (AINn+) - (AINn-) ranges from -V<sub>REF</sub> to +V<sub>REF</sub>, and the full-scale range is:

$$FSR = 2 \times V_{REF}$$

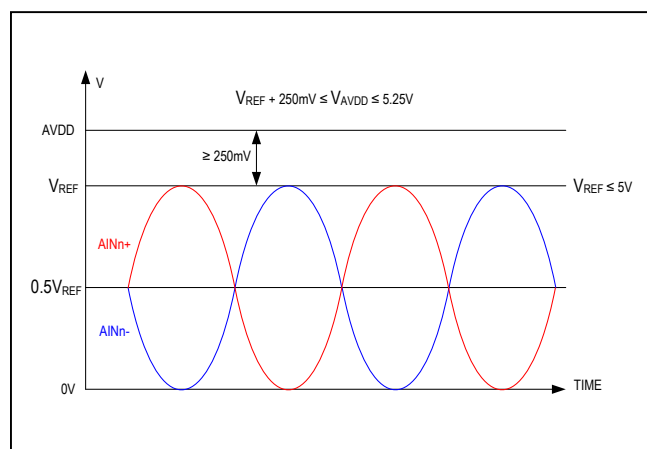


Figure 1. Input Signal Ranges

The nominal resolution step width of the least significant bit (LSB) is:

$$LSB = \frac{FSR}{2^N} = \frac{2 \times V_{REF}}{2^N}, N = 12/14/16$$

The differential analog input must be centered with respect to a common mode signal of V<sub>REF</sub>/2, with a tolerance of ±100mV. The reference voltage can range from 2.5V to 250mV below the reference supply AVDD. This will guarantee adequate headroom for the internal reference buffers. Figure 1 illustrates signal ranges for AINn+/AINn-, reference voltage V<sub>REF</sub> and reference supply voltage AVDD.

Figure 2 shows the analog input equivalent circuit of MAX11192/MAX11195/MAX11198. The ADC samples both inputs, AINn+ and AINn-, with a differential on-chip track-and-hold exhibiting no pipeline delay or latency.

Each analog input (see Figure 2) has dedicated input clamps to protect from overranging. Diodes D1 and D2 provide ESD protection and act as a clamp for the input voltages. Diodes D1/D2 can sustain a maximum forward current of 100mA. The sampling switches connect the inputs to the sampling capacitors.

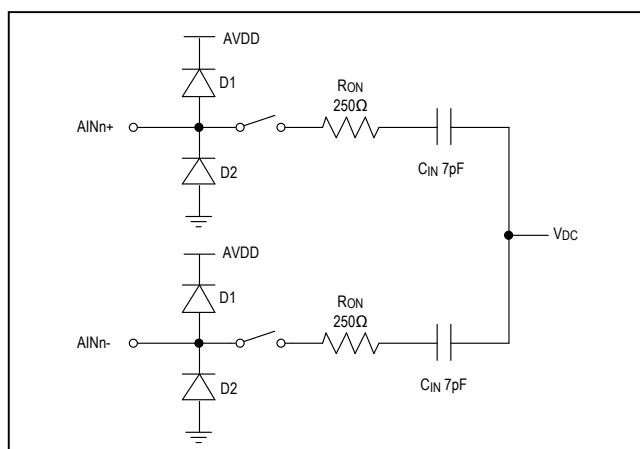


Figure 2. Simplified Model of Input Sampling Circuit

## Input Settling

[Figure 3](#) shows the timing of the conversion cycle's track, SAR conversion, and read data operations. In the track phase, starting with the rising edge of  $\overline{\text{CNVST}}$ , the sample switches are closed and the analog inputs are directly connected to the sample capacitors. The source resistance determines the charging of the sample capacitor to the input voltage. The falling edge of  $\overline{\text{CNVST}}$  is the sampling instant for the ADCs. At this instant, the track phase ends, the sample switches open, and the ADC enters into the successive approximation (SAR) conversion phase. In the conversion phase, a comparator compares the voltage on the sample capacitor against the internal DAC value, which cycles through values of binary-weighted fractions of  $V_{\text{REF}}$  using the successive approximation technique. The final result is read through the SPI bus. Note that ADC1 and ADC2 operate in parallel and conversion data is available simultaneously through DOUT1 and DOUT2.

The ADCs go back into track phase on the rising edge of  $\overline{\text{CNVST}}$ . To achieve accurate conversion results, each ADC should track its input signal for an interval longer than the input signal's settling time. If the signal cannot settle within the allocated track time due to excessive source resistance, external ADC drivers are recommended to achieve faster settling. Note that, since the MAX11192/MAX11195/MAX11198 has a fixed conversion time set by an internal oscillator, reducing the sample rate can increase the track time.

The settling behavior is determined by the time constant in the sampling network. The time constant depends upon the total resistance (source resistance + switch resistance,  $R_{\text{ON}}$ ) and total capacitance (sampling capacitor  $C_{\text{IN}}$ , external input capacitor, PCB parasitic capacitors,

etc). Modeling the input circuit with a single pole network, the time constant,  $R_{\text{TOTAL}} \times C_{\text{LOAD}}$ , of the input should not exceed  $t_{\text{TRACK}}/12$ , where  $R_{\text{TOTAL}}$  is the total resistance (source resistance + switch resistance),  $C_{\text{LOAD}}$  is the total capacitance (sampling capacitor, external input capacitor, PCB parasitic capacitor), and  $t_{\text{TRACK}}$  is the track time.

When an ADC driver amplifier is used, it is recommended to use a series resistance (typically  $5\Omega$  to  $50\Omega$ ) between the amplifier and the ADC inputs, as shown in the Application Diagram. The following are some of the requirements for the ADC driver amplifier.

- 1) Fast settling time: For a multichannel multiplexed circuit, the ADC driver amplifier must be able to settle with an error less than 0.5 LSB during the minimum track time when a full-scale step is applied.
- 2) Low noise: It is important to ensure that the ADC driver has a sufficiently low noise density in the bandwidth of interest. When the MAX11192/MAX11195/MAX11198 is used with its full bandwidth of 50MHz, it is preferable to use an amplifier with an output noise spectral density of less than  $6\text{nV}/\sqrt{\text{Hz}}$ , to ensure that the overall SNR is not degraded significantly. It is recommended to insert an external RC filter at the ADC input to attenuate out-of-band input noise.
- 3) To take full advantage of the ADC's excellent dynamic performance, we recommend the use of ADC drivers with equal or even better THD performance. This will ensure that the ADC drivers do not limit distortion performance in the signal path. The ADC drivers listed in [Table 1](#) are all excellent choices.

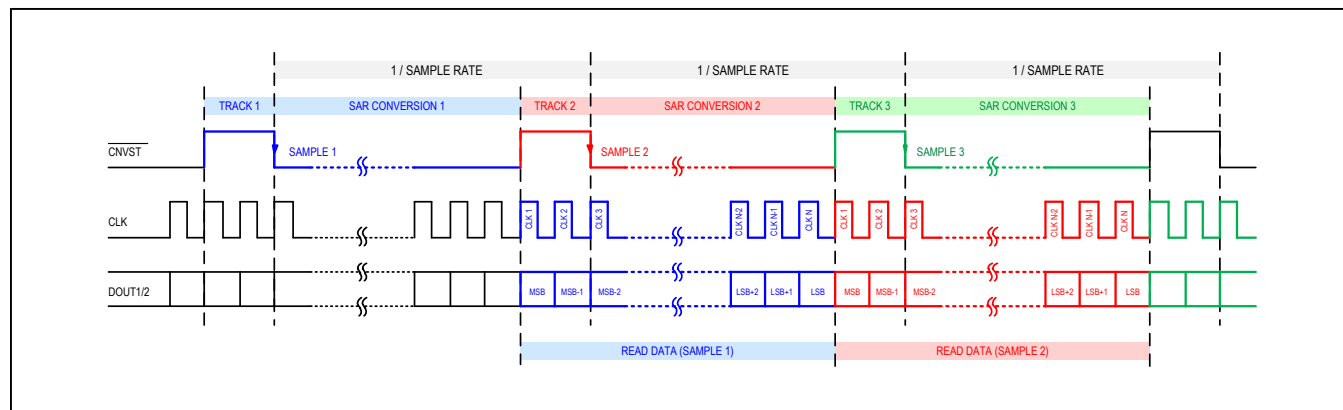


Figure 3. Conversion Timing: Track, SAR Conversion, and Read Operations

MAX11192/MAX11195/  
MAX11198

12-/14-/16-Bit, 2Msps, Dual Simultaneous  
Sampling SAR ADCs with Internal Reference

Table 1. ADC Driver Amplifier Recommendations

| AMPLIFIER | INPUT-NOISE DENSITY (NV/√Hz) | SMALL-SIGNAL BANDWIDTH (MHZ) | SLEW RATE (V/MS) | THD (DB) | ICC (MA) | MAX OFFSET (MV) | COMMENTS                                  |
|-----------|------------------------------|------------------------------|------------------|----------|----------|-----------------|-------------------------------------------|
| MAX44263  | 12.7                         | 15                           | 7                | -110     | 0.75     | 0.05            | Low current, low THD at 10kHz             |
| MAX44242  | 5                            | 10                           | 8                | -124     | 1.2      | 0.6             | High voltage 2.7V to 20V, low THD at 1kHz |
| MAX9632   | 1                            | 55                           | 30               | -128     | 3.9      | 0.125           | Low noise, low THD at 10kHz               |

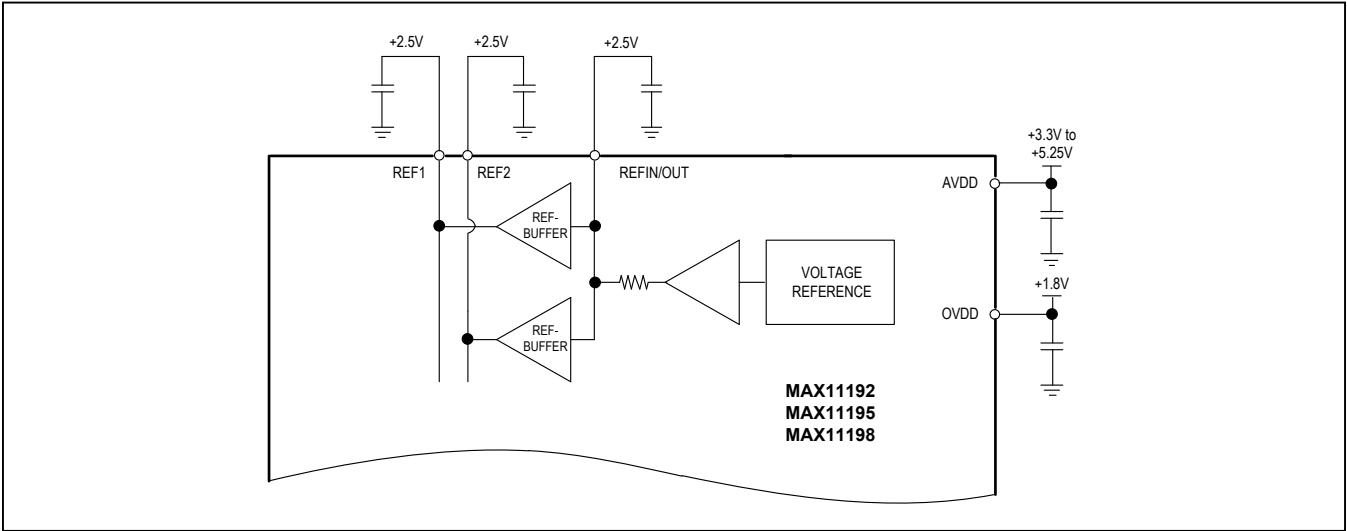


Figure 4. Internal Reference

Input Filtering

Noisy input signals should be filtered prior to the ADC driver amplifier input with an appropriate filter to minimize noise. The RC network shown in the Application Diagram is mainly designed to reduce the load transient seen by the amplifier when the ADC starts the track phase. This network has to satisfy the settling time requirement and provides the benefit of limiting the noise bandwidth.

Voltage Reference Configurations

Using An Internal Reference

The MAX11192/MAX11195/MAX11198 feature a 2.5V integrated reference with built-in reference buffers that help to reduce component count and board space. When using internal reference, only bypass capacitors are required on the REF1, REF2, and REFIN/OUT pins (see

Figure 4). The REF1/REF2 pins require external bypass capacitors of at least 1μF.

Using An External Reference

To use an external reference (see Figure 5), drive the REFIN/OUT pin directly with an external reference voltage source, ensuring that the reference voltage is no greater than AVDD - 250mV. This will allow the on-chip reference buffers to operate with sufficient supply head-room. The REF1/REF2 pins require external bypass capacitors of at least 1μF.

Table 2 lists excellent choices for low-noise, low-temperature drift external references.

Transfer Function

Figure 6 shows the ideal transfer characteristics for the MAX11192/MAX11195/MAX11198.



### Table 2. External Reference Recommendations

Figure 1 is a graph showing the transfer characteristic of the AD7714. The vertical axis is labeled "OUTPUT CODE (TWO'S COMPLEMENT)" and the horizontal axis is labeled "DIFFERENTIAL ANALOG INPUT (LSB)". The graph displays a staircase-like transfer function. The output code values are shown as 100...000, 100...001, 100...010, ..., 011...101, 011...110, 011...111. The input values are shown as  $-2^{N-1}$ ,  $-2^{N-1}+1$ ,  $-2^{N-1}+2$ , ...,  $2^{N-1}-2$ ,  $2^{N-1}-1$ ,  $2^{N-1}$ . The graph is divided into two sections by a break symbol. The left section is labeled "ZERO SCALE" with  $V_{IN} = -V_{REF}$  and the right section is labeled "FULL SCALE (FS)" with  $V_{IN} = +V_{REF}$ . The total input range is indicated as  $2 \times V_{REF}$ . The formula for the Least Significant Bit (LSB) is given as  $LSB = \frac{2 \times V_{REF}}{2^N}$ , with  $N = 12/14/16$ . A specific point on the right edge is marked as  $FS - 1.5 \times LSB$ .

**Figure 6. Ideal ADC Transfer Characteristics**

## Digital Interface

Conversion data may be read in the track phase, the conversion phase, or both. Outlined below are the specifics of the various ways to read conversion data.

The input signals of the two ADC channels are sampled simultaneously on the falling edge of  $\overline{\text{CNVST}}$  and the conversion is initiated. At the end of the conversion, the ADCs go idle until the next rising edge of  $\overline{\text{CNVST}}$ , at which point

the ADCs enter track mode. To complete a conversion, the time between  $\overline{\text{CNVST}}$  falling and rising edge must be at least the minimum of the conversion time  $t_{12}$  (see [Figure 11](#)). The conversion data can then be read immediately after the rising edge of the next  $\overline{\text{CNVST}}$  pulse, which should not occur before the minimum conversion time value ( $t_{12}$ ) has elapsed. guard against digital noise from the data bus, corrupting the sample.

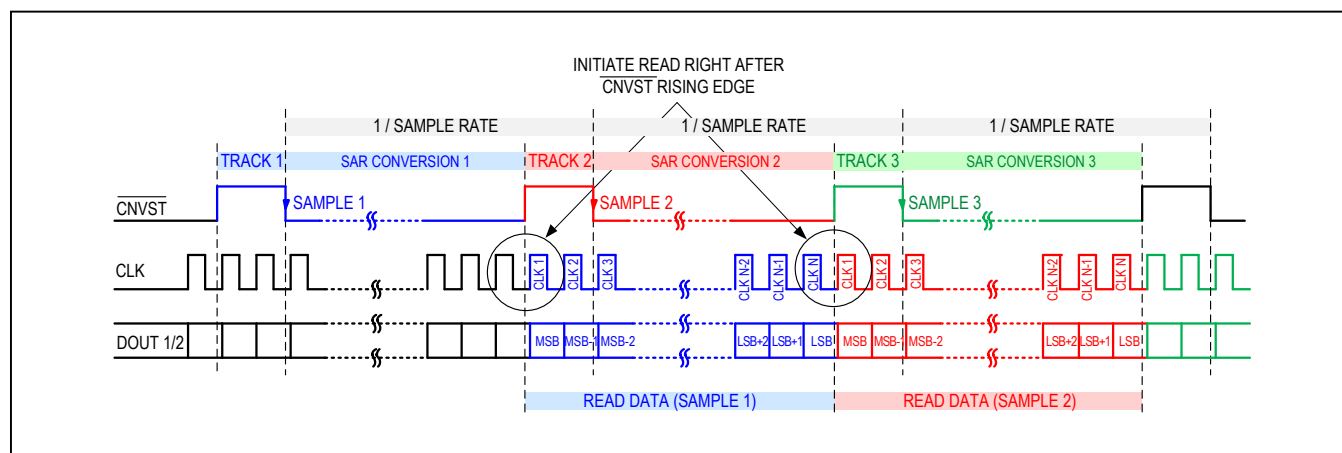


Figure 7. Convert and Data Read

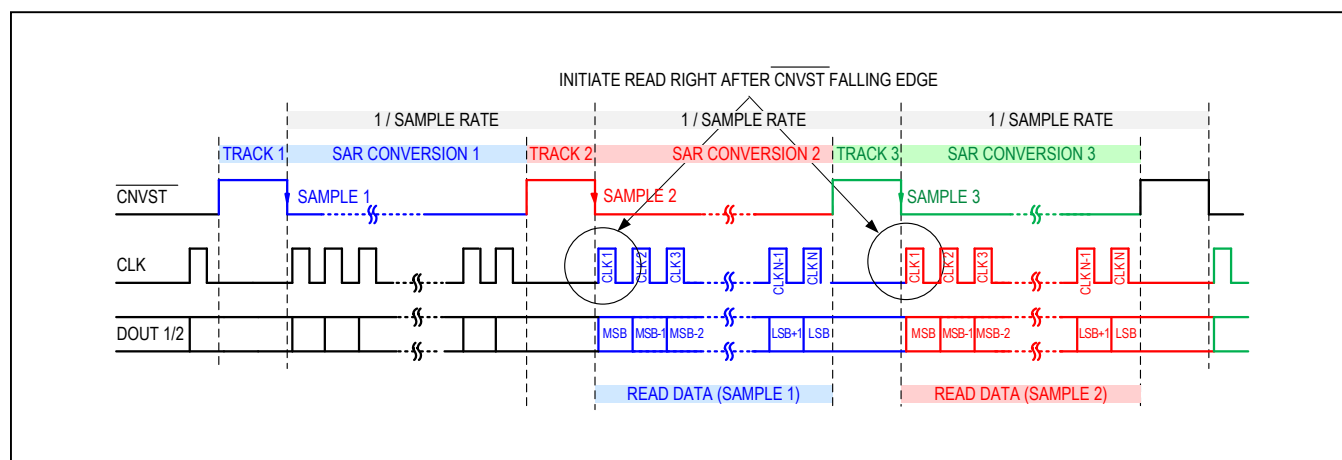


Figure 8. Reading Data After Falling Edge of CNVST

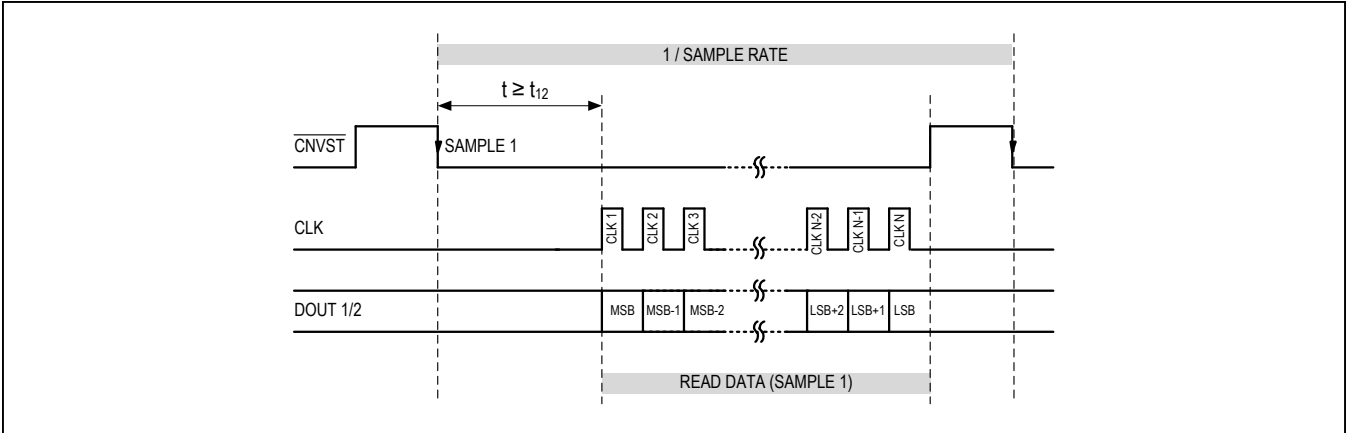


Figure 9. Convert and Data Read in a Single Conversion Period

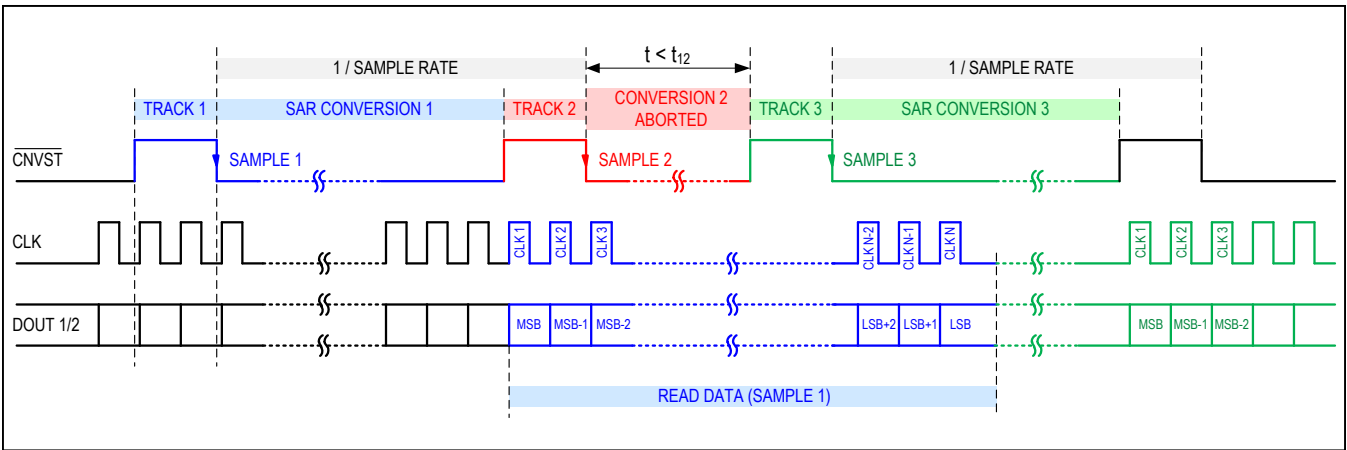


Figure 10. Conversion Abort Data Read

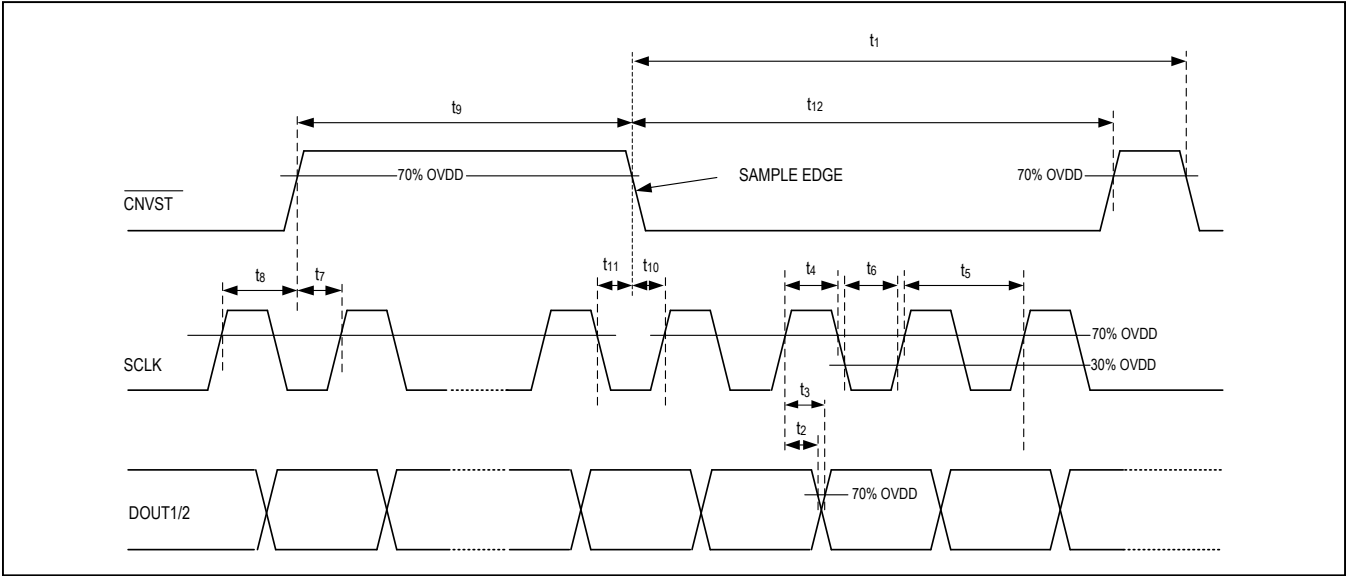


Figure 11. Interface Timing Specifications

## Applications Information

### Interfacing to Common Input Signals

Real-world signals typically require conditioning before they can be digitized by an ADC. The following outlines common examples of analog signal processing circuits.

The ADCs in the MAX11192/MAX11195/MAX11198 accept differential input signals with unipolar common mode. Refer to **THD vs. Input Impedance** to use buffers to minimize distortion. The three following examples show input signal conditioning approaches to common signal path configurations.

### Differential Unipolar Input

The circuit in [Figure 12](#) shows how amplifiers can be configured to buffer a differential unipolar input signal.

### Single-Ended Unipolar Input

The circuit in [Figure 13](#) shows how a single-ended, unipolar signal can interface with the MAX11192/MAX11195/MAX11198. This signal conditioning circuit transforms a 0V to +V<sub>REF</sub> single-ended input signal to a fully differential output signal with a signal peak-to-peak amplitude of 2 x V<sub>REF</sub> and common-mode voltage of V<sub>REF</sub>/2. In this case, the single-ended signal source drives the high-impedance

input of the first amplifier. This amplifier drives the AIN1+ input, and the second stage amplifier with a peak-to-peak amplitude of V<sub>REF</sub> and a common-mode output voltage of V<sub>REF</sub>/2. The second amplifier inverts this signal to generate AIN1-, the inverted version of AIN1+.

### Single-Ended Bipolar Input

[Figure 14](#) shows a signal conditioning circuit that transforms a -2 x V<sub>REF</sub> to +2 x V<sub>REF</sub> single-ended bipolar input signal to a balanced differential output signal with a peak-to-peak amplitude of 2 x V<sub>REF</sub> and a common-mode voltage V<sub>REF</sub>/2.

The single-ended bipolar input signal drives the inverting input of the first amplifier. This amplifier inverts and adds an offset to the input signal. It also drives the AIN1- input and the second stage amplifier with a peak-to-peak amplitude of V<sub>REF</sub> and a common-mode output voltage of V<sub>REF</sub>/2. The second amplifier is also in inverting configuration and drives the AIN1+ input. This amplifier adds an offset to generate a signal with a peak-to-peak amplitude of V<sub>REF</sub> and a common-mode output voltage of V<sub>REF</sub>/2. The input impedance, seen by the signal source, is determined by the input resistor of the first-stage inverting amplifier. The input impedance must be chosen carefully based on the output impedance of the signal source.

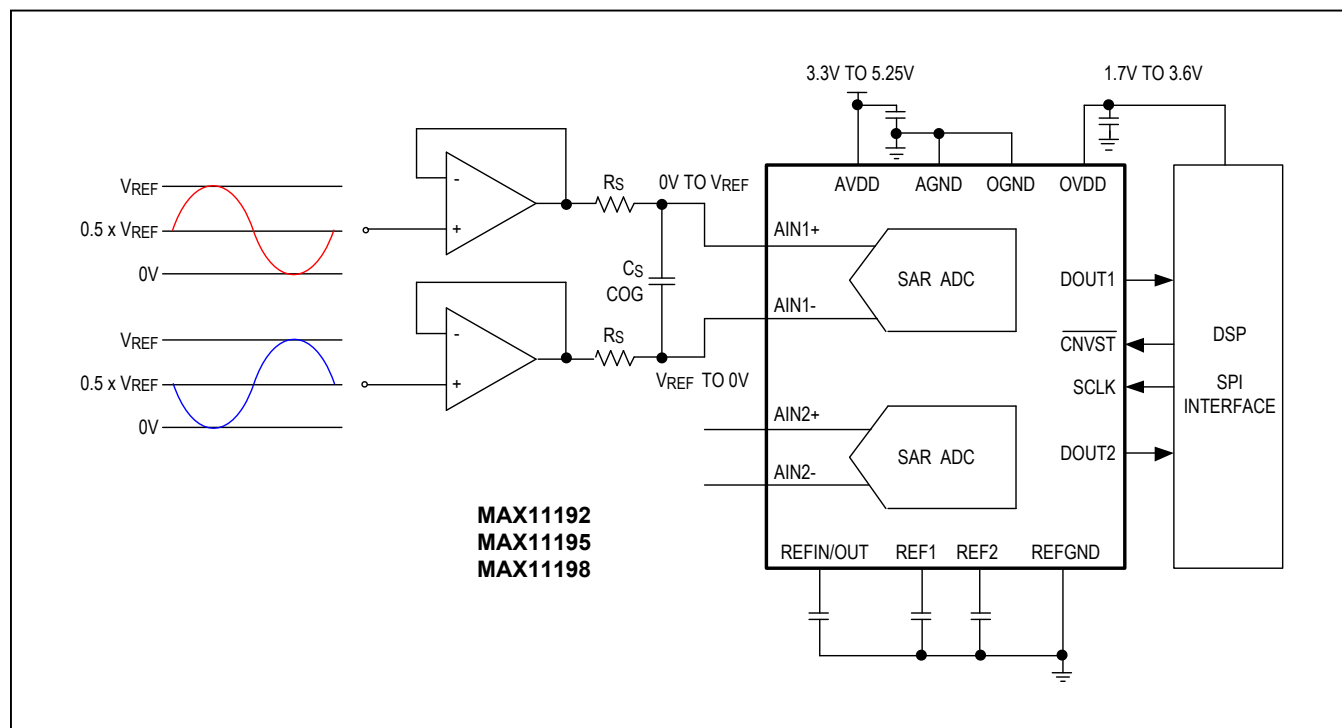


Figure 12. Unipolar Differential Input

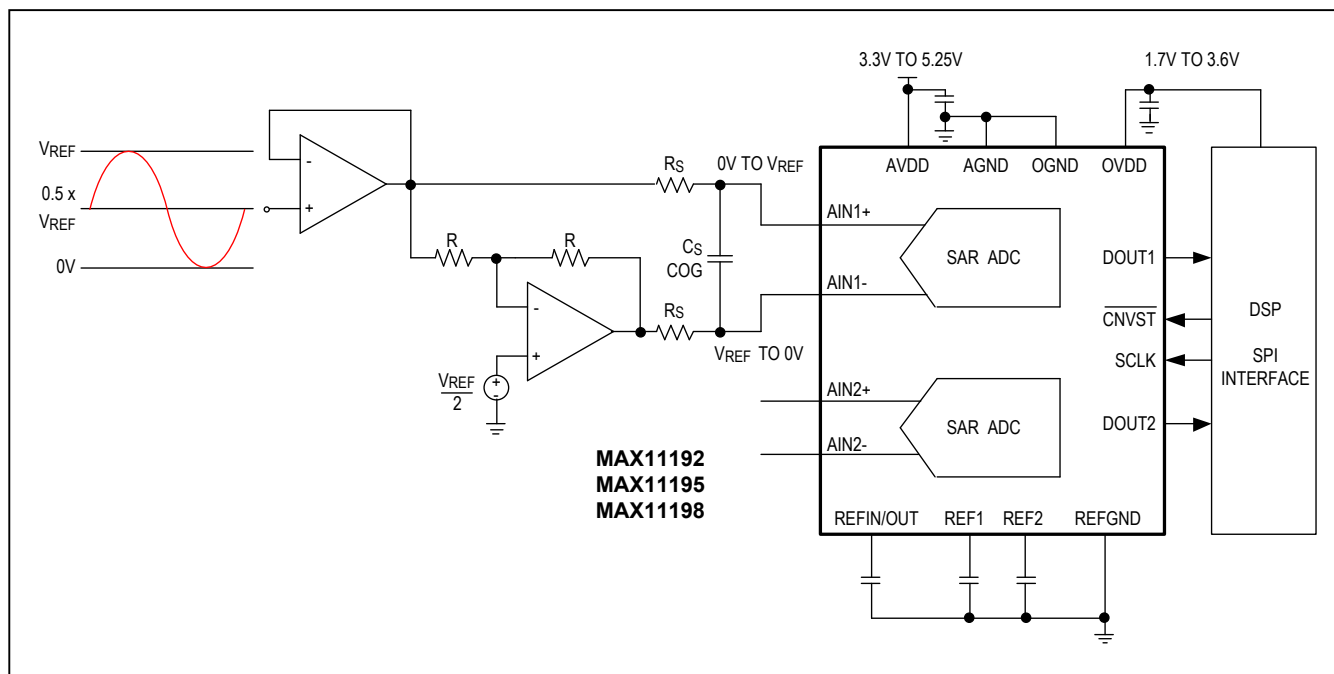


Figure 13. Unipolar Single-Ended Input

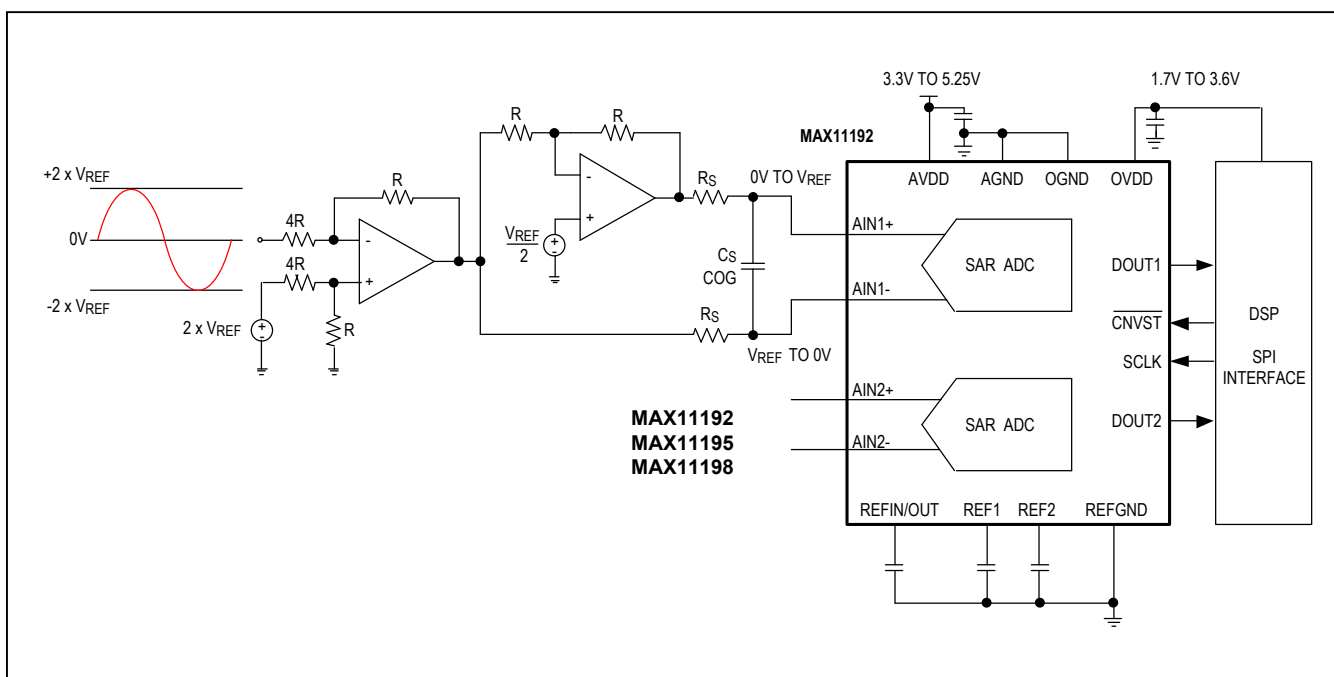


Figure 14. Bipolar Single-Ended Input

### Layout, Grounding, and Bypassing

For best performance, use PCBs with ground planes. Ensure that digital and analog signal lines are separated from each other. Do not run analog and digital lines parallel to one another (especially clock lines), and avoid running digital lines underneath the ADC package. A single solid GND plane configuration with digital signals routed from one direction and analog signals from the other provides the best performance. Connect the GND pins of the MAX11192/MAX11195/MAX11198 to this ground plane. Keep the ground return path to the power supply low impedance and as short as possible. A 1nF C0G ceramic chip capacitor should be placed between AINn+ and AINn- as close as possible to the MAX11192/MAX11195/MAX11198. This capacitor reduces the voltage transient

seen by the driving stage of the ADC input. For best performance, connect the REF1/2 output to the ground plane with a 16V, 10 $\mu$ F ceramic chip capacitor with a X5R dielectric in a 1210 or smaller case size. Ensure that all bypass capacitors are connected directly into the ground plane with an independent via.

Bypass AVDD and OVDD to the ground plane with 10 $\mu$ F ceramic chip capacitors on each pin as close as possible to the device to minimize parasitic inductance. For best performance, bring the AVDD power plane in from the analog interface side of the MAX11192/MAX11195/MAX11198 and the OVDD power plane from the digital interface side of the device. [Figure 15](#) shows the PCB top layer of a sample layout with optimal placement of passive components.

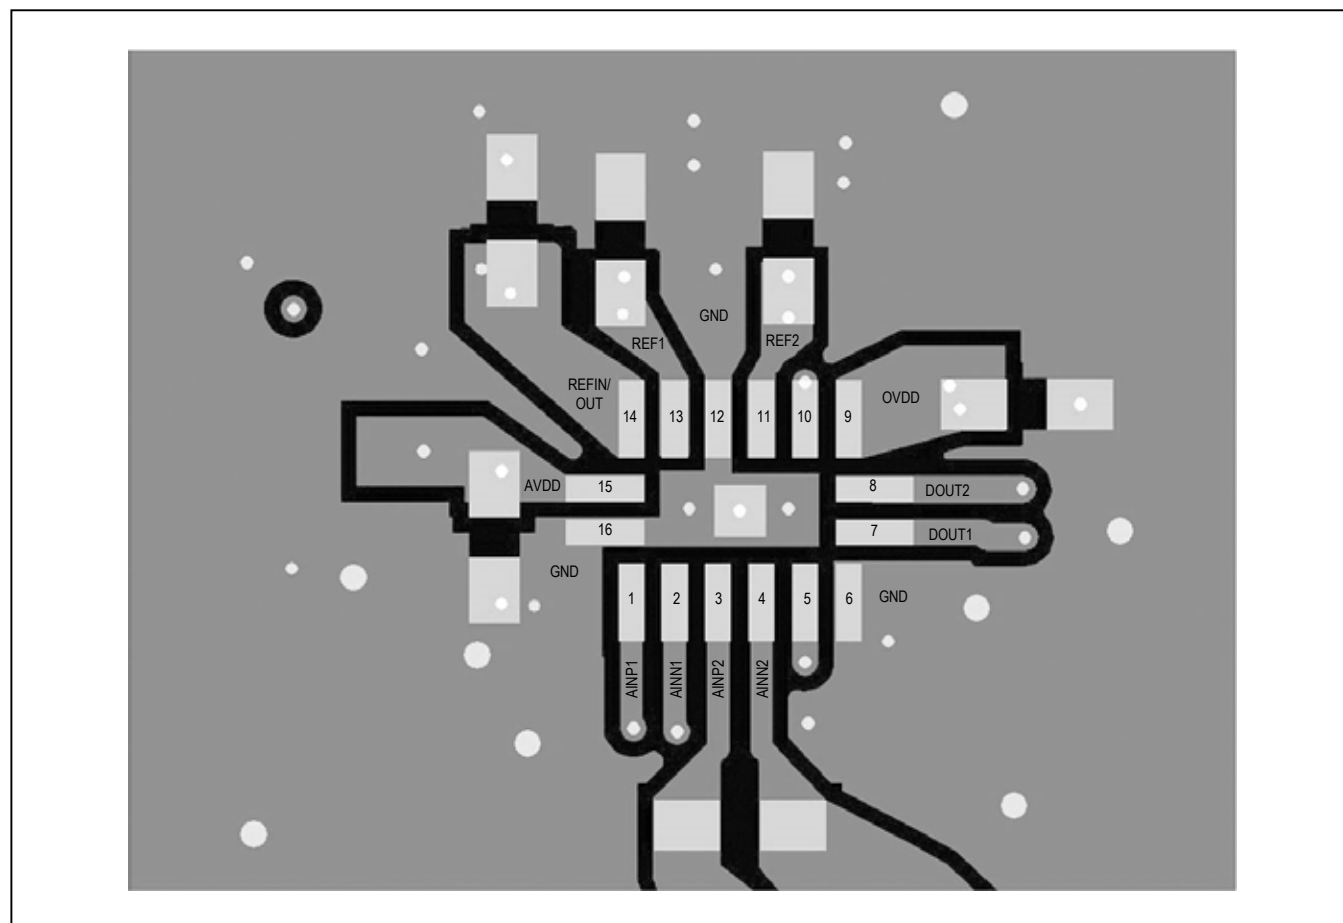


Figure 15. PCB Layout Example for MAX11192/MAX11195/MAX11198

MAX11192/MAX11195/  
MAX11198

12-/14-/16-Bit, 2Msps, Dual Simultaneous  
Sampling SAR ADCs with Internal Reference

## Ordering Information

| PART NUMBER   | RESOLUTION | TEMP RANGE      | PIN-PACKAGE | INTERNAL REFERENCE |
|---------------|------------|-----------------|-------------|--------------------|
| MAX11192ATE+  | 12         | -40°C to +125°C | 16 TDFN-EP* | 2.5V               |
| MAX11192ATE+T | 12         | -40°C to +125°C | 16 TDFN-EP* | 2.5V               |
| MAX11195ATE+  | 14         | -40°C to +125°C | 16 TDFN-EP* | 2.5V               |
| MAX11195ATE+T | 14         | -40°C to +125°C | 16 TDFN-EP* | 2.5V               |
| MAX11198ATE+  | 16         | -40°C to +125°C | 16 TDFN-EP* | 2.5V               |
| MAX11198ATE+T | 16         | -40°C to +125°C | 16 TDFN-EP* | 2.5V               |

*Denotes a lead(Pb)-free/RoHS-compliant package.*

*T = tape and reel.*

*\*EP = Exposed Pad*

MAX11192/MAX11195/  
MAX11198

12-/14-/16-Bit, 2Msps, Dual Simultaneous  
Sampling SAR ADCs with Internal Reference

## Revision History

| REVISION<br>NUMBER | REVISION<br>DATE | DESCRIPTION     | PAGES<br>CHANGED |
|--------------------|------------------|-----------------|------------------|
| 0                  | 9/17             | Initial release | —                |

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim Integrated's website at [www.maximintegrated.com](http://www.maximintegrated.com).

*Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the Electrical Characteristics table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.*

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А